

Bandsaws for Shops and Industry

Perfect for Meat, Fish, Poultry, Bones



**Rudolf Schad
GmbH & Co. KG**

Schulstraße 7 • 36154 Hosenfeld-Germany
Telefon: 0049 66 50 96 21-0 • Telefax: 0049 66 50 96 21-98
E-Mail: info@r-schad.de • Internet: www.r-schad.de

Table top model

ST 200/230/270/320

The Table top models ST 200/230/270/320 are qualified for Shops and Supermarkets. You can work parts of Meat, Bones, Fish and Poultry with these saws.



Model ST 200
Aluminium pulley, Motor 1HP,
3~230/400V oder 1~230V
Portioning device, Pusher

Model ST 230/270/320
Stainless steel pulley with double rim,
Motor 1/1,5/2HP, 3~230/400V
Portioning device, Pusher



Options ST 230/270/320

Available in different motor powers and voltages

Half Sliding Table, Table, Wheels

Standmodels

STL 350/390/430/480

The Model STL 350 is the economy model to start for working of your products as Butcher Shops, Supermarkets.

The STL-Models are suitable for portioning of fresh and frozen parts of meat, Bones, Poultry and Fish. These saws pay of his excellent cutting performance.

STL-Models are in different table options available.

STL-350/390/430/480-F (Fix table)



Model STL 350/390/430/480 -F
Stainless steel pulley, Motor 3/4/4/5,5HP, 3~230/400V
Portioning device, Pusher

Options STL 350/390/430/480 -F

Half Sliding Table or in Pusher Version available
wheels
Hand cutting side right or left
Model STL 480 optional with Bearing table

STL-350/390/430/480-M

Bearing table

Model STL 350/390/430/480 -M
Stainless steel pulley,
Motor 3/4/4/5,5HP, 3~230/400V
Portioning device, Pusher



Options STL 350/390/430/480 -M


wheels

Hand cutting side right or left

Half Sliding Table or in Pusher Version available


MASCHINENDATEN STL-M 350-390-430-480

STL-M

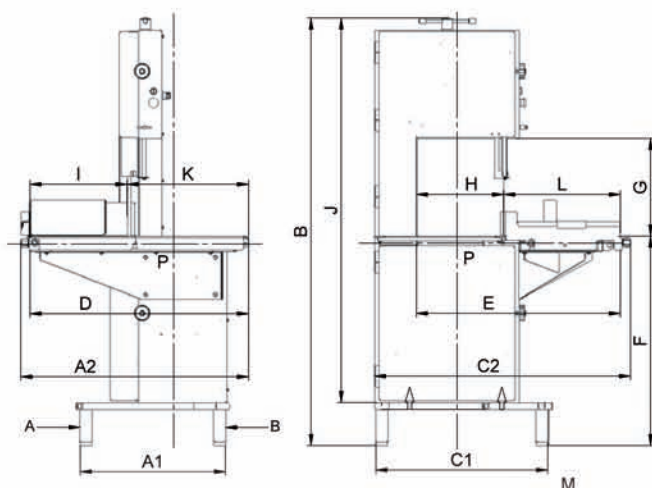

P : Maschinenschwerpunkt

(I) OPTION Links:



	STL 350 M (I)	STL 390 M (I)	STL 430 M (I)	STL 480 M (I)
	(mm.)	(mm.)	(mm.)	(mm.)
A1	625	625	625	625
A2	850	895	980	980
B	1.670	1.780	1.840	1.950
C1	610	700	740	810
C2	830	1.010	1.100	1.170
D	815	855	945	945
E	653	787	880	930
F	900	900	900	900
G	350	400	420	480
H	275	335	375	425
I	322	357	422	422
J	1.485	1.595	1.655	1.765
K	493	498	523	523
L	378	452	505	505
M	1.070	1.300	1.430	1.500
N	1.620	1.660	1.870	1.870
Kg.	170	205	220	250
Cv. I	3	4	4	5,5
d	2.500	2.910	3.155	3.500

P = Centro de gravedad Centre of gravity Center of gravity

STL-350/390/430/480-R

Ramp table

Model STL 350/390/430/480 -R
Stainless steel purely, Motor 3/4/4/5,
5HP, 3~230/400V
Portioning device, Pusher




Options STL 350/390/430/480 -R

Half Sliding Table or in Pusher Version available
Hand cutting side right or left
wheels
Conversion to a fix table model

MASCHINENDATEN
STL-R 350-390-430-480

STL-R

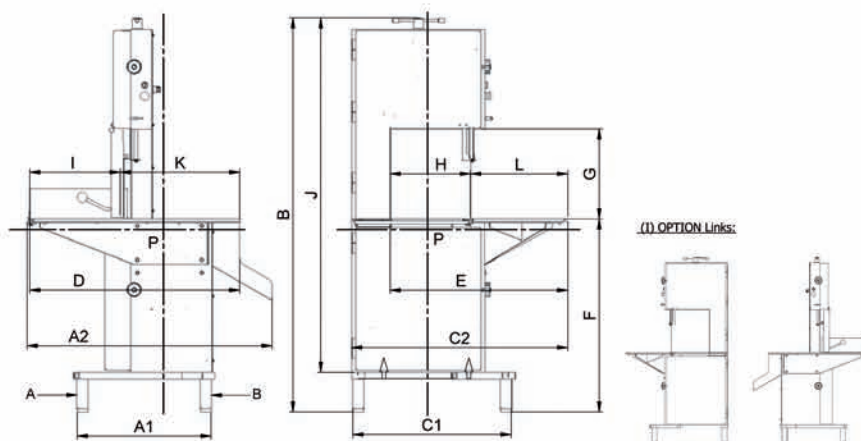

(1) OPTION Links:

P : Maschinenschwerpunkt

	STL 350 R (I)	STL 390 R (I)	STL 430 R (I)	STL 480 R (I)
	(mm)	(mm)	(mm)	(mm)
A1	625	625	625	625
A2	1.045	1.080	1.145	1.145
B	1.670	1.780	1.840	1.950
C1	610	700	740	810
C2	735	920	1.010	1.080
D	880	915	980	980
E	604	739	829	879
F	900	900	900	900
G	350	400	420	480
H	275	335	375	425
I	322	357	422	422
J	1.485	1.595	1.655	1.765
K	558	558	558	558
L	329	404	454	454
M	1.030	1.280	1.430	1.500
N	1.375	1.445	1.575	1.575
Kg	160	195	210	240
Cv.	3	4	4	5.5
d	2.500	2.910	3.155	3.500

P = Centro de gravedad Centre of gravity

STL-350/390/430/480-B

Banked table



Model STL 350/390/430/480 -R
Stainless steel pulley, Motor 3/4/4/5,
5HP, 3~230/400V
Portioning device, Pusher

Options STL 350/390/430/480 -B

Half Sliding Table or in Pusher Version available
Hand cutting side right or left
wheels
Conversion to a fix table model

STL-800

the Industry Bandsaw

The STL-800 Model are construct for industrial applications in slaughterhouses, deboning plants for meat or fish industry.

Ideal for deboning and portioning of pork-, beef-, fish- and wild parts. Fresh meat or frozen parts can be used with the models STL-800.

The STL-Models are available in different table options.

STL 800-F (Fix table)



Model STL 800-F (Fix table)
Stainless steel pulley, Motor 5,
5HP, 3~400V
Portioning device, Pusher

Options STL 800-F

Hand cutting side right or left
wheels

Water cooling

Fix table



STL 800-M

Bearing table

Model STL 800-M
(Bearing table)
Stainless steel pulley,
Motor 5,5HP, 3~400V
Portioning device, Pusher



Options STL 800-M



Hand cutting side right or left
wheels
Water cooling

Characteristics of the Bandsaw STL-Models:

Robust construction and converting
Easy and hygienic cleaning
Fast and easy tension control
Detachable cleaners for easy cleaning without tools
Options on different table models
Options on different motors and volatages

Machine data

MASCHINENDATEN ST 200/230/270/320

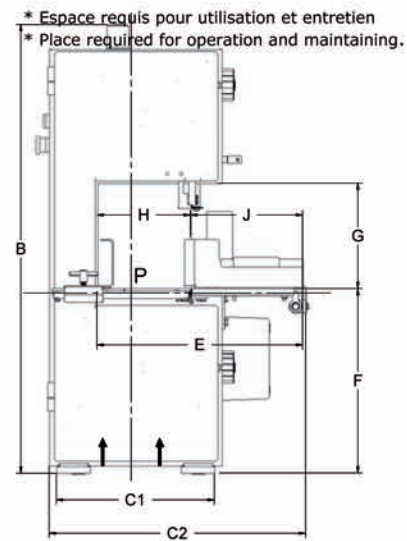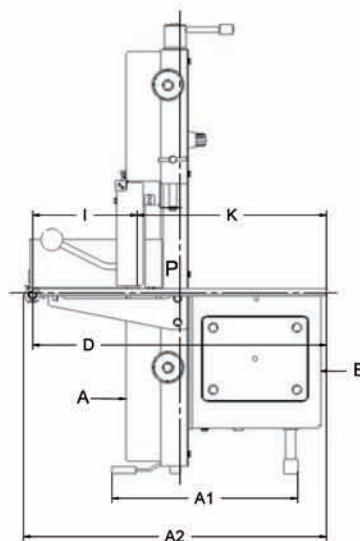


		ST 200 (mm.)	ST 230 (mm.)	ST 270 (mm.)	ST 320 (mm.)
	A1	325	390	400	400
	A2	540	695	740	740
	B	825	935	1045	1195
	C1	300	350	400	450
	C2	475	560	600	650
	D	530	610	660	660
	E	385	430	480	530
	F	300	385	420	470
	G	180	220	270	320
	H	175	195	225	275
	I	205	215	250	250
	J	210	235	255	255
	K	325	395	410	410
	L		910	995	995
	M		740	835	835
	kg.	57	73	85	97
HP.	II	1	1	1,5	2
	III	1	1	1,5	2
	Blade	1600	1740	1985	2340

P: Maschinenschwerpunkt

Machine data

MASCHINENDATEN STL 350-390-430-480


STL-F

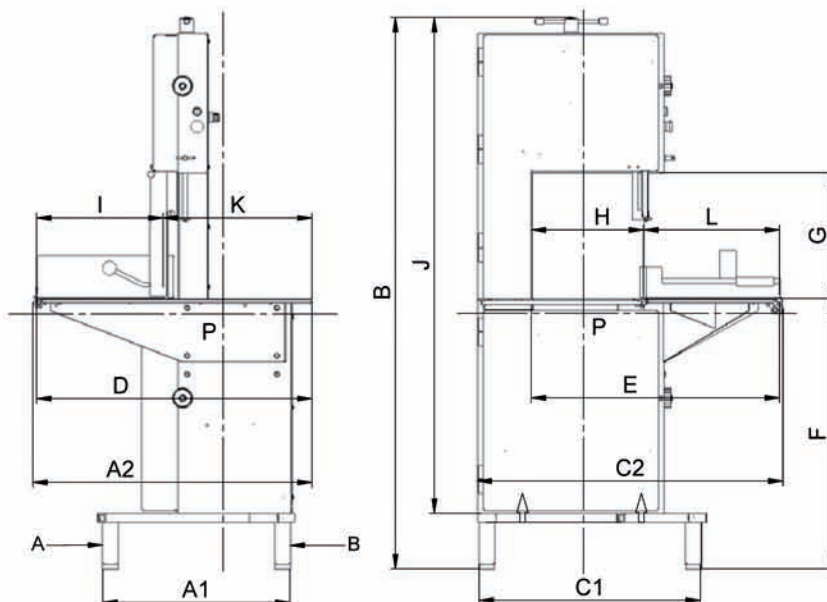

	STL 350 F	STL 390 F	STL 430 F	STL 480 F
	(mm.)	(mm.)	(mm.)	(mm.)
A1	625	625	625	625
A2	790	845	960	960
B	1.670	1.780	1.840	1.950
C1	610	700	740	810
C2	745	930	1.020	1.090
D	775	830	945	945
E	604	739	829	879
F	900	900	900	900
G	350	400	420	480
H	275	335	375	425
I	322	357	422	422
J	1.485	1.595	1.655	1.765
K	453	473	523	523
L	329	404	454	454
M	1.030	1.280	1.430	1.500
N	1.120	1.210	1.390	1.575
Kg.	155	190	205	235
Cv.	3	4	4	5,5
d	2.500	2.910	3.155	3.500

P: Maschinenschwerpunkt

(I) OPTION Links:




P = Centro de gravedad. Centre of gravity. Center of gravity

Machine data

MASCHINENDATEN STL-B 350-390-430-480


STL-B

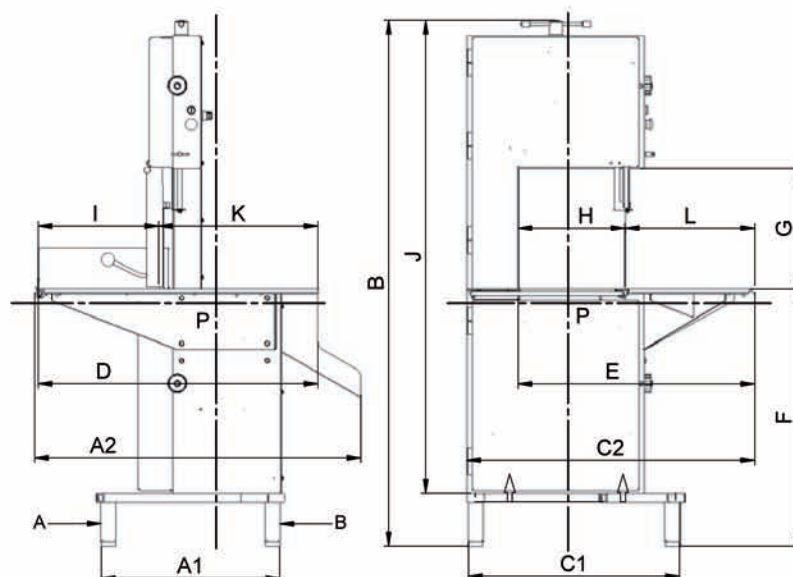

	STL 350 B (I) (mm.)	STL 390 B (I) (mm.)	STL 430 B (I) (mm.)	STL 480 B (I) (mm.)
A1	625	625	625	625
A2	860	895	960	960
B	1.670	1.780	1.840	1.950
C1	610	700	740	810
C2	735	920	1.010	1.080
D	845	880	945	945
E	604	739	829	879
F	900	900	900	900
G	350	400	420	480
H	275	335	375	425
I	322	357	422	422
J	1.485	1.595	1.655	1.765
K	523	523	523	523
L	329	404	454	454
M	1.030	1.280	1.430	1.500
N	1.190	1.260	1.390	1.390
Kg.	155	190	205	235
Cv.	3	4	4	5,5
d	2.500	2.910	3.155	3.500

P = Centro de gravedad. Centre de gravité. Center of gravity

(I)OPTION Links:

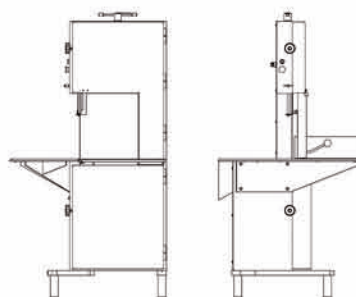

P : Maschinenschwerpunkt

Bandsaw blades for all Manufacture models and dimensions

**Ideal for
Meat, Bones, Splitting,
Fish, Poultry, Sausages
and Cheese**

OPTIONS



**Widia blade guide - Roller table - Adjustable thickness plate - Wheels
Table with measures - Special height - Special tables - Refrigeration
Right and left hand side**

