

## SR20 Cylinder for Oil Hydraulics



**SR20** is a series of double acting hydraulic cylinders made entirely from stainless materials. Standard cylinder piston diameters from  $\varnothing 25$  mm to  $\varnothing 100$  mm.

### Application

Typically used within food industry, fishing industry, environmental technology and in adversely affected environments.

### Cylinder Tube

Seamless stainless steel tube, quality W.St. 1.4301 or W.St. 1.4401

### Piston Rod

Centerless-polished stainless steel, hard chromed, quality W.St. 1.4460 or similar.

### Operation pressure


Maximum 200 bar.

### Pressure fluid

Hydraulic oil on mineral oil basis.

For further information on SR20 cylinders and accessories please visit our homepage.

### Dimensions

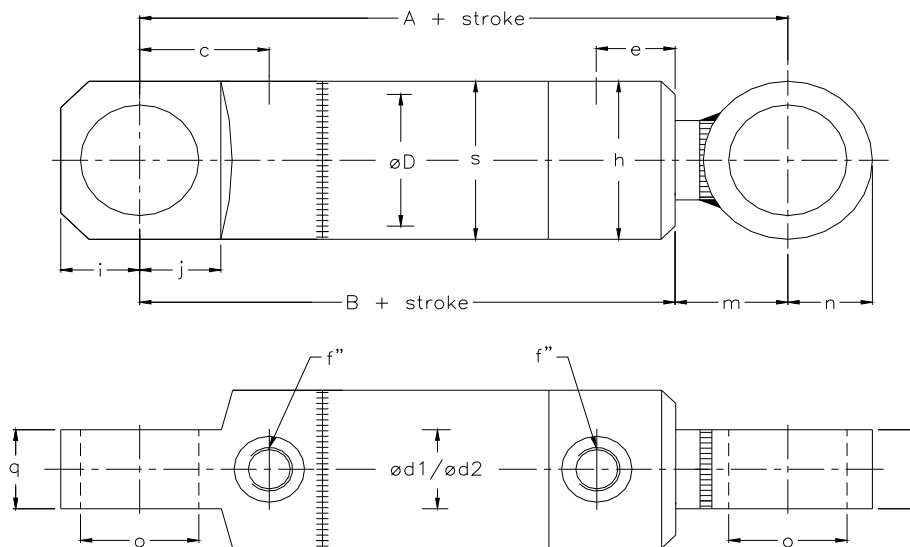

$\varnothing D$ (mm)	25	32	40	50	63	80
$\varnothing d1$ $\varnothing d2$ (mm)	12 16	16	20 25	25 30	30 40	40 50
A (mm)	135	155	185	217	225	265