



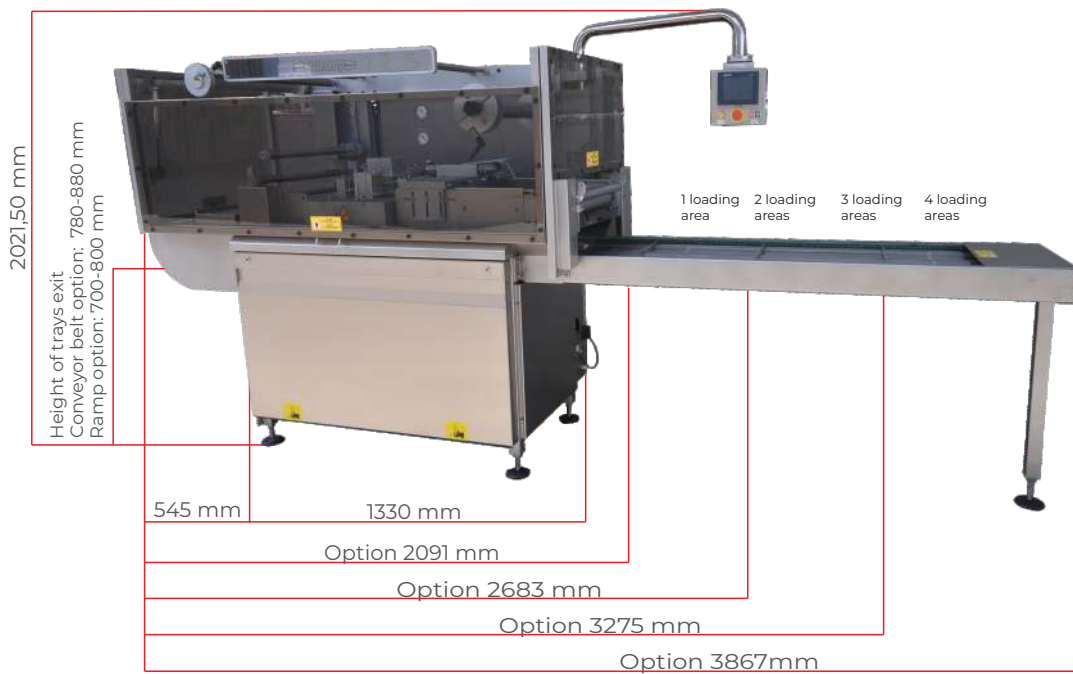








TRAYSEALER TSA 826



TSA 826

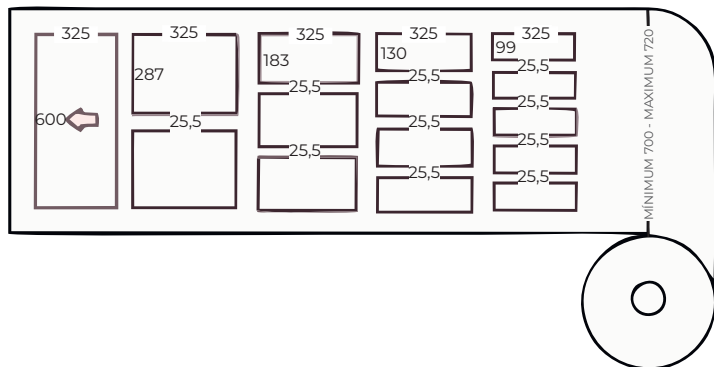

features:

- | | | |
|---|---|--|
| <ul style="list-style-type: none"> - Colour touchscreen panel 5.7". - Structure in stainless steel aisi 304. - Vacuum by mbars and time, or both. - Gas injection by mbars and time over gas. - Capacity for 2 1/2 gn trays. | <ul style="list-style-type: none"> - Capacity for 3 1/4 gn trays. - Capacity for 4 1/8 gn trays. - Film dragging by two synchronized motors. - Mould adaptation chosen by the customer. - Replaceable rings to adapt the tray to every manufacturer. | <ul style="list-style-type: none"> - Film progress mode: by lenght - by eye mark. - Trays dragging by stainless steel rods and dragged by chains. - Power: 12-20 kw (according to the pumps). |
|---|---|--|