


# FlexiT<sup>op</sup>

- ▶ Improved cut- and impact resistance
- ▶ Extremely easy to clean
- ▶ High pulling force


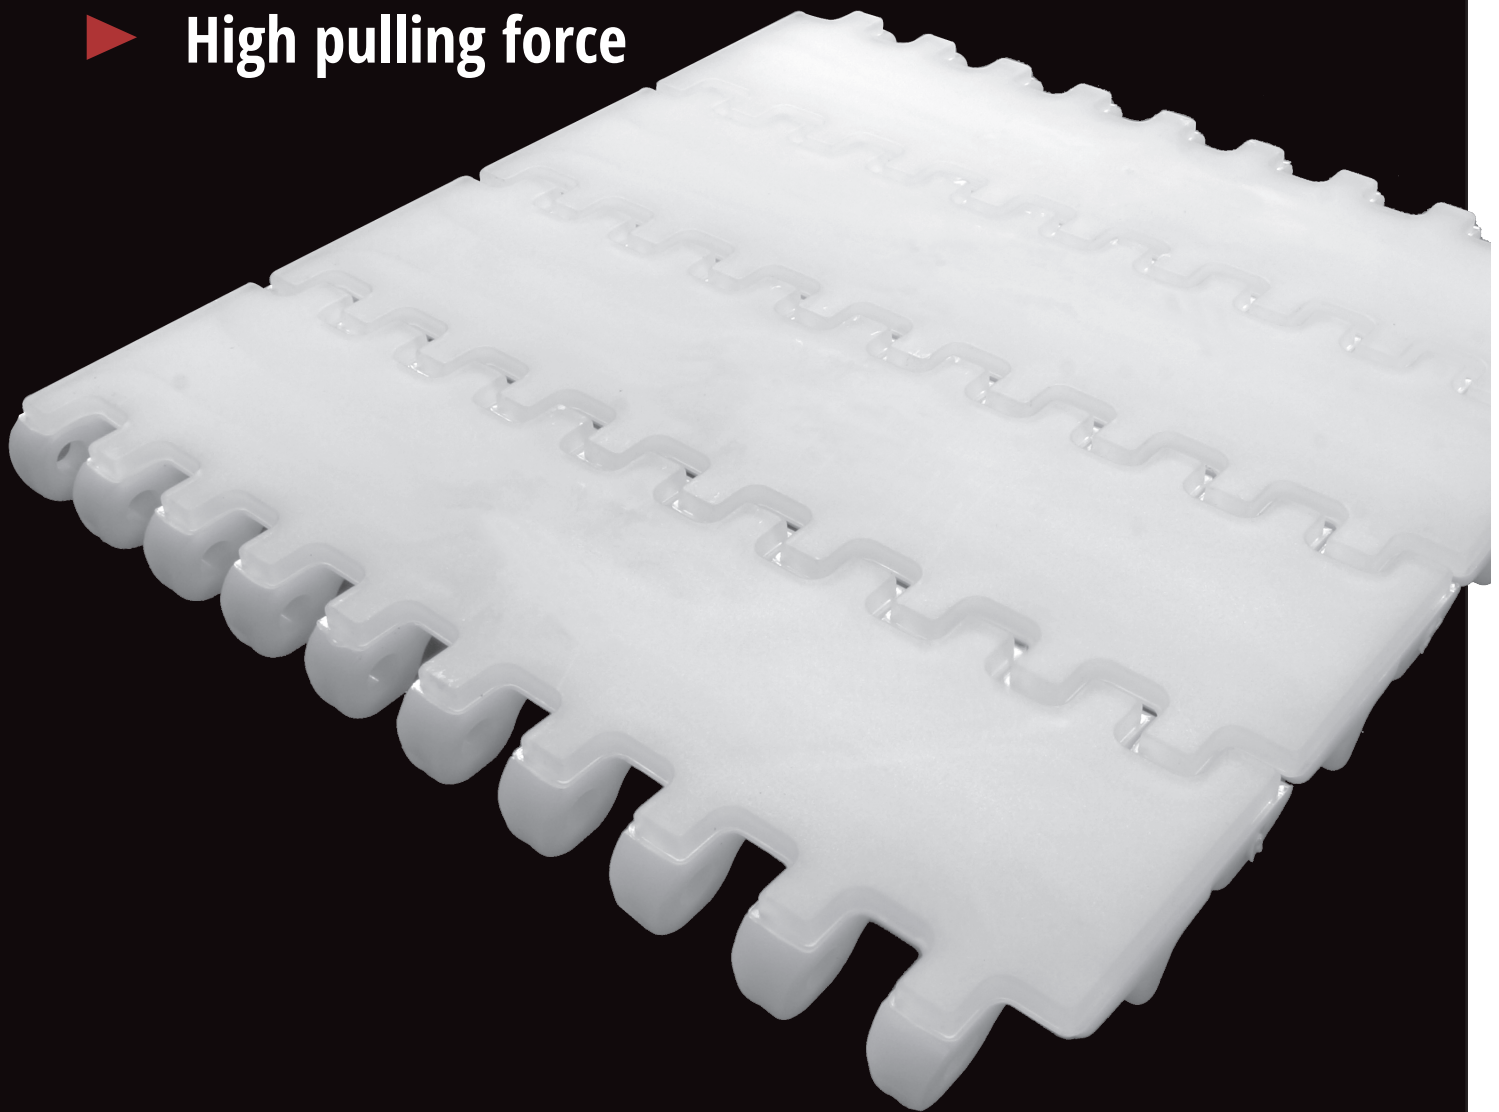


**SCANBELT**  
...keeping industry moving...

[www.scanbelt.com](http://www.scanbelt.com)

# S.50-808 FlexiTop

Ideal for cutting/trimming belt with an improved cut and impact resistance for the meat industry. FDA approved.

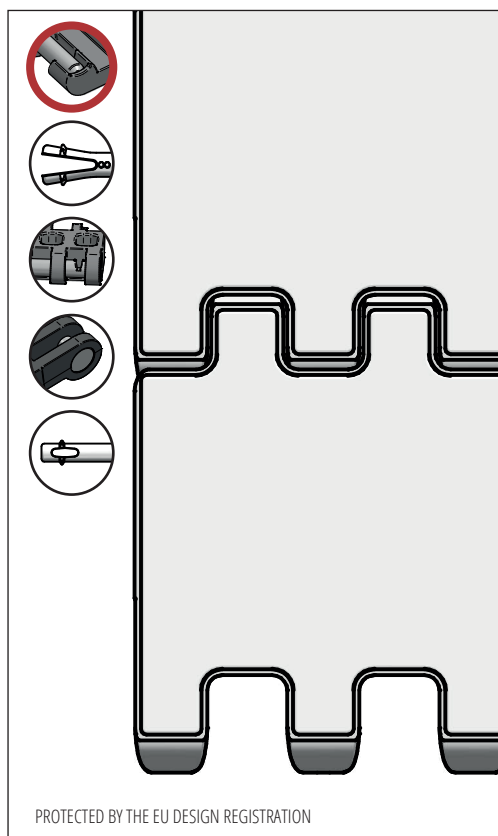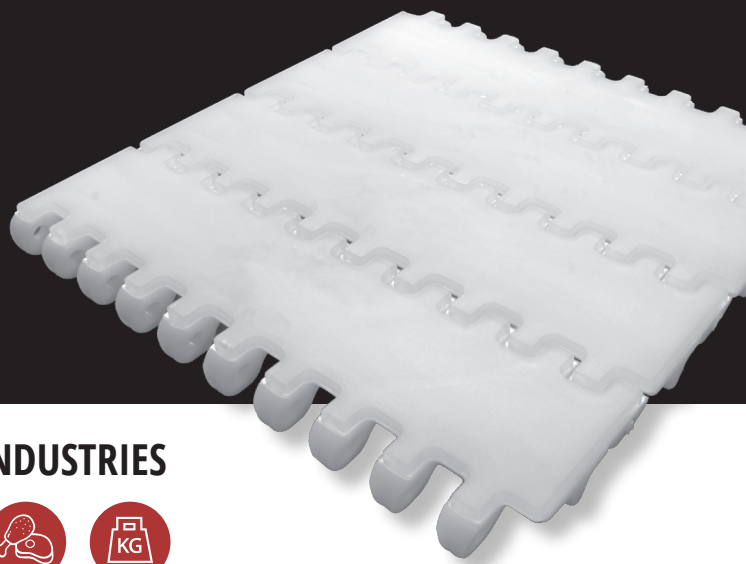

## SUGGESTED INDUSTRIES



## STANDARD FEATURES

Belt surface	Closed belt with 3 mm FlexiTop
Open area	Closed
Strength	Ideal choice for medium to heavy-duty transportation
Cleanability	Excellent
Standard width	Increments of 20 mm, e.g. 100, 120 mm etc.


## BELT DATA

Belt materials	Temperature range		Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>	Belt weight kg/m <sup>2</sup> w. steel rods	Standard Colours
	Min.	Max.				
Nylon	-45	150	2200	12	16	Natural
PE	-73	66	-	-	-	-
PP	+5	100	-	-	-	-
POM	-43	95	-	-	-	-

## ACCESSORIES

Type	mm
Flights	25*, 50*, 75*, 100*
Scoop Flights	50, 75, 100*, 150*
Bent Flights	75*, 100*
Supported Flights	75, 100, 150
Flights fitted with a Round Top	Yes
Side Guard	-
Friction Top	-
Hold-downs	-

\*Modules can be supplied with a moulded indent of 40 mm.

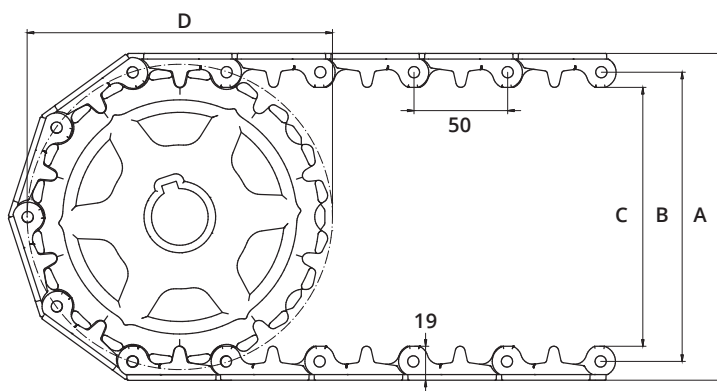

## SPROCKET DATA

A = Outside, B = Pitch, C = Inside, D = Pitch Circle Diameter

No. Teeth	A	B	C	D	Hub Width	Round Bore		Square Bore	
	mm	mm	mm	mm		mm	Inch	mm	Inch
6	111	89	73	100	20	20 / 25 / 30 / 40	¾ / 1 / 1¼	25 / 40	1½
8	144	122	106	132	35	25 / 30 / 40	1 / 1¼	25 / 40	1½
10	178	156	140	162	35	20 / 25 / 30 / 40 / 50 / 60 / 80	1 / 1¼	25 / 40 / 60	1½ / 2½
12	211	189	173	195	35	20 / 25 / 30 / 40 / 50 / 60 / 80	1 / 1¼	25 / 40 / 60	1½ / 2½