

进取・为更好 | PROGRESS FOR IMPROVEMENT



+86 0536-5037151

Www.vicel.net

No. 8019-2, Xinsha Road, Gudi Street, Hanting District, Weifang City, Shandong Province

❷ 山东省潍坊市寒亭区固堤街道新沙路8019号-2号





CELLULOSE CASING 纤维素肠衣

Shandong Vicel New Material Technology Co., LTD /

山东潍森新材料科技股份有限公司

COMPANY PROFILE

公司简介

山东潍森新材料科技股份有限公司致力于为人们美好生活提供绿色环保型包装材料—— 纤维素肠衣及纤维素新材料。

公司自主设计建设了拥有自主知识产权的纤维素肠衣生产线,构建起符合 FSSC22000、Kosher、Halal、MUI、ISO9001、ISO24001、ISO45001等国际标准 体系要求的生产制造系统。同时,公司还是HACCP标准的坚定拥护者,对所有的生产和化学过程进行严格管控,建有完善的产品追溯系统,向社会提供绿色环保安全的卓越产品。



Shandong Vicel New Material Technology Co., Ltd is committed to providing protective packaging for better living, including cellulose sausage casing and other cellulose materials.

Vicel designed and built the fully independent factory in Asia to manufacture peelable cellulose sausage casing. A complete system was built that meets international standards including FSSC22000, Kosher, Halal, MUI, ISO9001, ISO24001, ISO45001. Also the company supports HACCP standards, complying with all requirements for traceability in the chemical process. This provides the customers the high excellent products with health and safety.

VICEL OVERVIEW

潍森荣誉认证



















SHANDONG VICEL NEW MATERIAL TECHNOLOGY CO., LTD / PROFILE PAGE 03 / 04



✔ 取材天然 资源无限

所用的主要原材料取材于树木和棉短绒(棉花副产品)中富含的天然纤维素,原料可再生。

✔ 绿色环保 安全健康

无毒无味,在土壤中可自然降解,不会对环境造成二次污染。

∨ 性能卓越 使用方便

厚度均匀,强度高、弹性好、耐磨性高、不产生静电,更适合高速自动化灌装需求。

其分子链存在一种奇妙的微透气性,具有良好透气性和透水性,便于实现烟熏、上色,增加香肠香味和色泽。

口径均匀,尺寸稳定,具有适宜的弹性和强度,保鲜、保香效果更佳。

使用前无需冷藏, 无需浸润, 开箱即可直接使用。

耐高温,使用环境要求更宽松。

封尾形式多样,可满足不同客户使用方式需求。 易于剥离,方便食用。

✔ 多色可选 多元应用

可根据客户需求,提供涵盖透明肠衣、条纹肠衣、 染色肠衣、转移色肠衣、印刷肠衣在内的多种颜色 产品,满足客户多元化要求。

Natural material, abundant supply

The main raw materials are made from natural cellulose of tree and cotton linter. The raw materials are biodegradable.

Casing purity

The casing is pure and free from residuals and contaminants, exceeding all food safety standards.

Excellent performance and ease of use

Uniform thickness, high strength, good elasticity, good abrasion resistance, suitable for high speed automatic filling requirements.

Cellulose molecules have high permeability to water, air, and smoke, improving the sausage flavor and color.

The casing has uniform caliber, consistent size, correct elasticity and strength, and good preservation qualities.

During storage, no refrigration is required. The casing can be used directly from the package without soaking.

The casing has high temperature resistance.

Various end closures are offered to the needs of all customers.

Easy to peel, and easy to eat.

Various colors offered


According to customer's diverisfied needs, we can provide a variety of casings, including clear, stripes, color, transfer color, printed .



OVERVIEW PRODUCTS

UB QUB QUB QUB QUB

产品选项

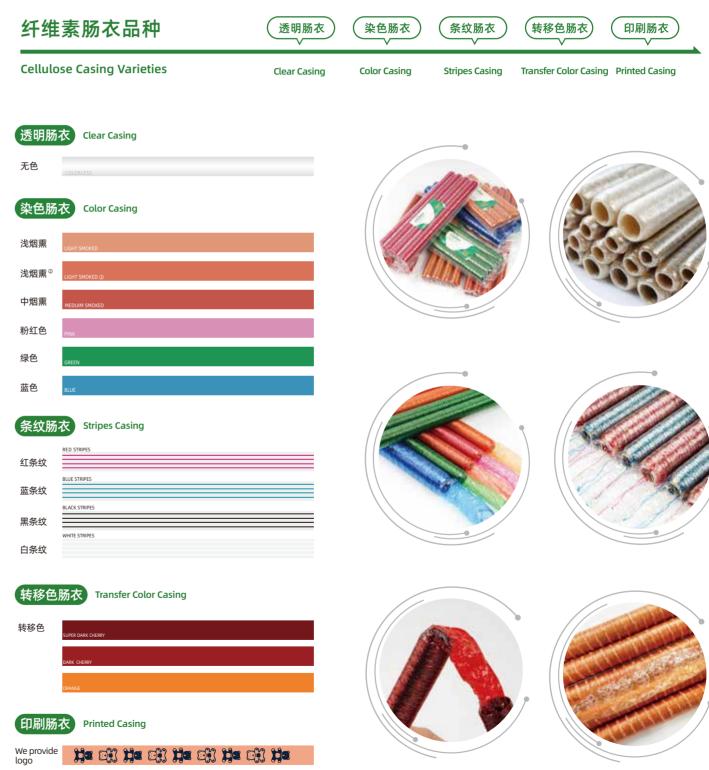

SPECIFICATION OF CELLULOSE CASING

纤维素肠衣质量标准

			RSD	(mm)		Sta	andard	Casing	Lengt	h in Standar	d Caddy	Len	gth
Caliber (Euro)	Caliber (USA)	Flat width	LOW	MEDIUM	Horn Tube	16.8	21.3	25.6	29.0	33.5-38.1-39.6	47.2-48.8	51.8	54.9
(= a. o)	(03/1)	mm	ELASTICITY	ELASTICITY	mm	8-8.5in	10-10.5in	11-11.5in	13-13.5 in	14.5-15in	15.5in	18in	19.5i
10	12	22.5		15.1	8	55 '	70 '	84 '	95 '	110-125 -130'			
11	13	23.5		15.8	8	55 '	70 '	84 '	95 '	110-125 -130'			
12	14	24.5		16.3	9	55 '	70 '	84 '	95 '	110-125 -130'			
13	15	25.0		16.8	9	55 '	70 '	84 '	95 '	110-125 -130'			
14	16	25.5		17.2	9	55 '	70 '	84 '	95 '	110-125 -130'			
15	17	26.0	17.9	18.9	10	55 '	70 '	84 '	95 '	110-125 -130'			
16	18	26.5	18.2	19.2	10	55 '	70 '	84 '	95'	110-125 -130'			
17	19	27.5	18.9	20.0	10	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	18
18	20	28.5	19.6	20.7	11	55 '	70 '	84 '	95'	110-125 -130'	140-160'	170′	18
19	21	29.5	20.3	21.4	11	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	18
20	22	30.5	21.0	22.1	12	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	18
21	23	31.5	21.7	22.9	12	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	18
22	24	32.5	22.4	23.6	13	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	18
23	25	33.5	23.0	24.3	13	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	18
24	26	35.5	24.4	25.8	14	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	18
25	27	36.5	25.1	26.5	14	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	18
26	28	37.5	25.8	27.2	15	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	18
27	29	39.0	26.8	28.3	15	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	180
28	30	40.0	27.5	29.0	16	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	18
29	31	42.0	28.7	30.0	16	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	18
30	32	43.0	29.6	31.2	16	55 '	70 '	84 '	95 '	110-125 -130'	140-160'	170′	18
31	33	44.5	30.6	32.3	17	55 '	70 '	84 '	95 '	110-125 -130'		<i>b</i> :+	
32	34	45.5	31.3	33.0	17	55 '	70 '	84 '	95 '	110-125 -130'	双S肠衣针	备注: 长度140	-180′
33	35	47.0	32.5	34.0	18	55 '	70 '	84 '	95 '	110-125 -130'	填料管要	求比标准	
34	36	48.0	33.0	34.9	18	55 '	70 '	84 '	95 '	110-125 -130'			





MAXIMUM STICK LENGTH,mm

	Hand twist linkers, (Handtmann Vemag)	<350
	Marel-Townsend FAM NL14	356
b	Marel-Townsend FAM NL17	432
V	Marel-Townsend iLinker	482
	Marel-Townsend FAM NL21	533
1	Handtmann PVLH 240, 241	425
	Handtmann FPVLH 242	580
	Vemag LPG 208	350
11110	Vemag LPG 209	420
10	Vemag LPG 213	580
N	Hitec Linkwel X M10	325
7	Hitec M-3X	419
	Hitec Linkwel XL M20	440
	Hitec M-3XL	546



STANDARD	27 US- 34 US
55 and 70 feet	300 sticks per carton
84 and 95 feet	200 sticks per carton
100 feet and greater	200 sticks per carton
15 US- 26 US	35 US- 36 US
15 US- 26 US 400 sticks per carton	35 US- 36 US 200 sticks per carton

SHANDONG VICEL NEW MATERIAL TECHNOLOGY CO., LTD / PROFILE PAGE 07 / 08

PRODUCT DISPLAY

产品展示









素食香肠 Kiss Sausage Vegetarian Sausage

鸡肉香肠 Chicken Sausage







Vienna Sausage

Italian Sausage

Hot Dog

产品封尾

PRODUCT END CLOSURES



Knotted







Automatic Open End

Standard









PRODUCT STORAGE

产品储存

包装好的肠衣应存放于通风、清洁、无异味的仓库内, 避免阳光 直射。离地、离墙10cm, 按批次、分品种码堆。要有防虫、防鼠 设施。要远离污染源、火源。在上述储存条件下,产品保质期为 2年,超过保质期的产品经检验合格后可以使用。包装袋要随时 密封, 防止水分散失和污染。存放在温度不高于25℃, 湿度在 40%-70%的环境内。

使用说明

- Y 保证灌装机良好运转。
- ✔ 在湿度不低于40%的环境下使用,烟熏时应保持香肠表面湿润。
- ✓ 在剥皮前香肠应迅速冷却,使用盐水冷却效果更好。
- ✓ 使用蒸汽加温、加湿更利于剥皮。







The packed casing should be stored in a ventilated, clean, and odor-free warehouse, avoid direct sunlight, 10cm from the ground and from the wall, stacked according to batches and varieties. Storage should be antiinsect and rodent-proof. Keep away from contamination sources and fire sources. Under the above storage conditions, the product has a shelf life of 2 years, and products over shelf life can be used after passing the inspection. The packaging bag should be sealed at all times to prevent water loss and contamination where the temperature is below 25°C and the humidity is 40%-70%.

CONDITIONS FOR USE

- Always ensure the stuffing machine is set up
- Typically the casing is processed in a sausage kitchen at relative humidity above 40%; The sausage surface should be maintained wet during smoking.
- Before peeling, the sausage must be cooled down quickly, preferably with brine chill if available.
- Use steam to heat and humidify the sausage to achieve better peelability.

包装展示





Warehouse Storage

Warehouse Storage

PACKAGING FORM

Product Packaging











SALES TECHNICAL SUPPORT

销售技术支持

潍森以客户为中心,客户服务是我们 优先考虑的。

我们的销售技术支持团队针对在纤维 素肠衣灌装肠制品过程中出现的一系 列问题进行解答,帮助客户解决实际 问题。

Vicel is focused on our customer's needs. Customer service is our priority.

Our sales technical team will provide support to solve all processing performance parame-ters. We help customers to improve quality, yield,costs,so they can provide better products.



以客户为中心

销售技术支持

潍森以客户优先为原则,我们的技术支持团队可以在肠衣的品类定制、香肠制作等方面更好的服务于广大客户。

- ✔ 肠衣使用的最大效益
- ✔ 产品质量的一致性
- ✔ 优化客户加工参数
- **V** 新产品研发
- ✔ 成本控制(效率)
- ✔ 关于肠衣工业和肉类加工技
- ✔ 肠衣使用和香肠生产过程 中的故障排除
- 术方面的信息/培训



Sales technical support

Vicel's principle objective is to put the customer's needs first. Our focus is to customize the products both in casing and sausage production.

- · Maximize the casing benefits
- · Optimize customer processing
- · Yield, efficiency, cost control
- · Trouble shoot all production and usage
- Quality consistency
- New products
- Technology support in casing and meat technology

怎样开始销售技术支持工作

将问题与销售经理沟通后共同制定服务计划。

How to initiate sales technical support work

Please communicate your concerns with your sales agent. Then we can mutually develop a customized service plan.

技术支持的原则和宗旨

- ✔坚持"用户第一"原则。
- v 始终以向客户提供专业化、标准化、多元化的全方位服务为宗旨。
- ▼专业服务团队提供解决方案。
- **∨**服务方式分为:销售热线支持、定期巡检服务、电子邮件、现场支持等方式。

Principles and purposes of technical support

- Our objective is to put the customer's needs first.
- Always aim to provide total service of specialization and standardization.
- We have a professional service team to provide solutions.
- Service modes include: sales hotline support,regular inspection service,e-mail,on-site support,training and other ways as necessary.



精诚合作 Sincere Cooperation



选材优质 High Quality Material



信誉良好 Good Reputation



产品优质 High Quality Product