



CDIX
川达机械



河北川达机械制造有限公司
Hebei Chuanda Machinery Manufacturing Co., Ltd

DIRECTORY

目录

● 冻肉切丁机 CD300/CD440	2
● 冻肉切丁机CD350	3
● 冻肉切丁机 CD500/CD550	4
● 冻肉切片机 CD455	5
● 连续式切片机 CD430	6
● 小型冻肉切片机 CD280	7
● 二维切丁机 CDEW	8
● 二维切丁机 CDEW-220	9
● 连续砍排机 CDV280/CDV360	10
● 冻肉分块机 CDK455/CDL455	11
● 鲜肉切片机 CDX250	12
● 鲜肉切片机 CD600	13
● 多功能切丁机 CD330/CDS350	14
● 多功能切丁机 CD400	15
● 多功能切丁机 CDS500	16
● 波纹薯条机	17
● 去根机 CDG	18
● 多功能切片切丝机 CDS	19
● 多功能切片切丝机 CD190	20
● 多功能切片切丝机 CD500-I	21
● 冻肉切块机 CDQ200	22
● 拌馅机 CDF100/CDF250/CDF350/CDF650/CDF1200	23
● 整形机 CDZX400	24
● 输送机 CDZ-44	25

DIRECTORY

目录

● Frozen Meat Dicer CD300/CD440	2
● Frozen Meat Dicer CD350	3
● Frozen Meat Dicer CD500/CD550	4
● Frozen Meat Slicer CD455	5
● Continuous Frozen Meat Slicer CD430	6
● Frozen Meat Slicer CD280	7
● Two-dimensional Frozen Meat Dicer CDEW	8
● Two-dimensional Frozen Meat Dicer CDEW-220	9
● Continuous Cutting Machine CDV280/CDV360	10
● Frozen Meat Divider CDK455/CDL455	11
● Fresh Meat Slicer CDX250	12
● Fresh Meat Slicer CD600	13
● Multi-Function Cutting Machine CD330/CDS350	14
● Multi-Function Cutting Machine CD400	15
● Multi-Function Cutting Machine CDS500	16
● Wavy Grain French Fry Machine	17
● Vegetable Root Remover CDG	18
● Multi-Functional Slicing Machine CDS	19
● Multi-Functional Slicing Machine CD190	20
● Multi-Functional Slicing Machine CD500-I	21
● Frozen Meat Flaker CDQ200	22
● Mixer CDF100/CDF250/CDF350/CDF650/CDF1200	23
● Shaping Machine CDZX400	24
● Conveyor CDZ-44	25

冻肉切丁机 CD300/CD440



技术参数

- 电压：三相380v 频率50Hz
- 内筒直径：300mm/440 mm
- 物料尺寸：直径小于100mm
直径小于200 mm
- 外形尺寸：1410x760x1208mm
2100x1300x2100mm
- 整机材料：SUS304不锈钢
- 切割范围：4~12mm冻肉丁、丝、片
4~20mm冻肉丁、丝、片
- 投料方式：连续
- 总功率：7kW/14.5 kW
- 产量：500~1000kg/h/1000~20000kg/h
- 重量：464kg/1500 kg
- 切割温度范围：-10℃~0℃
- 适宜切割温度：-6℃~-5℃
- 生产解冻环境温度：-8℃~-4℃
- 厚度调节：人工手动/触摸屏自动

性能介绍

- 先进的刀具拆卸方式
徒手拆卸刀组，不用任何工具
- 清洗方式
用水枪直接清洗
- 安全装置
感应式自动电路切断
- 用途
冻肉切丁、丝、片

Frozen Meat Dicer CD300/CD440

I Technical Data:

- Voltage&Frequency: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 7kW/14.5 kW
- Inner Drum Diameter: 300mm/440 mm
- Capacity: 500~1000kg/h/1000~20000kg/h
- Input Material Size: Diameter Less Than 100mm Diameter Less than 200mm
- Cutting Size Range: 4~12mm Frozen Meat Slices, Strips and Cubes
4~20mm Frozen Meat Slices, Strips and Cubes
- External Dimension: 1410*760*1208mm/2100x1300x2100mm
- Weight: 464kg/1500 kg
- Material of the Machine: SUS304 Stainless Steel
- Cutting Temperature for the Frozen Meat: -10℃~0℃
- Suitable Cutting Temperature for the Frozen Meat: -6℃~-5℃
- Meat Thaw Environment Temperature: -8℃~-4℃
- Material Input Way: Continuously
- Lubricating Way: Oil Nozzle
- Thickness Control: Manual Adjustment/Touch Screen Automatic
- Control System: PLC, Touch Screen, Frequency Transformer

II Introduction:

- Advanced Knife Rollers Disassembly Way:
Workers Could Disassemble the Knife Rollers by Hands,
no Need any Tools
- Cleaning Way:
High Pressure Gun Flush Directly
- Safety Equipment:
Inductive Automatic Shutoff Circuit
- Application:
Frozen Meat Slice, Strips and Cubes

冻肉切丁机 CD350



技术参数

- 电压: 380V 频率50Hz
- 内筒直径: 340mm
- 物料尺寸: 直径小于140mm
- 外形尺寸: 1862x1050x1560mm
- 重量: 800kg
- 投料方式: 连续
- 润滑方式: 机体外油嘴
- 控制系统: PLC 触摸屏变频器伺服
- 总功率: 11.5kW
- 产量: 800~2000kg/h
- 切割范围: 4~20mm冻肉丁、丝、片
- 切割温度范围: -10℃~0℃
- 适宜切割温度: -6℃~-4℃
- 生产解冻环境温度: -6℃~-2℃
- 厚度调节: 人工手动

性能介绍

- 先进的刀具拆卸方式
徒手拆卸刀组, 不用任何工具
- 清洗方式
关闭屏幕保护罩后可直接用水枪清洗
- 安全装置
打开出料口或机体外壳, 整机自动断电
- 用途
可对冷冻肉类进行丁、丝、片切割

Frozen Meat Dicer CD350

I Technical Data:

- Voltage&Frequency: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 11.5kW
- Inner Drum Diameter: 340mm
- Capacity: 800~2000kg/h
- Input Material Size: Diameter Less Than 140mm
- Cutting Size Range: 4~20mm Frozen Meat Slices, Strips and Cubes
- External Dimension: 1862*1050*1560mm
- Weight: 800kg
- Cutting Temperature for the Frozen Meat: -10℃~0℃
- Suitable Cutting Temperature for the Frozen Meat: -6℃~-4℃
- Meat Thaw Environment Temperature: -6℃~-2℃
- Material Input Way: Continuously
- Lubricating Way: Oil nozzle
- Thickness Control: Manual Adjustment
- Control System: PLC, Touch Screen, Frequency Transformer

II Introduction:

- Advanced Knife Rollers Disassembly Way:
Workers Could Disassemble the Knife Rollers by Hands, no Need any Tools
- Cleaning Way:
High Pressure Gun Flush Directly After Closing the Screen Protector
- Safety Equipment:
Open the Discharge Port or Body Shell, the Whole Machine Automatically Power off
- Application:
Frozen Meat Cutting, Slices, Strips and Cubes

冻肉切丁机 CD500/CD550



技术参数

- 电压：三相380v 频率50Hz
- 内筒直径：500mm/550mm
- 物料尺寸：直径小于130mm
直径小于280mm
- 外形尺寸：1630x1260x1840mm
2600x1500x1900mm
- 适宜切割温度：-6℃~-5℃
- 送料方式：连续
- 厚度调节：触摸屏自动
- 总功率：14.5kW/22kW
- 产量：900~1500kg/h/1000~3000kg/h
- 切割范围：4~20mm冻肉丁、丝、片
- 重量：1500kg/1700kg
- 整机材料：SUS304拉丝不锈钢
- 切割温度范围：-10℃~0℃
- 生产解冻环境温度：-8℃~-4℃
- 润滑方式：机体外油嘴
- 控制系统：PLC 触摸屏 变频器

Frozen Meat Dicer CD500/CD550

I Technical Data:

- Voltage&Frequency: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 14.5kW/22kW
- Inner Drum Diameter: 500mm/550mm
- Capacity: 900~1500kg/h/1000~3000kg/h
- Input Material Size: Diameter Less Than 130mm/Diameter Less Than 280mm
- Cutting Size Range: 4~20mm Frozen Meat Slices, Strips and Cubes
- External Dimension: 1630*1260*1840mm/2600*1500*1900mm
- Weight: 1500kg/1700kg
- Material of the Machine: SUS304 Stainless Steel
- Cutting Temperature for the Frozen Meat: -10℃~0℃
- Suitable Cutting Temperature for the Frozen Meat: -6℃~-5℃
- Meat Thaw Environment Temperature: -8℃~-4℃
- Material Input Way: Continuously
- Lubricating Way: Oil Nozzle
- Thickness Control: Touch Screen Automatic
- Control System: PLC, Touch Screen, Frequency Transformer

性能介绍

- 先进的刀具拆卸方式
徒手拆卸刀组，不用任何工具
- 清洗方式
用水枪直接清洗
- 安全装置
感应式自动电路切断
- 用途
冻肉切丁、丝、片

II Introduction:

- Advanced Knife Rollers Disassembly Way:
Workers Could Disassemble the Knife Rollers by Hands,
no Need any Tools
- Cleaning Way:
High Pressure Gun Flush Directly
- Safety Equipment:
Inductive Automatic Shutoff Circuit
- Application:
Frozen Meat Slice, Strips and Cubes

冻肉切片机 CD455



技术参数

- 电压：三相380v 频率50Hz
- 切刀速度：27~90次/分钟
- 物料尺寸：430×700mm
- 外形尺寸：2100x1100x1800mm
- 整机材料：SUS304不锈钢
- 重量：988kg
- 放料方式：往复间断
- 润滑方式：机体油嘴
- 控制系统：PLC 触摸屏 变频器
- 总功率：9.12kW
- 切片厚度：0.3~700mm
- 切割高度：185mm
- 切割温度范围：-10℃~0℃
- 适宜切割温度：-6℃~-5℃
- 生产解冻环境温度：-8℃~-4℃

性能介绍

- 先进的结构设计
六导柱直线定位运动切割结构
- 推料板可徒手拆卸清洗
- 下刃口磨损可更换
- 清洗方式
用水枪直接清洗
- 安全装置
感应式自动电路切断
- 用途
冻肉切片、条、块、卷

Frozen Meat Slicer CD455

I Technical Data:

- Voltage: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 9.12kW
- Knife Cutting Speed: 27~90Times/Minute
- Knife Cutting Thickness: 0.3~700mm
- Input Material Size: 430*700mm
- Cutting Height: 185mm
- External Dimension: 2100x1100x1800mm
- Weight: 988kg
- Machine Material: SUS304 Stainless Steel
- Cutting Temperature for the Frozen Meat: -10℃~0℃
- Suitable Cutting Temperature for the Frozen Meat: -6℃~-5℃
- Meat Thaw Environment Temperature: -8℃~-4℃
- Material Input Way: Put the Material Continuously
- Lubricating Way: Oil Nozzle
- Control System: PLC, Touch Screen, Frequency Transformer

II Introduction:

- Advanced Structure Design:
Six Guide Pillar Straight-line Positioning Cutting Structure
- Pushing Plate Could be Disassembled and Cleaned by Hands
- The lower Edge is Worn and Replaceable
- Cleaning Way:
High Pressure Gun Flush Directly
- Safety Equipment:
Inductive Automatic Shutoff Circuit
- Application:
Frozen Meat Slice, Strips, Blocks and Rolls.

连续式切片机 CD430



技术参数

- 电压：三相380V 频率50Hz
- 切刀速度：27~90次/分钟
- 物料尺寸：430mm
- 外形尺寸：2510x1060x1555 mm
- 整机材料：SUS304拉丝不锈钢
- 重量：1500kg
- 放料方式：连续
- 润滑方式：机体油嘴
- 控制系统：PLC 触摸屏 变频器
- 总功率：9.12kW
- 切割范围：3~1000mm 可调
- 切割高度：100mm
- 气源：0.2MPa
- 切割温度范围：-10℃~0℃
- 适宜切割温度：-6℃~-5℃
- 生产解冻环境温度：-8℃~-4℃

性能介绍

- 先进的切割方式
六导柱直线运动切割结构
- 先进的送料结构
上传送带夹料输送，上压料带与物料接触面始终保持平面状态
- 下刃口磨损可更换
- 清洗方式：
用水枪直接清洗
- 安全装置
感应式自动电路切断
- 用途
冻肉切片、条、块

Continuous Frozen Meat Slicer CD430

I Technical Data:

- Voltage: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 9.12kW
- Air Source: 0.2MPa
- Knife Cutting Speed: 27~90Times/Minute
- Cutting Size: 3~1000mm Cubes, Strips and Slice
- Input Material Width: 430mm
- Cutting Height: 100mm
- External Dimension: 2510*1060*1555mm
- Weight: 1500kg
- Machine Material: SUS304 Wire Drawing Stainless Steel
- Cutting Temperature for the Frozen Meat: -10℃~0℃
- Suitable Cutting Temperature for the Frozen Meat: -6℃~-5℃
- Meat Thaw Environment Temperature: -8℃~-4℃
- Material Input Way: Put the Material Continuously
- Lubricating Way: Oil Nozzle
- Control System: PLC, Touch Screen, Frequency Transformer

II Introduction:

- Advanced Cutting Way:
Six Guide Pillar Straight-line Cutting Structure
- Advanced Feeding-in Structure:
Up and Down Conveyor Belt Press the Meat and Feeding-in, the up Belt Part Connecting with the Meat is Always Flat
- The lower Edge is Worn and Replaceable
- Cleaning Way:
High Pressure Gun Flush Directly
- Safety Equipment:
Inductive Automatic Shutoff Circuit
- Application:
Frozen Meat Slice, Strips and Big Cubes.



小型冻肉切片机 CD280



技术参数

- 电压：三相380V 频率50Hz
- 总功率：4.5kW
- 切刀速度：35~85次/分钟
- 切片厚度：0.5~100mm
- 物料尺寸：400x280mm
- 切割高度：180mm
- 外形尺寸：1050x745x1715mm
- 整机材料：SUS304不锈钢
- 切割温度范围：-10℃~0℃
- 重量：560kg
- 适宜切割温度：-6℃~-5℃
- 放料方式：往复间断
- 生产解冻环境温度：-8℃~-4℃
- 润滑方式：机体油嘴
- 控制系统：PLC 触摸屏 变频器

性能介绍

- 先进的结构设计
六导柱直线定位运动切割结构
- 推料板可徒手拆卸清洗
- 清洗方式
用水枪直接清洗
- 安全装置
感应式自动电路切断
- 用途
冻肉切片、条、块、卷

Frozen Meat Slicer CD280

I Technical Data:

- Voltage: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 4.5kW
- Knife Cutting Speed: 35~85Times/Minute
- Knife Cutting Thickness: 0.5~100mm
- Input Material Size: 400*280mm
- Cutting Height: 180mm
- External Dimension: 1050*745*1715mm
- Weight: 560kg
- Machine Material: SUS304 Stainless Steel
- Cutting Temperature for the Frozen Meat: -10℃~0℃
- Suitable Cutting Temperature for the Frozen Meat: -6℃~-5℃
- Meat Thaw Environment Temperature: -8℃~-4℃
- Material Input Way: Put the Material Continuously
- Lubricating Way: Oil Nozzle
- Control System: PLC, Touch Screen, Frequency Transformer

II Introduction:

- Advanced Structure Design:
Six Guide Pillar Straight-line Positioning Cutting Structure
- Pushing Plate Could be Disassembled and Cleaned by Hands
- Cleaning Way:
High Pressure Gun Flush Directly
- Safety Equipment:
Inductive Automatic Shutoff Circuit
- Application:
Frozen Meat Slice, Strips, Blocks and Rolls.

二维切丁机 CDEW



技术参数

- 电压: 380v 频率50Hz
- 圆刀直径: 200mm
- 物料宽度: 430mm
- 外形尺寸: 2580x1130x1740mm
- 整机材料: SUS304拉丝不锈钢
- 重量: 1700kg
- 放料方式: 连续
- 润滑方式: 机体油嘴
- 控制系统: PLC 触摸屏 变频器
- 总功率: 12kW
- 切刀速度: 27~90次/min
- 切割高度: 50mm
- 切割温度范围: $-10^{\circ}\text{C} \sim 0^{\circ}\text{C}$
- 适宜切割温度: $-6^{\circ}\text{C} \sim -5^{\circ}\text{C}$
- 生产解冻环境温度: $-8^{\circ}\text{C} \sim -4^{\circ}\text{C}$

性能介绍

- 先进的切割结构设计
四导柱上下贯穿运动切割结构, 切条完成后刀架将条压入圆刀组成丁
- 先进的送料结构
上下传送带夹料输送, 上压料带与物料接触面始终保持平面状态
- 清洗方式
用水枪直接清洗
- 安全装置
感应式自动电路切断
- 用途
冻肉和麻冻肉的切片、条、块

Two-dimensional Frozen Meat Dicer CDEW

Technical Data:


- Voltage: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 12kW
- Circular Knife Diameter: 200mm
- Knife Cutting Speed: 27~90Times/Minute
- Input Material Width: 430mm
- Cutting Height: 50mm
- External Dimension: 2580*1130*1740mm
- Weight: 1700kg
- Machine Material: SUS304 Wire Drawing Stainless Steel
- Cutting Temperature for the Frozen Meat: $-10^{\circ}\text{C} \sim 0^{\circ}\text{C}$
- Suitable Cutting Temperature for the Frozen Meat: $-6^{\circ}\text{C} \sim -5^{\circ}\text{C}$
- Meat Thaw Environment Temperature: $-8^{\circ}\text{C} \sim -4^{\circ}\text{C}$
- Material Input Way: Put the Material Continuously
- Lubricating Way: Oil Nozzle
- Control System: PLC, Touch Screen, Frequency Transformer

II Introduction:

- Advanced Cutting Structure Design:
Four Guide Pillar Up-and-Down Cutting Structure, After Cutting to Strips, the Blade Carrier Will Press the Strips Into Circular Knife and Cut Into Cubes.
- Advanced Feeding-in Structure:
Up and Down Conveyor Belt Press the Meat and Feeding-in, the up Belt Part Connecting With the Meat is Always Flat.
- Cleaning Way:
High Pressure Gun Flush Directly
- Safety Equipment:
Inductive Automatic Shutoff Circuit
- Application:

 Frozen Meat Slice, Strips, Cubes.

二维切丁机 CDEW-220



技术参数

- 电压：三相380V 频率50HZ
- 物料尺寸：宽度218mm 高度5-20mm 长度1100mm
- 外形尺寸：2347x1021x1325mm
- 重量：772kg
- 进料皮带宽度：220mm
- 材质：304不锈钢
- 切割温度范围：10℃~0℃
- 生解冻环境温度：-8℃~-4℃
- 润滑方式：机体外油嘴加注170℃耐高温润滑油
- 总功率：6kW
- 切割范围：5-20mm
- 出料口距地面：530mm
- 适宜切割温度：-6℃~-5℃
- 放料方式：连续
- 控制系统：PLC 触摸屏 变频器

性能介绍

- 先进的刀具拆卸方式：
徒手拆卸刀组，不用任何工具
- 清洗方式：
用水枪直接清洗
- 安全装置：
感应式自动电路切断
- 用途：
可对冷冻肉、漂烫菜、巧克力、干果等食材进行切丁、切碎

Two-Dimensional Frozen Meat Dicer CDEW-220


Technical Data:

- Voltage & Frequency: 380V/50Hz /3Phase or According to Customer's Demands
- Power: 6kW.
- Input Material Size: Width 218mm, Height 5-20mm, Length 1100mm
- External Dimension: 2347 x1021x1325mm
- Weight: 772kg
- Cutting Range: 5-20mm
- Input Belt Width: 220mm
- Distance Between Outlet to Ground: 530mm
- Machine Material: SUS304 Stainless Steel
- Suitable Cutting Temperature: -6℃ ~ -5℃
- Cutting Temperature: -10℃ ~ 0℃
- Meat Thaw Environment Temperature: -8℃ ~ -4℃
- Material Input Way: Continuously
- Lubricating Way: Oil Nozzle (170℃ High Temperature Resistant lubricating oil)
- Control System: PLC, Touch Screen Frequency Transformer

Machine Introduction:

- Advanced Knife Rollers Disassembly Way:
Workers Could Disassemble the Knife Rollers by Hands, no Need Any Tools
- Cleaning Way:
High Pressure Gun Flush Directly
- Safety Equipment:
Inductive Automatic Shutoff Circuit
- Application:
Frozen Meat/Vegetables/Chocolate/Nuts Slice, Strips and Cubes

连续砍排机 CDV280/CDV360



技术参数

- 电压: 380v 频率50Hz
- 功率: 5.5kW/7kW
- 进料尺寸: 宽260mm, 高100mm / 宽360mm, 高140mm
- 重量: 1200公斤/1600公斤
- 切割温度范围: $-6^{\circ}\text{C} \sim 0^{\circ}\text{C}$
- 外形尺寸: 2490x1090x1440 mm/2600x1300x1700 mm
- 生产解冻环境温度: $-6^{\circ}\text{C} \sim -3^{\circ}\text{C}$
- 切割尺寸: 1~50mm范围任意调整
- 适宜切割温度: $-4^{\circ}\text{C} \sim -3^{\circ}\text{C}$
- 生产量: 120~290刀/分钟 / 160~320刀/分钟
- 放料方式连续
- 控制系统: PLC触摸屏 变频器 霍尔开关式

性能介绍

- 切刀驱动:
由单独一台电机驱动, 用变频器控制, 根据物料调节切割刀速。
- 物料输送部分:
由一台伺服电机驱动, 根据需求, 在一定范围内随意调整输送速度。
- 用途:
肉类、骨类切片、切丝、切段, 切割范围1~50mm。

Continuous Cutting Machine CDV280/CDV360

I Technical Data:

- Voltage: 380V/50Hz/3Phase or According to Customer's Demands
- External Dimension: 2490x1090x1440 mm/2600x1300x1700mm
- Power: 5.5kW/7kW
- Feed Size: Width260mm, Height100mm / Width360mm, Height140mm
- Weight: 1200kg/1600kg
- Cutting Temperature for the Frozen Meat: $-6^{\circ}\text{C} \sim 0^{\circ}\text{C}$
- Suitable Cutting Temperature for the Frozen Meat: $-4^{\circ}\text{C} \sim -3^{\circ}\text{C}$
- Meat Thaw Environment Temperature: $-6^{\circ}\text{C} \sim -3^{\circ}\text{C}$
- Knife Cutting Speed: 120~290 Times/Minute / 160~320Times/Minute
- Cutting Size: 1~50mm
- Material Input Way: Put the Material Continuously
- Control System: PLC Touch Screen, Frequency Transformer, Hall Switch

II Introduction:

- Cutting Knife-Driven:
Driven by One Single Motor, Controlled by Frequency Transformer, Cutting Speed is Based on the Material.
- Material Transportation:
Driven by One Single Servo Motor, Able to Customize Transportation Speed Base on Demands
- Application:
Meat, Bones Slicing, Dicing, Cutting Range 1~50mm

冻肉分块机 CDK455/CDL455



技术参数

- 电压: 380V 频率50Hz
- 外形尺寸: 1960x990x1680mm
2450x1100x1660 mm
- 物料宽度: 440mm
- 重量: 1100kg/1550kg
- 切割尺寸: 5~100mm范围任意调整
- 生产量: 15~45刀/分钟
- 控制系统: PLC 触摸屏 变频器 伺服
- 两把立切刀距离: 145mm
- 功率: 9kW
- 物料高度: 250mm
- 切割温度范围: -10℃~0℃
- 生产解冻环境温度: -8℃~-4℃
- 适宜切割温度: -6℃~-5℃

Frozen Meat Divider CDK455/CDL455

I Technical Data:

- Voltage: 380V 50Hz
- Power: 9kW
- Dimension: 1960x990x1680 mm/2450x1100x1660mm
- Input Material Width: 440mm
- Input Material Height: 250mm
- Cutting Temperature for the Frozen Meat: -10℃~0℃
- Suitable Cutting Temperature for the Frozen Meat: -6℃~-5℃
- Meat Thaw Environment Temperature: -8℃~-4℃
- Weight: 1100kg/1550kg
- Cutting Speed: 15~45 Times/Minutes
- Cutting Size: 5~100mm or According to Customer's Demands
- Control System: PLC, Touch Screen, Frequency Transformer
- Distance Between Two Vertical Cutters: 145mm

性能介绍

- CDL455连续进料方式: 采用四套单独的上压料皮带与下压料皮带, 夹着物料向前输送, 上压料带与物料接触面始终保持平面压料状态
- 先进的切割方式: 六导柱直线运动切割结构
- 下刃口磨损可更换
- 清洗方式: 用水枪直接清洗
- 安全装置: 感应式自动电路切断
- 用途:
将大块原料肉分切成中小块物料 (可配合三维切丁机与绞肉机使用)

II Introduction:

- CDL455 Advanced Cutting Way, Four Sets Of Separate Upper And Lower Pressing Belts Are Used To Transport The Material Forward, And The Contact Surface Between The Upper Pressing Belt And The Material Is Always In A Flat Pressing State.
- Advanced Cutting Way:
Six Guide Pillar Straight-line Cutting Structure
- The lower Edge is Worn and Replaceable
- Cleaning Way:
High Pressure Gun Flush Directly
- Safety Equipment:
Inductive Automatic Shutoff Circuit
- Application: Cut the large Material Into Small and Medium Pieces(This Machine can be Sued With 3D Meat Dicer and Meat Mixer)

鲜肉切片机 CDX250



技术参数

- 电压：三相 380V 频率 50Hz
- 进料宽度：315mm
- 进料高度：100mm
- 外形尺寸：2800*1200*1700mm
- 生产量：90刀/分钟 X 2刀
- 适宜切割温度：3℃~3℃
- 放料方式：连续
- 润滑方式：机体外油嘴
- 总功率：5.37 KW
- 切割范围：1-20mm
- 重量：1000KG
- 材质：SUS 304不锈钢
- 控制系统：PLC 触摸屏 变频器

性能介绍

- 可徒手拆卸进料皮带和出料皮带
- 压料皮带采用水平压料方式，且压力可调，无尾料
- 采用双圆刀边旋转边切割的原理，保证肉切面光滑且无连刀现象
- 通过伺服送料及可调节的切片厚度装置，在屏幕上读取切割厚度，保证切割厚度精准
- 用途：适用于牛肉、羊肉、猪肉、鸡肉等鲜肉切片

Fresh Meat Slicer CDX250


I Technical Data:

- Voltage&Frequency: 380V/50Hz/3Phase or According to Customer's Demands
- Power 5.37KW
- Feed Width 315mm Feed Height 100mm
- Cutting Speed: 90 times/Minutes X 2 times
- External Dimension: 2800* 1200* 1700mm
- Weight: 1000kg
- Suitable Cutting Temperature: 3℃~3℃
- Cutting Range: 1-20mm
- Material: SUS 304 Stainless Steel
- Material Input Way: Continuously
- Control System: PLC Touch Screen Inverter Frequency Transformer
- Lubrication Method: Oil Nozzle

II Introduction:

- The Feed Belt And Discharge Belt Can Be Disassembled By Hand
- The Press Belt Adopts The Horizontal Press Mode, And The Pressure Is Adjustable, No Tail Material
- Using The Principle Of Double Round Knife Edge Rotating Edge Cutting, To Ensure That The Meat Section Is Smooth And It Splits All The Meat
- The Cutting Thickness Is Read On The Screen Through The Servo Feed And Adjustable Slice Thickness Device To Ensure Accurate Cutting Thickness
- Application: Suitable For Beef, Lamb, Pork, Chicken And Other Fresh Meat Slices

鲜肉切片机 CD600

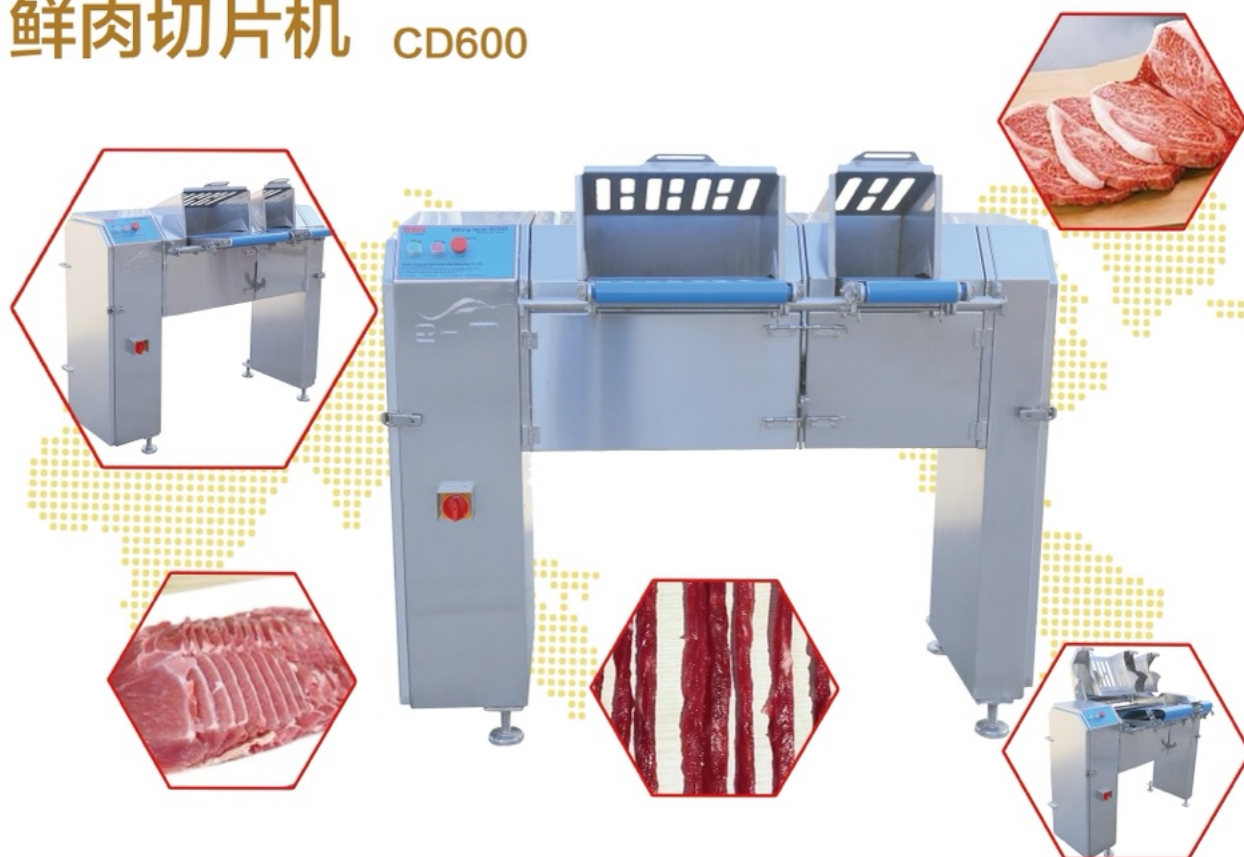

☑ 技术参数

- 电压: 380v 频率50Hz
- 总功率: 2.2kW
- 切刀直径: 200mm 产量: 500kg/h
- 外形尺寸: 1540x900x1390mm
- 重量: 570kg
- 原料肉放入尺寸: ≤400mm
- 原料肉温: 冷鲜肉
- 切割尺寸: 3-50mm的丁、丝、片

⚙ 性能介绍

- 整机采用SUS304不锈钢制作, 保证了其耐用性和安全性, 并且易于清洗。本机有两个刀组料道, 可同时切割不同规格的两种尺寸的产品, 最小切割规格3mm, 可对宽度小于400mm, 厚度小于150mm的冷鲜肉进行肉片、肉丝的切割。
- 本机配备了进料传送带和进料保护罩, 在鲜肉切割时会起到很好的防护作用, 传送带传送速度62mm/s。
- 本机刀轴采用特种不锈钢, 强度高, 性能稳定不易弯曲变形。

Fresh Meat Slicer CD600

I Technical Data:

- Voltage&Frequency: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 2.2kW
- Knife Diameter: 200mm
- Capacity: 500kg/h
- External Dimension: 1540*900*1390mm
- Weight: 570kg
- Raw Material Meat: Meat Width ≤ 400 mm
- Temperature: Fresh Meat
- Dicing size: 3-50mm, Cubes, Shreds, Slices

II Introduction:

- The Whole Machine is Made of SUS304 Stainless Steel Which Makes the Machine Durable and Safety, Easy to Clean.
- Two Slicing Sizes and Two Conveyor Belts, CD600 Could Slice Two Different Sizes at the Same Time.
- Minimum Slicing Size is 3mm, Raw Material Fresh Meat Size Width Smaller Than 400mm, Thickness Smaller Than 150mm.
- CD600 Equipped With Feed-in Conveyor and Protective Cover, They all Protect Worker's Safety. Conveyor Belt Speed is 62mm/s.
- Knife Shaft Adopts Special Stainless Steel, High Intensity, Stable Property and Not Easy to be Out of Shape.

多功能切丁机 CD330/CDS350



技术参数

- 电压：三相380v 频率50Hz
- 内筒直径：330 mm
- 物料尺寸：直径小于120 mm
- 外形尺寸：1260x900x1700mm
1580x1320x1600mm
- 整机材料：SUS304不锈钢
- 投料方式：连续
- 润滑方式：机体外油嘴
- 控制系统：防水按钮 变频器
- 总功率：4kW/6.2 kW
- 产量：1000~3000kg/h
- 切割范围：3~20mm丁、丝、片
- 重量：500 kg/650 kg
- 冻肉切割温度范围：-5℃~0℃
- 生产解冻环境温度：-6℃~-3℃
- 厚度调节：人工手动

性能介绍

CD330

- 采用变频器控制驱动电机
- 操作为按钮式操作
分为低速、中速、高速，可根据物料选择不同的切割速度

CDS350

- 采用双电机控制进行切割，可针对不同物料调整不同的切割速度
- 先进的刀具拆卸方式 徒手拆卸圆刀组和刨刀组，不使用任何工具
- 用途：
可对奶酪、蔬菜、冷冻水果、冷冻肉类进行丁、丝、片切割

Multi-Function Cutting Machine CD330/CDS350

I Technical Data:

- Voltage&Frequency: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 4kW/6.2 kW
- Inner Drum Diameter: 330mm
- Capacity: 1000~3000kg/h
- Input Material Size: Diameter less than 120mm
- Cutting Size Range: 3~20mm Slices, Strips and Cubes
- External Dimension: 1260*900*1700mm/1580x1320x1600mm
- Weight: 500kg/650 kg
- Material of the Machine: SUS304 Stainless Steel
- Cutting Temperature for the Frozen Meat: -5℃~0℃
- Meat Thaw Environment Temperature: -6℃~-3℃
- Material Input Way: Continuously
- Lubricating Way: Oil Nozzle
- Thickness Control: Manual Adjustment
- Control System: Waterproof Button, Frequency Transformer

II Introduction:

CD330

- Driven By A Motor; Controlled By The Transducer.
- Push-Button Operation (Low-Speed/ Medium-Speed/ High-Speed); Speed Adjustable.

CDS350

- Double Motor Control For Cutting, Can Adjust Different Cutting Speed For Different Materials
- Advanced Tool Disassembly Method Disassemble Round Tool Set And Planer Tool Set By Hand Without Using Any Tools
- Application:
Cheese, Vegetables, Frozen Fruit and Frozen Meat Cutting, Slices, Strips And Cubes

多功能切丁机 CD400



技术参数

- 电压：三相380v 频率50Hz
- 内筒直径：400mm
- 物料尺寸：直径小于200mm
- 外形尺寸：1440x1250x1600mm
- 整机材料：SUS304不锈钢
- 投料方式：连续
- 润滑方式：机体外油嘴
- 控制系统：防水按钮 变频器
- 总功率：7.5kW
- 产量：2000~4000kg/h
- 切割范围：3~12mm丁、丝、片
- 重量：600kg
- 冻肉切割温度范围：-5℃~0℃
- 生产解冻环境温度：-6℃~-3℃
- 厚度调节：人工手动

性能介绍

- 刀片采用进口刀片
刀片薄且锋利，切面光滑
- 清洗方式
用水枪直接清洗
- 安全装置
感应式自动电路切断
- 用途：
可对奶酪、蔬菜、冷冻水果、冷冻肉类进行丁、丝、片切割

Multi-Function Cutting Machine CD400

I Technical Data:

- Voltage&Frequency: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 7.5kW
- Inner Drum Diameter: 400mm
- Capacity: 2000~4000kg/h
- Input Material Size: Diameter less than 200mm
- Cutting Size Range: 3~12mm Slices, Strips and Cubes
- External Dimension: 1440*1250*1600mm
- Weight: 600kg
- Material of the Machine: SUS304 Stainless Steel
- Cutting Temperature for the Frozen Meat: -5℃~0℃
- Meat Thaw Environment Temperature: -6℃~-3℃
- Material Input Way: Continuously
- Lubricating Way: Oil Nozzle
- Thickness Control: Manual Adjustment
- Control System: Waterproof Button, Frequency Transformer

II Introduction:

- Use Imported Knife Blades:
The Knife Pieces is Thin and Sharp, Cutting Surface is Smooth
- Cleaning Way:
High Pressure Gun Flush Directly
- Safety Equipment:
Inductive Automatic Shutoff Circuit
- Application:
Cheese, Vegetables, Frozen Meat and Frozen Fruit Cutting, Slices, Strips and Cubes

多功能切丁机 CDS500



技术参数

- 电压：三相380v 频率50Hz
- 内筒直径：500mm
- 物料尺寸：直径小于200mm
- 重量：1751kg
- 冷冻食材切割温度范围：-8℃~0℃
- 生产解冻环境温度：-7℃~-3℃
- 润滑方式：机体外油嘴加注170℃ 耐高温润滑油
- 控制系统：PLC 触摸屏变频器
- 最大切割范围：3~20mm丁、丝、片
- 总功率：19kW
- 产量：1000~5000kg/h
- 外形尺寸：1650x1630x1780mm
- 材质：SUS 304不锈钢
- 冷冻食材适宜切割温度：-5℃
- 放料方式：连续
- 出料口高度：400mm

性能介绍

- 先进的刀具拆卸方式：
徒手拆卸刀组，不用任何工具
- 清洗方式：
关闭屏幕保护罩后可直接用水枪清洗
- 安全装置：
打开出料口或机体外壳，整机自动断电
- 用途：
可对奶酪、蔬菜、冷冻水果、冷冻肉类进行丁、丝、片切割

Multi-Function Cutting Machine CDS500

I Technical Data:

- Voltage&Frequency: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 19kW
- Inner Drum Diameter: 500mm
- Capacity: 1000~5000kg/h
- Input Material Size: Diameter less than 200mm
- External Dimension: 1650 * 1630 * 1780mm
- Weight: 1751kg
- Machine Material: SUS304 Stainless Steel
- Cutting Temperature: -8℃~0℃
- Suitable Cutting Temperature: -5℃
- Meat Thaw Environment Temperature: -7℃~-3℃
- Material Input Way: Continuously
- Lubricating Way: Oil Nozzle (170℃ High Temperature Resistant lubricating oil)
- Control System: PLC, Touch Screen Transformer
- Max Cutting Range: 3~20mm Cubes, Strips, Slices
- Output Material Hight: 400mm

II Machine Introduction:

- Advanced Knife Rollers Disassembly Way:
Workers Could Disassemble the Knife Rollers by Hands, no Need any Tools
- Cleaning Way:
High Pressure Gun Flush Directly After Closing the Screen Protector
- Safety Equipment:
Open the Discharge Port or Body Shell, the Whole Machine Automatically Power off
- Application:
Cheese, Vegetables, Frozen Meat and Frozen Fruit Cutting, Slices, Strips and Cubes

波纹薯条机



技术参数

- 电压：三相380v 频率50Hz
- 总功率：5.5 kW
- 内筒直径：500mm
- 产量：1000~5000kg/h
- 切割范围：3~20mm
- 物料尺寸：直径小于200mm
- 外形尺寸：1800x1300x1930mm
- 重量：680 kg
- 整机材料：SUS304不锈钢
- 投料方式：连续
- 润滑方式：机体外油嘴
- 厚度调节：人工手动

性能介绍

- 清洗方式
用水枪直接清洗
- 安全装置
感应式自动电路切断
- 用途
1.可更换刀组对根茎类蔬菜做丁、丝、片切割
2.可对土豆、红薯、芋头等根茎类农作物进行波浪条或波浪纹切割

Wavy grain French fry machine

I Technical Data:

- Voltage&Frequency: 380V/50Hz/3Phase Or According To Customer's Demands
- Power: 5.5Kw
- Inner Drum Diameter: 500mm
- Input Material Size: Diameter Less Than 200mm
- Capacity: 1000~5000Kg/H
- Cutting Size Range: 3~20mm
- External Dimension: 1800x1300x1930mm
- Weight: 680Kg
- Material Of The Machine: SUS304 Stainless Steel
- Material Input Way: Continuously
- Lubricating Way: Oil Nozzle
- Thickness Control: Manual Adjustment

II Introduction:

- Cleaning Way:
High pressure gun flush directly
- Safety Equipment:
Inductive Automatic Shutoff Circuit
- Application:
1. Replaceable Knife Set For Root Vegetables Cutting, Slices ,Strips And Cubes
2. The Root Crops Such As Potatoes, Sweet Potatoes And Taro Can Be Cut With Wavy Strips Or Wavy Patterns

去根机 CDG



技术参数

- 电压：三相380v 频率50Hz
- 总功率：0.55kW
- 产量：5-10秒/棵
- 气压：0.6MPa
- 外形尺寸：865x820x1405mm
- 重量：234 kg
- 整机材料：SUS304不锈钢

性能介绍

- 专用于白菜，圆白菜去根
- 产品高效，双手操作，安全、方便、稳定、卫生
- 自由调节圆白菜（白菜）去根深度
- 多种去根刀具，可以控制去根大小
- 清洗方式：直接用水枪清洗

Vegetable Root Remover CDG

Machine Parameters:

- Voltage: Three-Phase 380v
- Frequency: 50Hz
- Power: 0.55kW
- Air Pressure: 0.6MPa
- External Dimensions: 865x820x1405mm
- Weight: 234 kg
- Production Capability: 5-10 Sec/Pieces
- Material of the Machine: SUS304 Stainless Steel

Machine Introduction:

- Professional in Cabbage and Other Vegetables Root Removing
- The Machine is Easy to Use (can Operate With Hands Directly), and the Machine is Efficient, Convenience and Stable.
- The Machine can Use Customized Blade Size to Meet Different Vegetable Root Use.
- How to Clean the Machine: Directly Use Water Gun to Clean.

多功能切片切丝机 CDS



技术参数

- 电压：三相380v 频率50Hz
- 总功率：15kW
- 产量：1000~3000kg/h
- 物料尺寸：直径260mm
- 切割厚度：1.5~7mm
- 外形尺寸：1000x1500x1650mm
- 重量：459 kg
- 整机材料：SUS304不锈钢

性能介绍

- 可将卷心菜、大白菜切丝；土豆、红薯根茎类蔬菜切片。
- 清洗方式：直接用水枪清洗

Multi-Functional Slicing Machine CDS

Machine Parameters:

- Voltage: Three-Phase 380v
- Frequency: 50Hz
- Power: 1.5kW
- Material Size: Diameter 260 mm
- Cutting Thickness: 1.5~7mm
- External Dimensions: 1000x1500x1650mm
- Weight: 459 kg
- Product Capability: 1000 ~ 3000kg/h
- Material of the Machine: SUS304 Stainless Steel

Machine Introduction:

- This Machine Can Slice Vegetables (Potatoes, Sweet Potatoes, Etc) and Shred Vegetables (Cabbages and Other Root Vegetables, Etc)
- How to Clean the Machine: Directly Use Water Gun to Clean

多功能切片切丝机 CD190



技术参数

- 电压：三相380v 频率50Hz ● 功率：5.5Kw
- 外形尺寸：1800X1000X1500mm
- 重量：530kg
- 物料切割尺寸：宽190mm，高140mm
- 生产量：100-644刀/分钟
- 切割范围：1-50mm范围任意调整
- 进料口离地高度：910mm
- 出料口离地高度：500mm
- 整机材料：SUS304不锈钢 ● 切割方式：连续入料

性能介绍

- 输送带可徒手拆卸，方便清洁
- 上压料带前端随物料起伏，始终与切刀距离保持不变
- 安全保护：入料保护罩为感应开关，出料保护罩为霍尔开关
- 用途：叶类、根茎类蔬菜切段、切片

Multi-Functional Slicing Machine CD190

I Technical Data:

- Voltage&Frequency: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 5.5kw
- External Dimension: 1800*1000*1500mm
- Weight: 530kg
- Cutting Size: Width190mm, Height140mm
- Knife Cutting Speed: 100-644 Times/Minute
- Cutting Size: 1-50mm, According to Customer's Demands
- Input Material Height: 910mm
- Output Material Height: 500mm
- Machine Material: SUS304 Wire Drawing Stainless Steel
- Material Input Way: Put the Material Continuously

II Introduction:

- The Conveyor Belt can be Disassembled by Hand for Easy Cleaning.
- The Front End of the Upper Pressing Belt Fluctuates With the Material, and the Distance From the Cutter Remains Unchanged
- Security Protection: Material Input Protective Cover is an Induction Switch, and the Material Output Protective Cover is a Hall Switch
- Application: Leaf, Root Vegetables Dicing and Slicing

多功能切片切丝机 CD500-I



技术参数

- 电压：三相380v 频率50Hz
- 内筒直径：500mm
- 投入量：5kg/次
- 外形尺寸：1260x1000x1480mm
- 整机材料：SUS304镜面不锈钢
- 投料方式：连续
- 厚度调节：人工手动
- 总功率(Power)：2.25kW
- 产量：300~1000kg/h
- 切割范围：1~7mm 丝、片
- 重量：100kg
- 冻肉切割温度范围：-5℃~0℃
- 生产解冻环境温度：-4℃~-2℃
- 控制系统：防水按钮 变频器

性能介绍

- 切面光滑、薄厚均匀
- 清洗方式：用水枪直接清洗
- 安全装置：感应式自动电路切断
- 用途：土豆、胡萝卜等根茎类蔬菜和麻冻肉的切丝、切片

Multi-Functional Slicing Machine CD500-I

I Technical Data:

- Voltage&Frequency: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 2.25kW
- Inner Drum Diameter: 500mm
- Capacity: 300~1000kg/h
- Input: 5kg/Time
- Cutting Size Range: 1~7mm Strips, Slice
- External Dimension: 1260*1000*1480mm
- Weight: 100kg
- The Machine Material: SUS304 Mirror Finished Stainless Steel
- Cutting Temperature for the Frozen Meat: -5℃~0℃
- Meat Thaw Environment Temperature: -4℃~-2℃
- Input Way: Continuously
- Thickness Adjustment: Manual
- Control System: Waterproof Button, Frequency Transformer

II Introduction:

- Smooth Cutting Surface, Thick Even
- Cleaning Way: High Pressure Gun Flush Directly
- Safety Equipment: Inductive Automatic Shutoff Circuit
- Application: Potato, Carrot Etc Root Vegetables and Frozen Meat Shredding and Slicing.

冻肉切块机 CDQ200



技术参数

- 电压：三相380v 频率50Hz
- 产量：1000~2000kg/h
- 外形尺寸：1500x1235x1690mm
- 整机材料：SUS304不锈钢
- 投料方式：间歇
- 控制系统：防水按钮
- 总功率：11 kW
- 物料尺寸：600x500x190mm
- 重量：1000 kg
- 切割温度范围：-18℃~0℃
- 润滑方式：机体外油嘴

性能介绍

- 安全的上料斗
上料斗在切割或者放料时均与料仓形成封闭环境
- 机体面板倾斜
冲洗后可防止大量水滞留在机体表面
- 多位置料车进口
有前、右、后三个位置可以进出料车
- 清洗方式
用水枪直接清洗
- 安全装置
感应式自动电路切断
- 用途
冻肉切片

Frozen Meat Flaker CDQ200

I Technical Data:

- Voltage&Frequency: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 11kW
- Capacity: 1000~2000Kg/h
- Input Material Size: 600*500*190mm
- External Dimension: 1500*1235*1690mm
- Weight: 1000kg
- Material of the Machine: SUS304 Stainless Steel
- Cutting Temperature for the Frozen Meat: -18℃~0℃
- Material Input Way: Intermittently
- Lubricating Way: Oil Nozzle
- Control System: Waterproof Button

II Introduction:

- Safe loading Hopper:
When loading and Cutting, the Space Between loading Hopper and Cutting Hopper is Closed
- Machine Structure with Angles of Inclination:
There Won't be Much Water Stay on the Machine After Washing
- Skip Car Input Directions:
Skip Car Could be Put in From Front, Right and Back Three Directions
- Cleaning Way:
High Pressure Gun Flush Directly
- Safety Equipment:
Inductive Automatic Shutoff Circuit
- Application:
Frozen Meat Slice

拌馅机 CDF100/CDF250/CDF350/CDF650/CDF1200



☑ 技术参数

- 电压：三相380v 频率50Hz
- 总功率：0.85/1.5kW, 2.2/3.3kW, 3/4.5kW, 5/7.5kW
- 转速：低速20r/min 高速40r/min
- 容积：100L, 350L, 650L, 1200L
- 外形尺寸：1020x620x1150mm, 1430x965x1590mm, 1700x1060x1710mm, 2300x1400x2200mm
- 重量：100kg, 400kg, 700kg, 1100kg,
- 整机材料：SUS304不锈钢
- 润滑方式：机体外油嘴
- 控制系统：防水按钮

Mixer CDF100/CDF250/CDF350/CDF650/CDF1200

I Technical Data:

- Voltage: 380V/50Hz/3Phase or According to Customer's Demands
- Power: 0.85/1.5kW, 2.2/3.3kW, 3/4.5kW, 5/7.5kW
- Mixing Speed: Low Speed 20r/min, High Speed 40r/min
- Volume: 100L, 350L, 650L, 1200L
- External Dimension: 1020*620*1150mm, 1430*965*1590mm, 1700*1060*1710mm, 2300*1400*2200mm
- Weight: 100kg, 400kg, 700kg, 1100kg
- Machine Material: SUS304 Stainless Steel
- Lubricating Way: Oil Nozzle
- Control System: Waterproof Buttons

⚙ 性能介绍

- 可徒手拆卸搅拌轴，不用任何工具。
- 大出料口
- 出料口大，出料速度快
- 方便的出料盖
- 出料盖可方便取下，以便于彻底清洗
- 食品安全可靠
- 传动部分与箱体完全隔离，保证馅料卫生安全
- 清洗方式
- 用水枪直接清洗
- 用途
- 用于饺子、火腿等馅料的搅拌

II Introduction:

- No Need any Tools, Workers Could Remove the Mixing Shaft Only by Hands
- Big Output:
The Output is Very Big, Output Speed is Quite Fast
- Convenient Output Cover:
The Output Cover is Very Easy to Remove, it's Convenient for Washing Completely
- Guarantee of Food Safety:
Driving Part is Separated Completely With the Mixing Tank, Guarantee the Food Safety
- Cleaning Way:
High Pressure Gun Flush Directly
- Application:
Mixing Stuffing for Dumplings or Sausages

整形机 CDZX400



技术参数

- 电压: 380v 50Hz
- 产量: 3~5次/分钟
- 外形尺寸: 2780x1600x2000 mm
- 整形腔体尺寸: 700x400x110mm (整形尺寸在此范围内均可定做模具)
- 整机材料: SUS304不锈钢
- 润滑方式: 机体外置加油嘴
- 总功率: 15kW
- 重量: 3900Kg
- 适宜整形温度: -3℃
- 控制方式: 防水按钮PLC伺服驱动器

Shaping Machine CDZX400

I Technical Data:

- Voltage: 380v 50Hz
- Capacity: 3~5 Times/Minute
- External Dimension: 2780X1600X2000mm
- Plastic Cavity Size: 700X400X110mm (Shaping Size in this Range Can be Customized Mold)
- Material of the Machine: SUS304 Stainless Steel
- Suitable Shaping Temperature: -3℃
- Lubricating Way: Oil nozzle
- Control System: PLC, Waterproof Button, Servo Driver
- Power: 15KW
- Weight: 3900Kg

性能介绍

- 原料大小不一时,可直接通过调整PLC参数进行微量调整
- 整形模具更换方便,不同的原料需要定制不同的模具
- 液压站采用水冷循环降温,增加液压系统使用寿命
- 两个方向固定不动,四个方向可移动,并且任意位置可设定停止
- 清洗方式:直接用水枪清洗
- 用途:可以对-6℃以内猪肉 牛肉 羊肉进行整形

II Introduction:

- When the size of raw materials is not fixed, Can be Adjusted Directly by Adjusting PLC Parameters
- Shaping Mold Replacement is Convenient, Different Raw Materials Need to Customize Different Molds
- The hydraulic station adopts a water-cooled cycle to cool down to increase the service life of the hydraulic system.
- Two Directions are Fixed, Four Directions Can be Moved, and Any Position Can be Set to Stop
- Cleaning Way: High pressure gun flush directly
- Application: Pork, beef and mutton can be shaped within -6℃

输送机 CDZ-44



技术参数

- 外形尺寸: 2650x717x1956 mm
- 功率: 1.1kW
- 输送料道宽: 284mm
- 带速: 270mm/s
- 重量: 320kg

性能介绍

- 本机主要用来衔接前后工序环节或设备;
- 由单独一台电机驱动, 可加装变频器实现调速控制;
- 本机结构采用单悬臂式架体结构, 传送带拆卸更换清洗方便;
- 传送带上带有分隔板, 可输送球形等状产品;
- 整体形状为Z字形结构, 接料和进料不易漏料。

Conveyor CDZ-44

Machine Parameters:

- External Dimensions: 2650x717x1956mm
- Power: 1.1kW
- Width of the Input Material Belt: 284mm
- Speed: 270mm/s
- Weight: 320kg

Machine Introduction:

- the Machine is Mainly Used to Connect the Front and Back Food Processing link and Equipment
- Driven by a Single Motor, a Frequency Converter can be Added to Realize Speed Control
- The Machine is a Single Cantilever Frame Structure, and the Conveyor Belt is Easy to Disassemble, Replace and Clean;
- There are Dividers on the Conveyor Belt, Which can Transport Spherical and Other Products.
- The Overall Shape is a Zigzag Structure, and the Material is not Easy to leak When Receiving and Feeding.



www.cdqgjx.com

河北川达机械制造有限公司

Add : 河北省唐山市玉田县鸦鸿桥东风路工业园区

Add : Dongfeng Road Industrial Park, Yahongqiao Town, Yutian County, Tangshan City, Hebei Province.

PC : 064102

Tel : 13933058487 18686773488

Web : www.cdqgjx.com/www.cdqgjx.net

E-mail : cd@cdqgjx.com