


Segmented Transfer Plates

Prevent Product Loss and Increase Safety at the Transfer Point

Transferring products safely throughout your operation is paramount to maximizing production efficiency. Transition points, whether from one conveyor to another, from the belt to a chute, or from a belt to a structure, represent a large challenge in many industries, including Parcel Logistics, Baggage Handling, Food & Beverage, and others. Segmented Transfer Plates (STP) from Flexco can help prevent product loss, increase operator safety, and reduce pinch hazards at the transfer point, preventing potential damage to the product as well as the belt and conveyor structure. Bright yellow segments snap onto the mounting bar to accommodate belts up to 1500mm (60") wide and gaps from 100 to 250mm (4 to 10"). A Segmented Transfer Plate design with a narrower support bar is also available for smaller pulley to pulley gaps from 38 to 75mm (1.5 to 3").

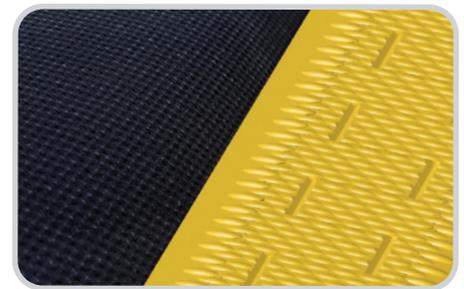

Provides a **smooth transition** at the transfer point.



HDPE segments lock together and raised ribs help reduce the surface friction so **product slides easily across the transfer**.

Features and Benefits:

- Bright yellow color makes segments easy to monitor for replacement.
- Compatible with both endless and mechanical belt splices.
- Ideal for package handling and airport applications.
- Precision-molded segments ensure accurate fit and long-term protection of gaps.
- HDPE segments have raised ribs that reduce surface friction and serve as visual wear indicators.
- Beveled plastic segments positioned directly on the belt prevent product ingestion and reduce pinch points.



Increase the safety of your conveyor by **reducing pinch points**.

Patents: www.flexco.com/patents

www.flexco.com




SEGMENTED TRANSFER PLATES

100–250mm (4–10") Gaps




Bridge segment for belt to chute or slide applications.

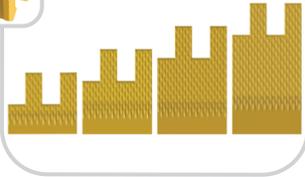

Segments are available in 1" (25mm) increments from 50 to 125mm (2 to 5") lengths.



Different segment lengths can be paired together to provide options for offset mounting to accommodate structure variations.

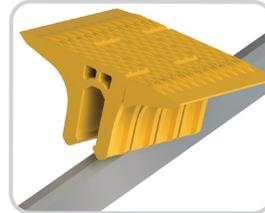


Bar Mounted Segments are easy to install and quickly release under pressure of trapped objects.




The two piece mounting bracket allows for easy mounting and removal.

How To Order


1. Specify belt width. Mounting bar is 50mm (2") longer than specified belt width.
2. Determine transfer size required.
3. Determine mounting bar location and if offset is required.

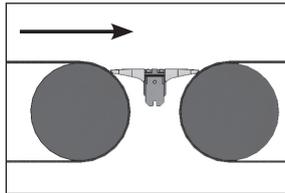

For horizontal to horizontal belt applications.
Measure distance between pulleys at a point no more than 25% of the pulley diameter (including belt thickness) down from the crown of both pulleys.

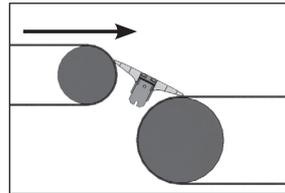

For waterfall applications.
Measure distance from about 45° from the top of the upper pulley to the top point on the lower pulley.

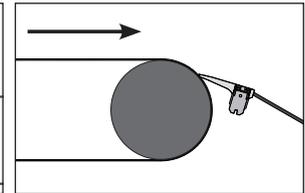

For belt to chute or slide applications.
On pulley side, position no higher than 12mm (1/2") below the crown with bridge segment positioned roughly 3 to 12mm (1/8 to 1/2") above the top of the chute or slide back wall.

For Horizontal to Horizontal or Waterfall Applications and Gaps from 100 to 250mm (4 to 10")

Transfer Width		Mounting Bar Offset		Belt Widths									
				610mm (24")		914mm (36")		1067mm (42")		1219mm (48")		1524mm (60")	
mm	in	mm	in	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number
102	4	none		56100	TGB-4/102-2/2-24/610	56101	TGB-4/102-2/2-36/914	56181	TGB-4/102-2/2-42/1067	56102	TGB-4/102-2/2-48/1219	56103	TGB-4/102-2/2-60/1524
127	5	13	0.5	56104	TGB-5/127-2/3-24/610	56105	TGB-5/127-2/3-36/914	56182	TGB-5/127-2/3-42/1067	56106	TGB-5/127-2/3-48/1219	56107	TGB-5/127-2/3-60/1524
152	6	25	1	56108	TGB-6/152-2/4-24/610	56109	TGB-6/152-2/4-36/914	56183	TGB-6/152-2/4-42/1067	56110	TGB-6/152-2/4-48/1219	56111	TGB-6/152-2/4-60/1524
		none		56112	TGB-6/152-3/3-24/610	56113	TGB-6/152-3/3-36/914	56184	TGB-6/152-3/3-42/1067	56114	TGB-6/152-3/3-48/1219	56115	TGB-6/152-3/3-60/1524
178	7	38	1.5	56116	TGB-7/178-2/5-24/610	56117	TGB-7/178-2/5-36/914	56185	TGB-7/178-2/5-42/1067	56118	TGB-7/178-2/5-48/1219	56119	TGB-7/178-2/5-60/1524
		13	0.5	56120	TGB-7/178-3/4-24/610	56121	TGB-7/178-3/4-36/914	56186	TGB-7/178-3/4-42/1067	56122	TGB-7/178-3/4-48/1219	56123	TGB-7/178-3/4-60/1524
203	8	25	1	56128	TGB-8/203-3/5-24/610	56129	TGB-8/203-3/5-36/914	56187	TGB-8/203-3/5-42/1067	56130	TGB-8/203-3/5-48/1219	56131	TGB-8/203-3/5-60/1524
		none		56132	TGB-8/203-4/4-24/610	56133	TGB-8/203-4/4-36/914	56188	TGB-8/203-4/4-42/1067	56134	TGB-8/203-4/4-48/1219	56135	TGB-8/203-4/4-60/1524
229	9	13	0.5	56140	TGB-9/229-4/5-24/610	56141	TGB-9/229-4/5-36/914	56189	TGB-9/229-4/5-42/1067	56142	TGB-9/229-4/5-48/1219	56143	TGB-9/229-4/5-60/1524
254	10	none		56148	TGB-10/254-5/5-24/610	56149	TGB-10/254-5/5-36/914	56190	TGB-10/254-5/5-42/1067	56150	TGB-10/254-5/5-48/1219	56151	TGB-10/254-5/5-60/1524

For Belt to Chute or Slide Applications and Gaps from 75 to 150mm (3 to 6")

Transfer Width		Mounting Bar Offset		Belt Widths									
				610mm (24")		914mm (36")		1067mm (42")		1219mm (48")		1524mm (60")	
mm	in	mm	in	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number
76	3	12	12	56206	TGB-3/76-2/B-24/610	56207	TGB-3/76-2/B-36/914	56208	TGB-3/76-2/B-42/1067	56209	TGB-3/76-2/B-48/1219	56210	TGB-3/76-2/B-60/1524
102	4	25	25	56211	TGB-4/102-3/B-24/610	56212	TGB-4/102-3/B-36/914	56213	TGB-4/102-3/B-42/1067	56214	TGB-4/102-3/B-48/1219	56215	TGB-4/102-3/B-60/1524
127	5	38	38	56216	TGB-5/127-4/B-24/610	56217	TGB-5/127-4/B-36/914	56218	TGB-5/127-4/B-42/1067	56219	TGB-5/127-4/B-48/1219	56220	TGB-5/127-4/B-60/1524
152	6	51	51	56221	TGB-6/152-5/B-24/610	56222	TGB-6/152-5/B-36/914	56223	TGB-6/152-5/B-42/1067	56224	TGB-6/152-5/B-48/1219	56225	TGB-6/152-5/B-60/1524

SEGMENTED TRANSFER PLATES

38–75mm (1.5–3") Gaps


A Segmented Transfer Plate option is available for narrower gaps from 38 to 75mm (1.5 to 3").



Combinations of paired segments lock together inside the support bar to create the span required for the application.



Raised Ribs help reduce the surface friction on the shorter transitions – especially important for the consistency in metered spacing when lighter parcels and packages are being conveyed.

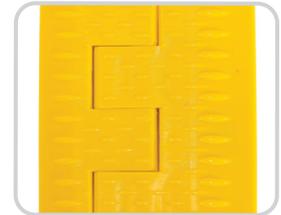


Easy to configure mounting plates provide **flexibility in installation options.**




How To Order

1. Specify belt width. Mounting bar is 50mm (2") longer than specified belt width.
2. Determine transfer size required.
3. Determine mounting bar location.
4. Segmented Transfer Plate 38 to 75mm (1.5 to 3") gaps are not recommended for belt to chute/slide applications.

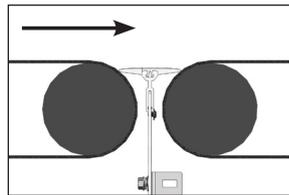

For horizontal to horizontal belt applications.
Measure distance between pulleys at a point no more than 25% of the pulley diameter (including belt thickness) down from the crown of both pulleys.

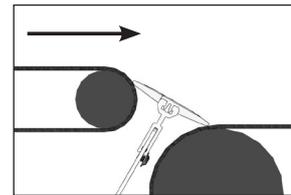

For waterfall applications.
Measure distance from about 45° from the top of the upper pulley to the top point on the lower pulley.

For Horizontal to Horizontal or Waterfall Applications and Gaps from 38 to 75mm (1.5 to 3")

Transfer Width		Mounting Bar Offset		Belt Widths					
				610 mm (24")		914 mm (36")		1067 mm (42")	
mm	in	mm	in	Item Code	Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number
38	1.5	none		56227	TGB-1.5/38-.75/.75-24/610	56228	TGB-1.5/38-.75/.75-36/914	56229	TGB-1.5/38-.75/.75-42/1067
44	1.75	3.2	0.125	56232	TGB-1.75/44-1/.75-24/610	56233	TGB-1.75/44-1/.75-36/914	56234	TGB-1.75/44-1/.75-42/1067
51	2.0	none		56237	TGB-2/51-1/1-24/610	56238	TGB-2/51-1/1-36/914	56239	TGB-2/51-1/1-42/1067
57	2.25	9.5	0.375	56242	TGB-2.25/57-1.5/.75-24/610	56243	TGB-2.25/57-1.5/.75-36/914	56244	TGB-2.25/57-1.5/.75-42/1067
64	2.5	6.4	0.250	56247	TGB-2.5/64-1.5/1-24/610	56248	TGB-2.5/64-1.5/1-36/914	56249	TGB-2.5/64-1.5/1-42/1067
76	3.0	none		56252	TGB-3/76-1.5/1.5-24/610	56253	TGB-3/76-1.5/1.5-36/914	56254	TGB-3/76-1.5/1.5-42/1067

For Horizontal to Horizontal or Waterfall Applications and Gaps from 38 to 75mm (1.5 to 3")

Transfer Width		Mounting Bar Offset		Belt Widths			
				1219mm (48")		1524mm (60")	
mm	in	mm	in	Item Code	Ordering Number	Item Code	Ordering Number
38	1.5	none		56230	TGB-1.5/38-.75/.75-48/1219	56231	TGB-1.5/38-.75/.75-60/1524
44	1.75	3.2	0.125	56235	TGB-1.75/44-1/.75-48/1219	56236	TGB-1.75/44-1/.75-60/1524
51	2.0	none		56240	TGB-2/51-1/1-48/1219	56241	TGB-2/51-1/1-60/1524
57	2.25	9.5	0.375	56245	TGB-2.25/57-1.5/.75-48/1219	56246	TGB-2.25/57-1.5/.75-60/1524
64	2.5	6.4	0.250	56250	TGB-2.5/64-1.5/1-48/1219	56251	TGB-2.5/64-1.5/1-60/1524
76	3.0	none		56255	TGB-3/76-1.5/1.5-48/1219	56256	TGB-3/76-1.5/1.5-60/1524



Unique, patented design



Easy to install: Mount the Hitch Guard to your conveyor with simple brackets and hardware, then install segments with a light mallet tap.



Snap-fit design: The 75mm (3") segments are designed to release under pressure if small objects become lodged between belt and segments.



Protection and Safety: UHMW plastic segments have a beveled design that prevents progressive belt damage and reduces pinch points.


Hitch Guard

The Hitch Guard from Flexco is engineered to provide a smooth transition of product, increasing safety at the conveyor hitch, and reducing pinch hazards at the transfer point. The Hitch Guard prevents small objects from becoming lodged in the hitch which can cause longitudinal conveyor belt tears, damage to conveyed products, and costly periods of unscheduled downtime. Designed to permit individual segments to release from the support bar, objects are quickly dislodged while remaining segments stay secured for continued operation.

Choose from a Universal Mounting System that fits most applications or a Scanner Eye Mounting System that doesn't interfere with electronic scanner eyes, but still keeps hitch protected.

Each Hitch Guard comes with a specially designed gauge for proper positioning in the hitch allowing for optimal installation and performance. See Hitch Guard Installation Specifications chart below to determine if the Flexco Hitch Guard is appropriate for your conveyor hitch.

Hitch Guard Installation Specifications									
Pulley Diameter (including belt)	63.5mm (2.5")	76.2mm (3")	88.9mm (3.5")	101.6mm (4")	114.3mm (4.5")	127mm (5.0")	139.7mm (5.5")	152.4mm (6")	165.1mm (6.5")
Minimum Gap Required	20.32mm (0.8")	12.7mm (0.5")	2.54mm (0.1")	0	0	0	0	0	0
Maximum Gap	40.64mm (1.6")	35.56mm (1.4")	30.48mm (1.2")	25.4mm (1")	20.32mm (0.8")	15.24mm (0.6")	10.16mm (0.4")	5.08mm (0.2")	0

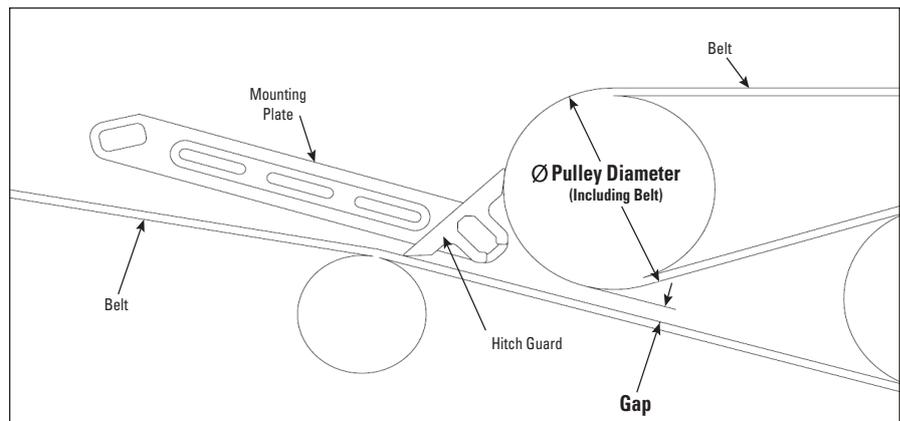

Hitch Guard Ordering Information							
Maximum Conveyor Width		Universal Mounting Bracket		Scanner Eye Mounting Bracket		Horizontal Transfer Mounting Bracket	
		Ordering Number	Item Code	Ordering Number	Item Code	Ordering Number	Item Code
mm	in						
914	36	HITCHGD-V3-KIT-36IN	04442	HITCHGD-V1-KIT-36IN	04322	TGB-HG-V4-36/914	56263
1067	42	HITCHGD-V3-KIT-42IN	04443	HITCHGD-V1-KIT-42IN	04321	TGB-HG-V4-42/1067	56264
1219	48	HITCHGD-V3-KIT-48IN	04444	HITCHGD-V1-KIT-48IN	04320	TGB-HG-V4-48/1219	56265
1524	60	HITCHGD-V3-KIT-60IN	04445	HITCHGD-V1-KIT-60IN	04319	TGB-HG-V4-60/1524	56266
1829	72	HITCHGD-V3-KIT-72IN	04988	HITCHGD-V1-KIT-72IN	04973	Not Available	

Visit www.flexco.com for other Flexco locations and products, or to find an authorised distributor.