

DIVUS[®]

Show it. Control it.



KNX IQ

Brings smartness into your building

EN


KNX IQ

KNX Stand Alone Panel



The cost-effective entry into the world of building visualization is managed by KNX IQ, our comprehensive 8-inch solution for home automation. As a stand-alone panel, KNX IQ seamlessly controls and monitors your electrical installation, providing full visibility and control over your smart home. With its on-wall mounting option, KNX IQ can be easily retrofitted and blends seamlessly into any environment. DIVUS KNX IQ08 TPS already supports KNX Secure!

Additionally, the introduction of the DIVUS CTP04 adds versatility to our lineup. This 4-inch room controller, when paired with KNX IQ, enhances the functionality of your smart building system, offering a convenient switch-like button layout and intercom indoor station capabilities for your home and office needs.




KNX IQ: A PANEL WITH MANY FEATURES

The apps DIVUS VISION, DIVUS IQ LAUNCHER, DIVUS VIDEOPHONE, DIVUS KIBRO, DIVUS IP CAM VIEWER and DIVUS SCREENCLEANER are included.



Freely available mobile app for access via the local network and/or control on the move via the **DIVUS CLOUD**.

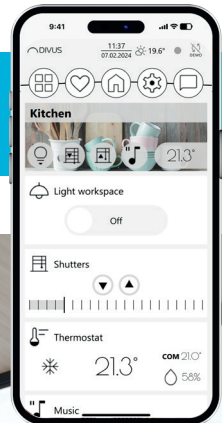


KNX IQ – THE RETROFIT COMPATIBLE PANEL

The KNX IQ touch panel can also be installed in many already installed wall mount boxes and it controls your intelligent home.

The KNX IQ panel can be installed wherever the mounting box has a larger diameter than 53 mm and is smaller than 215 x 135 mm.

The following mounting boxes are compatible with the 8" KNX IQ:



Schneider Electric U.Motion box
MTN6270-5001
Merten U.Motion box
MEG6270-5001



Kaiser round box German
standard 1555-04






ABB MT701 box UP-KAST2
GIRA MT701 box
BERKER MT701 box
JUNG EBG24 box



Italian Standard box
type 503

	DIVUS KNX-IQ08-IP KNX IP-Router / Interface needed	DIVUS KNX-IQ08-TPS with integrated KNX-interface
Design	DIVUS KNX-IQ08-IP BLACK - on wall mounted building touch panel for visualization purposes; multitouch display and capacitive touch screen with optical bonding 20,32 cm - 8"; with brightness and proximity sensor, microphone and speaker. DIVUS VISION, DIVUS IQ LAUNCHER, DIVUS VIDEOPHONE, DIVUS KIBRO, DIVUS IP CAM VIEWER and DIVUS SCREENCLEANER apps included.	DIVUS-KNX-IQ08-TPS BLACK - on wall mounted building touch panel for visualization purposes with KNX interface with data secure ; multitouch display and capacitive touch screen with optical bonding 20,32 cm - 8"; with brightness and proximity sensor, microphone and speaker. DIVUS VISION, DIVUS IQ LAUNCHER, DIVUS VIDEOPHONE, DIVUS KIBRO, DIVUS IP CAM VIEWER and DIVUS SCREENCLEANER apps included.

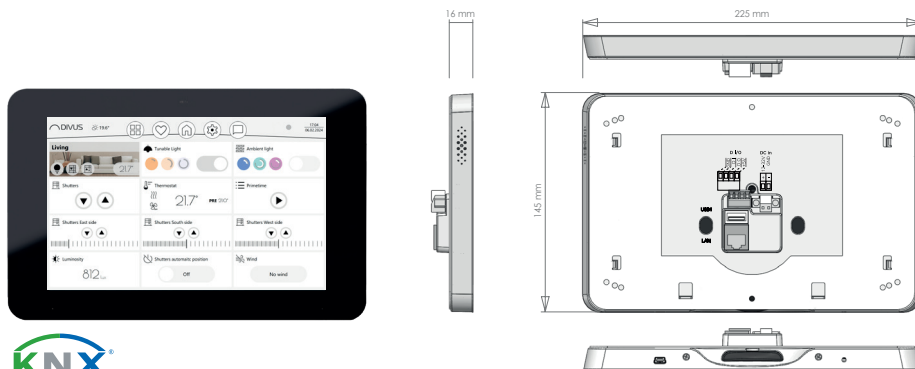

KNX IQ

with integrated DIVUS VISION software



The user interface DIVUS VISION convinces with its simplicity in the implementation by the system integrator and control by the house owner. Lights, shading, temperature, music, alarms can be managed and controlled through the panel. In addition, smart devices can be integrated into the visualization.



KNX IQ can score with the following features:

CONTROLLABLE ELEMENTS

- Illumination (on/off, dimming, RGB(W), tunable white)
- Heating / Cooling
- Shutter (short/long press)
- Venetian blinds (short/long press)
- Forced guidance
- KNX scenes
- Sequences (in addition to KNX scenes)
- Music (KNX)
- Generic values (on/off, percent etc.)
- IP cameras (IPCamViewer)
- Intercom (Videophone)
- Weather station *

RESOURCES

FREE MODE & ETS MODE:

- max. 300 elements
- max. 125 time schedules, approx. 10 commands each
- max. 55 logical expressions
- max. 10 mobile App users per installation
- max. 10 users (PIN codes)
- max. 12 thermostat logics
- last 25 notifications are shown

ETS MODE:

- max. 1000 group objects
- max. 1000 group addresses

SENSORS

- Proximity detection
- Brightness sensor

- I/O for simple intercom ring button
- Speaker and microphone



FUNCTIONS

- Time schedulings (daily, weekly, yearly)
- Sequences (in addition to KNX scenes)
- Basic logical operations (rules)
- 2 level configuration access (admin/user)
- Astronomical clock
- Notifications with text and sound (alarm, warning, information)
- Notifications via email
- Presence simulation
- Favourites page
- Automatic main command for lights/shutters/venetian blinds/music
- Automatic temperature average per room
- User management
- PIN protection of rooms/elements based on user permission
- Mobile App (access local and through cloud)
- Backup and restore
- Indoor and outdoor temperature visualization
- Choice between dark and light colour theme
- Structure by multiple rooms or as single room
- Room controller heating
- Choice of "classic" (6 elements per page) or "slim" design (12 elements per page)
- KNX data secure
- Datalogger/Graphs *
- Voice control *

* future development



DIVUS GmbH . Headquarters . Pillhof 51 . I-39057 Epnan (Italy) . Tel. +39 0471 633 662
DIVUS Germany . Leinfelder Str. 64 . D-70771 Leinfelden-Echterdingen . Tel. +49 (0)711 5087 5923

info@divus.eu . www.divus.eu