


Float



Float light has the best of both worlds. A high-quality acoustic solution due to its shape, surface, and application. In addition, Float Light with its high-quality LED panel is suitable for both mood and work lighting. The downlight LED panel illuminates the workplace while the acoustic felt absorbs sound and improves the acoustics.

Next to a panel downlight we also offer Float with a ringlight or an uplight. Float is available in two sizes and can be combined with acoustic islands without lighting. This makes Float a versatile ceiling panel.

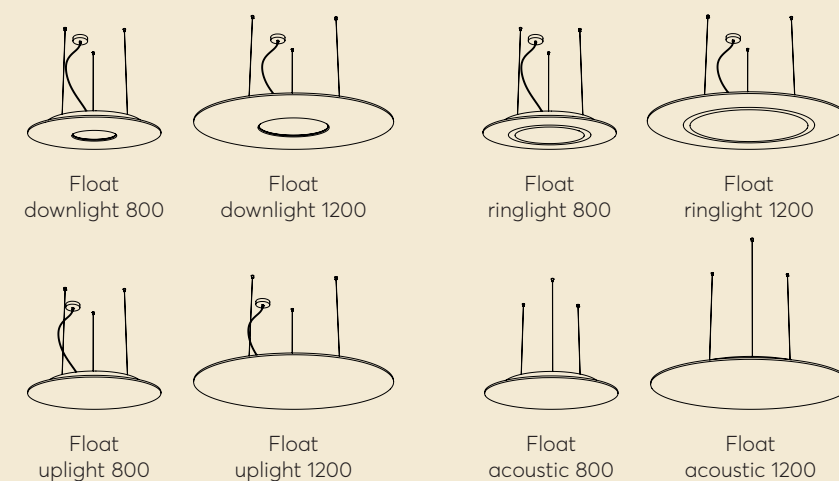



Float


Float downlight 800




Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands

Fixture:
2m black textile cable
3 black metal wires with adjustable griplock
Black ceiling cap and Charcoal PET Felt hood (standard)

Lighting properties:




Integrated LED
17W | 1870lm



Dimmable
Trailing edge (RC) | Dali




CCT 2700 | 3000K | 4000K




IP20

Acoustic properties:




High absorption
value




Diffusion


Measurements: Total weight: 2,7kg

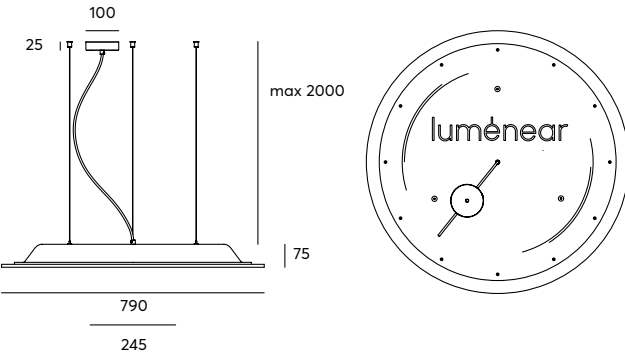

Hood colour:



Pattern options:

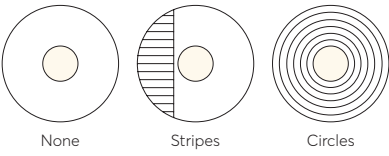

Colours:




Light source specifications:



LED power:	17W
Connection voltage:	220-240V AC
Luminous Flux:	1870lm
Frequency:	47-63Hz
Driver:	Included Integrated
Control (Dimmable):	Trailing Edge Dali
Power factor:	110lm/W
Optics:	Acrylic Opal Prism
CCT Colour temperature:	2700K 3000K 4000K
CRI:	Ra>80
UGR:	<25
Operating temperature:	-20 ~ +45

Photometrics:

Lumen intensity distribution



Acoustic specifications:

Our models are currently being tested for their improved acoustic value

Order code:

é 07			é 07..... / / / /	
Model		Version		Pattern		PET Felt colour		LED colour		Dimming technology		Uplight			
é 07		800 downlight		01 none stripes circles		a b c colour #		2700K 3000K 4000K		1 2 3 dimmable RC (trailing edge) Dali		B D no yes		0 1	

For example: é0701-a/11/2/B/0
Float light 800 downlight none / Fog Grey / 3000K / dimmable RC (trailing edge) / no uplight

Float downlight 1200



Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands

Fixture:
2m black textile cable
3 black metal wires with adjustable griplock
Black ceiling cap and Charcoal PET Felt hood (standard)

Lighting properties:

Integrated LED
33W | 3620lm

Dimmable
Trailing edge (RC) | Dali

CCT 2700 | 3000K | 4000K

IP20


Acoustic properties:

High absorption
value

Diffusion

Measurements:

Total weight: 9,1kg

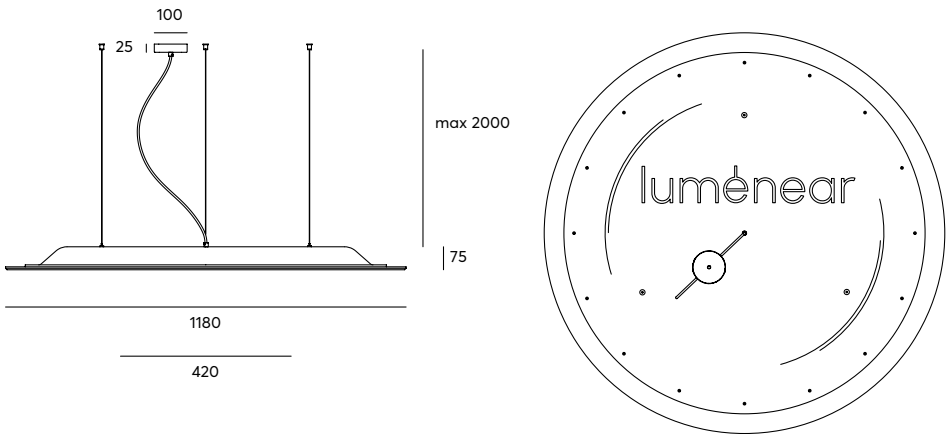

see it

Hood colour:

03_Charcoal

Pattern options:

None

Stripes

Circles

Colours:

13_Black

03_Charcoal

36_Dim Grey

11_Fog Grey

07_Ghost White

19_Midnight

26_Ocean

42_Rock Blue

30_Cool Grey

12_Turquoise

17_Forest

40_Faded Jade

41_Mint Pastel

39_Warm Grey

04_Bisque

35_Ochre

05_Lemon

09_Lavender

31_Rosé


45_Chilli

Light source specifications:

LED power:	33W
Connection voltage:	220-240V AC
Luminous Flux:	3620lm
Frequency:	47-63Hz
Driver:	Included Integrated
Control Dimmable:	Trailing Edge Dali
Power factor:	110lm/W
Optics	Acrylic Opal Prism
CCT Colour temperature:	2700K 3000K 4000K
CRI:	Ra>80
UGR:	<22
Operating temperature:	-20 ~ +45

Photometrics:

Lumen intensity distribution



Acoustic specifications:

Our models are currently being tested for their improved acoustic value

Order code:

é 07			é 07..... / / / /	
Model		Version		Pattern		PET Felt colour		LED colour		Dimming technology		Uplight			
é 07		1200 downlight		02		none stripes circles		a b c		colour #		2700K 3000K 4000K		1 2 3	
										dimmable RC (trailing edge) Dali		B D		no yes	
												0 1			

For example: é0702-a/11/2/B/0
Float light 1200 downlight none / Fog Grey / 3000K / dimmable RC (trailing edge) / no uplight

see it

Float ringlight 800



Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands

Fixture:
2m black textile cable
3 black metal wires with adjustable griplock
Black ceiling cap and Charcoal PET Felt hood (standard)

Lighting properties:

Integrated LED
20W | 2200lm

Dimmable
Trailing edge (RC) | Dali

CCT 2700 | 3000K | 4000K

IP20


Acoustic properties:

High absorption
value


Diffusion

Measurements:


Total weight: 2,9kg

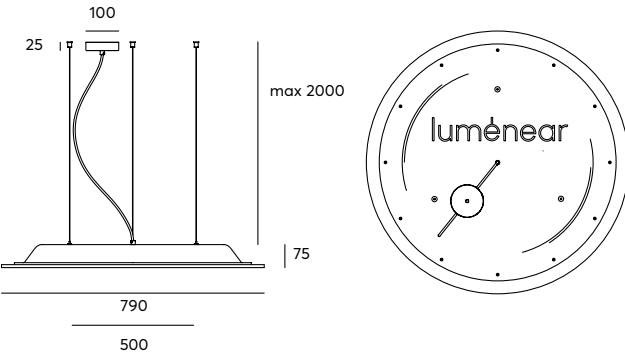

Hood colour:



Pattern options:

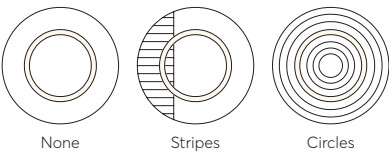

Colours:



Light source specifications:

	LED power:	20W
	Connection voltage:	220-240V AC
	Luminous Flux:	2200lm
	Frequency:	47-63Hz
	Driver:	Included Integrated
	Control Dimmable:	Trailing Edge Dali
	Power factor:	110lm/W
	Optics:	Acrylic Opal Prism
	CCT Colour temperature:	2700K 3000K 4000K
	CRI:	Ra>90
UGR:		<22
Operating temperature:		-20 ~ +45

Acoustic specifications:

Our models are currently being tested for their improved acoustic value

Order code:

é 07			é 07.....-... / / / /	
Model		Version		Pattern		PET Felt colour		LED colour		Dimming technology		Uplight			
é 07		800 with ring		03 none stripes circles		a b c colour #		2700K 3000K 4000K		1 2 3 dimmable RC (trailing edge) Dali		B D no yes		0 1	

For example: é0703-a/11/2/B/0
Float light 800 with ring none / Fog Grey / 3000K / dimmable RC (trailing edge) / no uplight

Float ringlight 1200



Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands

Fixture:
2m black textile cable
3 black metal wires with adjustable griplock
Black ceiling cap and Charcoal PET Felt hood (standard)

Lighting properties:

Integrated LED
35W | 3950lm

Dimmable
Trailing edge (RC) | Dali

CCT 2700 | 3000K | 4000K

IP20


Acoustic properties:

High absorption
value

Diffusion

Measurements:

Total weight: 9,1kg

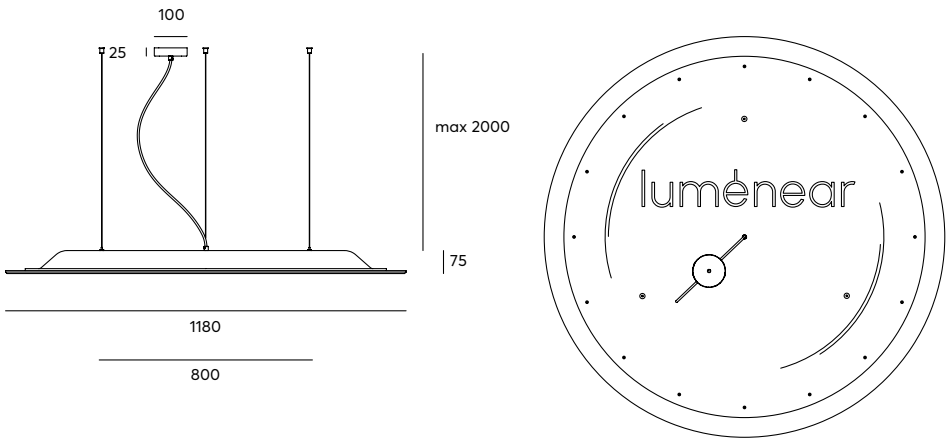

see it

Hood colour:

03_Charcoal

Pattern options:

None

Stripes

Circles

Colours:

13_Black

03_Charcoal

36_Dim Grey

11_Fog Grey

07_Ghost White

19_Midnight

26_Ocean

42_Rock Blue

30_Cool Grey

12_Turquoise

17_Forest

40_Faded Jade

41_Mint Pastel

39_Warm Grey

04_Bisque

35_Ochre

05_Lemon

09_Lavender

31_Rosé

45_Chilli

Light source specifications:

LED power:	35W
Connection voltage:	220-240V AC
Luminous Flux:	3950lm
Frequency:	47-63Hz
Driver:	Included/Integrated
Control Dimmable:	Trailing Edge Dali
Power factor:	113lm/W
Optics:	Acrylic Opal Prism
CCT Colour temperature:	2700K 3000K 4000K
CRI:	Ra>90
UGR:	<22
Operating temperature:	-20 ~ +45

Acoustic specifications:

Our models are currently being tested for their improved acoustic value

Order code:

é 07		-										é 07..... / / / /	
Model		Version		Pattern		PET Felt colour		LED colour		Dimming technology		Uplight	
é 07		1200 with ring	04	none stripes circles	a b c	colour	#	2700K 3000K 4000K	1 2 3	dimmmable RC (trailing edge) Dali	B D	no yes	0 1

For example: é0704-a/11/2/B/0
Float light 1200 with ring none / Fog Grey / 3000K / dimmable RC (trailing edge) / no uplight

see it


Float uplight 800




Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands

Fixture:
2m black textile cable
3 black metal wires with adjustable griplock
Black ceiling cap and Charcoal PET Felt hood (standard)


Lighting properties




Integrated LED
17W | 1870lm



Dimmable
Trailing edge (RC) | Dali




CCT 2700 | 3000K | 4000K




IP20

Acoustic properties




High absorption
value




Diffusion

Measurements:

Total weight: 2,7kg

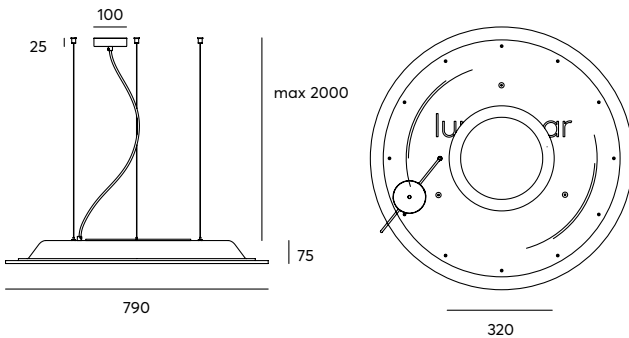


Hood colour:




03_Charcoal


Pattern options:



None



Stripes



Circles

Colours:



13_Black



03_Charcoal



36_Dim Grey



11_Fog Grey



07_Ghost White



19_Midnight



26_Ocean



42_Rock Blue



30_Cool Grey



12_Turquoise



17_Forest



40_Faded Jade



41_Mint Pastel



39_Warm Grey



04_Bisque



35_Ochre



05_Lemon



09_Lavender



31_Rosé




45_Chilli

Light source specifications:



LED power:	17W
Connection voltage:	220-240V AC
Luminous Flux:	1870lm
Frequency:	47-63Hz
Driver:	Included Integrated
Control Dimmable:	Trailing Edge Dali
Power factor:	110lm/W
Optics:	Acrylic Opal Prism
CCT Colour temperature:	2700K 3000K 4000K
CRI:	Ra>80
UGR:	<25
Operating temperature:	-20 ~ +45

Photometrics: Lumen intensity distribution



Acoustic specifications:

Our models are currently being tested for their improved acoustic value

Order code:

é 07			é 07.....-... / / /
Model	Version	Pattern	PET Felt colour		LED colour		Dimming technology					
é 07	800 uplight	05 none stripes circles	a b c	colour #	2700K 3000K 4000K	1 2 3	dimmable RC (trailing edge) Dali		B D			

For example: é0705-a/11/2/B
Float light 800 uplight none / Fog Grey / 3000K / dimmable RC (trailing edge)

Float
uplight 1200

PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands


2m black textile cable
3 black metal wires with adjustable griplock
Black ceiling cap and Charcoal PET Felt hood (standard)

Acoustic properties

- Integrated LED
17W | 1870lm
- Dimmable
Trailing edge (RC) | DALI
- CCT
2700 | 3000K | 4000K
- IP20

The diagram shows two circular cross-sections of a material. The top circle is divided vertically; the left half is white and the right half is shaded. A horizontal arrow points from the white half to the shaded half, and a jagged, wavy line is drawn across the vertical interface. To the right of this circle is the text "High absorption value". The bottom circle is also divided vertically, with the left half white and the right half shaded. A horizontal arrow points from the white half to the shaded half, and a smooth, curved line is drawn across the vertical interface. To the right of this circle is the text "Diffusion".

Total weight: 9,1kg

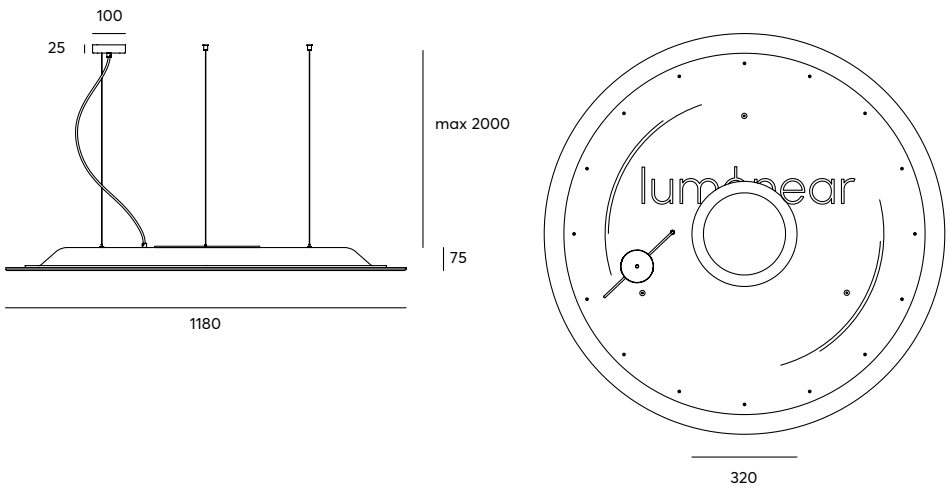

see it


Pattern options:


13_Black 03_Charcoal 36_Dim Grey 11_Fog Grey 07_Ghost White 19_Midnight 26_Ocean 42_Rock Blue 30_Cool Grey 12_Turquoise

17_Forest 40_Faded Jade 41_Mint Pastel 39_Warm Grey 04_Bisque 35_Ochre 05_Lemon 09_Lavender 31_Rosé 45_Chilli

Photometrics:

Lumen intensity distribution

	LED power:	17W
	Connection voltage:	220-240V AC
	Luminous Flux:	1870lm
	Frequency:	47-63Hz
	Driver:	Included Integrated
	Control Dimmable:	Trailing Edge Dali
	Power factor:	110lm/W
	Optics:	Acrylic Opal Prism
	CCT Colour temperature:	2700K 3000K 4000K
	CRI:	Ra>80
	UGR:	<25
	Operating temperature:	-20 ~ +45



Our models are currently being tested for their improved acoustic value

Order code:

è 07 -												è 07....-... / / /	
Model		Version		Pattern		PET Felt colour		LED colour		Dimming technology			
è 07	1200 uplight	06	none stripes circles	a b c	colour	#	2700K 3000K 4000K	1 2 3	dimmable RC (trailing edge) Dali		B D		

For example: e0706-a/11/2/B
Float light 1200 uplight none / Fog Grey / 3000K / dimmable RC (trailing edge)



Float acoustic



Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands


Fixture:
3 black metal wires with adjustable griplock
Charcoal PET Felt hood (standard)


Acoustic properties:

-  High absorption value
-  Diffusion


Measurements:


Total weight: 1,6kg / 4,1kg

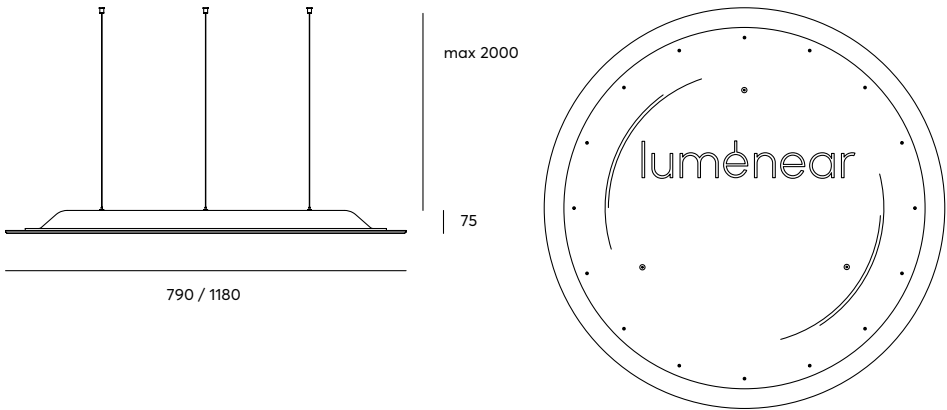



Hood colour:

03_Charcoal


Pattern options:



None 800


Stripes 800


Circles 800


None 1200


Stripes 1200


Circles 1200

Colours:


13_Black


03_Charcoal


36_Dim Grey


11_Fog Grey


07_Ghost White


19_Midnight


26_Ocean


42_Rock Blue


30_Cool Grey


12_Turquoise


17_Forest


40_Faded Jade


41_Mint Pastel


39_Warm Grey


04_Bisque


35_Ochre


05_Lemon


09_Lavender


31_Rosé


45_Chilli

Acoustic specifications:

Our models are currently being tested for their improved acoustic value

Order code:


é08 -		é08....-... /
Model		Version	Pattern		PET Felt colour		
é08	800 1200	01 02	none stripes circles	a b c	colour	#	

For example: é0801-a/35
Float acoustic 800 none / Ochre


Float uplight add-on




Lighting properties:




Integrated LED
17W | 1870lm



Dimmable
Trailing edge (RC) | Dali




CCT 2700 | 3000K | 4000K



IP20

Measurements:

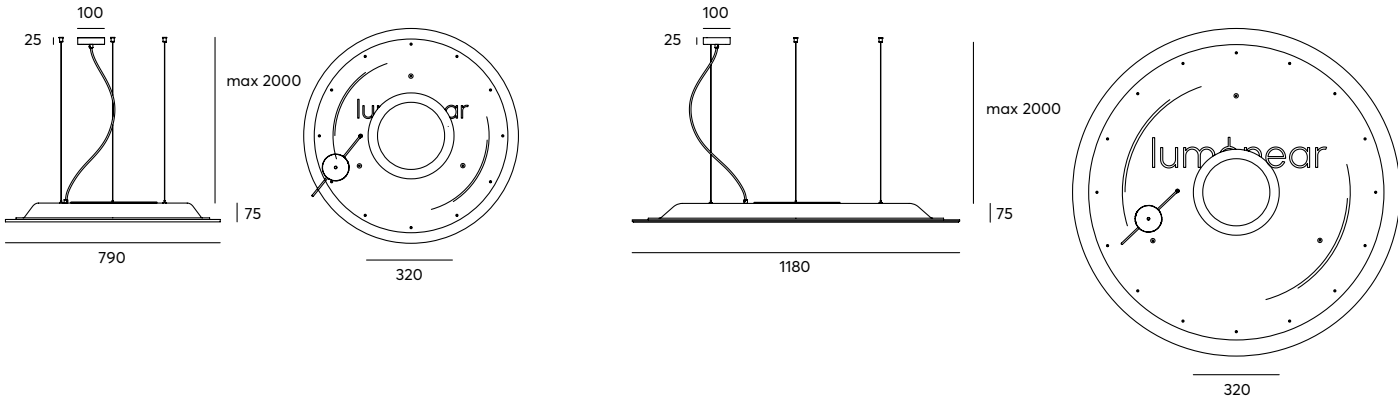


Light source specifications:



LED power:	17W
Connection voltage:	220-240V AC
Luminous Flux:	1870lm
Frequency:	47-63Hz
Driver:	Included Integrated
Control Dimmable:	Trailing Edge Dali
Power factor:	110lm/W
Optics:	Acrylic Opal Prism
CCT Colour temperature:	2700K 3000K 4000K
CRI:	Ra>80
UGR:	<25
Operating temperature:	-20 ~ +45

Photometrics: Lumen intensity distribution



Combinations:

Downlight with uplight:



Ringlight with uplight:



Order code:

An uplight can be added to our downlight and ringlight. See previous pages on how to add this to your order code.