




Halo

Halo is a durable fixture made of loose PET Felt slats. By inserting these transversely into each other, a characteristic and sturdy independent ring-shaped construction is created. In addition to this smart construction, Halo's design is very effective at "catching" reverberation from the room through its large felt surfaces.


The integrated LED panel with a high light intensity shines from above into the Halo. A blender at the bottom softens this light, which gives a wide down-light spread. On the other hand, the light partly remains between the LED panel and the diffuser, so that Halo also provides a nice grazing light due to its waffle structure. Halo is available in three sizes and various colours.

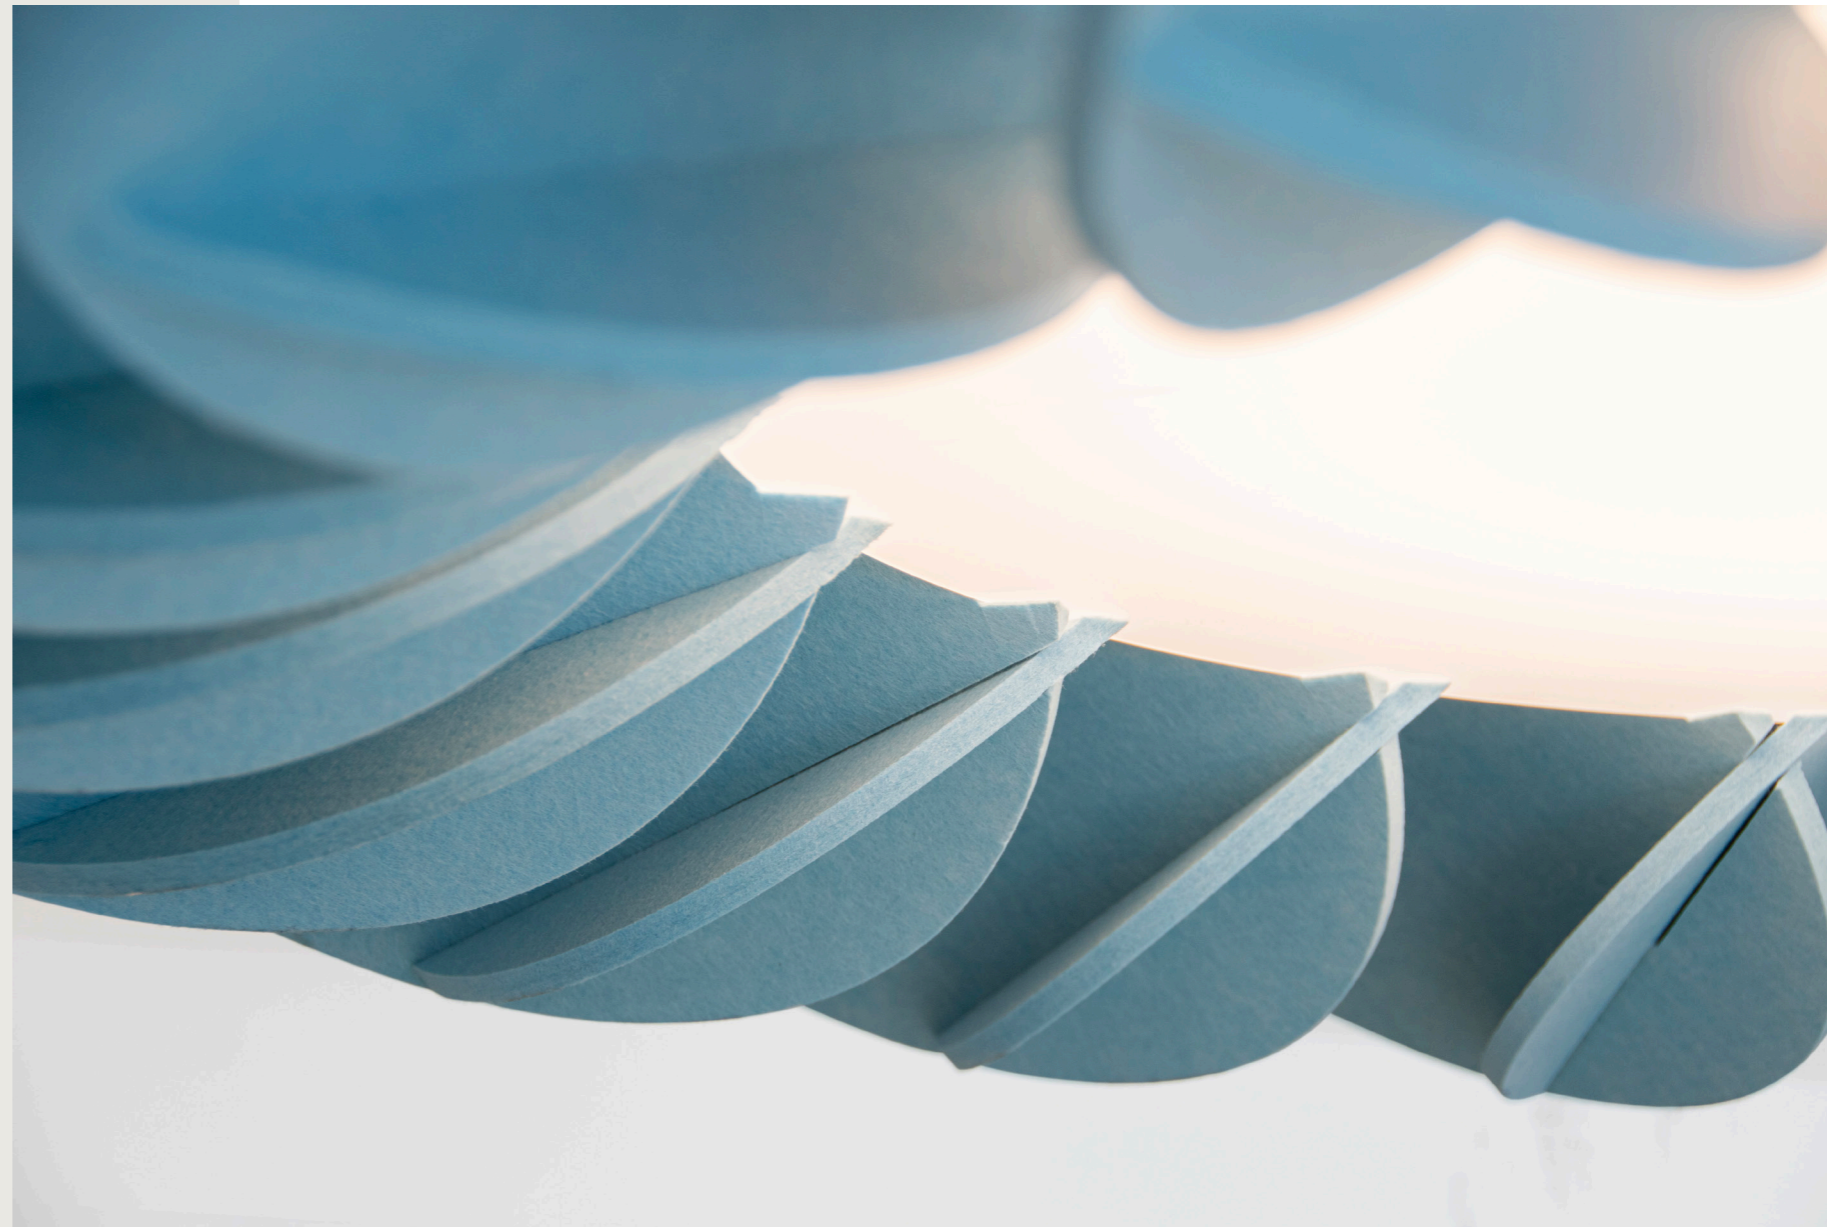


Halo light 700




Halo light 1000




Halo light 1400



Halo acoustic 700



Halo acoustic 1000



Halo acoustic 1400



Halo light 700



Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands

Fixture:
2m black textile cable
3 black metal wires with adjustable griplock
Black ceiling cap

Lighting properties:



Integrated LED
17W | 1850lm



Dimmable
Trailing edge (RC) | Dali




CCT 2700 | 3000K | 4000K




IP20

Acoustic properties:




High absorption
value



Diffusion

Measurements:

Total weight: 3,3kg

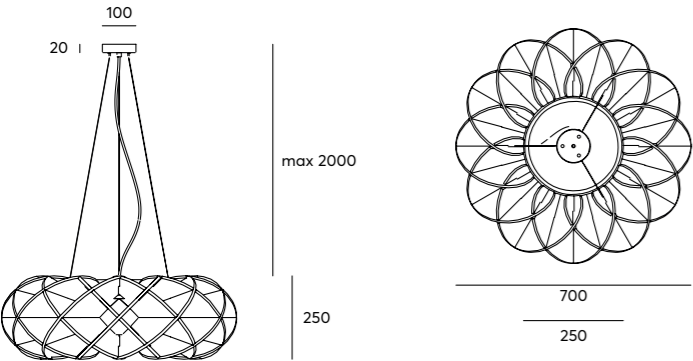

Colours:




13_Black03_Charcoal36_Dim Grey11_Fog Grey07_Ghost White19_Midnight26_Ocean42_Rock Blue30_Cool Grey12_Turquoise



17_Forest40_Faded Jade41_Mint Pastel39_Warm Grey04_Bisque35_Ochre05_Lemon09_Lavender31_Rosé45_Chilli

Light source specifications:



LED power:	17W
Connection voltage:	220-240V AC
Luminous Flux:	1850lm
Frequency:	47-63Hz
Driver:	Included Integrated
Control Dimmable:	Trailing Edge Dali
Power factor:	109lm/W
Optics Beam of light:	Acrylic Opal Prism 85°
CCT Colour temperature:	2700K 3000K 4000K
CRI:	Ra >80
UGR:	<22
Operating temperature:	-20 ~ +45

Acoustic specifications:

Our models are currently being tested for their improved acoustic value

Order code:

é 01				é 01.... / / /	
Model		Version	PET Felt colour		LED colour		Dimming technology		B D	
é 01		700 01	colour	#	2700K 3000K 4000K	1 2 3	dimmable RC (trailing edge) Dali			

For example: é 0101/39/2/B
Halo light 700 / Warm Grey / 3000K / dimmable RC (trailing edge)

Halo light 1000



Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands

Fixture:
2m black textile cable
3 black metal wires with adjustable griplock
Black ceiling cap

Lighting properties:



Integrated LED
36W | 3560lm



Dimmable
Trailing edge (RC) | Dali




CCT 2700 | 3000K | 4000K




IP20

Acoustic properties:




High absorption
value



Diffusion

Measurements:

Total weight: 9,5kg

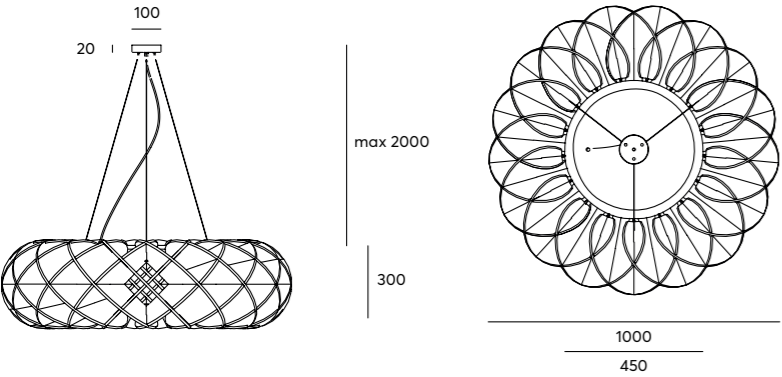


Colours:





Light source specifications:

	LED power:	36W
	Connection voltage:	220-240V AC
	Luminous Flux:	3560lm
	Frequency:	47-63Hz
	Driver:	Included Integrated
	Control/Dimmable:	Trailing Edge Dali
	Power factor:	99lm/W
	Optics Beam of light:	Acrylic Opal Prism 85°
	CCT Colour temperature:	2700K 3000K 4000K
	CRI:	Ra >80
UGR:		<22
Operating temperature:		-20 ~ +45

Acoustic specifications:

Our models are currently being tested for their improved acoustic value

Order code:

é 01									é 01.... /.... /.... /....	
Model		Version	PET Felt colour		LED colour		Dimming technology			
é 01	1000	02	colour	#	2700K 3000K 4000K	1 2 3	dimmable RC (trailing edge) Dali		B D	

For example: é0102/39/2/B
Halo light 1000 / Warm Grey / 3000K / dimmable RC (trailing edge)


Halo light 1400




Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands

Fixture:
2m black textile cable
3 black metal wires with adjustable griplock
Black ceiling cap


Lighting properties:




Integrated LED
64W | 6870lm



Dimmable
Dali




CCT 3000K | 4000K




IP20

Acoustic properties:




High absorption
value



Diffusion

Measurements:

Total weight: 19,6kg

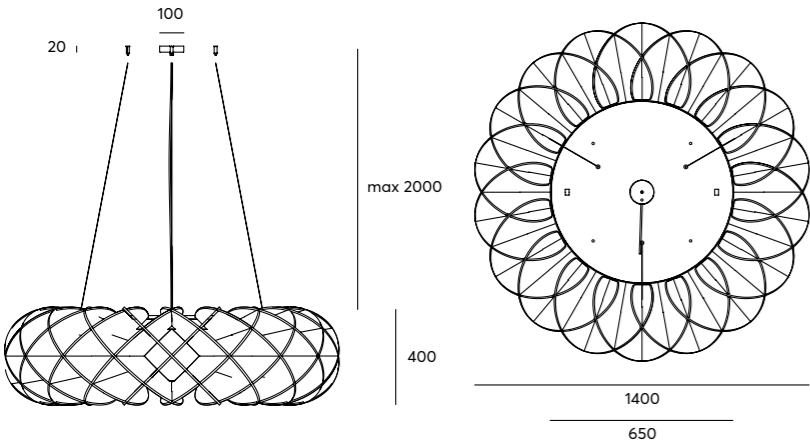

see it

Colours:



13_Black



03_Charcoal



36_Dim Grey



11_Fog Grey



07_Ghost White



19_Midnight



26_Ocean



42_Rock Blue



30_Cool Grey



12_Turquoise



17_Forest



40_Faded Jade



41_Mint Pastel



39_Warm Grey



04_Bisque



35_Ochre



05_Lemon



09_Lavender




31_Rosé



45_Chilli

Light source specifications:



LED power:	64W
Connection voltage:	220-240V AC
Luminous Flux:	6870lm
Frequency:	50/60Hz
Driver:	Included Integrated
Control Dimmable:	Dali
Power factor:	107lm/W
Optics Beam of light:	Acrylic Opal Prism 83°
CCT Colour temperature:	3000K 4000K
CRI:	Ra>80
UGR:	<19
Operating temperature:	-20 ~ +45

Acoustic specifications:

Our models are currently being tested for their improved acoustic value

Order code:

é01							D		é01.... / / / D
Model		Version	PET Felt colour		LED colour		Dimming technology		
é01		1400	03	colour	#	3000K 4000K	2 3	Dali	D

For example: é 0103/39/2/D
Halo light 1000 / Warm Grey / 3000K / Dali

see it



Halo acoustic



Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands


Fixture:
3 black metal wires with adjustable griplock

Acoustic properties:

-  High absorption value
-  Diffusion

Measurements:

Total weight: 1,3kg / 5,0kg / 10,5kg

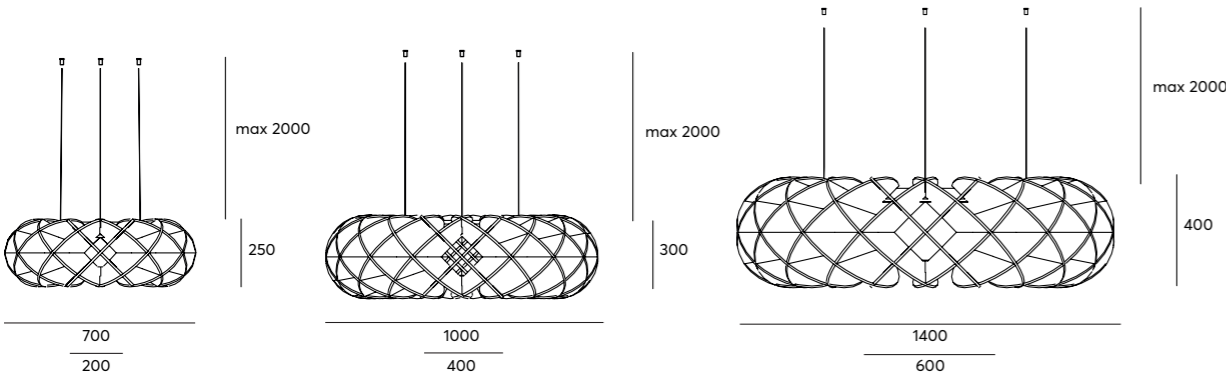

Colours:



Acoustic specifications:

Our models are currently being tested for their improved acoustic value

Order code:

è 02		è 02.... /
Model		Version	PET Felt colour		
è 02	700	01	colour	#	
	1000	02			
	1400	03			

For example: é 0201/04
Halo acoustic 700 / Bisque