


Line




Line is a technical luminaire ideal for lighting offices, public areas or even at home. Line is available in 3000K warm light or 4000K neutral work light. Line is made of acoustic PET Felt and available in different lengths and heights.

Line can be used well as a single light above a worktop, but in combination with the acoustic model, Line really comes into its own as a minimalistic fixture, which is also a sound absorber.

With Line it is therefore possible to make a real acoustic design statement of the ceiling with the combination of baffles and Line fixtures in various colours, length, and height. Without having to compromise on light output and sound absorption.




Line light single

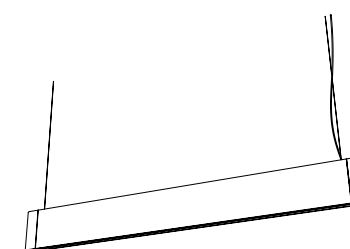

Line light double



Line acoustic single

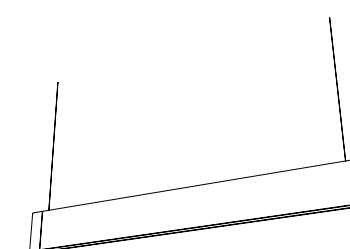

Line acoustic double

A very versatile lighting
module. A great asset,
especially combined with
the acoustic version.




Line light single




Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands

Fixture:
2m black cable
2 black metal wires with adjustable griplock
Black ceiling cap and black PET Felt interior (standard)


Lighting properties:




Integrated LED
17W | 2070lm



Dimmable
Not dimmable | Dali




CCT 3000K | 4000K




IP20

Acoustic properties:




High absorption
value




Diffusion

Measurements:

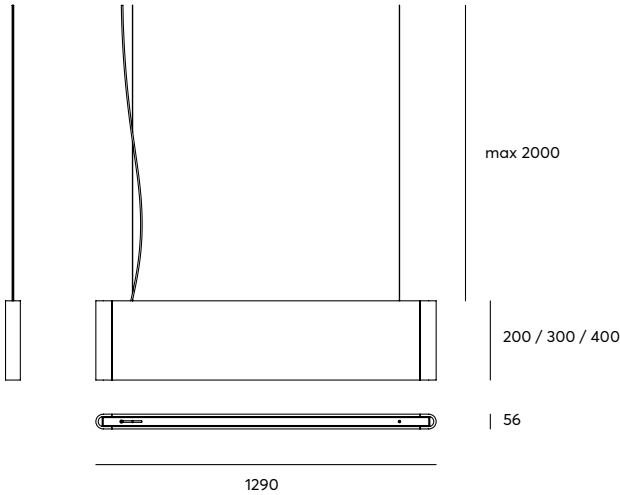


Total weight: 4,1kg (300mm)

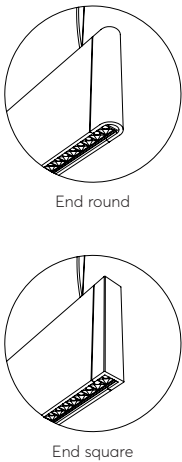


Colours:






Light source specifications:



LED power:	17W
Connection voltage:	220-240V AC
Luminous Flux:	2070lm
Frequency:	47-63Hz
Driver:	Included Integrated
Control Dimmable:	Not dimmable Dali
Power factor:	122lm/W
Optics:	Cubic Optic Noir
CCT Colour temperature:	3000K 4000K
CRI:	Ra>80
UGR:	<10
Operating temperature:	-20 ~ +45

Photometrics:

Lumen intensity distribution



Acoustic specifications:


Our models are currently being tested for their improved acoustic value

Order code:

é 03											é 03.....-...../...../...../.....	
Model	Version	End			PET Felt colour		LED colour		Dimming technology			
é 03	single x200 single x300 single x400	01 02 03	round square	a b	colour	#	3000K 4000K	2 3	not dimmable Dali	A D		

For example: é 0302-a/41/2/A
Line light single x300 round / Mint Pastel / 3000K / not dimmable

Line light double

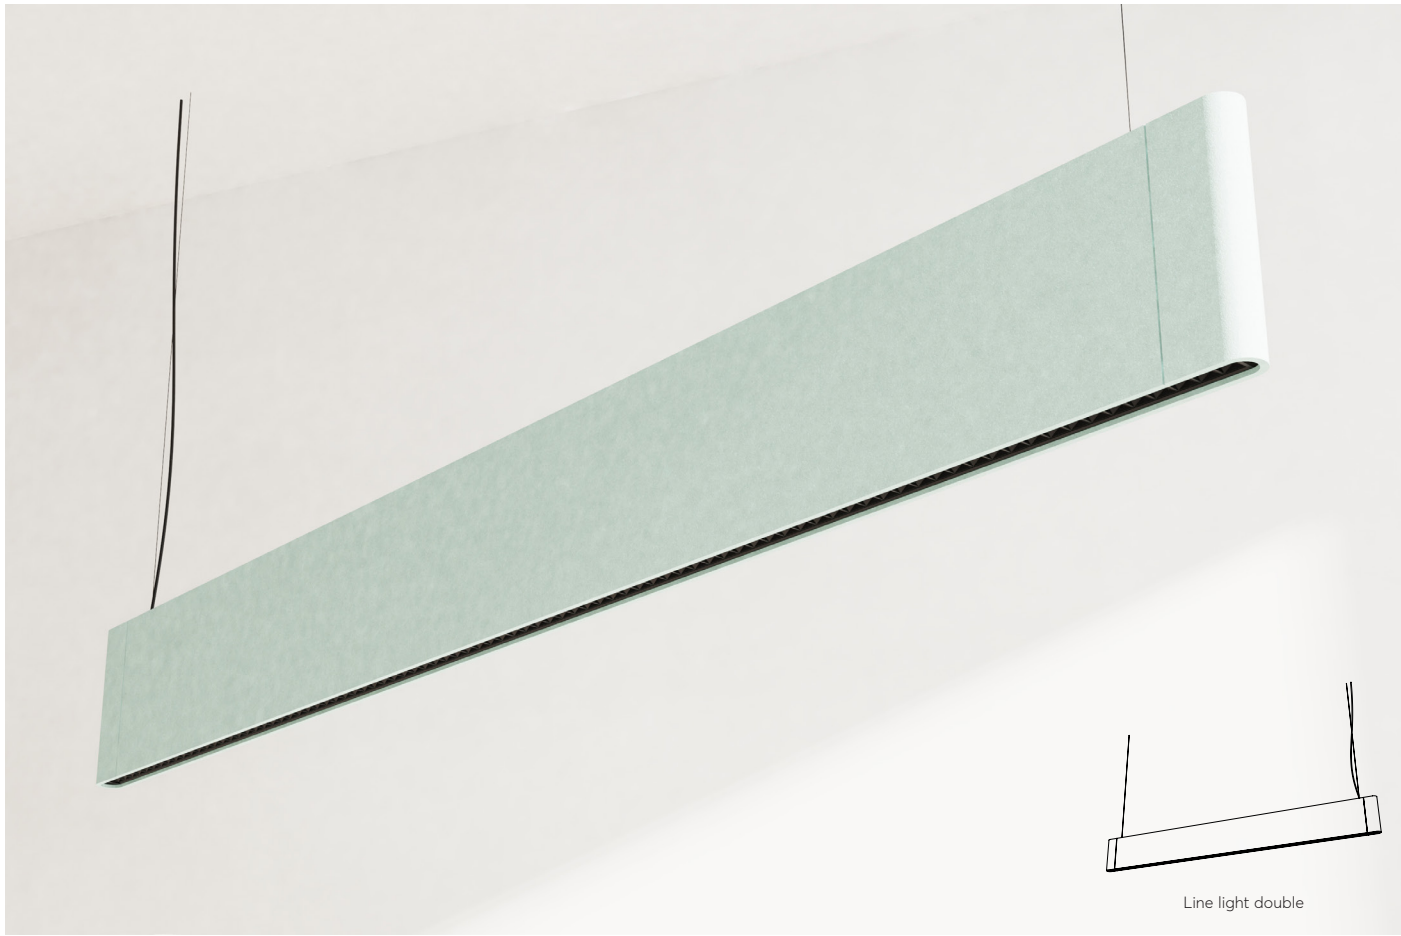

Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands

Fixture:
2m black cable
2 black metal wires with adjustable griplock
Black ceiling cap and black PET Felt interior (standard)

Lighting properties:

Integrated LED
34W | 4140lm

Dimmable
Not dimmable | Dali

CCT 3000K | 4000K

IP20

Acoustic properties:


High absorption
value

Diffusion

Measurements:



Total weight: 9,0kg (300mm)

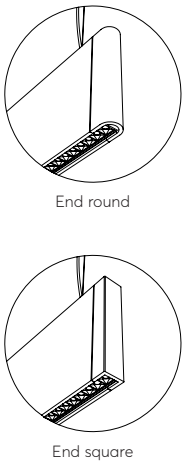

Colours:

13_Black

03_Charcoal

36_Dim Grey

11_Fog Grey

07_Ghost White

19_Midnight

26_Ocean

42_Rock Blue

30_Cool Grey

12_Turquoise

17_Forest

40_Faded Jade

41_Mint Pastel

39_Warm Grey

04_Bisque

35_Ochre

05_Lemon

09_Lavender


31_Rosé

45_Chilli

Light source specifications:

LED power:	34W
Connection voltage:	220-240V AC
Luminous Flux:	4140lm
Frequency:	47-63Hz
Driver:	Included Integrated
Control Dimmable:	Not dimmable Dali
Power factor:	122lm/W
Optics:	Cubic Optic Noir
CCT Colour temperature:	3000K 4000K
CRI:	Ra>80
UGR:	<10
Operating temperature:	-20 ~ +45

Photometrics:
Lumen intensity distribution




Acoustic specifications:

Our models are currently being tested for their improved acoustic value

Order code:

é 03											é 03..... / / /	
Model	Version	End			PET Felt colour		LED colour		Dimming technology			
é 03	double x200 double x300 double x400	04 05 06	round square	a b	colour	#	3000K 4000K	2 3	not dimmable Dali	A D		

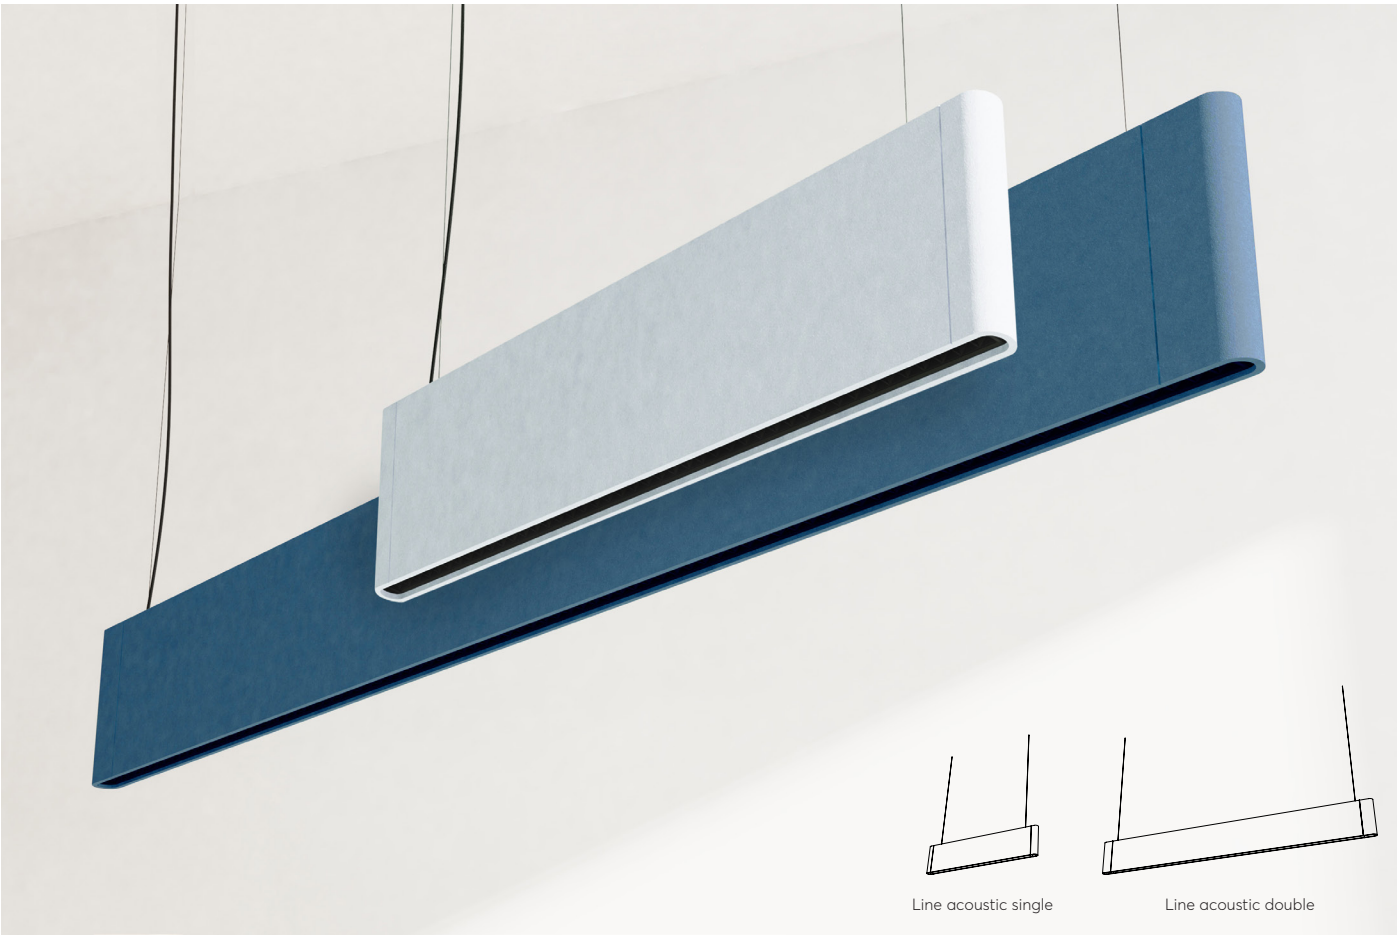

For example: é0101-a/41/3/D
Line light double x400 round / Mint Pastel / 4000K / Dali




Material:
PET Felt (polyethylene terephthalate)
Fireclass: EN13501-1 Class B-s1-d0
Produced in The Netherlands

Fixture:
2 black metal wires with adjustable griplock
Black PET Felt interior (standard)

Acoustic properties:

-  High absorption value
-  Diffusion

Measurements:

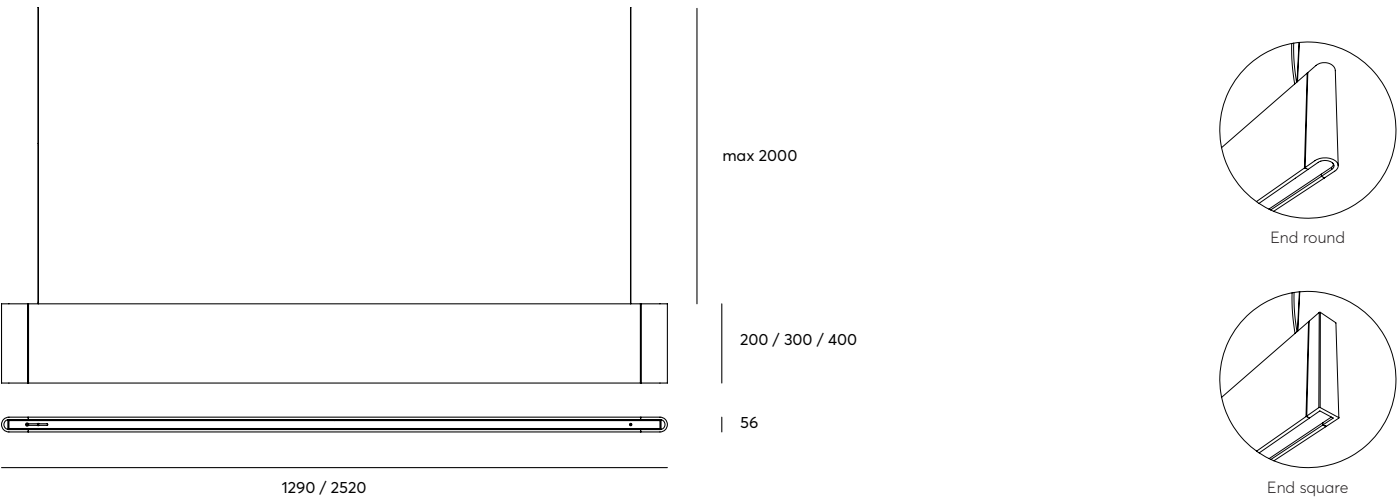

Colours:



Acoustic specifications:

Our models are currently being tested for their improved acoustic value

Order code:

é 04 - 		é 04....-.... /.....
Model	Version	End		PET Felt colour		
é 04	single x200	01	round	a b	colour	#
	single x300	02	square			
	single x400	03				
	double x200	04				
	double x300	05				
	double x400	06				

For example: é0402-a/26
Line acoustic double x300 round / Ocean