
# Toad


Toad harmoniously brings together functionality, acoustics and aesthetics. The design is inspired by natural and round shapes. The spherical shade with high-quality LED panel emits a soft and diffused light, creating a warm and inviting atmosphere.

The shape of the lamp with an inner side of organically shaped slats offers high acoustic efficiency and a nice diffusion of light. Toad also has a large mass and plenty of surface area. This is the perfect recipe for a high-quality acoustic lamp.

Toad is available in different shapes, sizes and colours of PET Felt taking into account that the inside is always finished in a light colour. The high-quality LED panel gives an even light, and is available in different colour temperatures and dimming options.



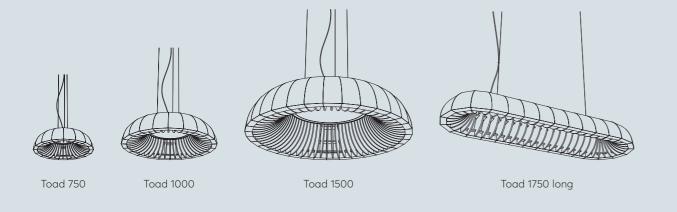

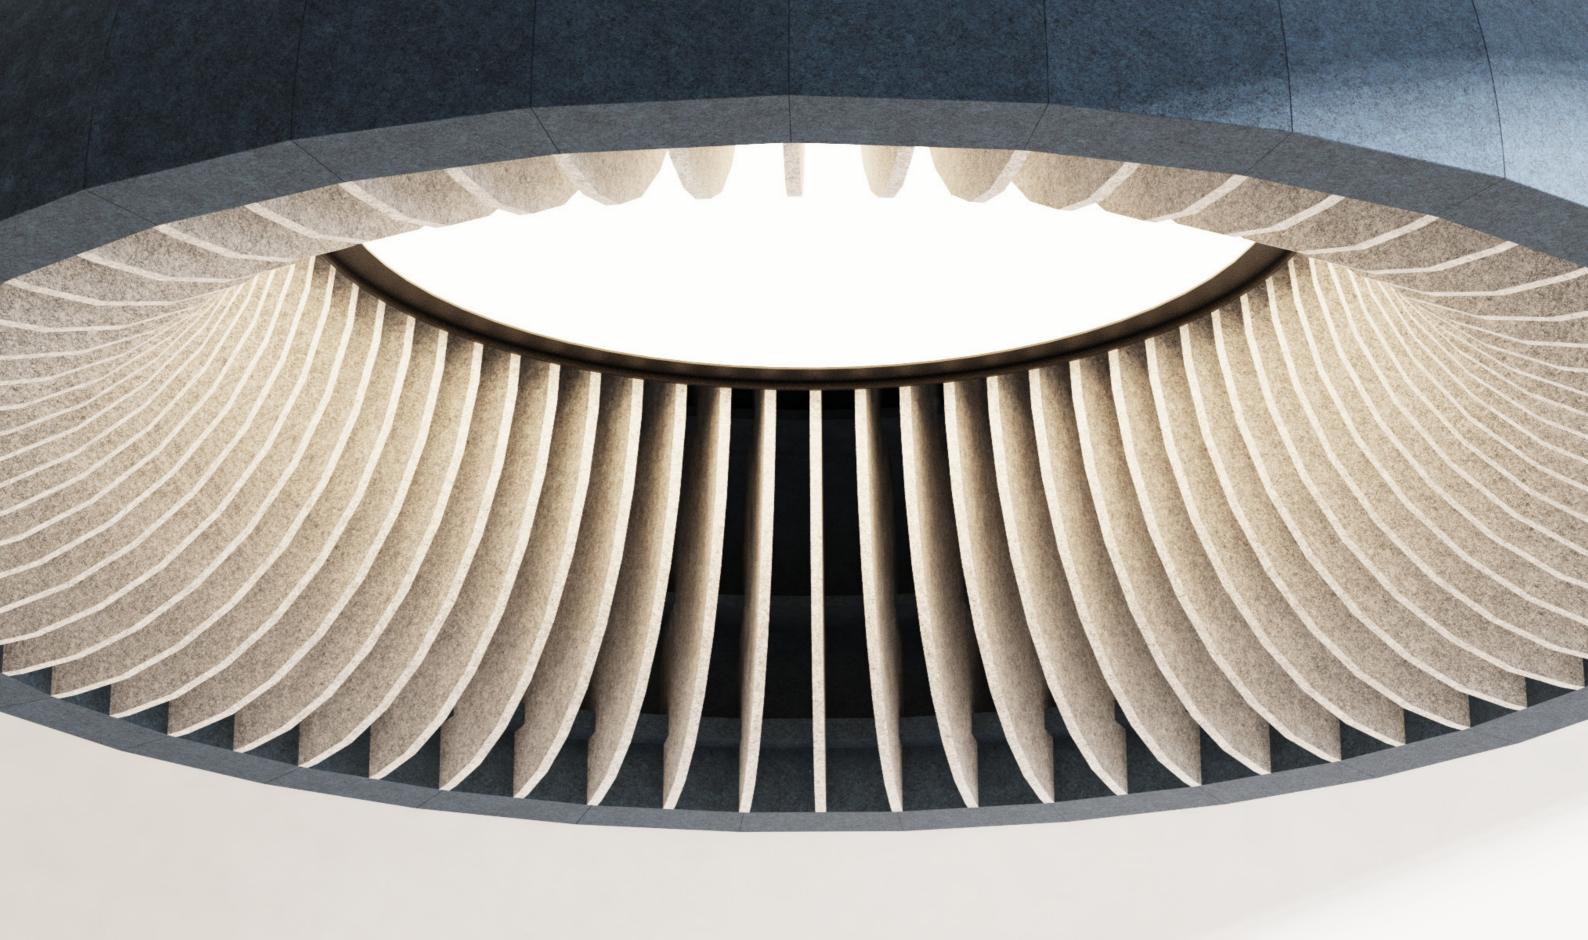



PET Felt (polyethylene terephthalate) Fireclass: EN13501-1 Class B-s1-d0 Produced in The Netherlands

#### Fixture:

2m black textile cable 3 black metal wires with adjustable griplock Black ceiling cap

## **Lighting properties:**



Integrated LED 17W | 1850lm



Dimmable Trailing edge (RC) | Dali



2700 | 3000K | 4000K



## **Acoustic properties:**




High absorption value



Diffusion

#### **Total weight:** 4,3kg Measurements:



## **Inside Colours:**









11\_Fog Grey 07\_Ghost White 30\_Cool Grey

## **Outside Colours:**





























42\_Rock Blue




Light source specifications:



LED power:	17W
Connection voltage:	220-240V AC
Luminous Flux:	1850lm
Frequency:	47-63Hz
Driver:	Included   Integrated
Control   Dimmable:	Trailing Edge   Dali
Power factor:	109lm/W
Optics   Beam of light:	Acrylic Opal Prism   85°
CCT Colour temperature:	2700K 3000K 4000K
CRI:	Ra >80
UGR:	<22
Operating temperature:	-20 ~ +45

## Photometrics:

Lumen intensity distribution



## **Acoustic specifications:**

Our models are currently being tested for their improved acoustic value

## Order code:

ė11	<u></u>											ė 11 / /.
Model	Versio	n	PET Fe	lt colo	ur		LED colour		Dimming technology	mming technology		
	750	01	inside		outside		2700K	1	dimmable RC (trailing edge) B			
ė11			colour	11 07 30 04	colour #		3000K 2 4000K 3	Dali	D			

For example: & 1101/11-26/2/B
Toad light 750 / inside=Fog Grey, outside=Ocean / 3000K / dimmable RC (trailing edge)

60 61





PET Felt (polyethylene terephthalate) Fireclass: EN13501-1 Class B-s1-d0 Produced in The Netherlands

## Fixture:

2m black textile cable 3 black metal wires with adjustable griplock Black ceiling cap

## **Lighting properties:**



CCT

Integrated LED 36W | 3560lm



Dimmable Trailing edge (RC) | Dali



## **Acoustic properties:**




High absorption



Diffusion

#### **Total weight:** 9,4kg Measurements:

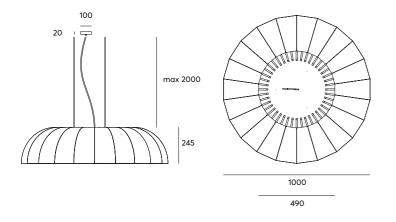

## **Inside Colours:**












11\_Fog Grey 07\_Ghost White 30\_Cool Grey

**Outside Colours:** 

















13\_Black







04\_Bisque 35\_Ochre

05\_Lemon

09\_Lavender

45\_Chilli


Light source specifications:



LED power:	36W
Connection voltage:	220-240V AC
Luminous Flux:	3560lm
Frequency:	47-63Hz
Driver:	Included   Integrated
Control/Dimmable:	Trailing Edge   Dali
Power factor:	99lm/W
Optics   Beam of light:	Acrylic Opal Prism   85°
CCT Colour temperature:	2700K 3000K 4000K
CRI:	Ra >80
UGR:	<22
Operating temperature:	-20 ~ +45

Photometrics:

Lumen intensity distribution



## Acoustic specifications:

Our models are currently being tested for their improved acoustic value

## Order code:

ė11					<u>-</u>						ė11//
Model	Versio	n	PET Felt colour		LED colour		Dimming technology				
	1000	1000 02	inside	ide outside			2700K 1	dimmable RC (trailing edge) B	В		
ė11			colour	11 07 30 04	colour	#	3000K 4000K	3	Dali	D	

For example:  $\stackrel{.}{\Theta}$  1102/11-26/2/B Toad light 1000 / inside=Fog Grey, outside=Ocean / 3000K / dimmable RC (trailing edge)

62 63



PET Felt (polyethylene terephthalate) Fireclass: EN13501-1 Class B-s1-d0 Produced in The Netherlands

## Fixture:

2m black textile cable 3 black metal wires with adjustable griplock Black ceiling cap

## **Lighting properties:**



Integrated LED

3000K | 4000K



Dimmable



## **Acoustic properties:**





High absorption



Diffusion

## Measurements:





Total weight: 25,7kg

## **Inside Colours:**









11\_Fog Grey 07\_Ghost White 30\_Cool Grey

## **Outside Colours:**















30\_Cool Grey











05\_Lemon 09\_Lavender



45\_Chilli


Light source specifications:



LED power:	64W
Connection voltage:	220-240V AC
Luminous Flux:	6870lm
Frequency:	50/60Hz
Driver:	Included   Integrated
Control   Dimmable:	Dali
Power factor:	107lm/W
Optics   Beam of light:	Acrylic Opal Prism   83°
CCT Colour temperature:	3000K 4000K
CRI:	Ra>80
UGR:	<19
Operating temperature:	-20 ~ +45

## Photometrics:

Lumen intensity distribution



## Acoustic specifications:

Our models are currently being tested for their improved acoustic value

## Order code:

ė11						11				D	ė11//
Model	Versio	n	PET Fe	lt colo	our	LED colour Dimming technology					
	1500	1500 04	inside	inside			3000K	2	Dali	D	
ė11			colour	11 07 30 04	colour	#	4000K	3			

For example:  $e^{\frac{1104}{11-26}}$  B Toad light 1700 long / inside=Fog Grey, outside=Ocean / 3000K / dimmable RC (trailing edge)

64 65





PET Felt (polyethylene terephthalate) Fireclass: EN13501-1 Class B-s1-d0 Produced in The Netherlands

#### Fixture:

2m black textile cable 2 black metal wires with adjustable griplock Black ceiling cap


## **Lighting properties:**



Integrated LED 34W | 4140lm



Dimmable



# **Acoustic properties:**





High absorption



Diffusion

#### Measurements:





## **Inside Colours:**











11\_Fog Grey 07\_Ghost White 30\_Cool Grey

## **Outside Colours:**





36\_Dim Grey



















04\_Bisque

35\_Ochre

05\_Lemon






Light source specifications:



LED power:	34W
Connection voltage:	220-240V AC
Luminous Flux:	4140lm
Frequency:	47-63Hz
Driver:	Included   Integrated
Control   Dimmable:	Not dimmable   Dali
Power factor:	122lm/W
Optics:	Cubic Optic Noir
CCT Colour temperature:	3000K 4000K
CRI:	Ra>80
UGR:	<10
Operating temperature:	-20 ~ +45

## Photometrics:

Lumen intensity distribution



## Acoustic specifications:

Our models are currently being tested for their improved acoustic value

## Order code:

ė11											ė 11 / /
Model	Versio	n	PET Fe	It colour LED colour Dimming technology		,					
	1750	04	inside		outside		3000K 2	not dimmable A			
ė11			colour 11 colour # 07 30 04	4000K 3	Dali D						

For example:  $\dot{\Theta}$ 1104/11-26/2/B Toad light 1750 long / inside=Fog Grey, outside=Ocean / 3000K / dimmable RC (trailing edge)

66 67

Total weight: 10,,0kg