

**lighting**  
**catalog**  
**part 1**

24

**vito**<sup>®</sup>  
all about lighting

VITO has a widespread international network of highly-valued business partners in over 40 countries. Vito is presented in West and East Europe, Middle East, Middle Asia and Africa.

#### **OUR AIM**

Our aim is the understanding of our partners' needs and stays at the centre of our business cooperation. We care for 2-way business-to business cooperation. Together with our customers, we're redefining the future of lighting. We're creating the lighting company of the future.

#### **OUR VALUES**

VITO with all workers and customers are a big family with common values holding us together and aware of the most important responsibility of future hopes and beliefs. We know that to live common values that hold us together is the most important condition.

#### **OUR MISSION**

Our mission is to be focused to ensure high reliability and cost effective solutions to all consumers. We keep improving our components and products, productivity, quality control, added value, and cost reduction in order to offer market-aligned solutions worldwide.

---

Our new catalog 2024 offers new solutions based on customers demands & our creativity.

More specific:

New series of architectural lighting.

New series of decorative lighting fixtures.

New series of indoor and outdoor led strips.

New aluminium profiles & controllers for led strips.

New series of solar lighting fixtures.

New luminaires for urban and street lighting.

New series of high luminosity bulbs and much more...

Now you have only to open the catalog and explore the entire range of our products.

---



1

# **TRACK LIGHTS**

**MAGNETIC & SINGLE PHASE  
TRACK LIGHTING SYSTEMS**






## GENERAL INFORMATION

MAGNA S1 is a rotatable led spot track lights family, equiped with CREE LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equiped with microprismatic diffuser with 24° and UGR<15.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.



## MAGNETIC LED TRACK LIGHTS

|                        |               |          |     |      |            |              |        |        |             |           |
|------------------------|---------------|----------|-----|------|------------|--------------|--------|--------|-------------|-----------|
| 3<br>YEARS<br>WARRANTY | LED<br>INSIDE | MAGNETIC | 48V | IP20 | UGR<br><15 | CRI<br>Ra>88 | 25000h | x25000 | Non<br>Dimm | -10/+40°C |
|------------------------|---------------|----------|-----|------|------------|--------------|--------|--------|-------------|-----------|



24°




Sand black

## MAGNA S1X 5



### PHOTOMETRIC DIAGRAM



|                       |    |       |       |
|-----------------------|----|-------|-------|
| 2101980 - Black color | 5W | 400lm | 3000K |
| 2101990 - Black color | 5W | 410lm | 4000K |


## GENERAL INFORMATION

MAGNA S1 is a rotatable led spot track lights family, equiped with CREE LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equiped with microprismatic diffuser with 15° and UGR<15.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.



|                        |               |          |     |      |            |              |        |        |             |           |
|------------------------|---------------|----------|-----|------|------------|--------------|--------|--------|-------------|-----------|
| 3<br>YEARS<br>WARRANTY | LED<br>INSIDE | MAGNETIC | 48V | IP20 | UGR<br><15 | CRI<br>Ra>88 | 25000h | x25000 | Non<br>Dimm | -10/+40°C |
|------------------------|---------------|----------|-----|------|------------|--------------|--------|--------|-------------|-----------|



15°




Sand black

## MAGNA S1 12



### PHOTOMETRIC DIAGRAM



|                       |     |       |       |
|-----------------------|-----|-------|-------|
| 2102120 - Black color | 12W | 960lm | 3000K |
| 2102130 - Black color | 12W | 984lm | 4000K |

## GENERAL INFORMATION


MAGNA S1 is a rotatable led spot track lights family, equipped with CREE LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 24° and UGR<15.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.

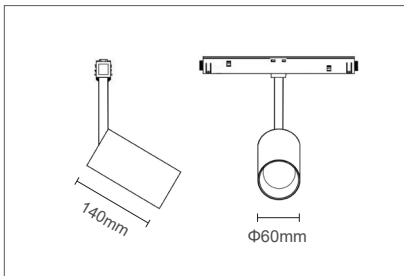


## MAGNETIC LED TRACK LIGHTS



## MAGNA S1 20



### PHOTOMETRIC DIAGRAM



|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102140 - Black color | 20W | 1600lm | 3000K |
| 2102150 - Black color | 20W | 1640lm | 4000K |

## GENERAL INFORMATION


MAGNA S1 is a rotatable led spot track lights family, equipped with CREE LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 24° and UGR<15.


Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.

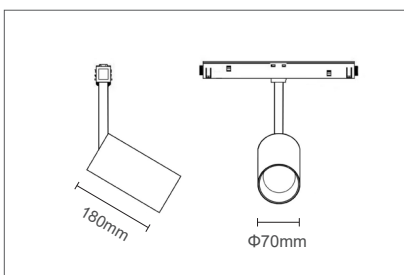

## MAGNA S1 30



### PHOTOMETRIC DIAGRAM



|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102160 - Black color | 30W | 2400lm | 3000K |
| 2102170 - Black color | 30W | 2460lm | 4000K |


## GENERAL INFORMATION

MAGNA S2 is a reflector led magnetic track lights family, equipped with OSRAM LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 36° and UGR<15.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.



## MAGNETIC LED TRACK LIGHTS



36°




Sand black

## MAGNA S2 12



### PHOTOMETRIC DIAGRAM



|                       |     |       |       |
|-----------------------|-----|-------|-------|
| 2102080 - Black color | 12W | 960lm | 3000K |
| 2102090 - Black color | 12W | 984lm | 4000K |


## GENERAL INFORMATION

MAGNA S2 is a reflector led magnetic track lights family, equipped with OSRAM LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 36° and UGR<15.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.



36°




Sand black

## MAGNA S2 18



### PHOTOMETRIC DIAGRAM



|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102100 - Black color | 18W | 1440lm | 3000K |
| 2102110 - Black color | 18W | 1476lm | 4000K |


## GENERAL INFORMATION

MAGNA S3 is a rotatable reflector led magnetic track lights family, equipped with OSRAM LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 24° and UGR<15.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.

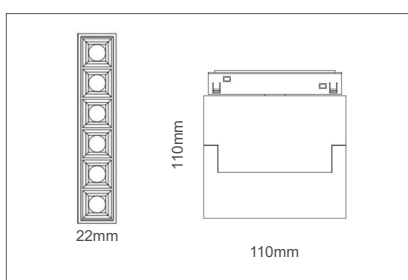

## MAGNETIC LED TRACK LIGHTS



24°




Sand black

## MAGNA S3 6



### PHOTOMETRIC DIAGRAM



|                       |    |       |       |
|-----------------------|----|-------|-------|
| 2102180 - Black color | 6W | 480lm | 3000K |
| 2102190 - Black color | 6W | 492lm | 4000K |


## GENERAL INFORMATION

MAGNA S3 is a rotatable reflector led magnetic track lights family, equipped with OSRAM LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 24° and UGR<15.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.

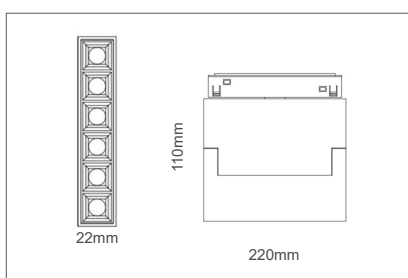

24°




Sand black

## MAGNA S3 12



### PHOTOMETRIC DIAGRAM



|                       |     |       |       |
|-----------------------|-----|-------|-------|
| 2102200 - Black color | 12W | 960lm | 3000K |
| 2102210 - Black color | 12W | 984lm | 4000K |

## GENERAL INFORMATION


MAGNA S4 is a linear led magnetic track lights family, equipped with OSRAM LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 120° and UGR<15.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.



## MAGNETIC LED TRACK LIGHTS



120°




Sand black

## MAGNA S4 10



### PHOTOMETRIC DIAGRAM



|                       |     |       |       |
|-----------------------|-----|-------|-------|
| 2102000 - Black color | 10W | 800lm | 3000K |
| 2102010 - Black color | 10W | 820lm | 4000K |

## GENERAL INFORMATION


MAGNA S4 is a linear led magnetic track lights family, equipped with OSRAM LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 120° and UGR<15.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.



120°




Sand black

## MAGNA S4 20



### PHOTOMETRIC DIAGRAM



|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102020 - Black color | 20W | 1600lm | 3000K |
| 2102030 - Black color | 20W | 1640lm | 4000K |

## GENERAL INFORMATION


MAGNA S4 is a linear led magnetic track lights family, equipped with OSRAM LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 120° and UGR<15.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.



## MAGNETIC LED TRACK LIGHTS



120°




Sand black

## MAGNA S4 30



### PHOTOMETRIC DIAGRAM



|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102040 - Black color | 30W | 2400lm | 3000K |
| 2102050 - Black color | 30W | 2460lm | 4000K |

## GENERAL INFORMATION


MAGNA S4 is a linear led magnetic track lights family, equipped with OSRAM LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 120° and UGR<15.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.



120°




Sand black

## MAGNA S4 40



### PHOTOMETRIC DIAGRAM



|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102060 - Black color | 40W | 3200lm | 3000K |
| 2102070 - Black color | 40W | 3280lm | 4000K |

## GENERAL INFORMATION

MAGNA S5 is a pendant led magnetic track light, equipped with CREE LED sources.


The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

It is equipped with microprismatic diffuser with 24° and UGR<15.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.

The length of the cable is 1000mm and is adjustable.

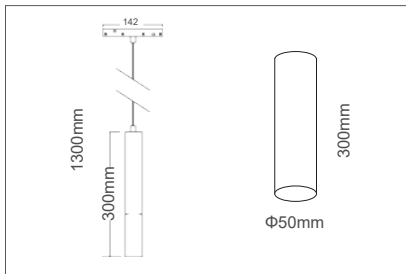


## MAGNETIC LED TRACK LIGHTS



## MAGNA S5 12



### PHOTOMETRIC DIAGRAM



|                       |     |       |       |
|-----------------------|-----|-------|-------|
| 2102220 - Black color | 12W | 960lm | 3000K |
| 2102230 - Black color | 12W | 984lm | 4000K |

## GENERAL INFORMATION


MAGNA HS3 is a rotatable reflector led magnetic track lights family, equipped with SANAN LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.


They are equipped with microprismatic diffuser with 24° and UGR<19.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.

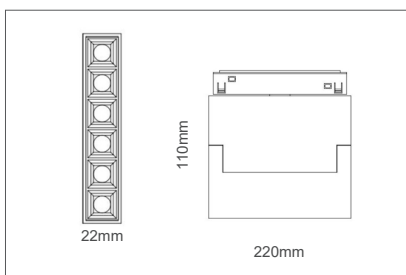

## MAGNA HS3 12

### PHOTOMETRIC DIAGRAM



|                       |     |       |       |
|-----------------------|-----|-------|-------|
| 2102211 - Black color | 12W | 984lm | 4000K |
|-----------------------|-----|-------|-------|




## GENERAL INFORMATION

MAGNA HS1 is a magnetic rotatable led spot track lights family, equipped with SANAN LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 15° and UGR<19.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.

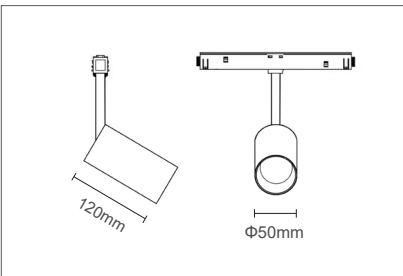


## MAGNETIC LED TRACK LIGHTS

|                        |               |          |     |      |            |              |        |        |             |         |
|------------------------|---------------|----------|-----|------|------------|--------------|--------|--------|-------------|---------|
| 2<br>YEARS<br>WARRANTY | LED<br>INSIDE | MAGNETIC | 48V | IP20 | UGR<br><19 | CRI<br>Ra>80 | 25000h | x25000 | Non<br>Dimm | 20÷40°C |
|------------------------|---------------|----------|-----|------|------------|--------------|--------|--------|-------------|---------|



## MAGNA HS1 12

### PHOTOMETRIC DIAGRAM



|                       |     |       |       |
|-----------------------|-----|-------|-------|
| 2102121 - Black color | 12W | 960lm | 3000K |
| 2102131 - Black color | 12W | 984lm | 4000K |

## GENERAL INFORMATION


MAGNA HS1 is a magnetic rotatable led spot track lights family, equipped with SANAN LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 24° and UGR<19.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.

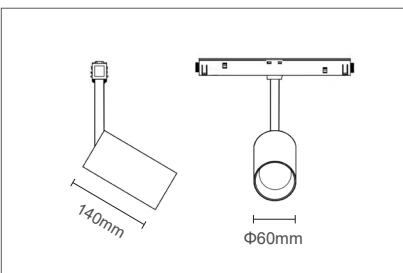


|                        |               |          |     |      |            |              |        |        |             |         |
|------------------------|---------------|----------|-----|------|------------|--------------|--------|--------|-------------|---------|
| 2<br>YEARS<br>WARRANTY | LED<br>INSIDE | MAGNETIC | 48V | IP20 | UGR<br><19 | CRI<br>Ra>80 | 25000h | x25000 | Non<br>Dimm | 20÷40°C |
|------------------------|---------------|----------|-----|------|------------|--------------|--------|--------|-------------|---------|



## MAGNA HS1 20

### PHOTOMETRIC DIAGRAM



|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102141 - Black color | 20W | 1600lm | 3000K |
| 2102151 - Black color | 20W | 1640lm | 4000K |


## GENERAL INFORMATION

MAGNA HS4 is a linear led magnetic track lights family, equipped with SANAN LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 120° and UGR<19.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.



## MAGNETIC LED TRACK LIGHTS




120°



Sand black

## MAGNA HS4 10

### PHOTOMETRIC DIAGRAM



|                       |     |       |       |
|-----------------------|-----|-------|-------|
| 2102001 - Black color | 10W | 800lm | 3000K |
| 2102011 - Black color | 10W | 820lm | 4000K |


## GENERAL INFORMATION

MAGNA HS4 is a linear led magnetic track lights family, equipped with SANAN LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. It can be operate on the magnetic 2 lines track rails of S20, Recessed, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 120° and UGR<19.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.




120°



Sand black

## MAGNA HS4 20

### PHOTOMETRIC DIAGRAM




|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102021 - Black color | 20W | 1600lm | 3000K |
| 2102031 - Black color | 20W | 1640lm | 4000K |



## MAGNA S20

9910720 1m 48V Black


9910730 2m 48V Black



## MAGNA S20


9910700 1m 48V Black


9910710 2m 48V Black



MAGNA S20 is a family of magnetic rails, operating on 48V, in which you can place all the MAGNA LED lighting fixtures. Due to their magnetic technology, their handle is a very easy process, as well as it is possible to move them even when they are on, achieving an enormous flexibility in your creation. They are ready for surface or pendant installation. Available in 1m & 2m length.

MAGNA S20 is a family of magnetic rails, operating on 48V, in which you can place all the MAGNA LED lighting fixtures. Due to their magnetic technology, their handle is a very easy process, as well as it is possible to move them even when they are on, achieving an enormous flexibility in your creation. They are ready for recessed, trimless, installation. Available in 1m & 2m length.

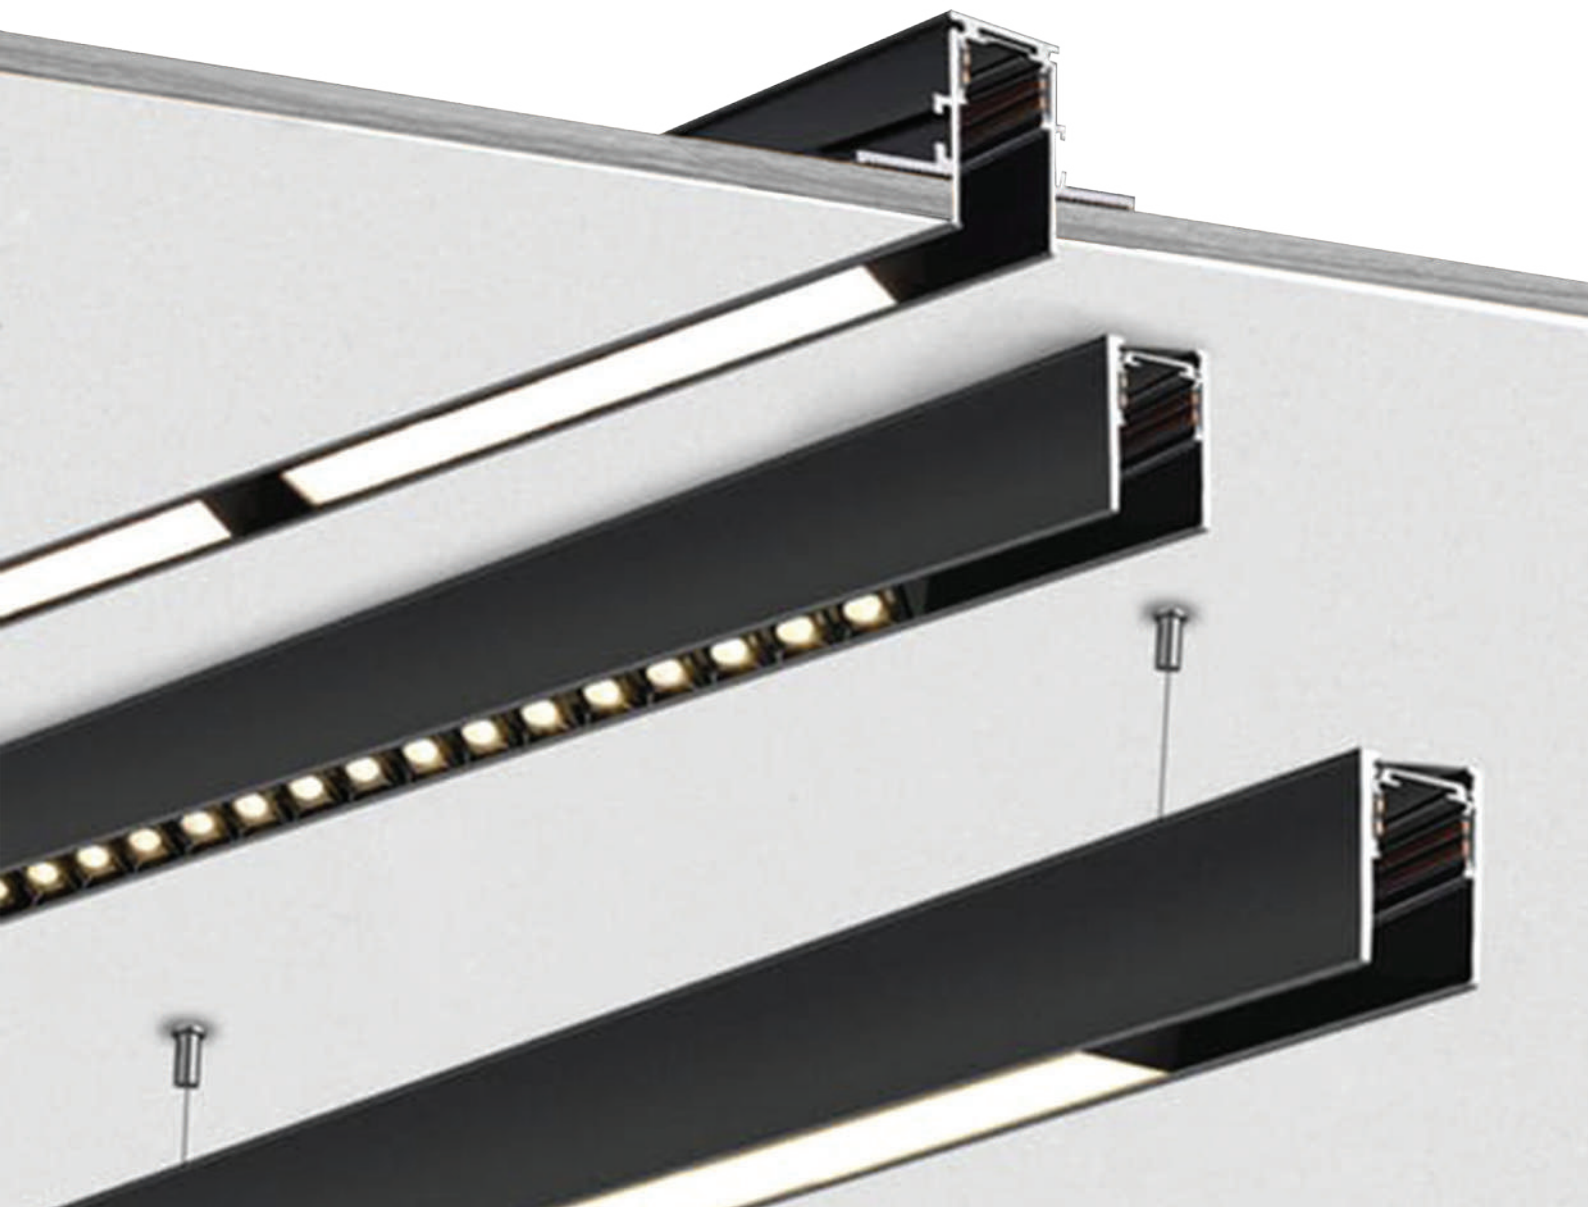


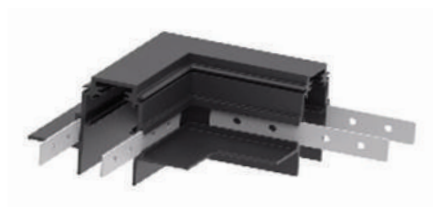

## MAGNA R20

**9910790** Recessed Horizontal Corner


Horizontal corner connector for recessed trimless track rails. In the package including 4 pcs of steel plates for the accurate installation. 80x80mm.

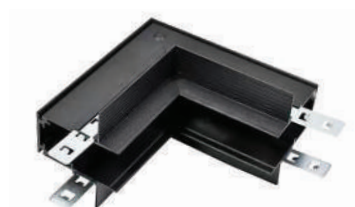

## MAGNA R30

**9910800** Recessed Vertical Corner

Vertical corner connector for recessed trimless track rails. In the package including 4 pcs of steel plates for the accurate installation. 80x80mm.

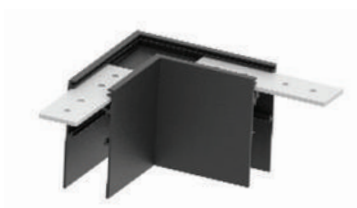

## MAGNA SCI

**9910780** Surface Horizontal Corner

Horizontal corner connector for surface mounted track rails. In the package including 2 pcs of steel plates for the accurate installation. 80x80mm.



## MAGNA SCV

**9910850** Surface Vertical Corner

Vertical corner connector for surface mounted track rails. In the package including 2 pcs of steel plates for the accurate installation. 80x80mm.



## MAGNA RT

**9910830** installation accessories


Set of 2 metal sheets for connection between 2 recessed track rails.



## MAGNA RT

**9910840** installation accessories

Metal sheet for connection between 2 surface track rails.



## MAGNA PRO

**9910811** Power supply 100W


Internal power supply for both surface or suspended rails. High quality with 3 years warranty.



## MAGNA PRO

**9910821** Power supply 200W

Internal power supply for both surface or suspended rails. High quality with 3 years warranty.



## MAGNA PS

**9910810** Power supply 100W

Internal power supply for both surface or suspended rails.



## MAGNA PS

**9910820** Power supply 200W

Internal power supply for both surface or suspended rails.



## MAGNA CI

**9910790** Angular power transmitter

Internal power transmitter with flexible angle for both surface or suspended rails. If you have installed more than one rails in an angle you need this accessory in order to transfer the power from one rail to another.



## MAGNA SI

**9910800** Straight power transmitter

Internal power transmitter with straight angle for both surface or suspended rails. If you have installed more than one rails in an angle you need this accessory in order to transfer the power from one rail to another.



## MAGNA PE

**9910750** Hanging set of 2 pcs

2 twisted steel wires, with maximum length of 1.5m, with steel fittings for fixing on the ceiling for suspended rail.



## MAGNA C

**9910740** End caps

2 pcs of end caps for surface mounted track rails.






## GENERAL INFORMATION

MONOLINO is a family of rotatable single phase led spot track lights equipped with SANAN LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. Suitable for 1 circuit track rails 9902670, 9902680, 9902690, 9902700, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 36° and UGR<19.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black & sand white.



## SINGLE PHASE LED TRACK LIGHTS

|                               |                      |                     |                 |             |                   |                     |               |               |                 |                 |
|-------------------------------|----------------------|---------------------|-----------------|-------------|-------------------|---------------------|---------------|---------------|-----------------|-----------------|
| <b>2</b><br>YEARS<br>WARRANTY | <b>LED</b><br>INSIDE | <b>SINGLE PHASE</b> | <b>185-265V</b> | <b>IP20</b> | <b>UGR</b><br><19 | <b>CRI</b><br>Ra>80 | <b>30000h</b> | <b>x30000</b> | <b>Non Dimm</b> | <b>25/+50°C</b> |
|-------------------------------|----------------------|---------------------|-----------------|-------------|-------------------|---------------------|---------------|---------------|-----------------|-----------------|




- 36°
- Sand black
- Sand white

## MONOLINO 10

|                       |     |       |       |
|-----------------------|-----|-------|-------|
| 2102640 - Black color | 10W | 930lm | 3000K |
| 2102650 - Black color | 10W | 950lm | 4000K |
| 2102660 - White color | 10W | 930lm | 3000K |
| 2102670 - White color | 10W | 950lm | 4000K |

## PHOTOMETRIC DIAGRAM




## GENERAL INFORMATION

MONOLINO is a family of rotatable single phase led spot track lights equipped with SANAN LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. Suitable for 1 circuit track rails 9902670, 9902680, 9902690, 9902700, Surface & Suspended systems.

They are equipped with microprismatic diffuser with 36° and UGR<19.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black & sand white.



|                               |                      |                     |                 |             |                   |                     |               |               |                 |                 |
|-------------------------------|----------------------|---------------------|-----------------|-------------|-------------------|---------------------|---------------|---------------|-----------------|-----------------|
| <b>2</b><br>YEARS<br>WARRANTY | <b>LED</b><br>INSIDE | <b>SINGLE PHASE</b> | <b>185-265V</b> | <b>IP20</b> | <b>UGR</b><br><19 | <b>CRI</b><br>Ra>80 | <b>30000h</b> | <b>x30000</b> | <b>Non Dimm</b> | <b>25/+50°C</b> |
|-------------------------------|----------------------|---------------------|-----------------|-------------|-------------------|---------------------|---------------|---------------|-----------------|-----------------|




- 36°
- Sand black
- Sand white

## MONOLINO 20

|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102680 - Black color | 20W | 1860lm | 3000K |
| 2102690 - Black color | 20W | 1900lm | 4000K |
| 2102700 - White color | 20W | 1860lm | 3000K |
| 2102710 - White color | 20W | 1900lm | 4000K |

## PHOTOMETRIC DIAGRAM






## GENERAL INFORMATION

MONOLINO is a family of rotatable single phase led spot lights equipped with SANAN LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. Suitable for 1 circuit track rails 9902670, 9902680, 9902690, 9902700, Surface & Suspended systems.


They are equipped with microprismatic diffuser with 36° and UGR<19.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black & sand white.



## SINGLE PHASE LED TRACK LIGHTS


|                  |     |              |          |      |         |           |        |        |          |          |
|------------------|-----|--------------|----------|------|---------|-----------|--------|--------|----------|----------|
| 2 YEARS WARRANTY | LED | SINGLE PHASE | 185-265V | IP20 | UGR <19 | CRI Ra>80 | 30000h | x30000 | Non Dimm | 25/+50°C |
|------------------|-----|--------------|----------|------|---------|-----------|--------|--------|----------|----------|



## MONOLINO 30

|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102720 - Black color | 30W | 2790lm | 3000K |
| 2102730 - Black color | 30W | 2850lm | 4000K |
| 2102740 - White color | 30W | 2790lm | 3000K |
| 2102750 - White color | 30W | 2850lm | 4000K |

## PHOTOMETRIC DIAGRAM



## GENERAL INFORMATION


SUN P2 is a rotatable single phase led spot track light equipped with SANAN LED sources.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.


Suitable for 1 circuit track rails 9902670, 9902680, 9902690, 9902700, Surface & Suspended systems.

It is equipped with microprismatic diffuser with 15° and UGR<19.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand black & sand white.




|                  |     |              |          |      |         |           |        |        |          |           |
|------------------|-----|--------------|----------|------|---------|-----------|--------|--------|----------|-----------|
| 2 YEARS WARRANTY | LED | SINGLE PHASE | 100-240V | IP20 | UGR <19 | CRI Ra>80 | 25000h | x25000 | Non Dimm | -10/+40°C |
|------------------|-----|--------------|----------|------|---------|-----------|--------|--------|----------|-----------|



## SUN P2 12

|                       |     |       |       |
|-----------------------|-----|-------|-------|
| 2101660 - Black color | 12W | 852lm | 3000K |
| 2101670 - Black color | 12W | 876lm | 4000K |
| 2101680 - White color | 12W | 852lm | 3000K |
| 2101690 - White color | 12W | 876lm | 4000K |


## PHOTOMETRIC DIAGRAM



## SINGLE PHASE TRACK LIGHTS

### GENERAL INFORMATION

LUMO N is a rotatable single phase led spot track light. Operated with LED bulbs, PAR16 type, GU10 socket. Suitable for 1 circuit track rails 9902670, 9902680, 9902690, 9902700, Surface & Suspended systems. Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in sand black.

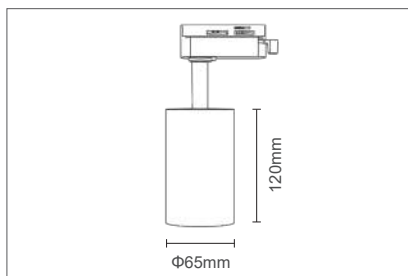

GU10 lampholder included in the package



2102800 - Black body


2102810 - White body



## LUMO N

### GENERAL INFORMATION

LUMO S is a rotatable single phase led spot track light. Operated with LED bulbs, PAR16 type, GU10 socket. Suitable for 1 circuit track rails 9902670, 9902680, 9902690, 9902700, Surface & Suspended systems. Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in sand black with black reflector.

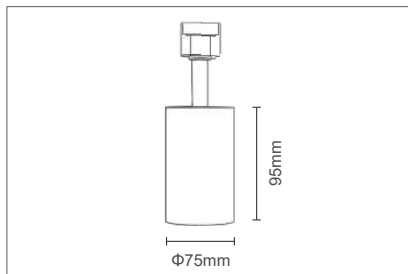

GU10 lampholder included in the package



2102270 - Black body



## LUMO S


## SINGLE PHASE TRACK LIGHTS

### GENERAL INFORMATION

LUMO T is a rotatable single phase led spot track light. Operated with LED bulbs, PAR16 type, GU10 socket.

Suitable for 1 circuit track rails 9902670, 9902680, 9902690, 9902700, Surface & Suspended systems.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.



GU10 lampholder  
included in the  
package



2101940 - White body

2101950 - Black body




## LUMO T

### GENERAL INFORMATION

LUMO P is a pendant single phase led spot track light. Operated with LED bulbs, PAR16 type, GU10 socket.

Suitable for 1 circuit track rails 9902670, 9902680, 9902690, 9902700, Surface & Suspended systems.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, white, black & black with a PVC ring.



GU10 lampholder  
included in the  
package





2101960 - White body

2101970 - Black body

2102280 - Black body with PVC ring



## LUMO P

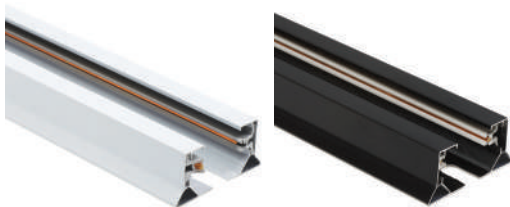

## PT1

|         |               |
|---------|---------------|
| 9902670 | White rail 1m |
| 9902690 | White rail 2m |
| 9902680 | Black rail 1m |
| 9902700 | Black rail 2m |

PT1 is a family of 1 circuit single phase track rails in lengths of 1m & 2m. They are made of aluminium and electrostatically painted in white & black. End caps and power supply included on the rail.



## APT1

|         |             |
|---------|-------------|
| 9902650 | White color |
| 9902660 | Black color |

APT 1, are open angle connectors which are used in order to create the desire arrangement of track rails. Are made of plastic and painted in white & black.



## APT1 CC

|         |                        |
|---------|------------------------|
| 9902570 | White corner connector |
| 9902580 | Black corner connector |

APT1 CC, are 90° angle connectors which are used in order to create the desire arrangement of track rails. Are made of plastic and painted in white & black.



## APT1 SC

|         |                          |
|---------|--------------------------|
| 9902630 | White straight connector |
| 9902640 | Black straight connector |

APT1 SC, are straight connectors which are used in order to create a straight line of track rails. Are made of plastic and painted in white & black.



## APT1 TC

|         |                     |
|---------|---------------------|
| 9902590 | White "T" connector |
| 9902600 | Black "T" connector |

APT1 TC, are "T" shape connectors which are used in order to create the desire arrangement of track rails. Are made of plastic and painted in white & black.



## APT1 QC

|         |                       |
|---------|-----------------------|
| 9902610 | White cross connector |
| 9902620 | Black cross connector |

APT1 QC, are quadruple 90° connectors which are used in order to create a straight line of track rails. Are made of plastic and painted in white & black.

# 2

## **LINEAR LIGHTS**

**SURFACE, SUSPENDED & RECESSED  
LED LIGHT FIXTURES**





## TECHNICAL SPECIFICATIONS


FITLINE 60 is a linear ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.

It can be installed on the surface of the ceiling or suspended, suspension set included in the package.


Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & sand black.

Polycarbonate difusser.

|                     |                |
|---------------------|----------------|
| CRI                 | 80             |
| Power Factor        | >0.95          |
| Voltage Range       | 170-240V       |
| Beam Angle          | 120°           |
| Protection Class    | IP20           |
| Working Temperature | -20°C/+50°C    |
| Main Material       | Aluminium & PC |

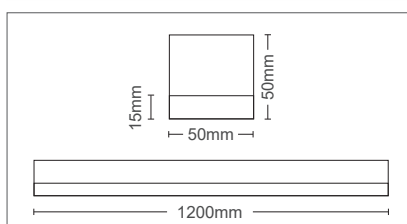


## LINEAR LED LIGHTS



## FITLINE 60

|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 3300160 - Black color | 60W | 6600lm | 4000K |
| 3300150 - White color | 60W | 6600lm | 4000K |

### PHOTOMETRIC DIAGRAM



## TECHNICAL SPECIFICATIONS



LINETA 40 is a linear ceiling mounting lighting fixture, equipped with backlit technology of SAMSUNG LED sources.

It can be installed on the surface of the ceiling or suspended, suspension set included in the package.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & sand black.

Polycarbonate difusser.

|                     |             |
|---------------------|-------------|
| CRI                 | 80          |
| Power Factor        | >0.95       |
| Voltage Range       | 170-240V    |
| Beam Angle          | 120°        |
| Protection Class    | IP40        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

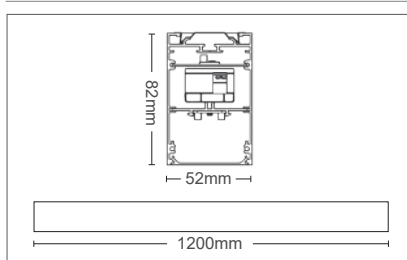


## LINETA 40



|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2429810 - Black color | 40W | 4300lm | 3000K |
| 2429820 - Black color | 40W | 4400lm | 4000K |
| 2429780 - White color | 40W | 4300lm | 3000K |
| 2429790 - White color | 40W | 4400lm | 4000K |

### PHOTOMETRIC DIAGRAM



## GENERAL INFORMATION

PROFILED SL1 is a Professional line of Linear fixtures.

SAMSUNG LED sources applied in our standard version of Linear Light Group solutions. OSRAM LED sources applied in our High Lumens version of Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

Linear standard versions are equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRI-DONIC 3 in 1 driver with option of 3 different dimmings (DALI / I-10V / PUSH BUTTON).

It can be installed on the surface of the ceiling or Suspended. The suspension set must be ordered separately, (HSL).

It can be installed on the wall. The mounting set must be ordered separately, (WML).

Polycarbonate difusser with High Permeability. There is option to put microprismatic difusser with 60° and UGR<15. It has to be ordered separately (MDL).

Housing of aluminum board electrostatically painted in sand white & sand black.



microprismatic diffuser 60° / UGR<15

9990870 - microprismatic diffuser

### SUSPENSION SET HSL



9910020 - Black color

9910030 - White color

### WALL MOUNTING ACCESSORIES SET WML



9911120 - Black color

9911100 - White color

### MIDDLE CONNECTOR MCL (optional)



middle connector for all profiled sl1 series

9910010 - middle connector

## LINEAR LED LIGHTS



120°



Sand black




Sand white




## PROFILED SL1 20



|                              |                       |                       |     |        |       |
|------------------------------|-----------------------|-----------------------|-----|--------|-------|
| STANDARD VERSION             | 2427700 - Black color | 2427100 - White color | 20W | 2000lm | 3000K |
|                              | 2427710 - Black color | 2427110 - White color | 20W | 2100lm | 4000K |
|                              | 2427720 - Black color | 2427120 - White color | 20W | 2200lm | 6500K |
| HIGH LUMENS VERSION          | 2427730 - Black color | 2427130 - White color | 20W | 2900lm | 3000K |
|                              | 2427740 - Black color | 2427140 - White color | 20W | 3000lm | 4000K |
|                              | 2427750 - Black color | 2427150 - White color | 20W | 3100lm | 6500K |
| DIMMABLE STANDARD VERSION    | 2427760 - Black color | 2427160 - White color | 20W | 2000lm | 3000K |
|                              | 2427770 - Black color | 2427170 - White color | 20W | 2100lm | 4000K |
|                              | 2427780 - Black color | 2427180 - White color | 20W | 2200lm | 6500K |
| DIMMABLE HIGH LUMENS VERSION | 2427790 - Black color | 2427190 - White color | 20W | 2900lm | 3000K |
|                              | 2427800 - Black color | 2427200 - White color | 20W | 3000lm | 4000K |
|                              | 2427810 - Black color | 2427210 - White color | 20W | 3100lm | 6500K |



### PHOTOMETRIC DIAGRAM





## GENERAL INFORMATION

PROFILED SL1 is a Professional line of Linear fixtures.

SAMSUNG LED sources applied in our standard version of Linear Light Group solutions.

OSRAM LED sources applied in our High Lumens version of Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

Linear standard versions are equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRI-DONIC 3 in 1 driver with option of 3 different dimmings (DALI / I-10V / PUSH BUTTON).

It can be installed on the surface of the ceiling or Suspended. The suspension set must be ordered separately, (HSL).

It can be installed on the wall. The mounting set must be ordered separately, (WML).

Polycarbonate difusser with High Permeability. There is option to put microprismatic difusser with 60° and UGR<15. It has to be ordered separately (MDL).

Housing of aluminum board electrostatically painted in sand white & sand black.



microprismatic diffuser 60° / UGR<15

9990880 - microprismatic diffuser

### SUSPENSION SET HSL



9910020 - Black color

9910030 - White color

### WALL MOUNTING ACCESSORIES SET WML



9911120 - Black color

9911100 - White color


### MIDDLE CONNECTOR MCL (optional)



middle connector for all profiled sl1 series

9910010 - middle connector

## LINEAR LED LIGHTS



120°



Sand black




Sand white





## PROFILED SL1 32



|                              |                       |                       |     |        |       |
|------------------------------|-----------------------|-----------------------|-----|--------|-------|
| STANDARD VERSION             | 2427820 - Black color | 2427220 - White color | 32W | 3200lm | 3000K |
|                              | 2427830 - Black color | 2427230 - White color | 32W | 3360lm | 4000K |
|                              | 2427840 - Black color | 2427240 - White color | 32W | 3520lm | 6500K |
| HIGH LUMENS VERSION          | 2427850 - Black color | 2427250 - White color | 32W | 4640lm | 3000K |
|                              | 2427860 - Black color | 2427260 - White color | 32W | 4800lm | 4000K |
|                              | 2427870 - Black color | 2427270 - White color | 32W | 4960lm | 6500K |
| DIMMABLE STANDARD VERSION    | 2427880 - Black color | 2427280 - White color | 32W | 3200lm | 3000K |
|                              | 2427890 - Black color | 2427290 - White color | 32W | 3360lm | 4000K |
|                              | 2427900 - Black color | 2427300 - White color | 32W | 3520lm | 6500K |
| DIMMABLE HIGH LUMENS VERSION | 2427910 - Black color | 2427310 - White color | 32W | 4640lm | 3000K |
|                              | 2427920 - Black color | 2427320 - White color | 32W | 4800lm | 4000K |
|                              | 2427930 - Black color | 2427330 - White color | 32W | 4960lm | 6500K |



### PHOTOMETRIC DIAGRAM

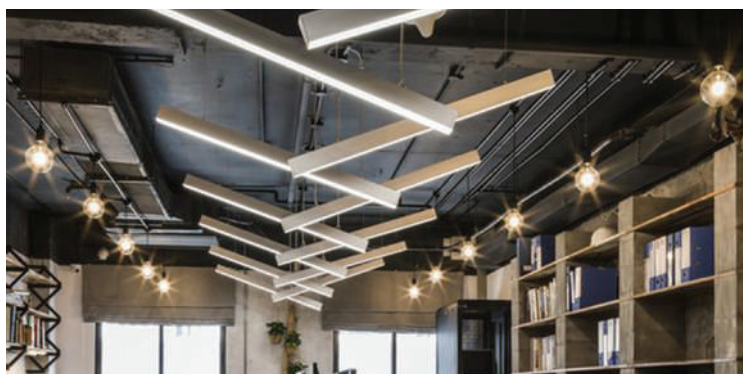

## GENERAL INFORMATION

PROFILED SL1 is a Professional line of Linear fixtures.

SAMSUNG LED sources applied in our standard version of Linear Light Group solutions.

OSRAM LED sources applied in our High Lumens version of Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

Linear standard versions are equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRI-DONIC 3 in 1 driver with option of 3 different dimmings (DALI / I-10V / PUSH BUTTON).

It can be installed on the surface of the ceiling or Suspended. The suspension set must be ordered separately, (HSL).

It can be installed on the wall. The mounting set must be ordered separately, (WML).

Polycarbonate difusser with High Permeability. There is option to put microprismatic difusser with 60° and UGR<15. It has to be ordered separately (MDL).

Housing of aluminum board electrostatically painted in sand white & sand black.



microprismatic diffuser 60° / UGR<15

9990890 - microprismatic diffuser

### SUSPENSION SET HSL



9910020 - Black color

9910030 - White color

### WALL MOUNTING ACCESSORIES SET WML



9911120 - Black color

9911100 - White color


### MIDDLE CONNECTOR MCL (optional)



middle connector for all profiled sl1 series

9910010 - middle connector

## LINEAR LED LIGHTS



120°



Sand black




Sand white





## PROFILED SL1 40



|                              |                       |                       |     |        |       |
|------------------------------|-----------------------|-----------------------|-----|--------|-------|
| STANDARD VERSION             | 2427940 - Black color | 2427340 - White color | 40W | 4200lm | 3000K |
|                              | 2427950 - Black color | 2427350 - White color | 40W | 4410lm | 4000K |
|                              | 2427960 - Black color | 2427360 - White color | 40W | 4620lm | 6500K |
| HIGH LUMENS VERSION          | 2427970 - Black color | 2427370 - White color | 40W | 5800lm | 3000K |
|                              | 2427980 - Black color | 2427380 - White color | 40W | 6000lm | 4000K |
|                              | 2427990 - Black color | 2427390 - White color | 40W | 6200lm | 6500K |
| DIMMABLE STANDARD VERSION    | 2428000 - Black color | 2427400 - White color | 40W | 4200lm | 3000K |
|                              | 2428010 - Black color | 2427410 - White color | 40W | 4410lm | 4000K |
|                              | 2428020 - Black color | 2427420 - White color | 40W | 4620lm | 6500K |
| DIMMABLE HIGH LUMENS VERSION | 2428030 - Black color | 2427430 - White color | 40W | 5800lm | 3000K |
|                              | 2428040 - Black color | 2427440 - White color | 40W | 6000lm | 4000K |
|                              | 2428050 - Black color | 2427450 - White color | 40W | 6200lm | 6500K |



### PHOTOMETRIC DIAGRAM

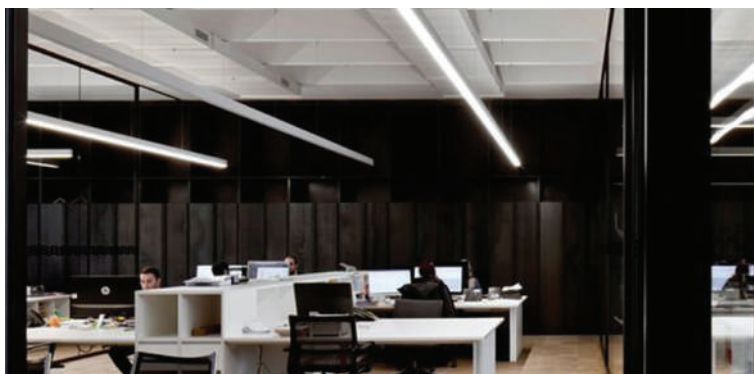

## GENERAL INFORMATION

PROFILED SL1 is a Professional line of Linear fixtures.

SAMSUNG LED sources applied in our standard version of Linear Light Group solutions.

OSRAM LED sources applied in our High Lumens version of Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

Linear standard versions are equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRIDONIC 3 in 1 driver with option of 3 different dimmings (DALI / I-10V / PUSH BUTTON).

It can be installed on the surface of the ceiling or Suspended. The suspension set must be ordered separately, (HSL).

It can be installed on the wall. The mounting set must be ordered separately, (WML).

Polycarbonate difusser with High Permeability. There is option to put microprismatic difusser with 60° and UGR<15. It has to be ordered separately (MDL).

Housing of aluminum board electrostatically painted in sand white & sand black.



microprismatic diffuser 60° / UGR<15

9990900 - microprismatic diffuser

### SUSPENSION SET HSL



9910020 - Black color

9910030 - White color

### WALL MOUNTING ACCESSORIES SET WML



9911120 - Black color

9911100 - White color


### MIDDLE CONNECTOR MCL (optional)



middle connector for all profiled sl1 series

9910010 - middle connector

## LINEAR LED LIGHTS



120°



Sand black




Sand white





## PROFILED SL1 50



|                              |                       |                       |     |        |       |
|------------------------------|-----------------------|-----------------------|-----|--------|-------|
| STANDARD VERSION             | 2428060 - Black color | 2427460 - White color | 50W | 5000lm | 3000K |
|                              | 2428070 - Black color | 2427470 - White color | 50W | 5250lm | 4000K |
|                              | 2428080 - Black color | 2427480 - White color | 50W | 5500lm | 6500K |
| HIGH LUMENS VERSION          | 2428090 - Black color | 2427490 - White color | 50W | 7250lm | 3000K |
|                              | 2428100 - Black color | 2427500 - White color | 50W | 7500lm | 4000K |
|                              | 2428110 - Black color | 2427510 - White color | 50W | 7750lm | 6500K |
| DIMMABLE STANDARD VERSION    | 2428120 - Black color | 2427520 - White color | 50W | 5000lm | 3000K |
|                              | 2428130 - Black color | 2427530 - White color | 50W | 5250lm | 4000K |
|                              | 2428140 - Black color | 2427540 - White color | 50W | 5500lm | 6500K |
| DIMMABLE HIGH LUMENS VERSION | 2428150 - Black color | 2427550 - White color | 50W | 7250lm | 3000K |
|                              | 2428160 - Black color | 2427560 - White color | 50W | 7500lm | 4000K |
|                              | 2428170 - Black color | 2427570 - White color | 50W | 7750lm | 6500K |



### PHOTOMETRIC DIAGRAM

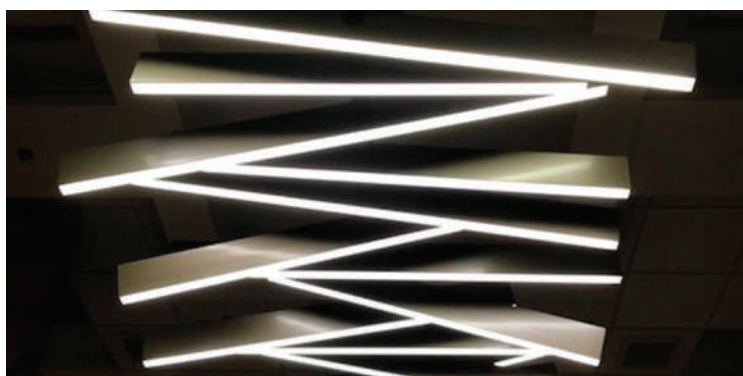



## GENERAL INFORMATION

PROFILED SL1 is a Professional line of Linear fixtures.

SAMSUNG LED sources applied in our standard version of Linear Light Group solutions. OSRAM LED sources applied in our High Lumens version of Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. Linear standard versions are equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRIDONIC 3 in 1 driver with option of 3 different dimmings (DALI / I-10V / PUSH BUTTON).

It can be installed on the surface of the ceiling or Suspended. The suspension set must be ordered separately, (HSL).

It can be installed on the wall. The mounting set must be ordered separately, (WML).

Polycarbonate difusser with High Permeability. There is option to put microprismatic difusser with 60° and UGR<15. It has to be ordered separately (MDL).

Housing of aluminum board electrostatically painted in sand white & sand black.



microprismatic diffuser 60° / UGR<15

9990910 - microprismatic diffuser

## SUSPENSION SET HSL



9910020 - Black color

9910030 - White color

## WALL MOUNTING ACCESSORIES SET WML



9911120 - Black color

9911100 - White color

## MIDDLE CONNECTOR MCL (optional)



middle connector for all profiled sl1 series

9910010 - middle connector

## LINEAR LED LIGHTS



120°



Sand black




Sand white





## PROFILED SL1 66



|                              |                       |                       |     |         |       |
|------------------------------|-----------------------|-----------------------|-----|---------|-------|
| STANDARD VERSION             | 2428180 - Black color | 2427580 - White color | 66W | 6600lm  | 3000K |
|                              | 2428190 - Black color | 2427590 - White color | 66W | 6930lm  | 4000K |
|                              | 2428200 - Black color | 2427600 - White color | 66W | 7260lm  | 6500K |
| HIGH LUMENS VERSION          | 2428210 - Black color | 2427610 - White color | 66W | 9570lm  | 3000K |
|                              | 2428220 - Black color | 2427620 - White color | 66W | 9900lm  | 4000K |
|                              | 2428230 - Black color | 2427630 - White color | 66W | 10230lm | 6500K |
| DIMMABLE STANDARD VERSION    | 2428240 - Black color | 2427640 - White color | 66W | 6600lm  | 3000K |
|                              | 2428250 - Black color | 2427650 - White color | 66W | 6930lm  | 4000K |
|                              | 2428260 - Black color | 2427660 - White color | 66W | 7260lm  | 6500K |
| DIMMABLE HIGH LUMENS VERSION | 2428270 - Black color | 2427670 - White color | 66W | 9570lm  | 3000K |
|                              | 2428280 - Black color | 2427680 - White color | 66W | 9900lm  | 4000K |
|                              | 2428290 - Black color | 2427690 - White color | 66W | 10230lm | 6500K |



## PHOTOMETRIC DIAGRAM

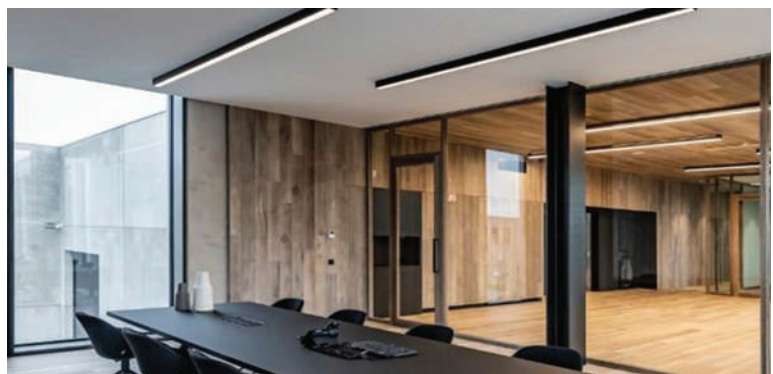

## GENERAL INFORMATION

TETRIS 2 SL1 is an Angular connector for Linears PROFILED SL1. Is a Professional Line of fixtures.

SAMSUNG LED sources applied in our standard version of Linear Light Group solutions.

OSRAM LED sources applied in our High Lumens version of Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

Linear standard versions are equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRI-DONIC 3 in 1 driver with option of 3 different dimmings (DALI / I-10V / PUSH BUTTON).

It can be installed on the surface of the ceiling or Suspended. The suspension set must be ordered separately, (HSL).

It can be installed on the wall. The mounting set must be ordered separately, (WML).

Polycarbonate difusser with High Permeability. There is option to put microprismatic difusser with 60° and UGR<15. It has to be ordered separately (MDL).

Housing of aluminum board electrostatically painted in sand white & sand black.



microprismatic diffuser 60° / UGR<15

9990920 - microprismatic diffuser

### SUSPENSION SET HSL



9910020 - Black color

9910030 - White color

### WALL MOUNTING ACCESSORIES SET WML



9911120 - Black color

9911100 - White color



### MIDDLE CONNECTOR MCL (optional)



middle connector for all profiled sl1 series

9910010 - middle connector



## LINEAR LED LIGHTS



## TETRIS 2 SL1



|                              |                       |                       |    |        |       |
|------------------------------|-----------------------|-----------------------|----|--------|-------|
| STANDARD VERSION             | 2429140 - Black color | 2429020 - White color | 9W | 900lm  | 3000K |
|                              | 2429150 - Black color | 2429030 - White color | 9W | 945lm  | 4000K |
|                              | 2429160 - Black color | 2429040 - White color | 9W | 990lm  | 6500K |
| HIGH LUMENS VERSION          | 2429170 - Black color | 2429050 - White color | 9W | 1260lm | 3000K |
|                              | 2429180 - Black color | 2429060 - White color | 9W | 1350lm | 4000K |
|                              | 2429190 - Black color | 2429070 - White color | 9W | 1395lm | 6500K |
| DIMMABLE STANDARD VERSION    | 2429200 - Black color | 2429080 - White color | 9W | 900lm  | 3000K |
|                              | 2429210 - Black color | 2429090 - White color | 9W | 945lm  | 4000K |
|                              | 2429220 - Black color | 2429100 - White color | 9W | 990lm  | 6500K |
| DIMMABLE HIGH LUMENS VERSION | 2429230 - Black color | 2429110 - White color | 9W | 1260lm | 3000K |
|                              | 2429240 - Black color | 2429120 - White color | 9W | 1350lm | 4000K |
|                              | 2429250 - Black color | 2429130 - White color | 9W | 1395lm | 6500K |

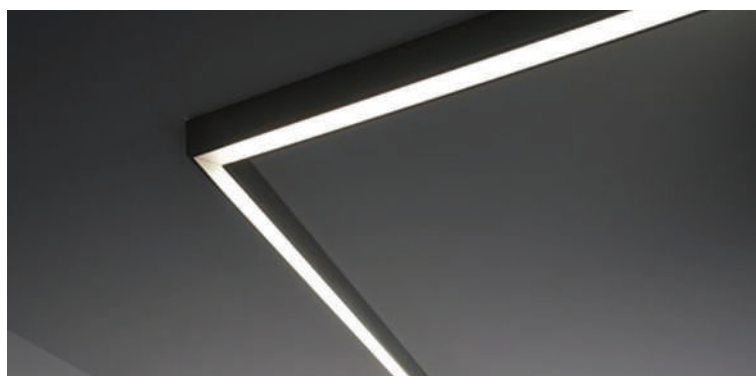

## GENERAL INFORMATION

TETRIS 3 SL1 is a "T" connector for Linears PROFILED SL1. Is a Professional Line of fixtures.

SAMSUNG LED sources applied in our standard version of Linear Light Group solutions. OSRAM LED sources applied in our High Lumens version of Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. Linear standard versions are equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRI-DONIC 3 in 1 driver with option of 3 different dimmings (DALI / I-10V / PUSH BUTTON).

It can be installed on the surface of the ceiling or Suspended. The suspension set must be ordered separately, (HSL).

It can be installed on the wall. The mounting set must be ordered separately, (WML).

Polycarbonate difusser with High Permeability. There is option to put microprismatic difusser with 60° and UGR<15. It has to be ordered separately (MDL).

Housing of aluminum board electrostatically painted in sand white & sand black.



microprismatic diffuser 60° / UGR<15

9990930 - microprismatic diffuser

### HANGING SET HSL (optional)



9910020 - Black color

9910030 - White color

### MIDDLE CONNECTOR MCL (optional)



middle connector for all profiled sl1 series

9910080 - middle connector

## LINEAR LED LIGHTS

5  
YEARS  
WARRANTY

LED  
INSIDE

170-265V

IP20

UGR  
<19

CRI  
Ra>88

100000h

x50000

Non  
Dimm

Dimm  
Optional

20-40°C



120°



Sand black




Sand white



## TETRIS 3 SL1

powered by  
**TRIDONIC** **SAMSUNG** **OSRAM**  
LED TECHNOLOGY INCLUDED

|                                    |                       |                       |    |        |       |
|------------------------------------|-----------------------|-----------------------|----|--------|-------|
| STANDARD<br>VERSION                | 2429380 - Black color | 2429260 - White color | 9W | 900lm  | 3000K |
|                                    | 2429390 - Black color | 2429270 - White color | 9W | 945lm  | 4000K |
|                                    | 2429400 - Black color | 2429280 - White color | 9W | 990lm  | 6500K |
| HIGH<br>LUMENS<br>VERSION          | 2429410 - Black color | 2429290 - White color | 9W | 1260lm | 3000K |
|                                    | 2429420 - Black color | 2429300 - White color | 9W | 1350lm | 4000K |
|                                    | 2429430 - Black color | 2429310 - White color | 9W | 1395lm | 6500K |
| DIMMABLE<br>STANDARD<br>VERSION    | 2429440 - Black color | 2429320 - White color | 9W | 900lm  | 3000K |
|                                    | 2429450 - Black color | 2429330 - White color | 9W | 945lm  | 4000K |
|                                    | 2429460 - Black color | 2429340 - White color | 9W | 990lm  | 6500K |
| DIMMABLE<br>HIGH LUMENS<br>VERSION | 2429470 - Black color | 2429350 - White color | 9W | 1260lm | 3000K |
|                                    | 2429480 - Black color | 2429360 - White color | 9W | 1350lm | 4000K |
|                                    | 2429490 - Black color | 2429370 - White color | 9W | 1395lm | 6500K |



## GENERAL INFORMATION

TETRIS 4 SL1 is a Cross connector for Linears PROFILED SL1. Is a Professional Line of fixtures.

SAMSUNG LED sources applied in our standard version of Linear Light Group solutions.

OSRAM LED sources applied in our High Lumens version of Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. Linear standard versions are equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRI-DONIC 3 in 1 driver with option of 3 different dimmings (DALI / I-10V / PUSH BUTTON).

It can be installed on the surface of the ceiling or Suspended. The suspension set must be ordered separately, (HSL).

It can be installed on the wall. The mounting set must be ordered separately, (WML).

Polycarbonate difusser with High Permeability. There is option to put microprismatic difusser with 60° and UGR<15. It has to be ordered separately (MDL).

Housing of aluminum board electrostatically painted in sand white & sand black.



microprismatic diffuser 60° / UGR<15

9990940 - microprismatic diffuser

### HANGING SET HSL (optional)



9910020 - Black color

9910030 - White color

### MIDDLE CONNECTOR MCL (optional)



middle connector for all profiled sl1 series

9910010 - middle connector

## LINEAR LED LIGHTS

5  
YEARS  
WARRANTY

LED  
INSIDE

170-265V

IP20

UGR  
<19

CRI  
Ra>88

100000h

x50000

Non  
Dimm

Dimm  
Optional

20-40°C




120°



Sand black





Sand white



## TETRIS 4 SL1

powered by  
**TRIDONIC** **SAMSUNG** **OSRAM**  
LED TECHNOLOGY INCLUDED

|                                    |                       |                       |    |        |       |
|------------------------------------|-----------------------|-----------------------|----|--------|-------|
| STANDARD<br>VERSION                | 2429620 - Black color | 2429500 - White color | 9W | 900lm  | 3000K |
|                                    | 2429630 - Black color | 2429510 - White color | 9W | 945lm  | 4000K |
|                                    | 2429640 - Black color | 2429520 - White color | 9W | 990lm  | 6500K |
| HIGH<br>LUMENS<br>VERSION          | 2429650 - Black color | 2429530 - White color | 9W | 1260lm | 3000K |
|                                    | 2429660 - Black color | 2429540 - White color | 9W | 1350lm | 4000K |
|                                    | 2429670 - Black color | 2429550 - White color | 9W | 1395lm | 6500K |
| DIMMABLE<br>STANDARD<br>VERSION    | 2429680 - Black color | 2429560 - White color | 9W | 900lm  | 3000K |
|                                    | 2429690 - Black color | 2429570 - White color | 9W | 945lm  | 4000K |
|                                    | 2429700 - Black color | 2429580 - White color | 9W | 990lm  | 6500K |
| DIMMABLE<br>HIGH LUMENS<br>VERSION | 2429710 - Black color | 2429590 - White color | 9W | 1260lm | 3000K |
|                                    | 2429720 - Black color | 2429600 - White color | 9W | 1350lm | 4000K |
|                                    | 2429730 - Black color | 2429610 - White color | 9W | 1395lm | 6500K |

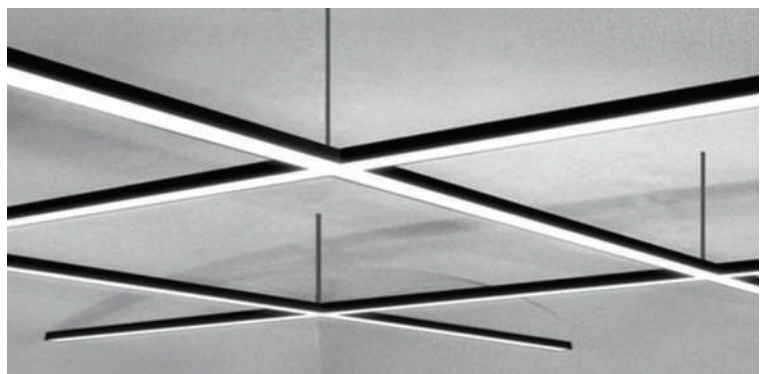

## GENERAL INFORMATION

PROFILED DIL1 is an up & down Professional Linear fixture.

SAMSUNG LED sources applied in our standard version of Linear Light Group solutions.

OSRAM LED sources applied in our High Lumens version of Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

Linear standard versions are equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRIDONIC 3 in 1 driver with option of 3 different dimmings (DALI / 1-10V / PUSH BUTTON).

It can be installed Suspended. Suspension set included in the package.

Polycarbonate diffuser with High Permeability. There is option to put microprismatic diffuser with 60° and UGR<15. It has to be ordered separately (MDL).

Housing of aluminum board electrostatically painted in sand white & sand black.



## SUSPENSION SET



9910020 - Black color

9910030 - White color


## LINEAR LED LIGHTS

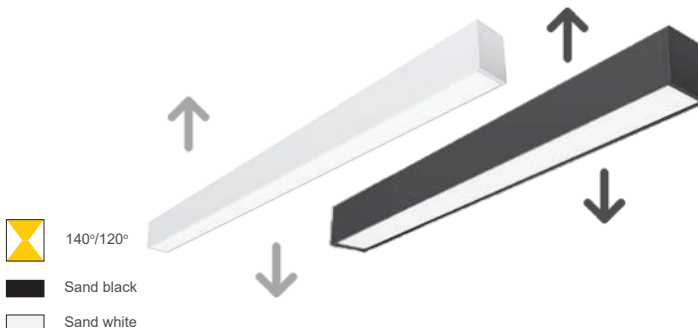




## PROFILED DIL1 63



|                           |                 |                 |               |             |       |
|---------------------------|-----------------|-----------------|---------------|-------------|-------|
| STANDARD<br>VERSION       | 2430100 - Black | 2430070 - White | 80W (48W+32W) | 4800/3200lm | 3000K |
|                           | 2430110 - Black | 2430080 - White | 80W (48W+32W) | 5040/3360lm | 4000K |
|                           | 2430120 - Black | 2430090 - White | 80W (48W+32W) | 5280/3500lm | 6000K |
| HIGH<br>LUMENS<br>VERSION | 2430160 - Black | 2430130 - White | 86W (50W+36W) | 7250/5040lm | 3000K |
|                           | 2430170 - Black | 2430140 - White | 86W (50W+36W) | 7500/5220lm | 4000K |
|                           | 2430180 - Black | 2430150 - White | 86W (50W+36W) | 7750/5580lm | 6000K |



## PHOTOMETRIC DIAGRAM

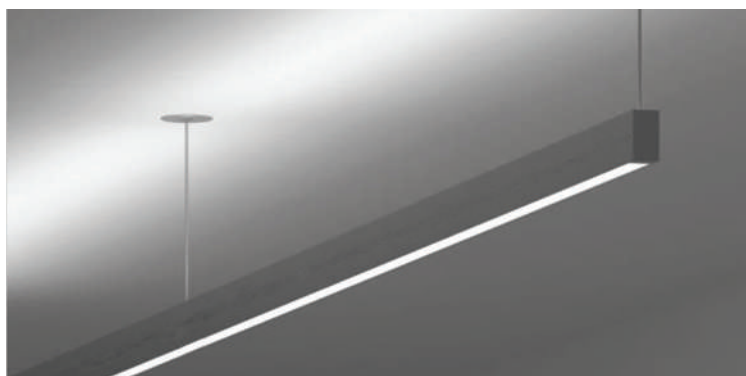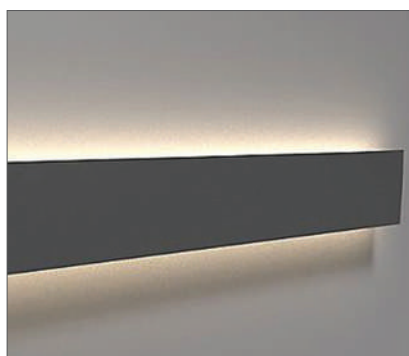





## GENERAL INFORMATION

PROFILED RL is a Professional line of Linear-fixtures.

SAMSUNG LED sources applied in our standard version of Linear Light Group solutions.

OSRAM LED sources applied in our High Lumens version of Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.


Dimmable versions are equipped with TRIDONIC 3 in 1 driver with option of 3 different dimmings (DALI / I-10V / PUSH BUTTON).

Intended for Recessed installation.



Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & sand black.

Different body color is possible according to the project needs.


Polycarbonate difusser with High Permeability.

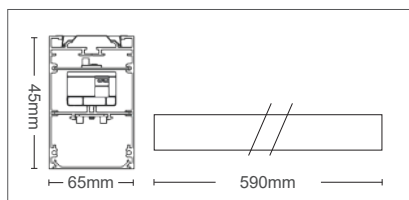

PHOTOMETRIC DIAGRAM

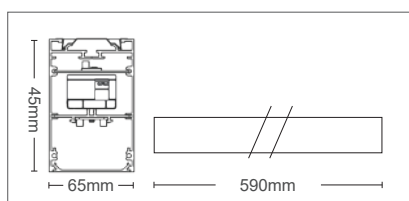



PHOTOMETRIC DIAGRAM



microprismatic diffuser 60° / UGR<15

99909650 - microprismatic diffuser

## RECESSED LINEAR LED LIGHTS



## PROFILED RL1 20



|                              |                       |                       |     |        |       |
|------------------------------|-----------------------|-----------------------|-----|--------|-------|
| STANDARD VERSION             | 2428300 - Black color | 2428540 - White color | 20W | 2000lm | 3000K |
|                              | 2428310 - Black color | 2428550 - White color | 20W | 2100lm | 4000K |
|                              | 2428320 - Black color | 2428560 - White color | 20W | 2200lm | 6500K |
| HIGH LUMENS VERSION          | 2428330 - Black color | 2428570 - White color | 20W | 2900lm | 3000K |
|                              | 2428340 - Black color | 2428580 - White color | 20W | 3000lm | 4000K |
|                              | 2428350 - Black color | 2428590 - White color | 20W | 3100lm | 6500K |
| DIMMABLE STANDARD VERSION    | 2428360 - Black color | 2428600 - White color | 20W | 2000lm | 3000K |
|                              | 2428370 - Black color | 2428610 - White color | 20W | 2100lm | 4000K |
|                              | 2428380 - Black color | 2428620 - White color | 20W | 2200lm | 6500K |
| DIMMABLE HIGH LUMENS VERSION | 2428390 - Black color | 2428630 - White color | 20W | 2900lm | 3000K |
|                              | 2428400 - Black color | 2428640 - White color | 20W | 3000lm | 4000K |
|                              | 2428410 - Black color | 2428650 - White color | 20W | 3100lm | 6500K |

## PROFILED RL1 40



|                              |                       |                       |     |        |       |
|------------------------------|-----------------------|-----------------------|-----|--------|-------|
| STANDARD VERSION             | 2428420 - Black color | 2428660 - White color | 40W | 4200lm | 3000K |
|                              | 2428430 - Black color | 2428670 - White color | 40W | 4210lm | 4000K |
|                              | 2428440 - Black color | 2428680 - White color | 40W | 4640lm | 6500K |
| HIGH LUMENS VERSION          | 2428450 - Black color | 2428690 - White color | 40W | 5800lm | 3000K |
|                              | 2428460 - Black color | 2428700 - White color | 40W | 6000lm | 4000K |
|                              | 2428470 - Black color | 2428710 - White color | 40W | 6200lm | 6500K |
| DIMMABLE STANDARD VERSION    | 2428480 - Black color | 2428720 - White color | 40W | 4200lm | 3000K |
|                              | 2428490 - Black color | 2428730 - White color | 40W | 4210lm | 4000K |
|                              | 2428500 - Black color | 2428740 - White color | 40W | 4640lm | 6500K |
| DIMMABLE HIGH LUMENS VERSION | 2428510 - Black color | 2428750 - White color | 40W | 5800lm | 3000K |
|                              | 2428520 - Black color | 2428760 - White color | 40W | 6000lm | 4000K |
|                              | 2428530 - Black color | 2428770 - White color | 40W | 6200lm | 6500K |

## GENERAL INFORMATION

TETRIS 2 RL1 is a recessed Angular connector for Linears PROFILED RL1. Is a Professional line of fixtures.

SAMSUNG LED sources applied in our Linear Ceiling Light Group solutions, offer high performance and long duration.

OSRAM LED sources applied in our High Lumens version of Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products.

Linear standard versions are equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRIDONIC 3 in 1 driver with option of 3 different dimmings (DALI / I-10V / PUSH BUTTON).


Polycarbonate difusser with High Permeability. There is option to put microprismatic diffuser with 60° and UGR<15. It has to be ordered seperately (MDL).

Housing of aluminum board electrostatically painted in sand white & sand black.



microprismatic diffuser 60° / UGR<15

9990960 - microprismatic diffuser



## RECESSED LINEAR LED LIGHTS

|                               |            |                 |             |                   |                     |                |               |                 |                      |                |
|-------------------------------|------------|-----------------|-------------|-------------------|---------------------|----------------|---------------|-----------------|----------------------|----------------|
| <b>5</b><br>YEARS<br>WARRANTY | <b>LED</b> | <b>170-265V</b> | <b>IP20</b> | <b>UGR</b><br><19 | <b>CRI</b><br>Ra>88 | <b>100000h</b> | <b>x50000</b> | <b>Non Dimm</b> | <b>Dimm Optional</b> | <b>20-40°C</b> |
|-------------------------------|------------|-----------------|-------------|-------------------|---------------------|----------------|---------------|-----------------|----------------------|----------------|



120°



Sand black



Sand white



## TETRIS 2 RL1



|                                     |                       |                       |    |        |       |
|-------------------------------------|-----------------------|-----------------------|----|--------|-------|
| <b>STANDARD VERSION</b>             | 2428900 - Black color | 2428780 - White color | 9W | 900lm  | 3000K |
|                                     | 2428910 - Black color | 2428790 - White color | 9W | 945lm  | 4000K |
|                                     | 2428920 - Black color | 2428800 - White color | 9W | 990lm  | 6500K |
| <b>HIGH LUMENS VERSION</b>          | 2428930 - Black color | 2428810 - White color | 9W | 1260lm | 3000K |
|                                     | 2428940 - Black color | 2428820 - White color | 9W | 1350lm | 4000K |
|                                     | 2428950 - Black color | 2428830 - White color | 9W | 1395lm | 6500K |
| <b>DIMMABLE STANDARD VERSION</b>    | 2428960 - Black color | 2428840 - White color | 9W | 900lm  | 3000K |
|                                     | 2428970 - Black color | 2428850 - White color | 9W | 945lm  | 4000K |
|                                     | 2428980 - Black color | 2428860 - White color | 9W | 990lm  | 6500K |
| <b>DIMMABLE HIGH LUMENS VERSION</b> | 2428990 - Black color | 2428870 - White color | 9W | 1260lm | 3000K |
|                                     | 2429000 - Black color | 2428880 - White color | 9W | 1350lm | 4000K |
|                                     | 2429010 - Black color | 2428890 - White color | 9W | 1395lm | 6500K |



# **2024**

## **lighting electrical catalog**

# 3

## **CEILING LIGHTS**

**RECESSED, SURFACE & SUSPENDED  
LIGHTING PANELS & PLAFONS**









### GENERAL INFORMATION

LENA RX is a family of round recessed led light fixtures equipped with SANAN LED sources in the sidelight position.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand white.

Diffuser of opal polystyrene with 120° beam angle. Driver is included in the package.

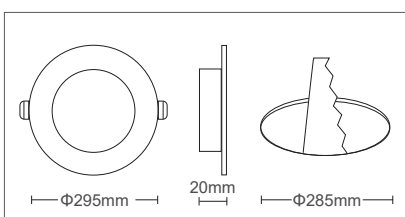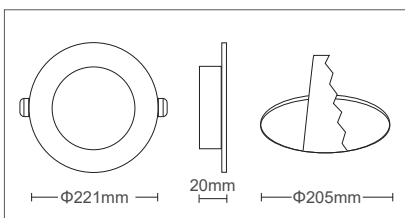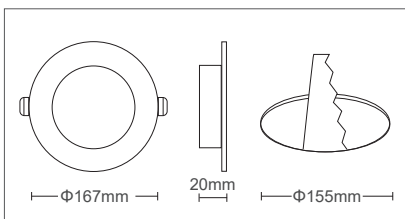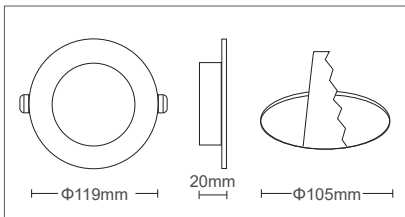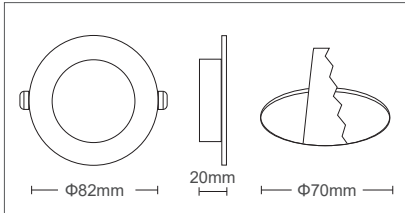

120°



Sand white

## LENA RX 3

|         |    |       |       |
|---------|----|-------|-------|
| 2023880 | 3W | 282lm | 3000K |
| 2023890 | 3W | 285lm | 4000K |
| 2023900 | 3W | 300lm | 6000K |

## LENA RX 6

|         |    |       |       |
|---------|----|-------|-------|
| 2023910 | 6W | 564lm | 3000K |
| 2023920 | 6W | 570lm | 4000K |
| 2023930 | 6W | 600lm | 6000K |

## LENA RX 12

|         |     |        |       |
|---------|-----|--------|-------|
| 2023940 | 12W | 1128lm | 3000K |
| 2023950 | 12W | 1140lm | 4000K |
| 2023960 | 12W | 1200lm | 6000K |

## LENA RX 18

|         |     |        |       |
|---------|-----|--------|-------|
| 2023970 | 18W | 1692lm | 3000K |
| 2023980 | 18W | 1710lm | 4000K |
| 2023990 | 18W | 1800lm | 6000K |

## LENA RX 24

|         |     |        |       |
|---------|-----|--------|-------|
| 2024000 | 24W | 2256lm | 3000K |
| 2024010 | 24W | 2280lm | 4000K |
| 2024020 | 24W | 2400lm | 6000K |






## GENERAL INFORMATION

LINA R is a family of round recessed led light fixtures equipped with SANAN LED sources in the backlight position.

Housing of PP painted with in sand white.

Diffuser of opal polystyrene with anti-yellow treatment with 120° beam angle & UGR<19.

Driver is included in the package.

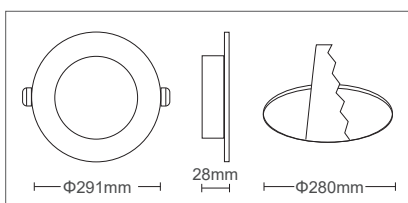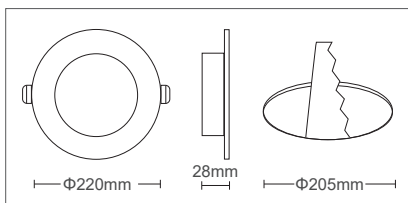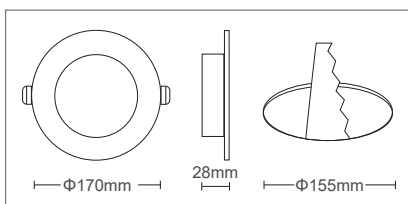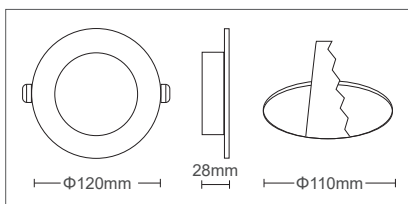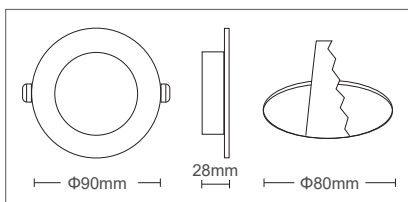

## RECESSED LED CEILING PANEL LIGHTS



120°



Sand white

## LINA R3

|         |    |       |       |
|---------|----|-------|-------|
| 2027160 | 3W | 330lm | 4000K |
| 2027170 | 3W | 330lm | 6000K |

## LINA R6

|         |    |       |       |
|---------|----|-------|-------|
| 2027180 | 6W | 660lm | 4000K |
| 2027190 | 6W | 660lm | 6000K |

## LINA R12

|         |     |        |       |
|---------|-----|--------|-------|
| 2027200 | 12W | 1320lm | 4000K |
| 2027210 | 12W | 1320lm | 6000K |

## LINA R18

|         |     |        |       |
|---------|-----|--------|-------|
| 2027220 | 18W | 1980lm | 4000K |
| 2027230 | 18W | 1980lm | 6000K |

## LINA R24

|         |     |        |       |
|---------|-----|--------|-------|
| 2027240 | 24W | 2640lm | 4000K |
| 2027250 | 24W | 2640lm | 6000K |

## GENERAL INFORMATION


DARIA R is a family of round recessed led light fixtures equipped with SANAN LED sources in the backlight position.

Housing of aluminum board electrostatically painted with sandblasted finishing in mat white.

Diffuser of opal polycarbonate with anti-yellow treatment with 170° beam angle & UGR<19.

Standard driver is included in the package.

Adjustable positions for the hooks in order to fit to many different hall sizes

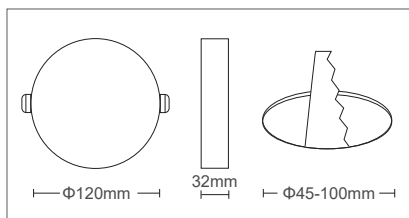


## RECESSED LED CEILING PANEL LIGHTS



120°


## DARIA R 17

|         |     |        |       |
|---------|-----|--------|-------|
| 2025510 | 17W | 1872lm | 4000K |
| 2025520 | 17W | 1908lm | 6500K |

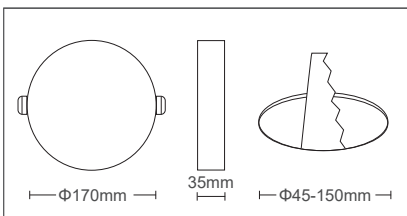

## DARIA R 24

|         |     |        |       |
|---------|-----|--------|-------|
| 2025540 | 24W | 2544lm | 4000K |
| 2025550 | 24W | 2592lm | 6500K |

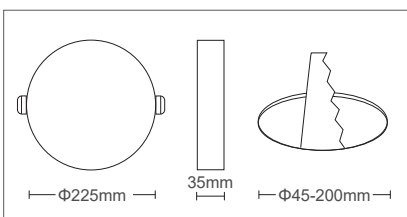

## DARIA R 36

|         |     |        |       |
|---------|-----|--------|-------|
| 2025570 | 36W | 3888lm | 4000K |
| 2025580 | 36W | 3960lm | 6500K |

## GENERAL INFORMATION

HELEN R is a family of round waterproof recessed led light fixtures equipped with SANAN LED sources in the backlight position. Housing of aluminum board electrostatically painted with sandblasted finishing in sand white. Diffuser of opal polycarbonate with anti-yellow treatment. Driver is included in the package.


## RECESSED LED CEILING PANEL LIGHTS



120°




Sand white

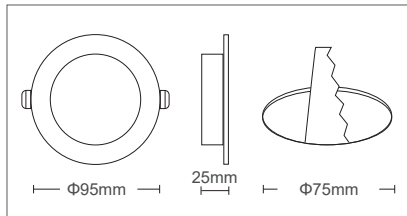


## HELEN R 5

|         |    |       |       |
|---------|----|-------|-------|
| 2024360 | 5W | 425lm | 3000K |
| 2027480 | 5W | 425lm | 4000K |
| 2027490 | 5W | 207lm | 6000K |

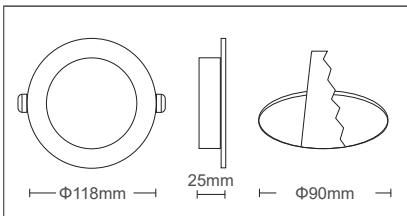

## HELEN R 9

|         |    |       |       |
|---------|----|-------|-------|
| 2027500 | 9W | 765lm | 4000K |
| 2027510 | 9W | 765lm | 6000K |

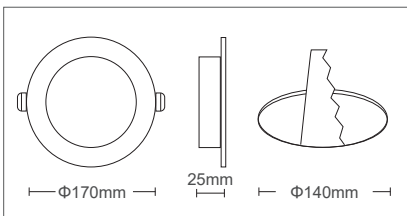

## HELEN R 18

|         |     |        |       |
|---------|-----|--------|-------|
| 2027520 | 18W | 1530lm | 4000K |
| 2027530 | 18W | 1530lm | 6000K |


## RECESSED LED CEILING PANEL LIGHTS

### GENERAL INFORMATION


LENA RG is a family of round recessed led light fixtures equipped with SANAN LED sources in the backlight position.

Housing of glass & aluminum board electrostatically painted with sandblasted finishing in sand white.

Diffuser of semi transparent glass with 120° beam angle. Driver is included in the package.




120°

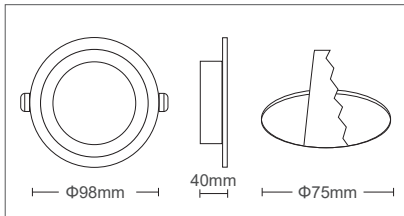


### LENA RG 6

|         |    |       |       |
|---------|----|-------|-------|
| 2023400 | 6W | 564lm | 3000K |
| 2023410 | 6W | 570lm | 4000K |
| 2023420 | 6W | 600lm | 6000K |

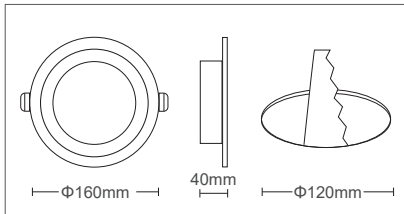

### LENA RG 12

|         |     |        |       |
|---------|-----|--------|-------|
| 2023430 | 12W | 1128lm | 3000K |
| 2023440 | 12W | 1140lm | 4000K |
| 2023450 | 12W | 1200lm | 6000K |

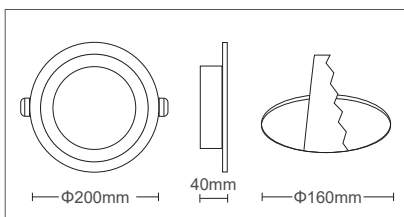

### LENA RG 16

|         |     |        |       |
|---------|-----|--------|-------|
| 2023460 | 16W | 1440lm | 3000K |
| 2023470 | 16W | 1504lm | 4000K |
| 2023480 | 16W | 1520lm | 6000K |





## GENERAL INFORMATION

LENA SG is a family of square recessed led light fixtures equipped with SANAN LED sources in the backlight position.


Housing of glass & aluminum board electrostatically painted with sandblasted finishing in sand white.

Diffuser of semi transparent glass with 120° beam angle. Driver is included in the package.

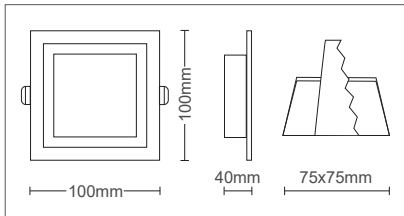


## LENA SG 6

|         |    |       |       |
|---------|----|-------|-------|
| 2023490 | 6W | 564lm | 3000K |
| 2023500 | 6W | 570lm | 4000K |
| 2023510 | 6W | 600lm | 6000K |

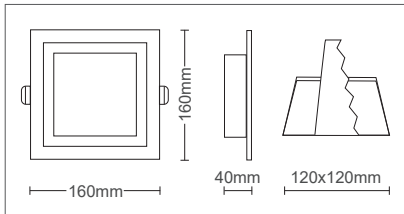

## LENA SG 12

|         |     |        |       |
|---------|-----|--------|-------|
| 2023520 | 12W | 1128lm | 3000K |
| 2023530 | 12W | 1140lm | 4000K |
| 2023540 | 12W | 1200lm | 6000K |

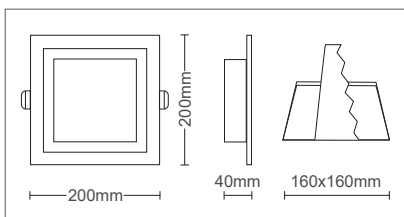

## LENA SG 16







|         |     |        |       |
|---------|-----|--------|-------|
| 2023550 | 16W | 1440lm | 3000K |
| 2023560 | 16W | 1504lm | 4000K |
| 2023570 | 16W | 1520lm | 6000K |

## GENERAL INFORMATION

LENA SX is a family of square recessed led light fixtures equipped with SANAN LED sources in the sidelight position.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand white.

Diffuser of opal polystyrene with 120° beam angle. Driver is included in the package.

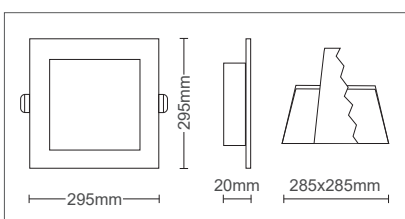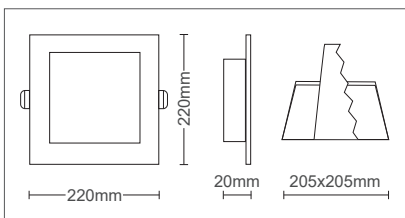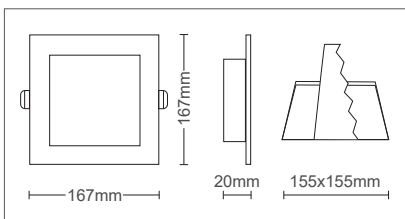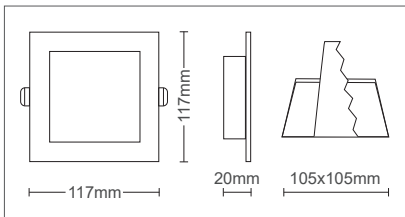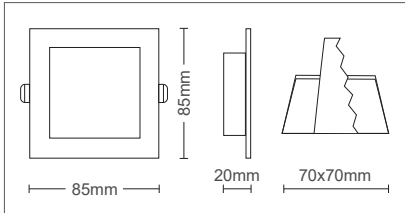

120°



Sand white

## LENA SX 3

|         |    |       |       |
|---------|----|-------|-------|
| 2024030 | 3W | 282lm | 3000K |
| 2024040 | 3W | 285lm | 4000K |
| 2024050 | 3W | 300lm | 6000K |

## LENA SX 6

|         |    |       |       |
|---------|----|-------|-------|
| 2024060 | 6W | 564lm | 3000K |
| 2024070 | 6W | 570lm | 4000K |
| 2024080 | 6W | 600lm | 6000K |

## LENA SX 12

|         |     |        |       |
|---------|-----|--------|-------|
| 2024090 | 12W | 1128lm | 3000K |
| 2024100 | 12W | 1140lm | 4000K |
| 2024110 | 12W | 1200lm | 6000K |

## LENA SX 18

|         |     |        |       |
|---------|-----|--------|-------|
| 2024120 | 18W | 1692lm | 3000K |
| 2024130 | 18W | 1710lm | 4000K |
| 2024140 | 18W | 1800lm | 6000K |

## LENA SX 24

|         |     |        |       |
|---------|-----|--------|-------|
| 2024150 | 24W | 2256lm | 3000K |
| 2024160 | 24W | 2280lm | 4000K |
| 2024170 | 24W | 2400lm | 6000K |






## GENERAL INFORMATION

LINA R is a family of square recessed led light fixtures equipped with SANAN LED sources in the backlight position.

Housing of PP painted with in sand white.

Diffuser of opal polystyrene with anti-yellow treatment with 120° beam angle & UGR<19.

Driver is included in the package.

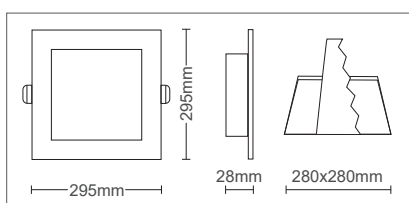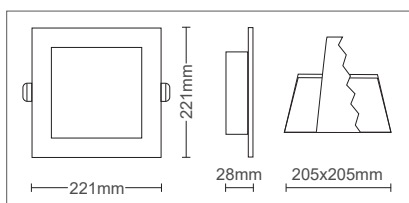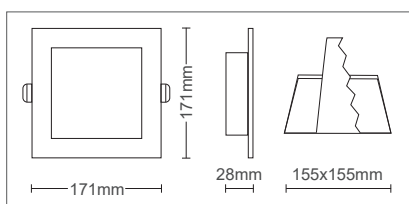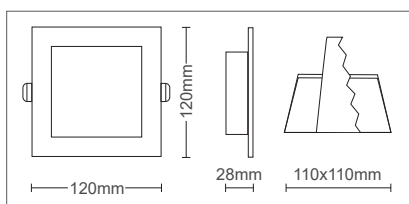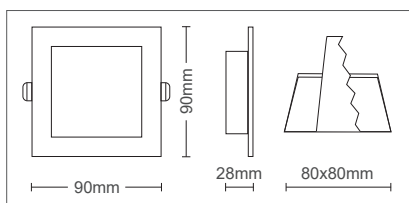

## RECESSED LED CEILING PANEL LIGHTS



## LINA S 3

|         |    |       |       |
|---------|----|-------|-------|
| 2027260 | 3W | 330lm | 4000K |
| 2027270 | 3W | 330lm | 6000K |

## LINA S 6

|         |    |       |       |
|---------|----|-------|-------|
| 2027280 | 6W | 660lm | 4000K |
| 2027290 | 6W | 660lm | 6000K |

## LINA S 12

|         |     |        |       |
|---------|-----|--------|-------|
| 2027300 | 12W | 1320lm | 4000K |
| 2027310 | 12W | 1320lm | 6000K |

## LINA S 18

|         |     |        |       |
|---------|-----|--------|-------|
| 2027320 | 18W | 1980lm | 4000K |
| 2027330 | 18W | 1980lm | 6000K |

## LINA S 24

|         |     |        |       |
|---------|-----|--------|-------|
| 2027340 | 24W | 2640lm | 4000K |
| 2027350 | 24W | 2640lm | 6000K |

## SURFACE LED CEILING PANEL LIGHTS


### GENERAL INFORMATION

LINDA-R is a family of round surface led light fixtures equipped with SANAN LED sources in the sidelight position.

Housing of die-cast aluminum board electrostatically painted with sandblasted finishing in sand white.

Diffuser of opal polypropylene with 120° beam angle.

Driver is included in the package.

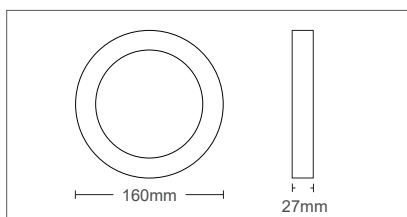


120°



Sand white


## LINDA R 12

|         |     |        |       |
|---------|-----|--------|-------|
| 2023640 | 12W | 1128lm | 3000K |
| 2023650 | 12W | 1140lm | 4000K |
| 2023660 | 12W | 1200lm | 6500K |

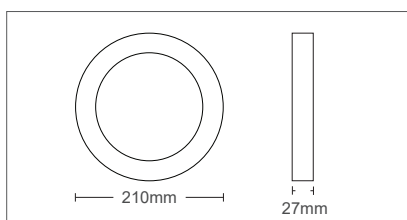

## LINDA R 20

|         |     |        |       |
|---------|-----|--------|-------|
| 2023670 | 20W | 1880lm | 3000K |
| 2023680 | 20W | 1900lm | 4000K |
| 2023690 | 20W | 2000lm | 6500K |

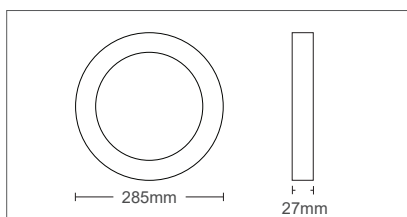

## LINDA R 24

|         |     |        |       |
|---------|-----|--------|-------|
| 2023700 | 24W | 2256lm | 3000K |
| 2023710 | 24W | 2280lm | 4000K |
| 2023720 | 24W | 2400lm | 6500K |




## GENERAL INFORMATION

LARA R is a family of round surface led light fixtures equipped with SANAN LED sources in the backlight position.

Housing of PP painted with in sand white.

Diffuser of opal polystyrene with anti-yellow treatment with 120° beam angle & UGR<19.

Driver is included in the package.

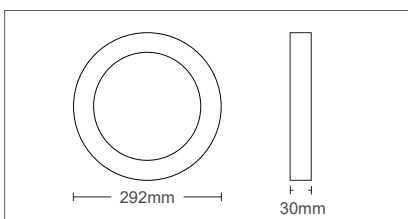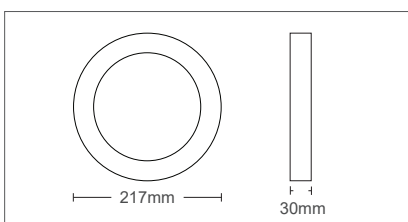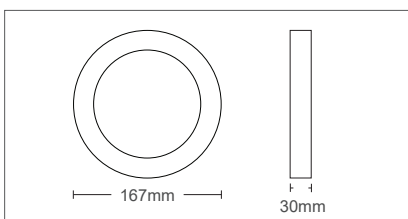

## SURFACE LED CEILING PANEL LIGHTS



120°



Sand white

## LARA R 12

|         |     |        |       |
|---------|-----|--------|-------|
| 2027360 | 12W | 1320lm | 4000K |
| 2027370 | 12W | 1320lm | 6000K |

## LARA R 18

|         |     |        |       |
|---------|-----|--------|-------|
| 2027380 | 18W | 1980lm | 4000K |
| 2027390 | 18W | 1980lm | 6000K |

## LARA R 24

|         |     |        |       |
|---------|-----|--------|-------|
| 2027400 | 24W | 2640lm | 4000K |
| 2027410 | 24W | 2640lm | 6000K |

## SURFACE LED CEILING PANEL LIGHTS


### GENERAL INFORMATION

LINDA-R is a family of round surface led light fixtures equipped with SANAN LED sources in the sidelight position.

Housing of die-cast aluminum board electrostatically painted with sandblasted finishing in sand white.

Diffuser of opal polypropylene with 120° beam angle.


Driver is included in the package.

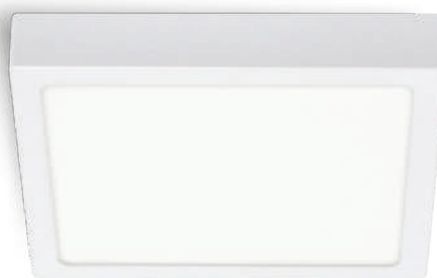

120°




Sand white

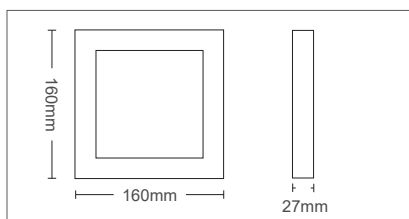


## LINDA S 12

|         |     |        |       |
|---------|-----|--------|-------|
| 2023790 | 12W | 1128lm | 3000K |
| 2023800 | 12W | 1140lm | 4000K |
| 2023810 | 12W | 1200lm | 6500K |

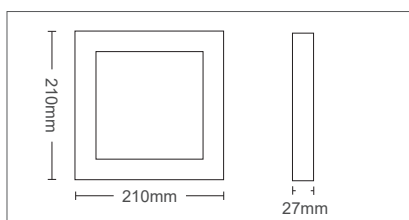

## LINDA S 20

|         |     |        |       |
|---------|-----|--------|-------|
| 2023820 | 20W | 1880lm | 3000K |
| 2023830 | 20W | 1900lm | 4000K |
| 2023840 | 20W | 2000lm | 6500K |

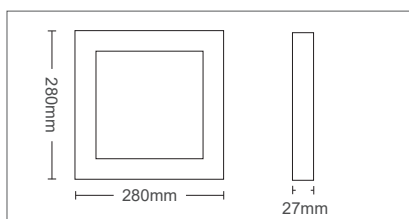

## LINDA S 24

|         |     |        |       |
|---------|-----|--------|-------|
| 2023850 | 24W | 2256lm | 3000K |
| 2023860 | 24W | 2280lm | 4000K |
| 2023870 | 24W | 2400lm | 6500K |



## SURFACE LED CEILING PANEL LIGHTS


### GENERAL INFORMATION

LARA R is a family of square surface led light fixtures equipped with SANAN LED sources in the backlight position.

Housing of PP painted with in mat white.

Diffuser of opal polystyrene with anti-yellow treatment with 120° beam angle & UGR<19.


Driver is included on the fixture.

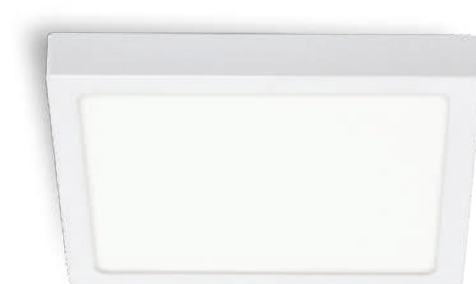

120°




Sand white

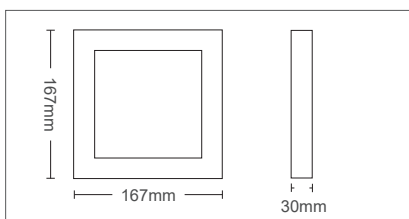


## LARA S 12

|         |     |        |       |
|---------|-----|--------|-------|
| 2027420 | 12W | 1320lm | 4000K |
| 2027430 | 12W | 1320lm | 6000K |

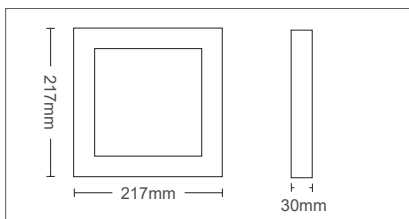

## LARA S 18

|         |     |        |       |
|---------|-----|--------|-------|
| 2027440 | 18W | 1980lm | 4000K |
| 2027450 | 18W | 1980lm | 6000K |

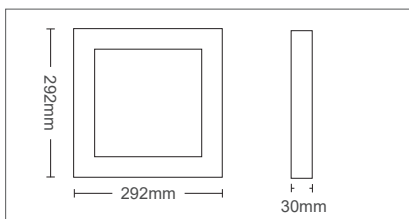

## LARA S 24

|         |     |        |       |
|---------|-----|--------|-------|
| 2027460 | 24W | 2640lm | 4000K |
| 2027470 | 24W | 2640lm | 6000K |



**2 IN 1  
SURFACE  
BACKLIGHT  
LED PANELS**

## GENERAL INFORMATION

COMBO is a **2 in 1** panel led light fixture equipped with SAMSUNG LED sources in the backlight position.

It can be installed in-grid, on the surface of the ceiling without additional frame or suspended with the pendant set PANELFIX-P (suspension set has to be ordered separately).


Housing of aluminum board electrostatically painted with sandblasted finishing in mat white color.

Diffuser of opal polystyrene with anti-yellow treatment with 120° beam angle.


Standard driver is included in the fixture.

Dimming option, with PANELDIM, 3in1 dimming with TRIDONIC driver one4all (DALI-2 DT 6, DSI, switch DIM, corridor FUNCTION V2). Driver has to be ordered separately.

Emergency unit, EMUP 1, with 3 hours autonomy is available for COMBO 2 IN 1 and has to be ordered separately.

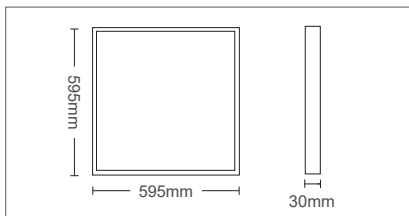

## LED CEILING PANEL LIGHTS



120°




Sand white

## COMBO 2IN1



### PHOTOMETRIC DIAGRAM



|         |            |        |       |
|---------|------------|--------|-------|
| 2430330 | 40W        | 4400lm | 4000K |
| 2430040 | 40W        | 4400lm | 6000K |
| 6200160 | EMUP 1     |        |       |
| 9990860 | PANELDIM   |        |       |
| 9901230 | PANELFIX P |        |       |

## GENERAL INFORMATION



COMBO E is a **2 in 1** panel led light fixture equipped with SANAN LED sources in the backlight position.

It can be installed in-grid, on the surface of the ceiling without additional frame or suspended with the pendant set PANELFIX-P (suspension set has to be ordered separately).

Housing of aluminum board electrostatically painted with sandblasted finishing in mat white color.

Diffuser of opal polystyrene with anti-yellow treatment with 120° beam angle.

Standard driver is included in the fixture.

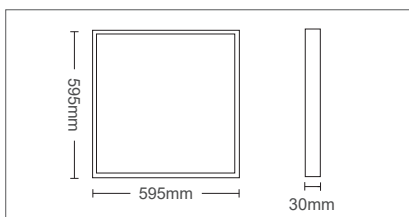


120°



Sand white

## COMBO E 2IN1

### PHOTOMETRIC DIAGRAM



|         |            |        |       |
|---------|------------|--------|-------|
| 2430050 | 40W        | 4000lm | 4000K |
| 2430060 | 40W        | 4000lm | 6000K |
| 9901230 | PANELFIX P |        |       |

## LED CEILING PANEL LIGHTS

### GENERAL INFORMATION

VENUS BC is a family of panel led light fixtures equipped with SAMSUNG LED sources in the backlight position.

It is for in grid ceiling installation, can be installed on the surface of the ceiling with the frame PANELFIX-S (has to be ordered separately). Also can be installed recessed on false ceilings with the set PANELFIX-C has to be ordered separately).

Housing of aluminum board electrostatically painted with sandblasted finishing in sand white.

Diffuser of opal polystyrene with anti-yellow treatment with 120° beam angle & UGR<19.

Standard driver is included on the fixture.

Dimming option, with PANELDIM, 3in1 dimming with TRIDONIC driver one4all (DALI-2 DT 6, DSI, switch DIM, corridor FUNCTION V2). Driver has to be ordered separately.

Emergency unit, EMUP 1, with 3 hours autonomy is available for VENUS-BC and has to be ordered separately.



150°




Sand white




## VENUS BC



### PHOTOMETRIC DIAGRAM



|         |            |        |       |
|---------|------------|--------|-------|
| 2429730 | 48W        | 5280lm | 4000K |
| 2429740 | 48W        | 5376lm | 6000K |
| 6200160 | EMUP 1     |        |       |
| 9990860 | PANELDIM   |        |       |
| 9901212 | PANELFIX S |        |       |
| 9901240 | PANELFIX C |        |       |



### GENERAL INFORMATION

ZAGREY is a family of panel led light fixtures equipped with high lumen SAMSUNG LED sources in the backlight position.

It is for in grid ceiling installation, can be installed on the surface of the ceiling with the frame PANELFIX-S (has to be ordered separately). Also can be installed recessed on false ceilings with the set PANELFIX-C has to be ordered separately).

Housing of aluminum board electrostatically painted with sandblasted finishing in mat white.

Diffuser of opal polystyrene with anti-yellow treatment with 120° beam angle & UGR<19.

Standard driver is included in the fixture.

Dimming option, with PANELDIM, 3in1 dimming with TRIDONIC driver one4all (DALI-2 DT 6, DSI, switch DIM, corridor FUNCTION V2). Driver has to be ordered separately.

Emergency unit, EMUP 1, with 3 hours autonomy is available for ZAGREY and has to be ordered separately.



120°




Sand white




## ZAGREY



### PHOTOMETRIC DIAGRAM



|         |            |        |       |
|---------|------------|--------|-------|
| 2430010 | 36W        | 4680lm | 4000K |
| 2430020 | 36W        | 4750lm | 6500K |
| 6200160 | EMUP 1     |        |       |
| 9990860 | PANELDIM   |        |       |
| 9901212 | PANELFIX S |        |       |
| 9901240 | PANELFIX C |        |       |



## LED CEILING PANEL LIGHTS

### GENERAL INFORMATION

VENUS BC is a family of panel led light fixtures equipped with SAMSUNG LED sources in the backlight position.

It is for in grid ceiling installation, can be installed on the surface of the ceiling with the frame PANELFIX-S (has to be ordered separately). Also can be installed recessed on false ceilings with the set PANELFIX-C has to be ordered separately).



Housing of aluminum board electrostatically painted with sandblasted finishing in sand white.

Diffuser of opal polystyrene with anti-yellow treatment with 120° beam angle & UGR<19.

Standard driver is included on the fixture.

Dimming option, with PANELDIM, 3in1 dimming with TRIDONIC driver one4all (DALI-2 DT 6, DSI, switch DIM, corridor FUNCTION V2). Driver has to be ordered separately.

Emergency unit, EMUP 1, with 3 hours autonomy is available for VENUS-BC and has to be ordered separately.

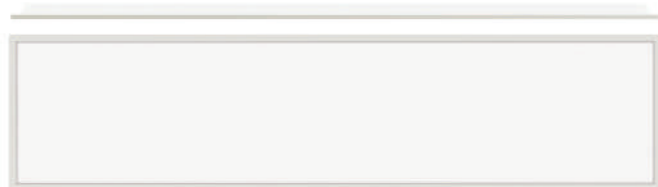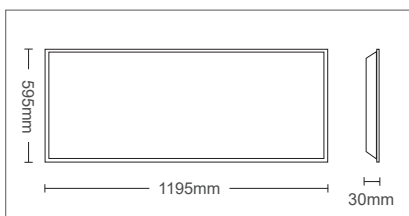

150°




Sand white

## VENUS BC



### PHOTOMETRIC DIAGRAM



|         |            |        |       |
|---------|------------|--------|-------|
| 2429920 | 48W        | 5184lm | 4000K |
| 2429930 | 48W        | 5280lm | 6000K |
| 6200160 | EMUP 1     |        |       |
| 9990860 | PANELDIM   |        |       |
| 9901213 | PANELFIX S |        |       |
| 9901240 | PANELFIX C |        |       |

### GENERAL INFORMATION

VENUS BC is a family of panel led light fixtures equipped with high lumen SAMSUNG LED sources in the backlight position.

It can be installed in-grid, on the surface of the ceiling without additional frame or suspended with the pendant set PANELFIX-P (suspension set has to be ordered separately).



Housing of aluminum board electrostatically painted with sandblasted finishing in mat white.

Diffuser of opal polystyrene with anti-yellow treatment with 120° beam angle & UGR<21.

Standard driver is included in the fixture.

Dimming option, with PANELDIM, 3in1 dimming with TRIDONIC driver one4all (DALI-2 DT 6, DSI, switch DIM, corridor FUNCTION V2). Driver has to be ordered separately.

Emergency unit, EMUP 1, with 3 hours autonomy is available for ZAGREY and has to be ordered separately.

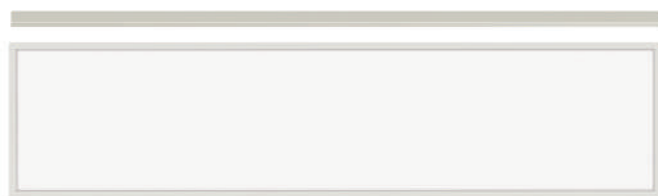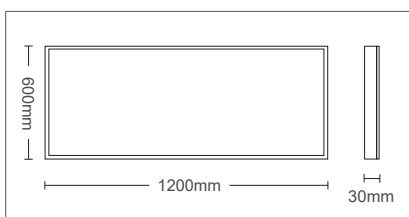

120°




Sand white

## VENUS BC



### PHOTOMETRIC DIAGRAM



|         |            |        |       |
|---------|------------|--------|-------|
| 2429940 | 48W        | 4680lm | 4000K |
| 2429950 | 48W        | 4750lm | 6500K |
| 6200160 | EMUP 1     |        |       |
| 9990860 | PANELDIM   |        |       |
| 9901240 | PANELFIX C |        |       |



## PANELFIX C

**9901240** SET by 4 pcs

Set by 4 clips necessary for recessed mounting of the panel .



## PANELFIX P

**9901230** Recessed Vertical Corner

Set by 4 wires and 4 bases, necessary for suspension mounting of the panel. The length of the wires is 1.5m and is adjustable.



## PANELFIX S

**9901212** Frame 60x60

Disassembled set of frame 60x60 for surface installation of the panels. Is made by aluminium.



## PANELDIM

**9990860** 3 in1 Dimmable driver 50W

Tridonic driver one4all (DALI-2 DT 6, DSI, switch DIM, corridor-FUNCTION V2). You can select the desired method of dimming according to the needs of the project.  
Dimming range 10 – 100 % (min. 25 mA).  
Max. output power 50 W.



## EMUP

**6200150** Emergency unit 3-50W

Emergency Unit ready to use. Offers 3 hours working time on 3W output power. Battery: LiOn 3.7V 2200mAh. It can be connected on panels from 3-50W.



## EMUP 1

**6200160** Emergency unit 10-50W

Emergency Unit ready to use. Offers 3 hours working time on 10W output power. Battery: LiOn 3x3.7V 2200mAh. It can be connected on panels from 10-50W.





### TECHNICAL SPECIFICATIONS

#### Power

45W

#### Luminous Flux

3600LM

#### Color Temperature

3000K / 4000K / 6000K - 3CCT+DIP SWITCH

#### CRI

80

#### Power Factor

>0.95

#### Voltage Range

180-265V

#### Beam Angle

120°

#### Protection Class


IP20

#### Working Temperature

-20°C/+40°C

#### Main Material

Aluminium

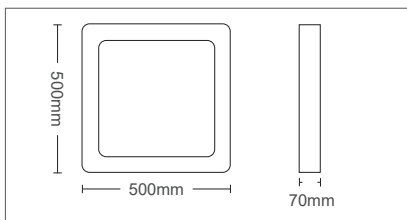

### SURFACE OR PENDANT LED CEILING LIGHTS



120°



Sand black



## FINESSE F 45

FINESSE F45 is a linear frame ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. It can be installed on the surface of the ceiling or suspended, suspension set included in the package. Housing of aluminum board electrostatically painted with sandblasted finishing in sand black. PS diffuser.

2026320 - Black color

#### SUSPENSION SET included



### TECHNICAL SPECIFICATIONS

#### Power

60W

#### Luminous Flux

4800LM

#### Color Temperature

3000K / 4000K / 6000K - 3CCT+REM.+APP.

#### CRI

80

#### Power Factor

>0.95

#### Voltage Range

180-265V

#### Beam Angle

120°

#### Protection Class


IP20

#### Working Temperature

-20°C/+40°C

#### Main Material

Aluminium

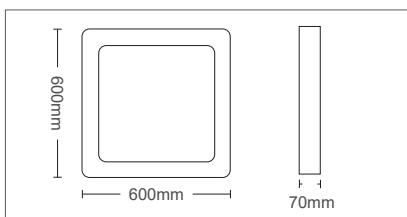

120°



Sand black



## FINESSE F 60

FINESSE F60 is a linear frame ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement. Operates with rem. control & Mobile Application which can make scenarios, dimming, select the color temperature between 3000K, 4000K or 6000K, etc. It can be installed on the surface of the ceiling or suspended, suspension set included in the package. Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.

2026330 - Black color

#### SUSPENSION SET included



## GENERAL INFORMATION

PROFILED PS is a Professional line of fixtures. SAMSUNG LED sources applied in our standard version of Donut Ceiling Linear Light Group solutions.

OSRAM LED sources applied in our High Lumens version of Donut Ceiling Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. Standard version is equipped with PHILIPS or TRIDONIC drivers.



Dimmable versions are equipped with TRIDONIC 3 in 1 driver with option of 3 different dimmings (DALI / 1-10V / PUSH BUTTON). Intended for surface or Suspended installation. The suspension set which is including in the package consisted of 1 square rozete and 4 ropes with length of 1.5m each which are adjustable.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & sand black.

Different body color is possible according to the project needs.

Polycarbonate difusser with High Permeability.

## SURFACE OR PENDANT LED CEILING LIGHTS

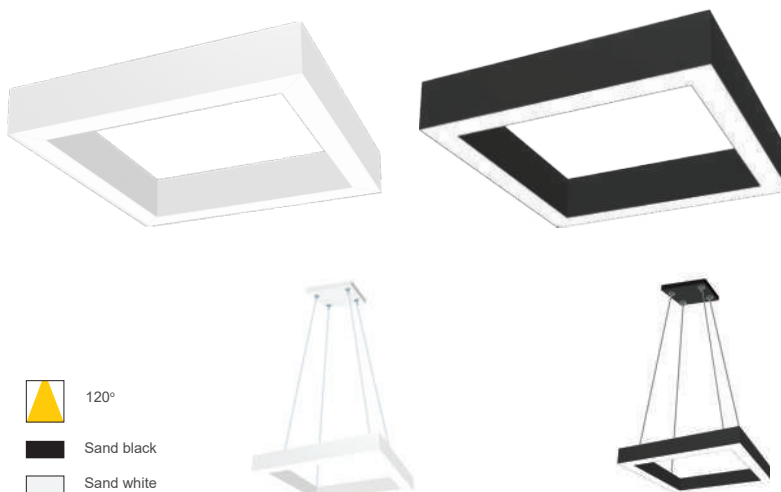


120°


Sand black

Sand white


## PROFILED PS 50

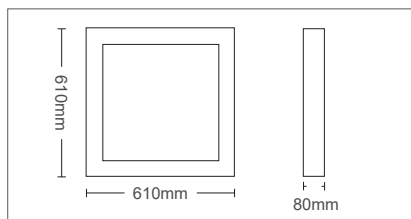


PHOTOMETRIC DIAGRAM



|                              |                       |                       |     |        |       |
|------------------------------|-----------------------|-----------------------|-----|--------|-------|
| STANDARD VERSION             | 2423370 - Black color | 2423280 - White color | 60W | 5980lm | 3000K |
|                              | 2423380 - Black color | 2423290 - White color | 60W | 6164lm | 4000K |
|                              | 2423390 - Black color | 2423300 - White color | 60W | 6348lm | 6500K |
| HIGH LUMENS VERSION          | 2425780 - Black color | 2425690 - White color | 60W | 8700lm | 3000K |
|                              | 2425790 - Black color | 2425700 - White color | 60W | 9000lm | 4000K |
|                              | 2425800 - Black color | 2425710 - White color | 60W | 9300lm | 6500K |
| DIMMABLE HIGH LUMENS VERSION | 2425810 - Black color | 2425720 - White color | 60W | 8700lm | 3000K |
|                              | 2425820 - Black color | 2425730 - White color | 60W | 9000lm | 4000K |
|                              | 2425830 - Black color | 2425740 - White color | 60W | 9300lm | 6500K |

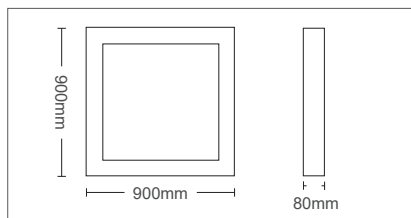

PHOTOMETRIC DIAGRAM



## PROFILED PS 80



|                              |                       |                       |     |         |       |
|------------------------------|-----------------------|-----------------------|-----|---------|-------|
| STANDARD VERSION             | 2423400 - Black color | 2423310 - White color | 80W | 9360lm  | 3000K |
|                              | 2423410 - Black color | 2423320 - White color | 80W | 9644lm  | 4000K |
|                              | 2423420 - Black color | 2423330 - White color | 80W | 9936lm  | 6500K |
| HIGH LUMENS VERSION          | 2425960 - Black color | 2425870 - White color | 80W | 11600lm | 3000K |
|                              | 2425970 - Black color | 2425880 - White color | 80W | 12000lm | 4000K |
|                              | 2425980 - Black color | 2425890 - White color | 80W | 12400lm | 6500K |
| DIMMABLE HIGH LUMENS VERSION | 2425990 - Black color | 2425900 - White color | 80W | 11600lm | 3000K |
|                              | 2426000 - Black color | 2425910 - White color | 80W | 12000lm | 4000K |
|                              | 2426010 - Black color | 2425920 - White color | 80W | 12400lm | 6500K |

## SURFACE OR PENDANT LED CEILING LIGHTS

### GENERAL INFORMATION

PROFILED PS is a Professional line of fixtures. SAMSUNG LED sources applied in our standard version of Donut Ceiling Linear Light Group solutions.

OSRAM LED sources applied in our High Lumens version of Donut Ceiling Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. Standard version is equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRIDONIC 3 in 1 driver with option of 3 different dimmings (DALI / 1-10V / PUSH BUTTON). Intended for surface or Suspended installation. The suspension set which is including in the package consisted of 1 square rozete and 4 ropes with length of 1.5m each which are adjustable.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & sand black.


Different body color is possible according to the project needs.

Polycarbonate difusser with High Permeability.


### SUSPENSION SET



Set contains 1 square rozete and 4 ropes with length of 1.5m each which is adjustable.

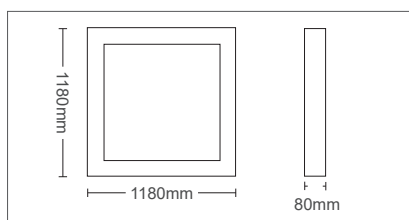

|                               |                      |                 |             |                   |                     |                |               |                 |                      |                |
|-------------------------------|----------------------|-----------------|-------------|-------------------|---------------------|----------------|---------------|-----------------|----------------------|----------------|
| <b>5</b><br>YEARS<br>WARRANTY | <b>LED</b><br>INSIDE | <b>170-265V</b> | <b>IP20</b> | <b>UGR</b><br><19 | <b>CRI</b><br>Ra>88 | <b>100000h</b> | <b>x50000</b> | <b>Non Dimm</b> | <b>Dimm Optional</b> | <b>20-40°C</b> |
|-------------------------------|----------------------|-----------------|-------------|-------------------|---------------------|----------------|---------------|-----------------|----------------------|----------------|

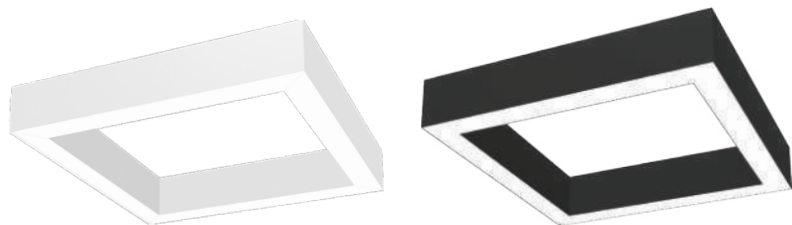

120°




Sand black



Sand white



### PHOTOMETRIC DIAGRAM



## PROFILED PS 100




|                                    |                       |                       |                    |
|------------------------------------|-----------------------|-----------------------|--------------------|
| STANDARD<br>VERSION                | 2423430 - Black color | 2423340 - White color | 100W 12480lm 3000K |
|                                    | 2423440 - Black color | 2423350 - White color | 100W 12864lm 4000K |
|                                    | 2423450 - Black color | 2423360 - White color | 100W 13248lm 6500K |
| HIGH<br>LUMENS<br>VERSION          | 2426140 - Black color | 2426050 - White color | 100W 14500lm 3000K |
|                                    | 2426150 - Black color | 2426060 - White color | 100W 15000lm 4000K |
|                                    | 2426160 - Black color | 2426070 - White color | 100W 15500lm 6500K |
| DIMMABLE<br>HIGH LUMENS<br>VERSION | 2426170 - Black color | 2426080 - White color | 100W 14500lm 3000K |
|                                    | 2426180 - Black color | 2426090 - White color | 100W 15000lm 4000K |
|                                    | 2426190 - Black color | 2426100 - White color | 100W 15500lm 6500K |





### TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 45W                                     |             |
| Luminous Flux                           |             |
| 3600LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

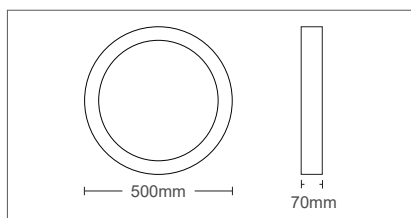

### SURFACE OR PENDANT LED CEILING LIGHTS



## FINESSE D 45

FINESSE D45 is a linear disc ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. It can be installed on the surface of the ceiling or suspended, suspension set included in the package. Housing of aluminum board electrostatically painted with sandblasted finishing in sand black. PS difusser.


2026300 - Black color

### SUSPENSION SET included



### TECHNICAL SPECIFICATIONS

|                                        |             |
|----------------------------------------|-------------|
| Power                                  |             |
| 60W                                    |             |
| Luminous Flux                          |             |
| 4800LM                                 |             |
| Color Temperature                      |             |
| 3000K / 4000K / 6000K - 3CCT+REM.+APP. |             |
| CRI                                    | 80          |
| Power Factor                           | >0.95       |
| Voltage Range                          | 180-265V    |
| Beam Angle                             | 120°        |
| Protection Class                       | IP20        |
| Working Temperature                    | -20°C/+40°C |
| Main Material                          | Aluminium   |

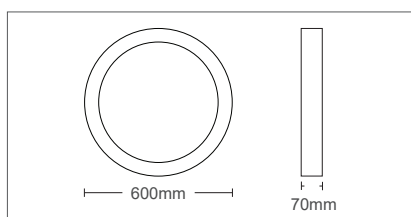

## FINESSE D 60

FINESSE D60 is a linear disc ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement. Operates with rem. control & Mobile Application which can make scenarios, dimming, select the color temperature between 3000K, 4000K or 6000K, etc. It can be installed on the surface of the ceiling or suspended, suspension set included in the package. Housing of aluminum board electrostatically painted with sandblasted finishing in sand black.

2026310 - Black color

### SUSPENSION SET included





## GENERAL INFORMATION

PROFILED PC is a Professional line of fixtures. SAMSUNG LED sources applied in our standard version of Donut Ceiling Linear Light Group solutions.

OSRAM LED sources applied in our High Lumens version of Donut Ceiling Linear Light Group solutions, offer highest performance and long duration.


The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. Standard version is equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRIDONIC 3 in 1 driver with option of 3 different dimmings (DALI / 1-10V / PUSH BUTTON). Intended for surface or Suspended installation. The suspension set which is including in the package consisted of 1 round rozete and 3 ropes with length of 1.5m each which are adjustable.



Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & sand black.

Different body color is possible according to the project needs.


Polycarbonate difusser with High Permeability.

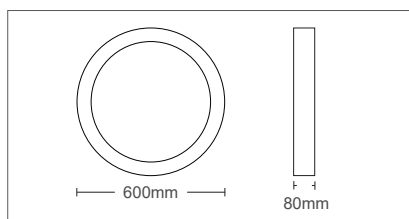



PHOTOMETRIC DIAGRAM

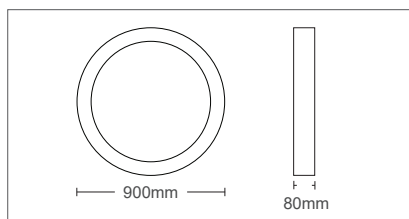

PHOTOMETRIC DIAGRAM



## SURFACE OR PENDANT LED CEILING LIGHTS



## PROFILED PC 50



|                                    |                       |                       |     |        |       |
|------------------------------------|-----------------------|-----------------------|-----|--------|-------|
| STANDARD<br>VERSION                | 2423910 - Black color | 2423820 - White color | 50W | 5980lm | 3000K |
|                                    | 2423920 - Black color | 2423830 - White color | 50W | 6164lm | 4000K |
|                                    | 2423930 - Black color | 2423840 - White color | 50W | 6348lm | 6500K |
| HIGH<br>LUMENS<br>VERSION          | 2426680 - Black color | 2426590 - White color | 50W | 7250lm | 3000K |
|                                    | 2426690 - Black color | 2426600 - White color | 50W | 7500lm | 4000K |
|                                    | 2426700 - Black color | 2426610 - White color | 50W | 7750lm | 6500K |
| DIMMABLE<br>HIGH LUMENS<br>VERSION | 2426710 - Black color | 2426620 - White color | 50W | 7250lm | 3000K |
|                                    | 2426720 - Black color | 2426630 - White color | 50W | 7500lm | 4000K |
|                                    | 2426730 - Black color | 2426640 - White color | 50W | 7750lm | 6500K |

## PROFILED PC 72



|                                    |                       |                       |     |         |       |
|------------------------------------|-----------------------|-----------------------|-----|---------|-------|
| STANDARD<br>VERSION                | 2423940 - Black color | 2423850 - White color | 72W | 9360lm  | 3000K |
|                                    | 2423950 - Black color | 2423860 - White color | 72W | 9648lm  | 4000K |
|                                    | 2423960 - Black color | 2423870 - White color | 72W | 9936lm  | 6500K |
| HIGH<br>LUMENS<br>VERSION          | 2426860 - Black color | 2426770 - White color | 72W | 10440lm | 3000K |
|                                    | 2426870 - Black color | 2426780 - White color | 72W | 10800lm | 4000K |
|                                    | 2426880 - Black color | 2426790 - White color | 72W | 11160lm | 6500K |
| DIMMABLE<br>HIGH LUMENS<br>VERSION | 2426890 - Black color | 2426800 - White color | 72W | 10440lm | 3000K |
|                                    | 2426900 - Black color | 2426810 - White color | 72W | 10800lm | 4000K |
|                                    | 2426910 - Black color | 2426820 - White color | 72W | 11160lm | 6500K |

## GENERAL INFORMATION

PROFILED PC is a Professional line of fixtures. SAMSUNG LED sources applied in our standard version of Donut Ceiling Linear Light Group solutions.

OSRAM LED sources applied in our High Lumens version of Donut Ceiling Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. Standard version is equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRIDONIC 3 in 1 driver with option of 3 different dimmings (DALI / 1-10V / PUSH BUTTON). Intended for surface or Suspended installation. The suspension set which is including in the package consisted of 1 round rozete and 3 ropes with length of 1.5m each which are adjustable.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & sand black.


Different body color is possible according to the project needs.

Polycarbonate difusser with High Permeability.

## SUSPENSION SET



Set contains 1 round rozete and 3 ropes with length of 1.5m each which is adjustable.

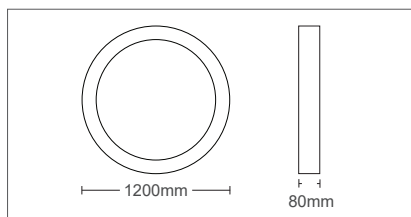

## SURFACE OR PENDANT LED CEILING LIGHTS


|                               |                      |          |      |                   |                     |         |        |          |               |         |
|-------------------------------|----------------------|----------|------|-------------------|---------------------|---------|--------|----------|---------------|---------|
| <b>5</b><br>YEARS<br>WARRANTY | <b>LED</b><br>INSIDE | 170-265V | IP20 | <b>UGR</b><br><19 | <b>CRI</b><br>Ra>88 | 100000h | x50000 | Non Dimm | Dimm Optional | 20-40°C |
|-------------------------------|----------------------|----------|------|-------------------|---------------------|---------|--------|----------|---------------|---------|



|                                                                                   |            |
|-----------------------------------------------------------------------------------|------------|
|  | 120°       |
|  | Sand black |
|  | Sand white |



## PHOTOMETRIC DIAGRAM



## PROFILED PC 100



|                                    |                       |                       |                    |
|------------------------------------|-----------------------|-----------------------|--------------------|
| STANDARD<br>VERSION                | 2423970 - Black color | 2423880 - White color | 100W 11700lm 3000K |
|                                    | 2423980 - Black color | 2423890 - White color | 100W 12060lm 4000K |
|                                    | 2423990 - Black color | 2423900 - White color | 100W 12420lm 6500K |
| HIGH<br>LUMENS<br>VERSION          | 2427040 - Black color | 2426950 - White color | 100W 14500lm 3000K |
|                                    | 2427050 - Black color | 2426960 - White color | 100W 15000lm 4000K |
|                                    | 2427060 - Black color | 2426970 - White color | 100W 15500lm 6500K |
| DIMMABLE<br>HIGH LUMENS<br>VERSION | 2427070 - Black color | 2426980 - White color | 100W 14500lm 3000K |
|                                    | 2427080 - Black color | 2426990 - White color | 100W 15000lm 4000K |
|                                    | 2427090 - Black color | 2427000 - White color | 100W 15500lm 6500K |






WORK

HARD


YOU

## TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 25W                                     |             |
| Luminous Flux                           |             |
| 2000LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

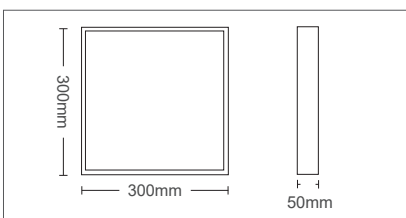

## SURFACE OR PENDANT LED CEILING LIGHTS



## FINESSE S1 25

FINESSE S1 25 is a square ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. Intended for surface or suspended installation, suspension set must be ordered separately (HSS). Housing of aluminum board electrostatically painted with sandblasted finishing in sand black & sand white. PS diffuser.

2026180 - Black color

2026140 - White color

### SUSPENSION SET HSS





2026420 - Black color

2026421 - White color

Length of the ropes, 1.5m, adjustable

## TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 35W                                     |             |
| Luminous Flux                           |             |
| 2800LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

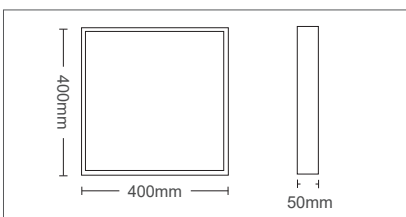

## FINESSE S1 35

FINESSE S1 35 is a square ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. Intended for surface or suspended installation, suspension set must be ordered separately (HSS). Housing of aluminum board electrostatically painted with sandblasted finishing in sand black & sand white. PS diffuser.

2026190 - Black color

2026150 - White color

### SUSPENSION SET HSS




2026420 - Black color

2026421 - White color

Length of the ropes, 1.5m, adjustable

## TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 45W                                     |             |
| Luminous Flux                           |             |
| 4050LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

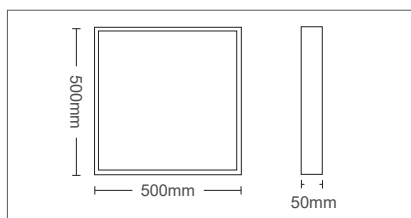

## SURFACE OR PENDANT LED CEILING LIGHTS



## FINESSE S1 45

FINESSE S1 45 is a square ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. Intended for surface or suspended installation, suspension set must be ordered separately (HSS). Housing of aluminum board electrostatically painted with sandblasted finishing in sand black & sand white. PS difusser.

2026200 - Black color

2026160 - White color

### SUSPENSION SET HSS





2026420 - Black color

2026421 - White color

Length of the ropes, 1.5m, adjustable

## TECHNICAL SPECIFICATIONS

|                                        |             |
|----------------------------------------|-------------|
| Power                                  |             |
| 60W                                    |             |
| Luminous Flux                          |             |
| 5400LM                                 |             |
| Color Temperature                      |             |
| 3000K / 4000K / 6000K - 3CCT+REM.+APP. |             |
| CRI                                    | 80          |
| Power Factor                           | >0.95       |
| Voltage Range                          | 180-265V    |
| Beam Angle                             | 120°        |
| Protection Class                       | IP20        |
| Working Temperature                    | -20°C/+40°C |
| Main Material                          | Aluminium   |

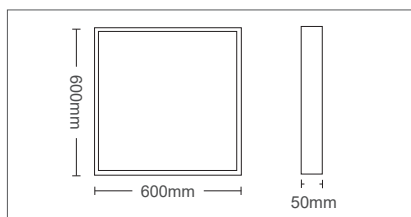


## FINESSE S1 60

FINESSE S1 60 is a square ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement. Operates with rem. control & Mobile Application. Possibility to make scenarios, dimming, select the color temperature between 3000K, 4000K or 6000K, etc. Intended for surface or suspended installation, suspension set must be ordered separately (HSS). Housing of aluminum electrostatically painted in sand black & sand white. PS difusser.

2026210 - Black color

2026170 - White color

### SUSPENSION SET HSS



2026420 - Black color

2026421 - White color

Length of the ropes, 1.5m, adjustable



## GENERAL INFORMATION

PROFILED PF is a Professional line of fixtures. OSRAM LED sources applied in our High Lumens version of Donut Ceiling Linear Light Group solutions, offer highest performance and long duration.

The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. Standard version is equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRIDONIC 3 in 1 driver with option of 3 different dimmings (DALI / I-10V / PUSH BUTTON).

Intended for surface or Suspended installation. The suspension set which is including in the package consisted of 1 square rozete and 4 ropes with length of 1.5m each which are adjustable.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & sand black.


Different body color is possible according to the project needs.

Polycarbonate difusser with High Permeability.

## SUSPENSION SET




Set contains 1 square rozete and 4 ropes with length of 1.5m each which is adjustable.

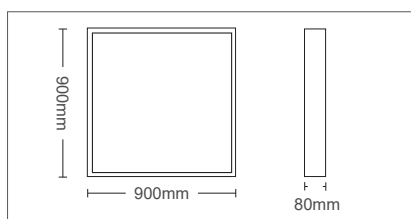

## SURFACE OR PENDANT LED CEILING LIGHTS


|                               |                      |          |      |                   |                     |         |        |          |               |         |
|-------------------------------|----------------------|----------|------|-------------------|---------------------|---------|--------|----------|---------------|---------|
| <b>5</b><br>YEARS<br>WARRANTY | <b>LED</b><br>INSIDE | 170-265V | IP20 | <b>UGR</b><br><19 | <b>CRI</b><br>Ra>88 | 100000h | x50000 | Non Dimm | Dimm Optional | 20-40°C |
|-------------------------------|----------------------|----------|------|-------------------|---------------------|---------|--------|----------|---------------|---------|

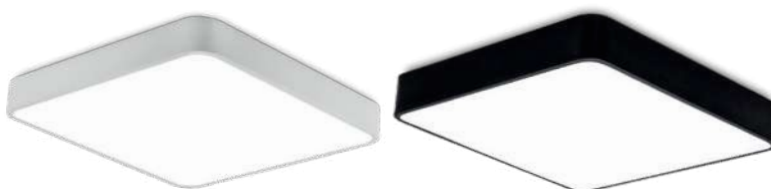

|  |            |
|--|------------|
|  | 120°       |
|  | Sand black |
|  | Sand white |



## PHOTOMETRIC DIAGRAM



## PROFILED PF 100




|                                     |                       |                       |                    |
|-------------------------------------|-----------------------|-----------------------|--------------------|
| <b>HIGH LUMENS VERSION</b>          | 2426260 - Black color | 2426200 - White color | 100W 14500lm 3000K |
|                                     | 2426270 - Black color | 2426210 - White color | 100W 15000lm 4000K |
|                                     | 2426280 - Black color | 2426220 - White color | 100W 15500lm 6500K |
| <b>DIMMABLE HIGH LUMENS VERSION</b> | 2426290 - Black color | 2426230 - White color | 100W 14500lm 3000K |
|                                     | 2426300 - Black color | 2426240 - White color | 100W 15000lm 4000K |
|                                     | 2426310 - Black color | 2426250 - White color | 100W 15500lm 6500K |




### TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 25W                                     |             |
| Luminous Flux                           |             |
| 2000LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

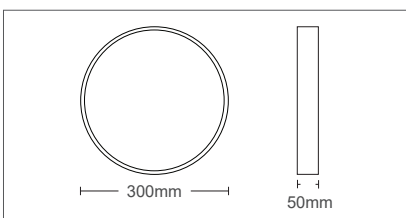

### SURFACE OR PENDANT LED CEILING LIGHTS



## FINESSE R1 25

FINESSE R1 25 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. Intended for surface or suspended installation, suspension set must be ordered separately (HSR). Housing of aluminum board electrostatically painted with sandblasted finishing in sand black & sand white. PS difusser.

2026100 - Black color

2026060 - White color

### SUSPENSION SET HSR





2026410 - Black color

2026411 - White color

Length of the ropes, 1.5m, adjustable

### TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 35W                                     |             |
| Luminous Flux                           |             |
| 2800LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

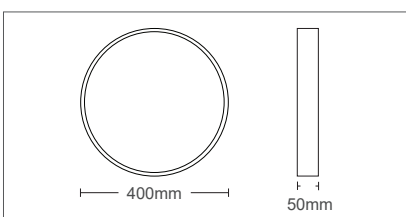

## FINESSE R1 35

FINESSE R1 35 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. Intended for surface or suspended installation, suspension set must be ordered separately (HSR). Housing of aluminum board electrostatically painted with sandblasted finishing in sand black & sand white. PS difusser.

2026110 - Black color

2026070 - White color

### SUSPENSION SET HSR




2026410 - Black color

2026411 - White color


Length of the ropes, 1.5m, adjustable

### TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 45W                                     |             |
| Luminous Flux                           |             |
| 3600LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

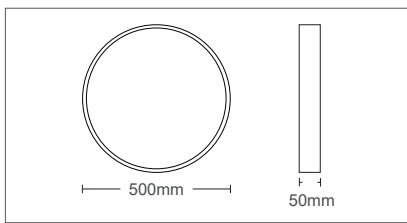

### SURFACE OR PENDANT LED CEILING LIGHTS



## FINESSE R1 45

FINESSE R1 45 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. Intended for surface or suspended installation, suspension set must be ordered separately (HSR). Housing of aluminum board electrostatically painted with sandblasted finishing in sand black & sand white. PS difusser.

2026120 - Black color

2026080 - White color

### SUSPENSION SET HSR





2026410 - Black color

2026411 - White color

Length of the ropes, 1.5m, adjustable

### TECHNICAL SPECIFICATIONS

|                                        |             |
|----------------------------------------|-------------|
| Power                                  |             |
| 60W                                    |             |
| Luminous Flux                          |             |
| 5400LM                                 |             |
| Color Temperature                      |             |
| 3000K / 4000K / 6000K - 3CCT+REM.+APP. |             |
| CRI                                    | 80          |
| Power Factor                           | >0.95       |
| Voltage Range                          | 180-265V    |
| Beam Angle                             | 120°        |
| Protection Class                       | IP20        |
| Working Temperature                    | -20°C/+40°C |
| Main Material                          | Aluminium   |

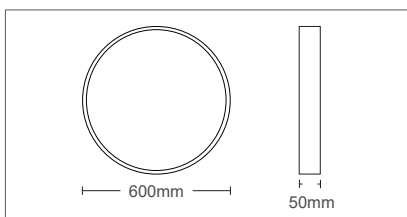

## FINESSE R1 60

FINESSE R1 60 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement. Operates with rem. control & Mobile Application. Possibility to make scenarios, dimming, select the color temperature between 3000K, 4000K or 6000K, etc. Intended for surface or suspended installation, suspension set must be ordered separately (HSR). Housing of aluminum electrostatically painted in sand black & sand white. PS difusser.

2026130 - Black color

2026090 - White color

### SUSPENSION SET HSR



2026410 - Black color

2026411 - White color

Length of the ropes, 1.5m, adjustable

## GENERAL INFORMATION

PROFILED PR is a Professional line of fixtures. SAMSUNG LED sources applied in our standard version of Donut Ceiling Linear Light Group solutions.

OSRAM LED sources applied in our High Lumens version of Donut Ceiling Linear Light Group solutions, offer highest performance and long duration.


The solutions subject of proposal vary in terms of form and type of installation, with one common denominator: the quality of our products. Standard version is equipped with PHILIPS or TRIDONIC drivers.

Dimmable versions are equipped with TRIDONIC 3 in 1 driver with option of 3 different dimmings (DALI / 1-10V / PUSH BUTTON). Intended for surface or Suspended installation. The suspension set which is including in the package consisted of 1 round rozete and 3 ropes with length of 1.5m each which are adjustable.



Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & sand black.

Different body color is possible according to the project needs.


Polycarbonate difusser with High Permeability.

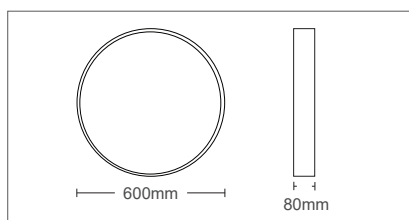

PHOTOMETRIC DIAGRAM

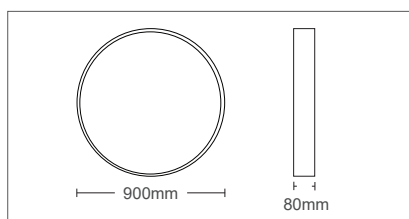

PHOTOMETRIC DIAGRAM



## SURFACE OR PENDANT LED CEILING LIGHTS

|                        |     |          |      |            |              |         |        |             |                  |         |
|------------------------|-----|----------|------|------------|--------------|---------|--------|-------------|------------------|---------|
| 5<br>YEARS<br>WARRANTY | LED | 170-265V | IP20 | UGR<br><19 | CRI<br>Ra>88 | 100000h | x50000 | Non<br>Dimm | Dimm<br>Optional | 20-40°C |
|------------------------|-----|----------|------|------------|--------------|---------|--------|-------------|------------------|---------|



## PROFILED PR 50



### HIGH LUMENS VERSION

|                       |                       |     |        |       |
|-----------------------|-----------------------|-----|--------|-------|
| 2423640 - Black color | 2423550 - White color | 50W | 7800lm | 3000K |
| 2423650 - Black color | 2423560 - White color | 50W | 8040lm | 4000K |
| 2423660 - Black color | 2423570 - White color | 50W | 8280lm | 6500K |

## PROFILED PR 100



### STANDARD VERSION

|                       |                       |      |         |       |
|-----------------------|-----------------------|------|---------|-------|
| 2423670 - Black color | 2423580 - White color | 100W | 11700lm | 3000K |
| 2423680 - Black color | 2423590 - White color | 100W | 12060lm | 4000K |
| 2423690 - Black color | 2423600 - White color | 100W | 12420lm | 6500K |

### HIGH LUMENS VERSION


|                       |                       |      |         |       |
|-----------------------|-----------------------|------|---------|-------|
| 2426500 - Black color | 2426380 - White color | 100W | 14500lm | 3000K |
| 2426510 - Black color | 2426390 - White color | 100W | 15000lm | 4000K |
| 2426520 - Black color | 2426400 - White color | 100W | 15500lm | 6500K |

### DIMMABLE HIGH LUMENS VERSION

|                       |                       |      |         |       |
|-----------------------|-----------------------|------|---------|-------|
| 2426530 - Black color | 2426410 - White color | 100W | 14500lm | 3000K |
| 2426540 - Black color | 2426420 - White color | 100W | 15000lm | 4000K |
| 2426550 - Black color | 2426430 - White color | 100W | 15500lm | 6500K |

### TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 30W                                     |             |
| Luminous Flux                           |             |
| 2400LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

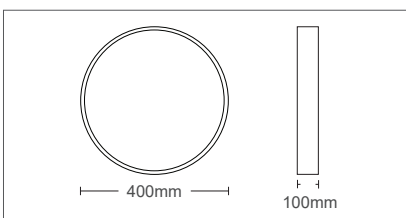

### SURFACE LED CEILING LIGHTS



120°



Nickel mat

## FINESSE R3 30

FINESSE R3 30 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. Intended for surface or suspended installation, suspension set must be ordered separately (HSR). Housing of aluminum board electrostatically painted nickel mat. PVC difusser.

2026050 - Nickel mat

### SUSPENSION SET HSR




2026411 - White color

Length of the ropes, 1.5m, adjustable

### TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 60W                                     |             |
| Luminous Flux                           |             |
| 4800LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

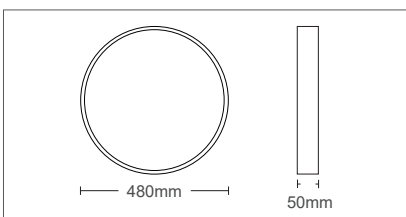

120°



Sand white

## FINESSE R4 45

FINESSE R4 45 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. Peripheral ring is lighted up simultaneously in the same CCT. Intended for surface or suspended installation, suspension set must be ordered separately (HSS). Housing of aluminum board electrostatically painted in sand white. PVC difusser.

2026290 - White color

### SUSPENSION SET HSR




2026411 - White color

Length of the ropes, 1.5m, adjustable

## TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 45W                                     |             |
| Luminous Flux                           |             |
| 3600LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

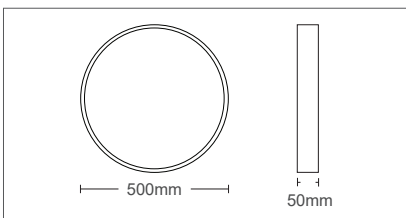

## SURFACE LED CEILING LIGHTS



120°



Sand white / oak

## FINESSE R2 45

FINESSE R2 45 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. Intended for surface or suspended installation, suspension set must be ordered separately (HSR). Housing of aluminum board electrostatically painted in sand white. There is a peripheral ring made by oak wood. PVC diffuser.

2026220 - White color with oak wood

### SUSPENSION SET HSR




2026411 - White color

Length of the ropes, 1.5m, adjustable

## TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 45W                                     |             |
| Luminous Flux                           |             |
| 3600LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

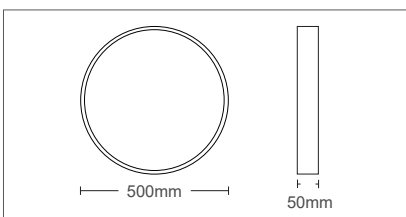

120°



Sand black / oak

## FINESSE R2 45

FINESSE R2 45 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. Intended for surface or suspended installation, suspension set must be ordered separately (HSR). Housing of aluminum board electrostatically painted in sand black. There is a peripheral ring made by oak wood. PVC diffuser.

2026230 - Black color with oak wood

### SUSPENSION SET HSR



2026410 - Black color

Length of the ropes, 1.5m, adjustable

## TECHNICAL SPECIFICATIONS

### Power

18W

### Luminous Flux

1620LM

### Color Temperature

4000K

### Voltage Range

170-265V

### Beam Angle

120°

### Protection Class



IP40

### Working Temperature

-20°C/+40°C

### Main Material

PP

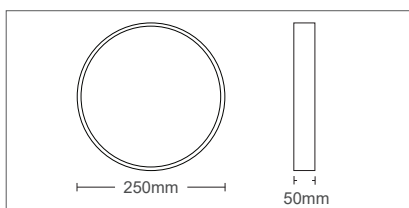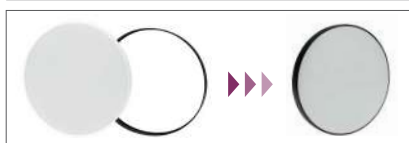

## SURFACE LED CEILING LIGHTS



## SATURN 18

SATURN 18 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.

Intended for surface installation.

Change the look of the fixture in a simple way.

Disassemble the white ring from the fixture and assemble the black ring which is included in the package.

IP40 protection class allows the use of the fixture indoor & outdoor as well. Also can be used in areas with high humidity. Made by PP.



Easy mounting way, just flip the fixture to its base which is installed on the ceiling separately.

2027010

## TECHNICAL SPECIFICATIONS

### Power

24W

### Luminous Flux

2120LM

### Color Temperature

4000K

### Voltage Range

170-265V

### Beam Angle

120°

### Protection Class



IP40

### Working Temperature

-20°C/+40°C

### Main Material

PP

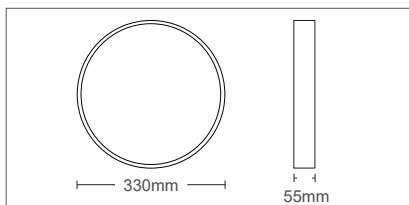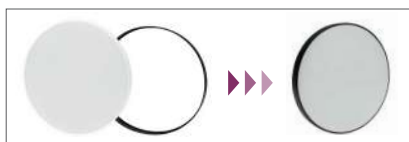

## SATURN 24

SATURN 24 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.

Intended for surface installation.

Change the look of the fixture in a simple way.

Disassemble the white ring from the fixture and assemble the black ring which is included in the package.

IP40 protection class allows the use of the fixture indoor & outdoor as well. Also can be used in areas with high humidity. Made by PP.




Easy mounting way, just flip the fixture to its base which is installed on the ceiling separately.

2027020



## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 32W                 |             |
| Luminous Flux       |             |
| 2880LM              |             |
| Color Temperature   |             |
| 4000K               |             |
| Voltage Range       | 85-265V     |
| Beam Angle          | 120°        |
| Protection Class    | IP54        |
| Working Temperature | -15°C/+20°C |
| Main Material       | PVC         |

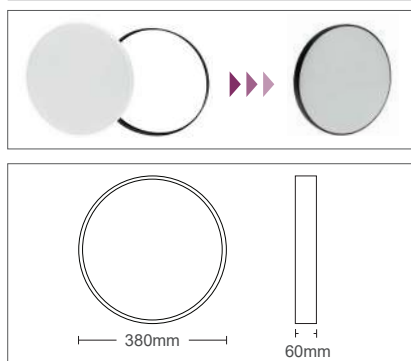

## SURFACE LED CEILING LIGHTS



## SATURN 32

SATURN 32 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.

Intended for surface installation.

Change the look of the fixture in a simple way.

Disassemble the white ring from the fixture and assemble the black ring which is included in the package.

IP40 protection class allows the use of the fixture indoor & outdoor as well. Also can be used in areas with high humidity. Made by PP.

2027030



Easy mounting way, just flip the fixture to its base which is installed on the ceiling separately.

### TECHNICAL SPECIFICATIONS

#### Power

18W

#### Luminous Flux

2160LM

#### Color Temperature

4000K

#### Voltage Range

170-240V

#### Beam Angle

120°

#### Protection Class


IP20

#### Working Temperature

-20°C/+40°C

#### Main Material

PP

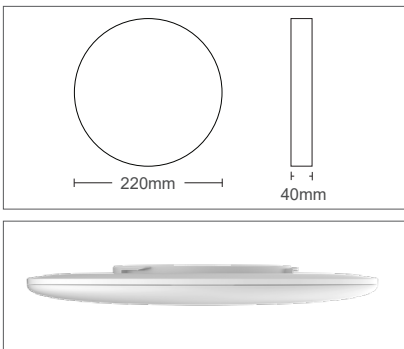

### SURFACE LED CEILING LIGHTS



## VENERA 18

VENERA 18 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.

Intended for surface installation.

IP20 protection class allows the use of the fixture only indoor. Also can be used in areas with low humidity. Made by PP.



Easy mounting way, just twist the fixture to its base which is installed on the ceiling separately.

2027120

### TECHNICAL SPECIFICATIONS

#### Power

24W

#### Luminous Flux

2880LM

#### Color Temperature

4000K

#### Voltage Range

170-240V

#### Beam Angle

120°

#### Protection Class



IP20

#### Working Temperature

-20°C/+40°C

#### Main Material

PP

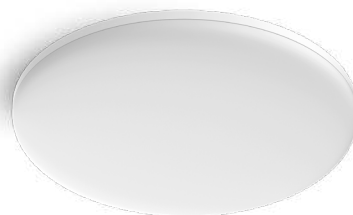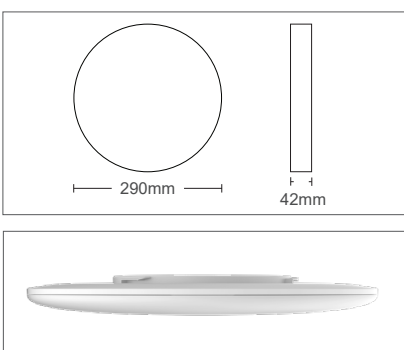

## VENERA 24

VENERA 24 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.

Intended for surface installation.

IP20 protection class allows the use of the fixture only indoor. Also can be used in areas with low humidity. Made by PP.



Easy mounting way, just twist the fixture to its base which is installed on the ceiling separately.

2027130

## TECHNICAL SPECIFICATIONS

### Power

36W

### Luminous Flux

4320LM

### Color Temperature

4000K

### Voltage Range

170-240V

### Beam Angle

120°

### Protection Class


IP20

### Working Temperature


-20°C/+40°C

### Main Material

PP

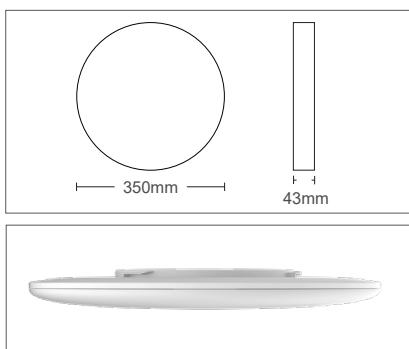

## SURFACE LED CEILING LIGHTS



## VENERA 36

VENERA 36 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.

Intended for surface installation.

IP20 protection class allows the use of the fixture only indoor. Also can be used in areas with low humidity.

Made by PP.



Easy mounting way, just twist the fixture to its base which is installed on the ceiling separately.

2027140

## TECHNICAL SPECIFICATIONS

### Power

50W

### Luminous Flux

6000LM

### Color Temperature

4000K

### Voltage Range

170-240V

### Beam Angle

120°

### Protection Class



IP20

### Working Temperature

-20°C/+40°C

### Main Material

PP

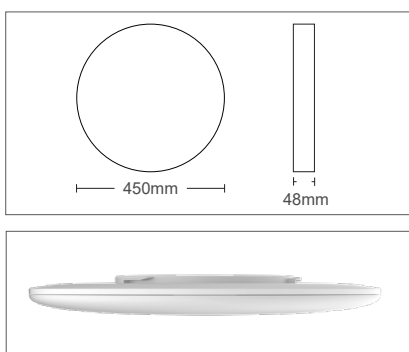

## VENERA 50

VENERA 50 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.

Intended for surface installation.

IP20 protection class allows the use of the fixture only indoor. Also can be used in areas with low humidity.

Made by PP.




Easy mounting way, just twist the fixture to its base which is installed on the ceiling separately.

2027150

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 50W (26/50/26/4W)                       |                   |
| Luminous Flux                           |                   |
| 3200LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+REM. CONT. |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.60             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+65°C       |
| Main Material                           | Metal sheet & PVC |

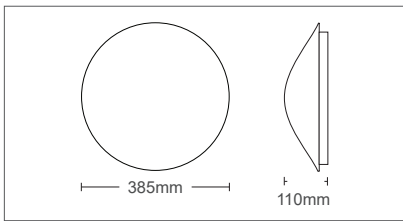

### SURFACE LED CEILING LIGHTS



## PEARL A35

PEARL A35 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.


Is equipped with Remote control which can make scenarios, dim the density of the light, select the color temperature between 3000K, 4000K or 6000K, etc. On 3000K - 1560lm, on 4000K - 3200lm & on 6000K - 1690lm. It can be used as night lamp as well with 4W power & 240lm.

Intended for surface installation. Made by metal sheet & PVC.

2024600

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 75W (38/75/38/5W)                       |                   |
| Luminous Flux                           |                   |
| 4200LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+REM. CONT. |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.60             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+65°C       |
| Main Material                           | Metal sheet & PVC |

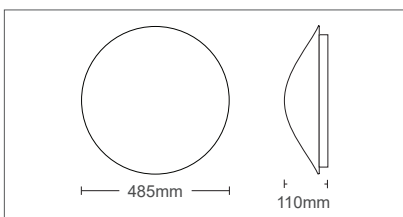

## PEARL A45

PEARL A45 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.


Is equipped with Remote control which can make scenarios, dim the density of the light, select the color temperature between 3000K, 4000K or 6000K, etc. On 3000K - 2052lm, on 4000K - 4200lm & on 6000K - 2280lm. It can be used as night lamp as well with 5W power & 300lm.

Intended for surface installation. Made by metal sheet & PVC.

2024610

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 48W (24/48/24/4W)                       |                   |
| Luminous Flux                           |                   |
| 3600LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+REM. CONT. |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.60             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+65°C       |
| Main Material                           | Metal sheet & PVC |

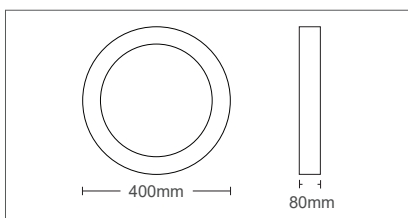

### SURFACE LED CEILING LIGHTS



## NOTILUS RH35

NOTILUS RH35 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.


Is equipped with Remote control which can make scenarios, dim the density of the light, select the color temperature between 3000K, 4000K or 6000K, etc. On 3000K - 1680lm, on 4000K - 3600lm & on 6000K - 1920lm. It can be used as night lamp as well with 4W power & 300lm.

Intended for surface installation. Made by metal sheet & PVC.

2025430

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 72W (36/72/36/5W)                       |                   |
| Luminous Flux                           |                   |
| 4680LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+REM. CONT. |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.60             |
| Voltage Range                           | 85-265V           |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+65°C       |
| Main Material                           | Metal sheet & PVC |

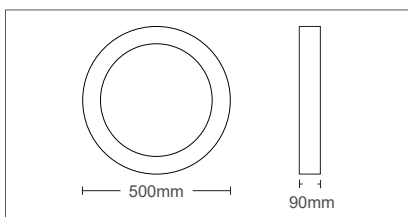

## NOTILUS RH45

NOTILUS RH45 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.


Is equipped with Remote control which can make scenarios, dim the density of the light, select the color temperature between 3000K, 4000K or 6000K, etc. On 3000K - 2160lm, on 4000K - 4680lm & on 6000K - 2520lm. It can be used as night lamp as well with 5W power & 350lm.

Intended for surface installation. Made by metal sheet & PVC.

2025440

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 48W (24/48/24/4W)                       |                   |
| Luminous Flux                           |                   |
| 3600LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+REM. CONT. |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.60             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+65°C       |
| Main Material                           | Metal sheet & PVC |

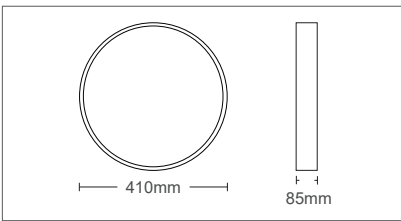

### SURFACE LED CEILING LIGHTS



## DIAMOND DG35

DIAMOND DG35 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.


Is equipped with Remote control which can make scenarios, dim the density of the light, select the color temperature between 3000K, 4000K or 6000K, etc. On 3000K - 1680lm, on 4000K - 3600lm & on 6000K - 1920lm. It can be used as night lamp as well with 4W power & 300lm.

Intended for surface installation. Made by metal sheet & PVC.

2025450

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 72W (36/72/36/5W)                       |                   |
| Luminous Flux                           |                   |
| 4680LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+REM. CONT. |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.60             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+65°C       |
| Main Material                           | Metal sheet & PVC |

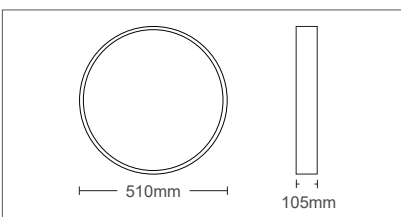

## DIAMOND DG45

DIAMOND DG45 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.

Is equipped with Remote control which can make scenarios, dim the density of the light, select the color temperature between 3000K, 4000K or 6000K, etc. On 3000K - 2160lm, on 4000K - 4680lm & on 6000K - 2520lm. It can be used as night lamp as well with 5W power & 350lm.


Intended for surface installation. Made by metal sheet & PVC.

2025460



### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 52W (27/52/27/4W)                       |                   |
| Luminous Flux                           |                   |
| 3380LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+REM. CONT. |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.60             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+65°C       |
| Main Material                           | Metal sheet & PVC |

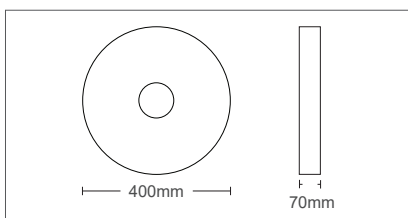

### SURFACE LED CEILING LIGHTS



## PEARL F35

PEARL F35 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.


Is equipped with Remote control which can make scenarios, dim the density of the light, select the color temperature between 3000K, 4000K or 6000K, etc. On 3000K - 1620lm, on 4000K - 3380lm and on 6000K - 1836lm. It can be used as night lamp as well with 4W power & 244lm.

Intended for surface installation. Made by metal sheet & PVC.

2024640

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 78W (39/78/39/5W)                       |                   |
| Luminous Flux                           |                   |
| 5148LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+REM. CONT. |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.60             |
| Voltage Range                           | 85-265V           |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+65°C       |
| Main Material                           | Metal sheet & PVC |

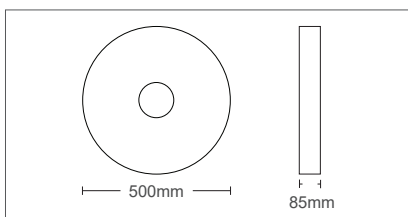

## PEARL F45

PEARL F45 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.


Is equipped with Remote control which can make scenarios, dim the density of the light, select the color temperature between 3000K, 4000K or 6000K, etc. On 3000K - 2496lm, on 4000K - 5148lm and on 6000K - 2691lm. It can be used as night lamp as well with 5W power & 380lm.

Intended for surface installation. Made by metal sheet & PVC.

2024650

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 52W (27/52/27/4W)                       |                   |
| Luminous Flux                           |                   |
| 3328LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+REM. CONT. |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.60             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+65°C       |
| Main Material                           | Metal sheet & PVC |

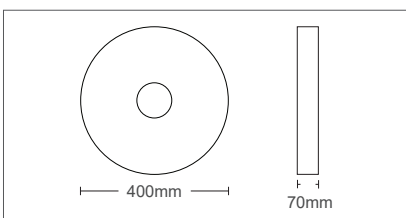

### SURFACE LED CEILING LIGHTS



## PEARL D35

PEARL D35 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.


Is equipped with Remote control which can make scenarios, dim the density of the light, select the color temperature between 3000K, 4000K or 6000K, etc. On 3000K - 1593lm, on 4000K - 3328lm & on 6000K - 1809lm. It can be used as night lamp as well with 4W power & 244lm.

Intended for surface installation. Made by metal sheet & PVC.

2024620

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 78W (39/78/39/5W)                       |                   |
| Luminous Flux                           |                   |
| 5070LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+REM. CONT. |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.60             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+65°C       |
| Main Material                           | Metal sheet & PVC |

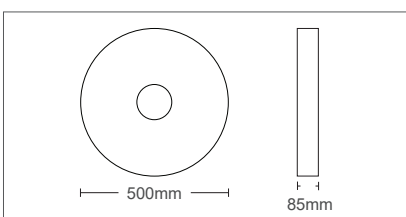

## PEARL D45

PEARL D45 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.


Is equipped with Remote control which can make scenarios, dim the density of the light, select the color temperature between 3000K, 4000K or 6000K, etc. On 3000K - 2418lm, on 4000K - 5070lm & on 6000K - 2652lm. It can be used as night lamp as well with 5W power & 380lm.

Intended for surface installation. Made by metal sheet & PVC.

2024630

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 48W (24/48/24/4W)                       |                   |
| Luminous Flux                           |                   |
| 3600LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+REM. CONT. |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.60             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+65°C       |
| Main Material                           | Metal sheet & PVC |

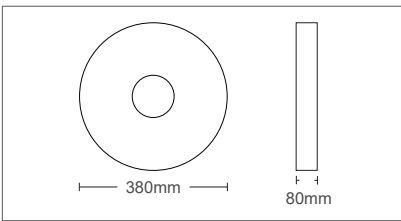

### SURFACE LED CEILING LIGHTS



## PEARL M35

PEARL M35 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.


Is equipped with Remote control which can make scenarios, dim the density of the light, select the color temperature between 3000K, 4000K or 6000K, etc. On 3000K - 1680lm, on 4000K - 3600lm & on 6000K - 1920lm. It can be used as night lamp as well with 4W power & 300lm.

Intended for surface installation. Made by metal sheet & PVC.

2025470

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 72W (36/72/36/5W)                       |                   |
| Luminous Flux                           |                   |
| 4680LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+REM. CONT. |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.60             |
| Voltage Range                           | 85-265V           |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+65°C       |
| Main Material                           | Metal sheet & PVC |

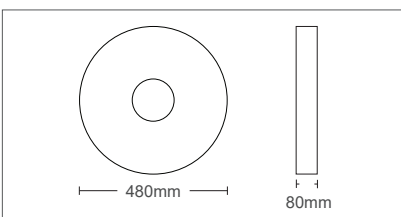

## PEARL M45

PEARL M45 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources.

Is equipped with Remote control which can make scenarios, dim the density of the light, select the color temperature between 3000K, 4000K or 6000K, etc. On 3000K - 2160lm, on 4680K - 5148lm & on 6000K - 2520lm. It can be used as night lamp as well with 5W power & 350lm.

Intended for surface installation. Made by metal sheet & PVC.

2025480

## GENERAL INFORMATION

DIANA D18 is a round ceiling mounting lighting fixture with built-in PIR sensor, equipped with backlit technology of SANAN LED sources.

PIR functions:


Light sensitivity: <3 LUX (adjustable).

Time delay: 10 sec - 5 min.


Detection angle: 360°.

Installation height: 1.8 - 2.5 m.

Made by ABS & PVC.

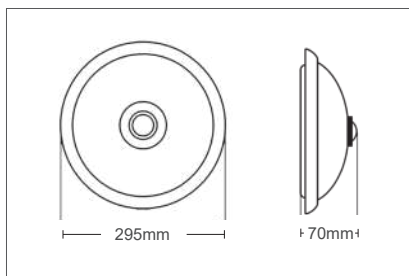

## SURFACE CEILING LIGHTS WITH PIR SENSOR



## DIANA D18

|         |     |        |       |
|---------|-----|--------|-------|
| 2025840 | 18W | 1575lm | 4000K |
| 2025850 | 18W | 1620lm | 6000K |

## GENERAL INFORMATION

LIKYA is a round ceiling mounting lighting fixture with built-in PIR sensor, operating with 2xLED bulbs (not included), E27, A60 type.

PIR functions:

Light sensitivity: <3 LUX (adjustable).


Time delay: 10 sec - 5 min.

Detection angle: 360°.

Detection distance: 10m max.

Installation height: 1.8 - 2.5 m.

Made by steel body & glass.

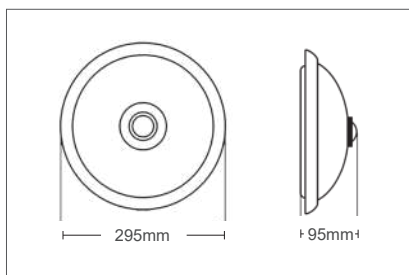


## LIKYA


2022660

### TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 46W                                     |             |
| Luminous Flux                           |             |
| 2760LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

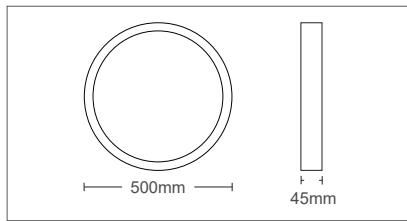

### SURFACE LED CEILING LIGHTS



## DISC 1



DISC 1 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources. arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K.

Intended for surface installation. Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & black.

2026240

### TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 46W                                     |             |
| Luminous Flux                           |             |
| 2760LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

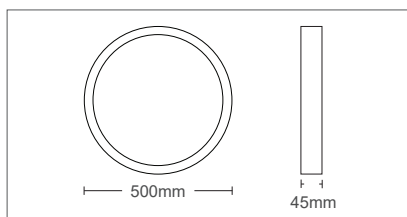

## DISC 2


DISC 2 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources. arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K.

Intended for surface installation. Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & gold.


2026250

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 52W                                     |                   |
| Luminous Flux                           |                   |
| 3120LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.95             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+40°C       |
| Main Material                           | Aluminium & Metal |

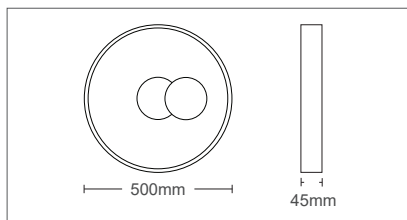

### SURFACE LED CEILING LIGHTS



## DISC 3


DISC 3 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources. arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K.

Intended for surface installation. Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & black.

2026260

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 60W                                     |                   |
| Luminous Flux                           |                   |
| 3600LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.95             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+40°C       |
| Main Material                           | Aluminium & Metal |

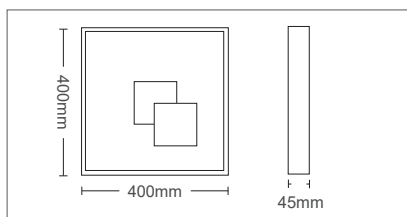

## DISC 4

DISC 4 is a square ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources. arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K.


Intended for surface installation. Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & black.

2026270




### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 38W                                     |                   |
| Luminous Flux                           |                   |
| 2280LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.95             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+40°C       |
| Main Material                           | Aluminium & Metal |

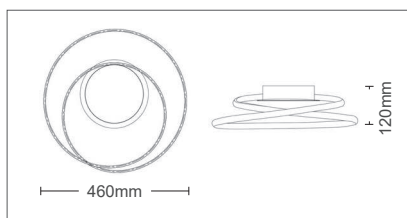

### SURFACE LED CEILING LIGHTS



## RING 38

RING 38 is a round ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources. arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K.

Intended for surface installation.


Housing of aluminum board & metal sheet electrostatically painted with sandblasted finishing in sand white & black. Difusser made by PVC.

2026370 - Black color

2026380 - White color

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 64W                                     |                   |
| Luminous Flux                           |                   |
| 3840LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.95             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+40°C       |
| Main Material                           | Aluminium & Metal |

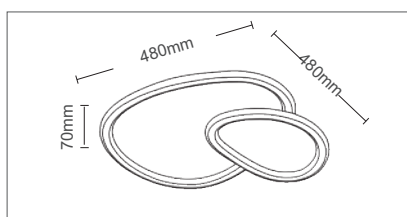

## RING 64

RING 64 is a ceiling mounting lighting fixture, equipped with backlit technology of SANAN LED sources. arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K.


Intended for surface installation. Housing of aluminum board electrostatically painted with sandblasted finishing in sand white.

Difusser made by PVC.

2026280

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 46W                                     |                   |
| Luminous Flux                           |                   |
| 2880LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.95             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+40°C       |
| Main Material                           | Aluminium & Metal |

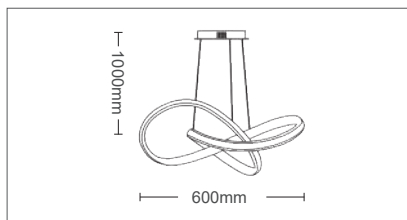

### PENDANT LED LIGHTS

|                  |            |          |      |           |        |        |          |          |          |
|------------------|------------|----------|------|-----------|--------|--------|----------|----------|----------|
| 2 YEARS WARRANTY | LED INSIDE | 180-265V | IP20 | CRI Ra>80 | 30000h | x30000 | Non Dimm | Hg 0.00% | 20/+40°C |
|------------------|------------|----------|------|-----------|--------|--------|----------|----------|----------|



## WAVE

WAVE is a pendant lighting fixture, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K.

Housing of aluminum board & metal sheet electrostatically painted with sand-blasted finishing in sand white & black.


Difusser made by PVC.

2026400 - White color

2026390 - Black color

### TECHNICAL SPECIFICATIONS

|                                         |                   |
|-----------------------------------------|-------------------|
| Power                                   |                   |
| 48W                                     |                   |
| Luminous Flux                           |                   |
| 2880LM                                  |                   |
| Color Temperature                       |                   |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |                   |
| CRI                                     | 80                |
| Power Factor                            | >0.95             |
| Voltage Range                           | 180-265V          |
| Beam Angle                              | 120°              |
| Protection Class                        | IP20              |
| Working Temperature                     | -20°C/+40°C       |
| Main Material                           | Aluminium & Metal |

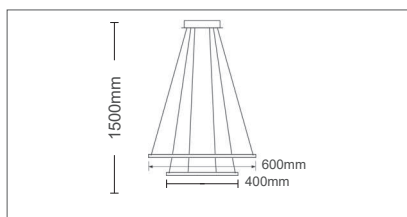

|                  |            |          |      |         |           |        |        |          |          |          |
|------------------|------------|----------|------|---------|-----------|--------|--------|----------|----------|----------|
| 2 YEARS WARRANTY | LED INSIDE | 180-265V | IP20 | UGR <21 | CRI Ra>80 | 30000h | x30000 | Non Dimm | Hg 0.00% | 20/+40°C |
|------------------|------------|----------|------|---------|-----------|--------|--------|----------|----------|----------|



## DUO

DUO is a pendant lighting fixture with 2 circles, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K.


Housing of aluminum board & metal sheet electrostatically painted with sand-blasted finishing in sand white & black.

Difusser made by PVC.

2026340

## TECHNICAL SPECIFICATIONS

|                                         |             |
|-----------------------------------------|-------------|
| Power                                   |             |
| 56W                                     |             |
| Luminous Flux                           |             |
| 3360LM                                  |             |
| Color Temperature                       |             |
| 3000K / 4000K / 6000K - 3CCT+DIP SWITCH |             |
| CRI                                     | 80          |
| Power Factor                            | >0.95       |
| Voltage Range                           | 180-265V    |
| Beam Angle                              | 120°        |
| Protection Class                        | IP20        |
| Working Temperature                     | -20°C/+40°C |
| Main Material                           | Aluminium   |

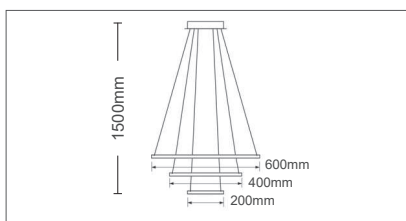

## PENDANT LED LIGHTS

|                        |               |          |      |            |              |        |        |             |             |          |
|------------------------|---------------|----------|------|------------|--------------|--------|--------|-------------|-------------|----------|
| 2<br>YEARS<br>WARRANTY | LED<br>INSIDE | 180-265V | IP20 | UGR<br><21 | CRI<br>Ra>80 | 30000h | x30000 | Non<br>Dimm | Hg<br>0.00% | 20/+40°C |
|------------------------|---------------|----------|------|------------|--------------|--------|--------|-------------|-------------|----------|



## TRIO-1

TRIO 1 is a pendant lighting fixture with 3 circles, equipped with backlit technology of SANAN LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K.

Housing of aluminum board & metal sheet electrostatically painted with sandblasted finishing in sand white & black.

Difusser made by PVC.

2026350 - White color

2026360 - Black color

**2024**  
**lighting**  
**electrical**  
**catalog**


# 4

## **CEILING FIXTURES**

**RECESSED & SURFACE  
LED LIGHTING FIXTURES**


## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 3W                  |             |
| Luminous Flux       |             |
| 240LM               |             |
| Color Temperature   |             |
| 4200K               |             |
| CRI                 | 80          |
| Power Factor        | >0.95       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 180°        |
| Protection Class    | IP20        |
| Working Temperature | -10°C/+50°C |
| Main Material       | Metal sheet |

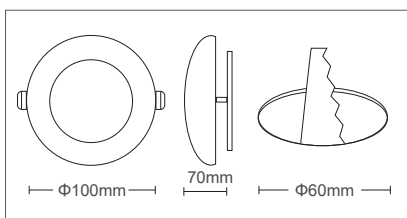

## RECESSED LED SPOT LIGHTS

|                  |            |         |      |         |           |        |        |          |           |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|-----------|
| 2 YEARS WARRANTY | LED INSIDE | 85-265V | IP20 | UGR <19 | CRI Ra>80 | 30000h | x30000 | Non Dimm | -10/+50°C |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|-----------|

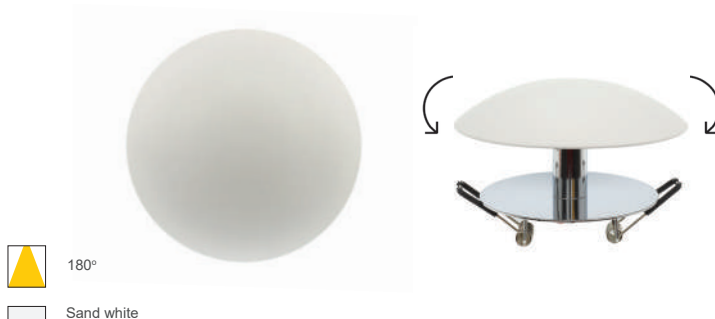


## FORMATO D1

FORMATO D1 is a rotatable & recessed led spot light equipped with SANAN LED sources. Indirect light spread 180°. Housing of metal sheet electrostatically painted in sand white. Head is removable and It can be painted with all the plastic & acrylic colors available in the market. Driver is included in the package.


2012460

## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 5W                  |             |
| Luminous Flux       |             |
| 400LM               |             |
| Color Temperature   |             |
| 4200K               |             |
| CRI                 | 80          |
| Power Factor        | >0.95       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 180°        |
| Protection Class    | IP20        |
| Working Temperature | -10°C/+50°C |
| Main Material       | Metal sheet |

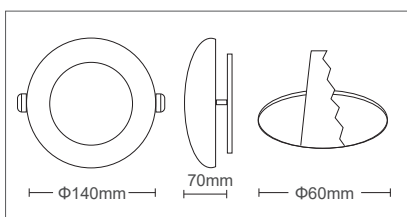

|                  |            |         |      |         |           |        |        |          |           |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|-----------|
| 2 YEARS WARRANTY | LED INSIDE | 85-265V | IP20 | UGR <19 | CRI Ra>80 | 30000h | x30000 | Non Dimm | -10/+50°C |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|-----------|

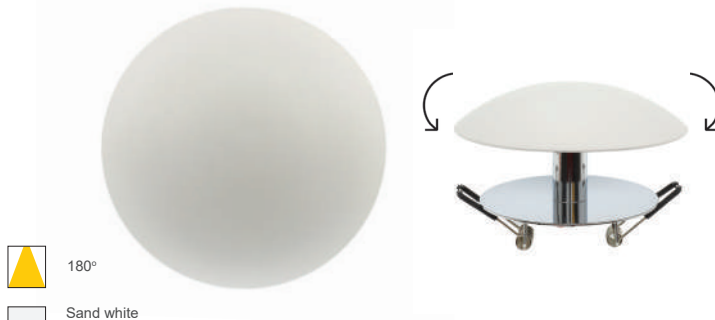

## FORMATO D3


FORMATO D3 is a rotatable & recessed led spot light equipped with SANAN LED sources. Indirect light spread 180°. Housing of metal sheet electrostatically painted in sand white. Head is removable and It can be painted with all the plastic & acrylic colors available in the market. Driver is included in the package.

2012520




## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 3W                  |             |
| Luminous Flux       |             |
| 240LM               |             |
| Color Temperature   |             |
| 4200K               |             |
| CRI                 | 80          |
| Power Factor        | >0.95       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 180°        |
| Protection Class    | IP20        |
| Working Temperature | -10°C/+50°C |
| Main Material       | Metal sheet |

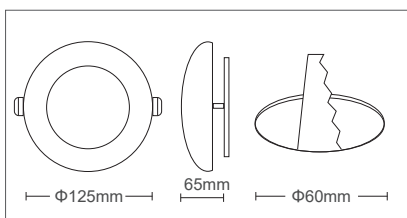

## RECESSED LED SPOT LIGHTS

|                  |            |         |      |         |           |        |        |          |           |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|-----------|
| 2 YEARS WARRANTY | LED INSIDE | 85-265V | IP20 | UGR <19 | CRI Ra>80 | 30000h | x30000 | Non Dimm | -10/+50°C |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|-----------|

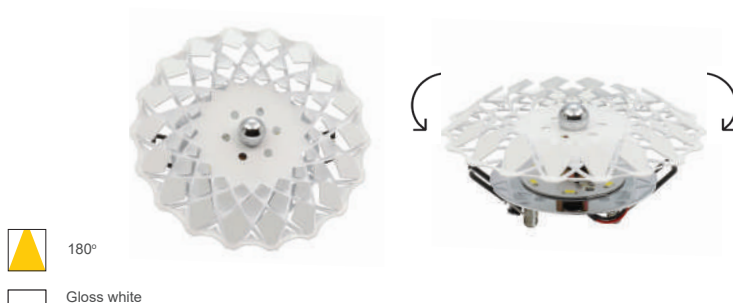

## FORMATO F3

FORMATO F3 is a rotatable & recessed led spot light equipped with SANAN LED sources.

Indirect light spread 180°.

Housing of metal sheet electrostatically painted in gloss white.


Head is removable.

Driver is included in the package.


2012410

## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 3W                  |             |
| Luminous Flux       |             |
| 240LM               |             |
| Color Temperature   |             |
| 4200K               |             |
| CRI                 | 80          |
| Power Factor        | >0.95       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 180°        |
| Protection Class    | IP20        |
| Working Temperature | -10°C/+50°C |
| Main Material       | Metal sheet |

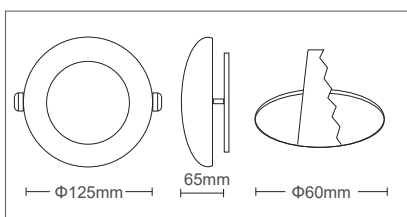

|                  |            |         |      |         |           |        |        |          |           |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|-----------|
| 2 YEARS WARRANTY | LED INSIDE | 85-265V | IP20 | UGR <19 | CRI Ra>80 | 30000h | x30000 | Non Dimm | -10/+50°C |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|-----------|

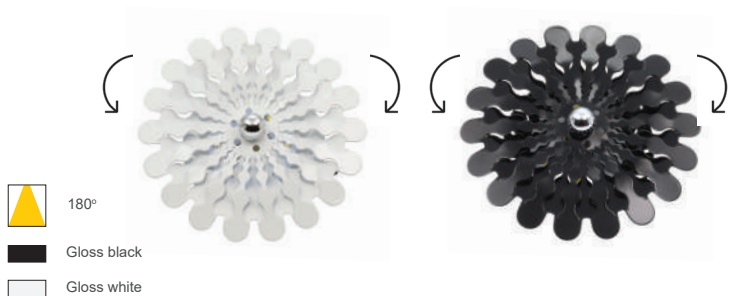

## FORMATO F4

FORMATO F4 is a rotatable & recessed led spot light equipped with SANAN LED sources.

Indirect light spread 180°.

Housing of metal sheet electrostatically painted in gloss white & gloss black. Head is removable.


Driver is included in the package.

2012420 - White body

2012430 - Black body

## GENERAL INFORMATION

NICK R is a round rotatable & recessed led spot light equipped with SANAN LED sources. Is equipped with microprismatic difusser with 45° beam angle. Housing of PC painted in sand white. Driver is included in the package.

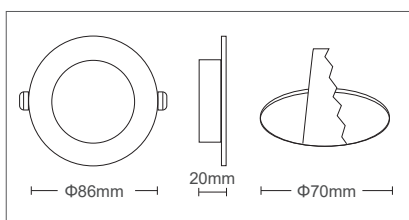

## RECESSED LED SPOT LIGHTS

|                               |                      |                 |             |                   |                     |               |               |                 |                 |
|-------------------------------|----------------------|-----------------|-------------|-------------------|---------------------|---------------|---------------|-----------------|-----------------|
| <b>2</b><br>YEARS<br>WARRANTY | <b>LED</b><br>INSIDE | <b>100-240V</b> | <b>IP20</b> | <b>UGR</b><br><19 | <b>CRI</b><br>Ra>80 | <b>25000h</b> | <b>x25000</b> | <b>Non Dimm</b> | <b>25/-50°C</b> |
|-------------------------------|----------------------|-----------------|-------------|-------------------|---------------------|---------------|---------------|-----------------|-----------------|



45°




Sand white

## NICK R

|                              |    |       |       |
|------------------------------|----|-------|-------|
| <b>2026770</b> - White color | 5W | 590lm | 4200K |
| <b>2026780</b> - White color | 5W | 600lm | 6400K |

## GENERAL INFORMATION

NICK S is a square rotatable & recessed led spot light equipped with SANAN LED sources. Is equipped with microprismatic difusser with 45° beam angle. Housing of PC painted in sand white. Driver is included in the package.

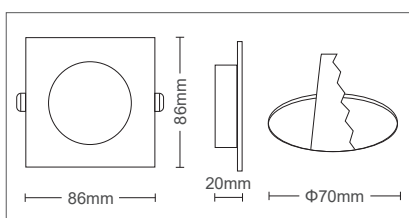

|                               |                      |                 |             |                   |                     |               |               |                 |                 |
|-------------------------------|----------------------|-----------------|-------------|-------------------|---------------------|---------------|---------------|-----------------|-----------------|
| <b>2</b><br>YEARS<br>WARRANTY | <b>LED</b><br>INSIDE | <b>100-240V</b> | <b>IP20</b> | <b>UGR</b><br><19 | <b>CRI</b><br>Ra>80 | <b>25000h</b> | <b>x25000</b> | <b>Non Dimm</b> | <b>25/-50°C</b> |
|-------------------------------|----------------------|-----------------|-------------|-------------------|---------------------|---------------|---------------|-----------------|-----------------|



45°



Sand white

## NICK S

|                              |    |       |       |
|------------------------------|----|-------|-------|
| <b>2026790</b> - White color | 5W | 590lm | 4200K |
| <b>2026800</b> - White color | 5W | 600lm | 6400K |


## GENERAL INFORMATION

ZANZI P is a non rotatable & recessed led spot light equipped with SANAN LED sources. Light beam angle 30°.


Housing of PC painted in sand white & sand black.

Diffuser is made of PS.

Driver is included in the package.

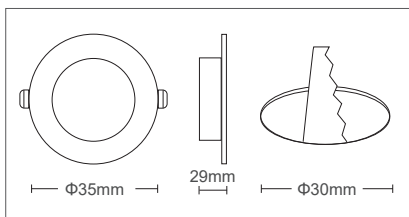

PHOTOMETRIC DIAGRAM



## RECESSED LED SPOT LIGHTS

|                        |               |          |      |            |              |        |        |             |         |
|------------------------|---------------|----------|------|------------|--------------|--------|--------|-------------|---------|
| 2<br>YEARS<br>WARRANTY | LED<br>INSIDE | 100-240V | IP20 | UGR<br><19 | CRI<br>Ra>80 | 25000h | x25000 | Non<br>Dimm | 25±50°C |
|------------------------|---------------|----------|------|------------|--------------|--------|--------|-------------|---------|



30°



Sand black



Sand white



## ZANZI P

|                       |                       |    |      |       |
|-----------------------|-----------------------|----|------|-------|
| 2026830 - Black color | 2026810 - White color | 1W | 75lm | 3000K |
| 2026840 - Black color | 2026820 - White color | 1W | 75lm | 4000K |


## GENERAL INFORMATION

ZANZI M is a non rotatable & recessed led spot light equipped with SANAN LED sources. Light beam angle 30°.


Housing of Die cast aluminium painted in sand white & nickel mat.

Diffuser is made of PS and is microprismatic.

Driver is included in the package.

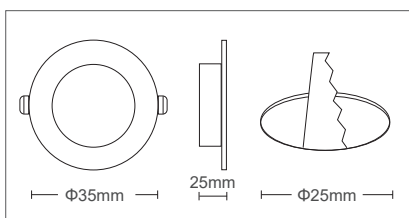

PHOTOMETRIC DIAGRAM



|                        |               |          |      |            |              |        |        |             |         |
|------------------------|---------------|----------|------|------------|--------------|--------|--------|-------------|---------|
| 2<br>YEARS<br>WARRANTY | LED<br>INSIDE | 100-240V | IP20 | UGR<br><19 | CRI<br>Ra>80 | 25000h | x25000 | Non<br>Dimm | 25±50°C |
|------------------------|---------------|----------|------|------------|--------------|--------|--------|-------------|---------|



30°



Nickel mat



Sand white




## ZANZI M


|                       |                      |    |       |       |
|-----------------------|----------------------|----|-------|-------|
| 2026870 - White color | 2026850 - Nickel mat | 3W | 225lm | 3000K |
| 2026880 - White color | 2026860 - Nickel mat | 3W | 225lm | 4000K |

## GENERAL INFORMATION


RITA 2 is a non rotatable & recessed led spot light equipped with SANAN LED sources.  
Light beam angle 60°.  
Housing of extruded aluminium electrostatically painted in chrome.  
Diffuser is made of PS.  
Driver is included in the package.

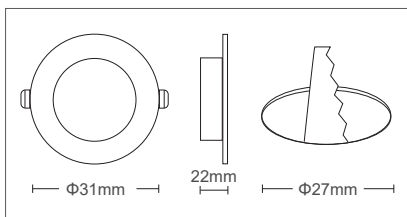

PHOTOMETRIC DIAGRAM



## RECESSED LED SPOT LIGHTS



## RITA 2

|                       |    |       |       |
|-----------------------|----|-------|-------|
| 2021580 - White color | 1W | 98lm  | 3000K |
| 2021590 - White color | 1W | 105lm | 6000K |

## TECHNICAL SPECIFICATIONS

Power

1W

Luminous Flux

98LM

Color Temperature

3000K

CRI

80

Power Factor

>0.50

Voltage Range

110-240V

Beam Angle

60°

Protection Class




IP20

Working Temperature

-15°C/+50°C

Main Material

Zinc, alloy & glass

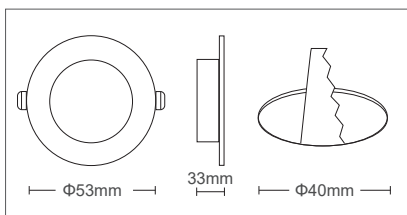


## RITA 3

RITA 3 is a rotatable & recessed led spot light equipped with SANAN LED sources.  
Light beam angle 60°.  
Housing of Zinc & alloy electrostatically painted in nickel mat.  
Diffuser is made of glass.  
Driver is included in the package.

2021600


PHOTOMETRIC DIAGRAM






## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 5W                  |             |
| Luminous Flux       |             |
| 600LM               |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 90          |
| Power Factor        | >0.50       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 24°         |
| Protection Class    | IP20        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

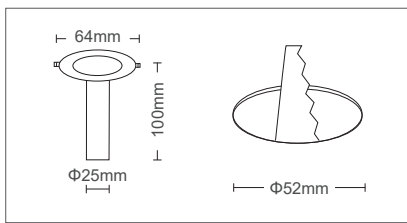

## RECESSED LED SPOT LIGHTS

|                  |            |         |      |         |           |        |        |          |          |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|----------|
| 5 YEARS WARRANTY | LED INSIDE | 85-265V | IP20 | UGR <19 | CRI Ra>90 | 30000h | x30000 | Non Dimm | 20/+40°C |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|----------|

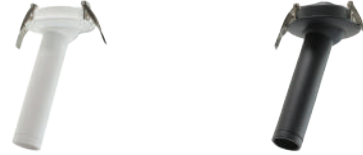

24°



Sand black



Sand white

## TUBO 1



TUBO is a family of rotatable recessed spot lights equipped with BRIDGELUX LED sources.

They are equipped with PC diffuser with 24° and UGR<19.


Housing of extruded aluminium electrostatically painted in sand black & sand white.

Driver is included in the package.

|                       |    |       |       |
|-----------------------|----|-------|-------|
| 2102400 - Black color | 5W | 400lm | 3000K |
| 2102440 - White color | 5W | 400lm | 3000K |

## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 5W                  |             |
| Luminous Flux       |             |
| 400LM               |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 90          |
| Power Factor        | >0.50       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 24°         |
| Protection Class    | IP20        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

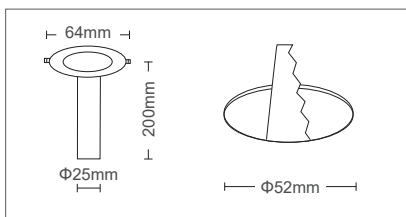

|                  |            |         |      |         |           |        |        |          |          |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|----------|
| 5 YEARS WARRANTY | LED INSIDE | 85-265V | IP20 | UGR <19 | CRI Ra>90 | 30000h | x30000 | Non Dimm | 20/+40°C |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|----------|



24°



Sand black



Sand white

## TUBO 2



TUBO is a family of rotatable recessed spot lights equipped with BRIDGELUX LED sources.

They are equipped with PC diffuser with 24° and UGR<19.

Housing of extruded aluminium electrostatically painted in sand black & sand white.


Driver is included in the package.

|                       |    |       |       |
|-----------------------|----|-------|-------|
| 2102410 - Black color | 5W | 400lm | 3000K |
| 2102450 - White color | 5W | 400lm | 3000K |



## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 5W                  |             |
| Luminous Flux       |             |
| 600LM               |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 90          |
| Power Factor        | >0.50       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 24°         |
| Protection Class    | IP20        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

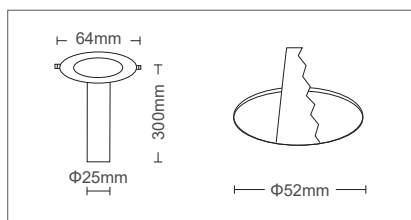

## RECESSED LED SPOT LIGHTS

|                  |            |         |      |         |           |        |        |          |         |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|---------|
| 5 YEARS WARRANTY | LED INSIDE | 85-265V | IP20 | UGR <19 | CRI Ra>90 | 30000h | x30000 | Non Dimm | 20-40°C |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|---------|



24°



Sand black



Sand white



## TUBO 3



TUBO is a family of rotatable recessed spot lights equipped with BRIDGELUX LED sources.

They are equipped with PC diffuser with 24° and UGR<19.


Housing of extruded aluminium electrostatically painted in sand black & sand white.

Driver is included in the package.

|                       |    |       |       |
|-----------------------|----|-------|-------|
| 2102420 - Black color | 5W | 400lm | 3000K |
| 2102460 - White color | 5W | 400lm | 3000K |

## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 5W                  |             |
| Luminous Flux       |             |
| 600LM               |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 90          |
| Power Factor        | >0.50       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 24°         |
| Protection Class    | IP20        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

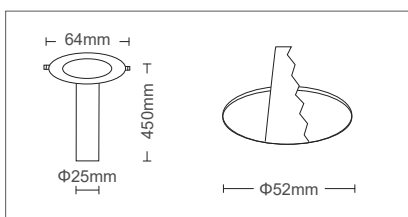

|                  |            |         |      |         |           |        |        |          |         |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|---------|
| 5 YEARS WARRANTY | LED INSIDE | 85-265V | IP20 | UGR <19 | CRI Ra>90 | 30000h | x30000 | Non Dimm | 20-40°C |
|------------------|------------|---------|------|---------|-----------|--------|--------|----------|---------|



24°



Sand black



Sand white



## TUBO 4



TUBO is a family of rotatable recessed spot lights equipped with BRIDGELUX LED sources.

They are equipped with PC diffuser with 24° and UGR<19.


Housing of extruded aluminium electrostatically painted in sand black & sand white.

Driver is included in the package.


|                       |    |       |       |
|-----------------------|----|-------|-------|
| 2102430 - Black color | 5W | 400lm | 3000K |
| 2102470 - White color | 5W | 400lm | 3000K |

## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 5W                  |             |
| Luminous Flux       |             |
| 400LM               |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 90          |
| Power Factor        | >0.50       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 24°         |
| Protection Class    | IP20        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

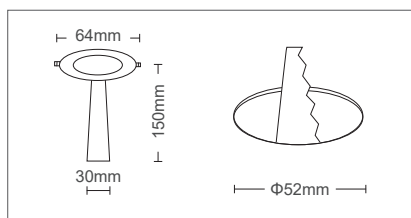

## RECESSED LED SPOT LIGHTS

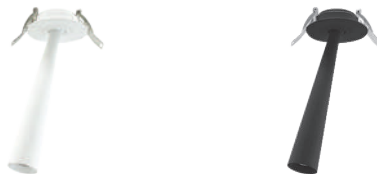

24°



Sand black



Sand white

## CONO 1




CONO is a family of rotatable recessed spot lights equipped with BRIDGELUX LED sources.  
They are equipped with PC polycarbonate diffuser with 24° and UGR<19.  
Housing of extruded aluminium electrostatically painted in sand black & sand white.  
Driver is included in the package.

|                       |    |       |       |
|-----------------------|----|-------|-------|
| 2102480 - Black color | 5W | 400lm | 3000K |
| 2102500 - White color | 5W | 400lm | 3000K |

## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 5W                  |             |
| Luminous Flux       |             |
| 400LM               |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 90          |
| Power Factor        | >0.50       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 24°         |
| Protection Class    | IP20        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

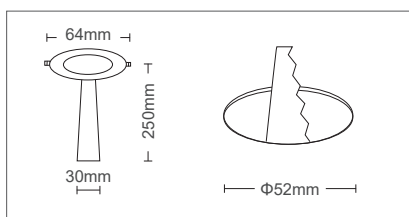

24°



Sand black




Sand white

## CONO 2




CONO is a family of rotatable recessed spot lights equipped with BRIDGELUX LED sources.  
They are equipped with PC polycarbonate diffuser with 24° and UGR<19.  
Housing of extruded aluminium electrostatically painted in sand black & sand white.  
Driver is included in the package.

|                       |    |       |       |
|-----------------------|----|-------|-------|
| 2102490 - Black color | 5W | 400lm | 3000K |
| 2102510 - White color | 5W | 400lm | 3000K |

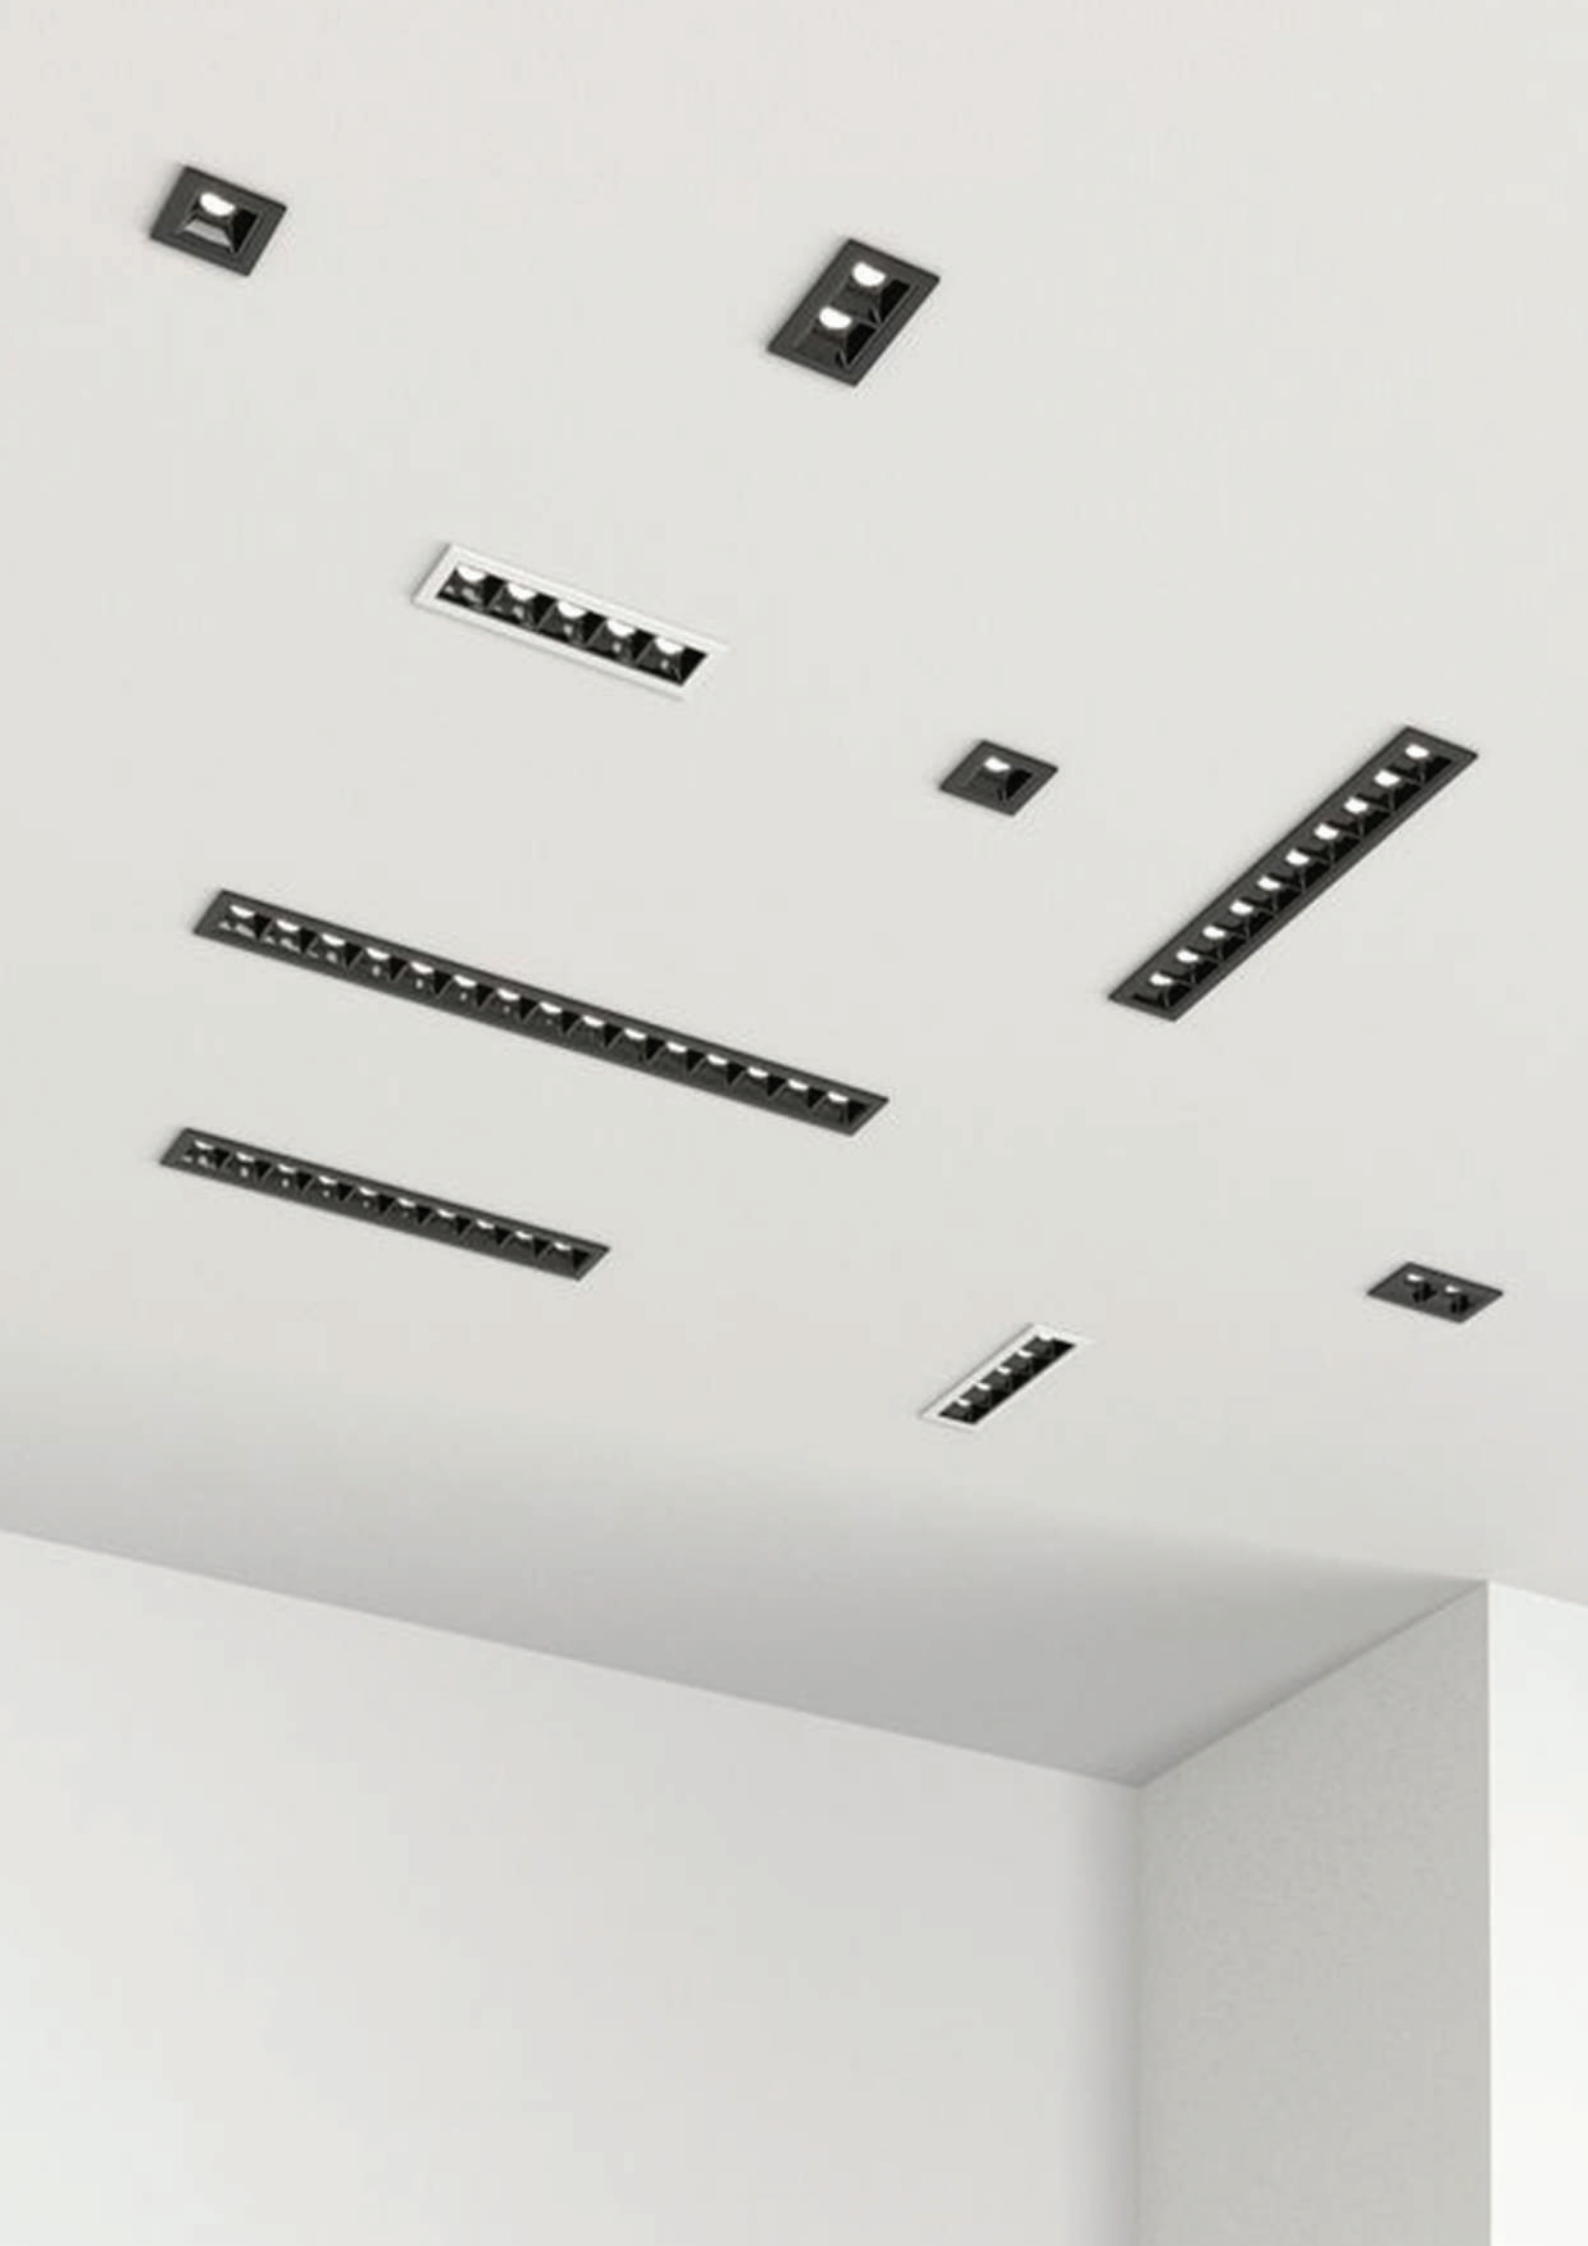


## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 2W                  |             |
| Luminous Flux       |             |
| 186LM               |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 80          |
| Power Factor        | >0.50       |
| Voltage Range       | 185-265V    |
| Beam Angle          | 36°         |
| Protection Class    | IP20        |
| Working Temperature | -25°C/+50°C |
| Main Material       | Aluminium   |

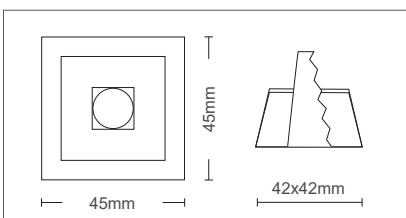

## RECESSED CEILING LED LIGHT FIXTURES



## ICECUBE 2

ICECUBE is a family of non rotatable recessed spot lights, equipped with SANAN LED sources, with short height of 35mm.


They are equipped with microprismatic polycarbonate diffuser with 36° and UGR<19.

Housing of extruded aluminium electrostatically painted in sand black.

Driver is included in the package.



2102940 - Black color

### PHOTOMETRIC DIAGRAM



## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 6W                  |             |
| Luminous Flux       |             |
| 558LM               |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 80          |
| Power Factor        | >0.50       |
| Voltage Range       | 185-265V    |
| Beam Angle          | 36°         |
| Protection Class    | IP20        |
| Working Temperature | -25°C/+50°C |
| Main Material       | Aluminium   |

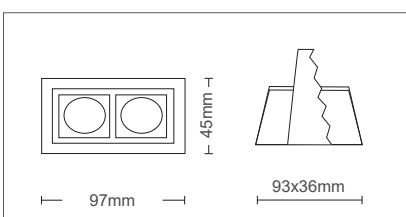

## ICECUBE 6

ICECUBE is a family of non rotatable recessed spot lights, equipped with SANAN LED sources, with short height of 35mm.


They are equipped with microprismatic polycarbonate diffuser with 36° and UGR<19.

Housing of extruded aluminium electrostatically painted in sand black.

Driver is included in the package.

2102950 - Black color


### PHOTOMETRIC DIAGRAM






## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 30W                 |             |
| Luminous Flux       |             |
| 2790LM              |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 80          |
| Power Factor        | >0.50       |
| Voltage Range       | 185-265V    |
| Beam Angle          | 36°         |
| Protection Class    | IP20        |
| Working Temperature | -25°C/+50°C |
| Main Material       | Aluminium   |

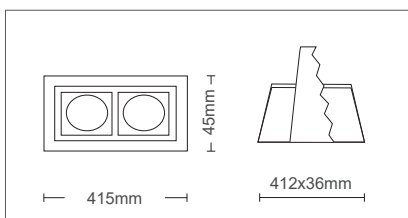

## RECESSED CEILING LED LIGHT FIXTURES



36°



Sand black

## ICECUBE 30

ICECUBE is a family of non rotatable recessed spot lights, equipped with SANAN LED sources, with short height of 35mm.


They are equipped with microprismatic polycarbonate diffuser with 36° and UGR<19.

Housing of extruded aluminium electrostatically painted in sand black.

Driver is included in the package.

2102980 - Black color

## PHOTOMETRIC DIAGRAM








## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 7W (1x7W)           |             |
| Luminous Flux       |             |
| 560LM               |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 90          |
| Power Factor        | >0.50       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 24°         |
| Protection Class    | IP20        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

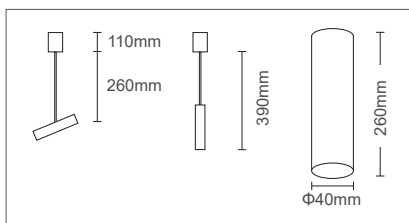

## SURFACE CEILING LED LIGHT FIXTURES



24°



Sand black



Sand white



## CLIMBER




CLIMBER is a family of rotatable surface spot lights equipped with BRIDGELUX LED sources. They are equipped with clear PC diffuser with 24° and UGR<19. Each spot rotating in both directions, horizontal 360° & vertical 75°. Housing of extruded aluminium electrostatically painted in sand black & sand white. The total length is 50cm & include 1 spots 7W.

|                       |    |       |       |
|-----------------------|----|-------|-------|
| 2102580 - Black color | 7W | 560lm | 3000K |
| 2102590 - White color | 7W | 560lm | 3000K |

## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 7W (1x7W)           |             |
| Luminous Flux       |             |
| 840LM               |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 90          |
| Power Factor        | >0.50       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 24°         |
| Protection Class    | IP20        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

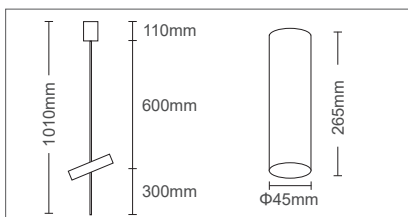

24°



Sand black



Sand white



## CLIMBER 1




CLIMBER 1 is a family of rotatable surface spot lights equipped with BRIDGELUX LED sources. They are equipped with clear PC diffuser with 24° and UGR<19. Each spot rotating in both directions, horizontal 360° & vertical 75°. Housing of extruded aluminium electrostatically painted in sand black & sand white. The total length is 101cm & include 1 spots 7W.

|                       |    |       |       |
|-----------------------|----|-------|-------|
| 2102520 - Black color | 7W | 560lm | 3000K |
| 2102550 - White color | 7W | 560lm | 3000K |

## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 14W (2x7W)          |             |
| Luminous Flux       |             |
| 1120LM              |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 90          |
| Power Factor        | >0.50       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 24°         |
| Protection Class    | IP20        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

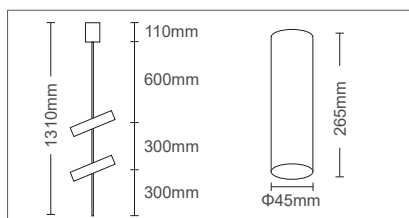

## SURFACE CEILING LED LIGHT FIXTURES

|                  |     |        |         |      |         |           |        |        |          |          |
|------------------|-----|--------|---------|------|---------|-----------|--------|--------|----------|----------|
| 5 YEARS WARRANTY | LED | INSIDE | 85-265V | IP20 | UGR <19 | CRI Ra>90 | 30000h | x30000 | Non Dimm | 20/+40°C |
|------------------|-----|--------|---------|------|---------|-----------|--------|--------|----------|----------|



36°



Sand black



Sand white



## CLIMBER 2



CLIMBER 2 is a family of rotatable surface spot lights equipped with BRIDGELUX LED sources.

They are equipped with clear PC diffuser with 24° and UGR<19.

Each spot rotating in both directions, horizontal 360°

& vertical 75°.


Housing of extruded aluminium electrostatically painted in sand black & sand white.

The total length is 131cm & include 2 spots by 7W each.

|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102530 - Black color | 14W | 1120lm | 3000K |
| 2102560 - White color | 14W | 1120lm | 3000K |

## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 21W (3x7W)          |             |
| Luminous Flux       |             |
| 1680LM              |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 90          |
| Power Factor        | >0.95       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 24°         |
| Protection Class    | IP20        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

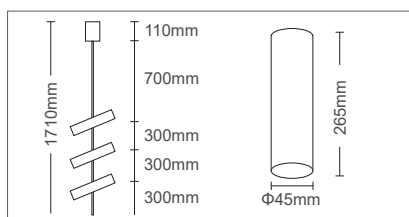

|                  |     |        |         |      |         |           |        |        |          |          |
|------------------|-----|--------|---------|------|---------|-----------|--------|--------|----------|----------|
| 5 YEARS WARRANTY | LED | INSIDE | 85-265V | IP20 | UGR <19 | CRI Ra>90 | 30000h | x30000 | Non Dimm | 20/+40°C |
|------------------|-----|--------|---------|------|---------|-----------|--------|--------|----------|----------|



36°



Sand black



Sand white



## CLIMBER 3



CLIMBER 3 is a family of rotatable surface spot lights equipped with BRIDGELUX LED sources.

They are equipped with clear PC diffuser with 24° and UGR<19.

Each spot rotating in both directions, horizontal 360°

& vertical 75°.


Housing of extruded aluminium electrostatically painted in sand black & sand white.

The total length is 171cm & include 3 spots by 7W each.

|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102540 - Black color | 21W | 1680lm | 3000K |
| 2102570 - White color | 21W | 1680lm | 3000K |

## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 10W (2x5W)          |             |
| Luminous Flux       |             |
| 800LM               |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 90          |
| Power Factor        | >0.50       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 60°         |
| Protection Class    | IP20        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

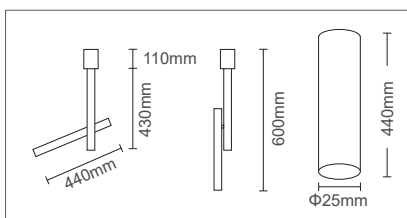

## SURFACE CEILING LED LIGHT FIXTURES

|                  |     |        |         |      |         |           |        |        |          |          |
|------------------|-----|--------|---------|------|---------|-----------|--------|--------|----------|----------|
| 5 YEARS WARRANTY | LED | INSIDE | 85-265V | IP20 | UGR <19 | CRI Ra>90 | 30000h | x30000 | Non Dimm | 20/+40°C |
|------------------|-----|--------|---------|------|---------|-----------|--------|--------|----------|----------|



60°



Sand black



Sand white



## ACROBAT




ACROBAT is a family of rotatable surface spot lights equipped with BRIDGELUX LED sources. They are equipped with clear PC diffuser with 60° and UGR<19. One spot rotating vertical 360°. Housing of extruded aluminium electrostatically painted in sand black & sand white. The total length is 60cm & include 2 spots 5W each.

|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2102600 - Black color | 10W | 1200lm | 3000K |
| 2102610 - White color | 10W | 1200lm | 3000K |

## TECHNICAL SPECIFICATIONS

|                     |             |
|---------------------|-------------|
| Power               |             |
| 5W                  |             |
| Luminous Flux       |             |
| 400LM               |             |
| Color Temperature   |             |
| 3000K               |             |
| CRI                 | 90          |
| Power Factor        | >0,50       |
| Voltage Range       | 85-265V     |
| Beam Angle          | 24°         |
| Protection Class    | IP20        |
| Working Temperature | -20°C/+40°C |
| Main Material       | Aluminium   |

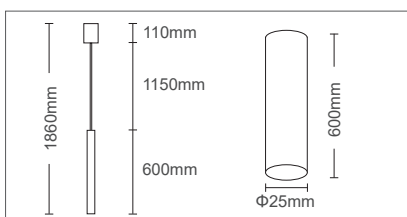

|                  |     |        |         |      |         |           |        |        |          |          |
|------------------|-----|--------|---------|------|---------|-----------|--------|--------|----------|----------|
| 5 YEARS WARRANTY | LED | INSIDE | 85-265V | IP20 | UGR <19 | CRI Ra>90 | 30000h | x30000 | Non Dimm | 20/+40°C |
|------------------|-----|--------|---------|------|---------|-----------|--------|--------|----------|----------|



24°



Sand black



Sand white



## VERTO




VERTO is a family of pendant surface spot lights equipped with BRIDGELUX LED sources. They are equipped with clear PC diffuser with 24° and UGR<19. Housing of extruded aluminium electrostatically painted in sand black & sand white. The total length of the fixture is 1860mm and the length of the cable is adjustable.


|                       |    |       |       |
|-----------------------|----|-------|-------|
| 2102620 - Black color | 5W | 600lm | 3000K |
| 2102630 - White color | 5W | 600lm | 3000K |

## GENERAL INFORMATION

LAZY is a rotatable & surface led spot lights family, equipped with SANAN LED sources. They are equipped with microprismatic diffuser with 24° and UGR<19. It is adjustable in 2 axis, vertical rotating 0-90° and horizontal rotating 0-359°. Housing of aluminum board electrostatically painted with sandblasted finishing in sand black & sand white.

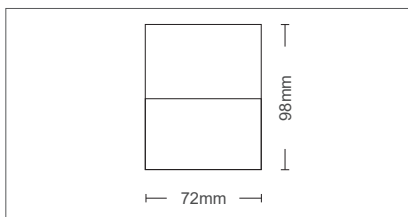

### PHOTOMETRIC DIAGRAM



## SURFACE CEILING LED LIGHT FIXTURES

|                        |               |          |      |            |              |        |        |             |          |
|------------------------|---------------|----------|------|------------|--------------|--------|--------|-------------|----------|
| 2<br>YEARS<br>WARRANTY | LED<br>INSIDE | 185-265V | IP20 | UGR<br><19 | CRI<br>Ra>80 | 30000h | x30000 | Non<br>Dimm | 25/+50°C |
|------------------------|---------------|----------|------|------------|--------------|--------|--------|-------------|----------|

-  24°
-  Sand black
-  Sand white




## LAZY 10


|                       |                       |     |       |       |
|-----------------------|-----------------------|-----|-------|-------|
| 2102860 - Black color | 2102880 - White color | 10W | 930lm | 3000K |
| 2102870 - Black color | 2102890 - White color | 10W | 950lm | 4000K |

## GENERAL INFORMATION

LAZY is a rotatable & surface led spot lights family, equipped with SANAN LED sources. They are equipped with microprismatic diffuser with 24° and UGR<19. It is adjustable in 2 axis, vertical rotating 0-90° and horizontal rotating 0-359°. Housing of aluminum board electrostatically painted with sandblasted finishing in sand black & sand white.

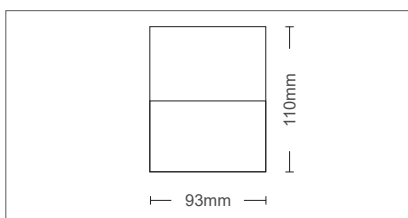

### PHOTOMETRIC DIAGRAM



|                        |               |          |      |            |              |        |        |             |          |
|------------------------|---------------|----------|------|------------|--------------|--------|--------|-------------|----------|
| 2<br>YEARS<br>WARRANTY | LED<br>INSIDE | 185-265V | IP20 | UGR<br><19 | CRI<br>Ra>80 | 30000h | x30000 | Non<br>Dimm | 25/+50°C |
|------------------------|---------------|----------|------|------------|--------------|--------|--------|-------------|----------|

-  24°
-  Sand black
-  Sand white



## LAZY 20

|                       |                       |     |        |       |
|-----------------------|-----------------------|-----|--------|-------|
| 2102900 - Black color | 2102920 - White color | 20W | 1860lm | 3000K |
| 2102910 - Black color | 2102930 - White color | 20W | 1900lm | 4000K |

**2024**  
**lighting**  
**electrical**  
**catalog**



# 5

## **CEILING SPOTS**

**SURFACE &  
RECESSED SPOTS**



FINO S is a single square surface ceiling spot lighting fixture family operating with 1xLED bulb (not included), PAR16 type, GU10 socket.


They are intended for interior use.

Base for ceiling mounting of aluminium.


Fixing on the base with all necessary accessories.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

There are 2 different variants on the reflectors color, mat gold and black mat.



## FINO S

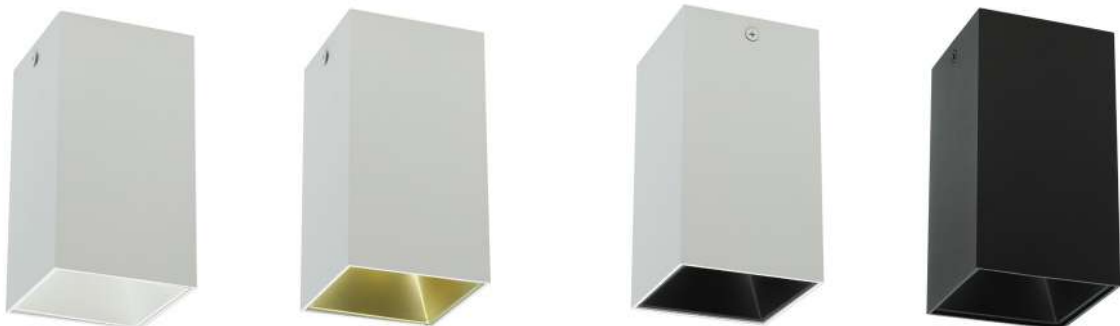

2026950 - White body & white reflector

2026960 - White body & golden reflector

2026930 - White body & black reflector

2026940 - Black body & black reflector



FINO R is a single round surface ceiling spot lighting fixture family operating with 1xLED bulb (not included), PAR16 type, GU10 socket.


They are intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base with all necessary accessories.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

There are 2 different variants on the reflectors color, mat gold and black mat.



## FINO R



2026900 - White body & white reflector

2026910 - White body & golden reflector

2026890 - Black body & black reflector

2026920 - Black body & golden reflector

## GENERAL INFORMATION


DONNA AS is a single surface ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base without screws, by rotating and clicking.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black with PVC reflector.

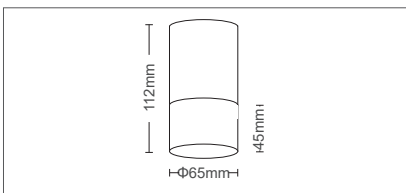

2012830 - White body

2012840 - Black body

## GENERAL INFORMATION


DONNA AB is a single surface ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base without screws, by rotating and clicking.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black with PVC reflector.

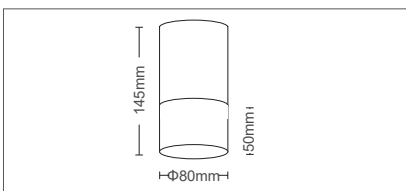

2012850 - White body

2012860 - Black body

## GENERAL INFORMATION


DONNA BB is a single surface ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base without screws, by rotating and clicking.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black with PVC reflector.

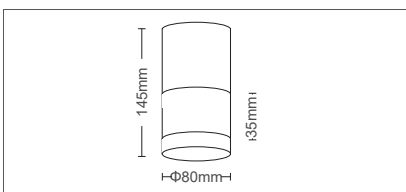

2012870 - White body

2012880 - Black body

## CEILING SURFACE SPOT FIXTURES



## DONNA AS



## DONNA AB



## DONNA BB

## CEILING RECESSED & SURFACE SPOT FIXTURES


### GENERAL INFORMATION

ELCHE 1 is a single adjustable recessed ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket. Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base with all necessary accessories.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

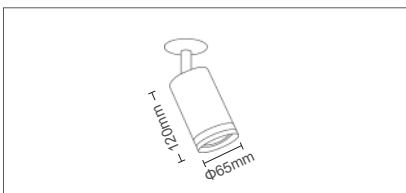

2102770 - White body

2102760 - Black body


### GENERAL INFORMATION

ELCHE 2 is a single adjustable surface ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket. Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base with all necessary accessories.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

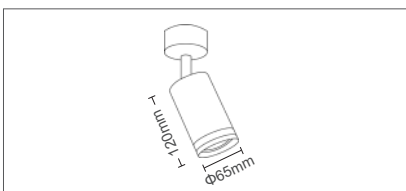

2102780 - White body

2102790 - Black body


### GENERAL INFORMATION

LUMO C is a single adjustable surface ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket. Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base with all necessary accessories.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

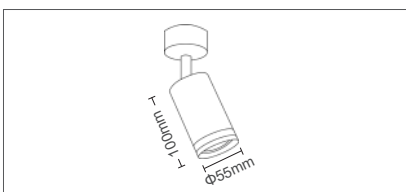

2101920 - White body

2101930 - Black body



■ Sand black  
□ Sand white

## ELCHE 1



■ Sand black  
□ Sand white

## ELCHE 2



■ Sand black  
□ Sand white

## LUMO C

## GENERAL INFORMATION


LUGO 1 is a single adjustable surface ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base with all necessary accessories.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

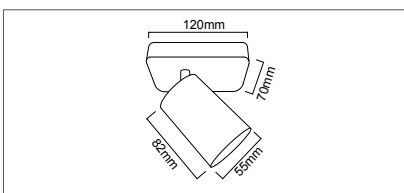

2102320 - White body

2102310 - Black body

## GENERAL INFORMATION


LUGO 2 is a double adjustable surface ceiling spot lighting fixture operating with 2xLED bulbs (not included), PAR16 type, GU10 socket.

Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base with all necessary accessories.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

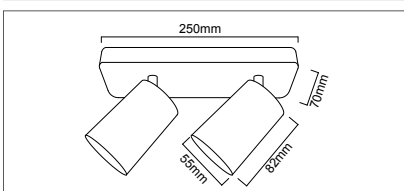

2102340 - White body

2102330 - Black body

## GENERAL INFORMATION


LUGO 3 is a triple adjustable surface ceiling spot lighting fixture operating with 3xLED bulbs (not included), PAR16 type, GU10 socket.

Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base with all necessary accessories.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

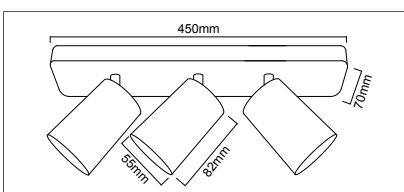

2102360 - White body

2102350 - Black body

## CEILING SURFACE SPOT FIXTURES



## LUGO 1



## LUGO 2



## LUGO 3





## GENERAL INFORMATION


HUESCA is a single adjustable surface ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base with all necessary accessories.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

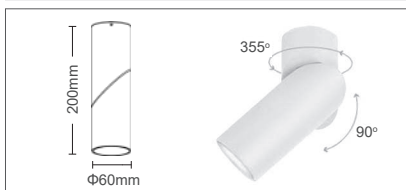

GU10 lampholder included in the package



2102830 - White body

2102820 - Black body

5  
YEARS  
WARRANTY



■ Sand black

□ Sand white

# HUESCA

## GENERAL INFORMATION


ELDA 1 is a single square adjustable surface ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base with all necessary accessories.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

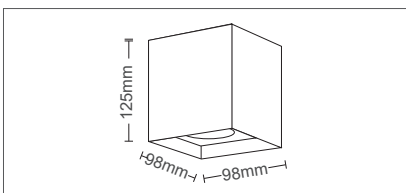

2103000 - White body

2103010 - Black body

## GENERAL INFORMATION


ELDA 2 is a double adjustable surface ceiling spot lighting fixture operating with 2xLED bulbs (not included), PAR16 type, GU10 socket.

Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base with all necessary accessories.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

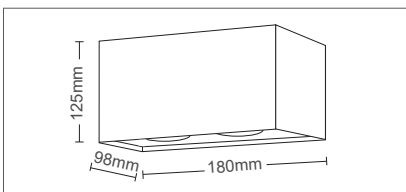

2103020 - White body

2103030 - Black body

## CEILING SURFACE SPOT FIXTURES

5  
YEARS  
WARRANTY

GU10

220-240V

IP20



■ Sand black  
□ Sand white

## ELDA 1

5  
YEARS  
WARRANTY

GU10

220-240V

IP20



■ Sand black  
□ Sand white

## ELDA 2

### GENERAL INFORMATION

OLA S00 is a single surface ceiling spot lighting fixture, operating with 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

Fixing on the base with all necessary accessories by rotating and clicking.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

There are 3 different variants on the reflectors color, white mat, black mat & copper mat.



## OLA S00




2012640 - White body & white reflector

2012650 - Black body & black reflector

2012630 - White body & black reflector

2012660 - Black body & copper reflector

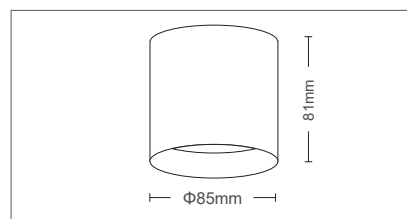

### GENERAL INFORMATION

HOLA is a single surface ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

Base for ceiling mounting of aluminium.

Fixing on the base with all necessary accessories by rotating and clicking.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.



■ Sand black  
□ Sand white

2102840 - Black body

2102850 - White body

## HOLA

## GENERAL INFORMATION


DONNA 10 is a single recessed ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

GU10 lampholder included in the package.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in sand white.

PC reflector with special UV anti-yellow coating to prevent change of the color.

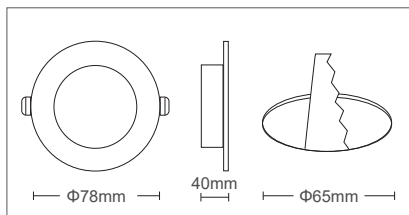

GU10 lampholder included in the package



2012760 - transparent body

## CEILING RECESSED SPOT FIXTURES

5  
YEARS  
WARRANTY



□ Sand white

## DONNA 10

## GENERAL INFORMATION


DONNA 11 is a single recessed ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

GU10 lampholder included in the package.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 2 colors, sand white & sand black.

PC reflector with special UV anti-yellow coating to prevent change of the color.

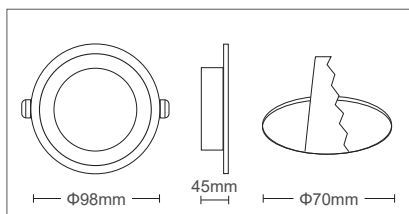

GU10 lampholder included in the package



2012770 - White body

2012780 - Black body

5  
YEARS  
WARRANTY



■ Sand black

□ Sand white

## DONNA 11

### GENERAL INFORMATION

DONNA 01 is a single recessed ceiling spot lighting fixture operating with 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

GU10 lampholder included in the package.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in 3 colors, sand white, sand black & silver mat.

PC reflector with special UV anti-yellow coating to prevent change of the color.



## DONNA 01




2012790 - White body

2012810 - Silver body

2012800 - Black body



GU10 lampholder included in the package

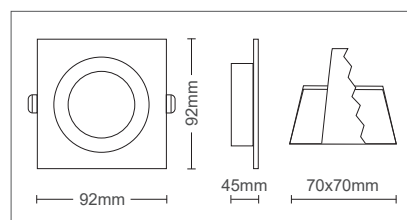

### GENERAL INFORMATION

DONNA 01D is a double rectangle recessed ceiling spot lighting fixture operating with 1xLED bulbs (not included), PAR16 type, GU10 socket.

Is intended for interior use.

GU10 lampholder included in the package.


Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in sand white.

PC reflector with special UV anti-yellow coating to prevent change of the color.



Sand white

## DONNA 01D

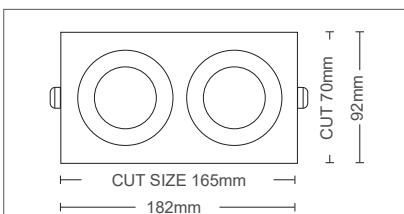

GU10 lampholder included in the package



2012820 - White body

## GENERAL INFORMATION

PALACE is a single recessed ceiling spot lighting fixture family operating with, 1xLED bulb (not included), MR16 type, G5.3 socket.

They are intended for interior use.

MR16 lampholder included in the package.


Housing of aluminum & painted glass.

Available in 3 different colors, chrome, black & copper.



## PALACE 01

-  Chrome
-  Black
-  Copper




2012100 - Chrome

2012110 - Black

2012120 - Copper



MR16 lampholder included in the package



Φ95mm




Φ60mm

### GENERAL INFORMATION

CRYSTAL is a single recessed ceiling spot lighting fixture family operating with 1xLED bulb (not included), MR16 type, G5.3 socket. They are intended for interior use. MR16 lampholder included in the package. Housing of aluminum & glass. Available in 3 different shapes, round, ellipse & square.



## CRYSTAL R/E/S






2012060 - Crystal R (Round)

2012080 - Crystal E (Ellipse)

2012070 - Crystal S (Square)

MR16 lampholder included in the package



### GENERAL INFORMATION

PALACE is a single recessed ceiling spot lighting fixture family operating with 1xLED bulb (not included), MR16 type, G5.3 socket. They are intended for interior use. MR16 lampholder included in the package. Housing of aluminum & embossed glass. Available in 2 different shapes, round & square.



## PALACE 02/03






2012140 - Palace 02 (Round)

2012150 - Palace 03 (Ellipse)

2012130 - Palace 02 (Square)

MR16 lampholder included in the package





### GENERAL INFORMATION

METALLICA R is a single round recessed ceiling spot lighting fixture family operating with, 1xLED bulb (not included), PAR16 type, GU10 socket.

They are intended for interior use.

GU10 lampholder included in the package.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in, white mat, black mat, inox mat & chrome.



## METALLICA R



2012900 - White mat



2012910 - Black mat

2012920 - Nickel mat

2012930 - Chrome



GU10 lampholder included in the package





### GENERAL INFORMATION

METALLICA S is a single square recessed ceiling spot lighting fixture family operating with, 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

GU10 lampholder included in the package.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in, black mat & inox mat.



GU10 lampholder included in the package



2012940 - Black mat

2012950 - Nickel mat

## METALLICA S

### GENERAL INFORMATION

OLA D is a single recessed ceiling spot lighting fixture family operating with, 1xLED bulb (not included), PAR16 type, GU10 socket.

They are intended for interior use.

GU10 lampholder included in the package.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in, white mat with white and black reflectors, black mat with white and black reflectors, black mat with black and shiny gold reflectors.



## OLA D




2012550 - White with white mat reflector

2012540 - White with black mat reflector

2012560 - Black with black mat reflector

2012570 - Black with shiny gold reflector

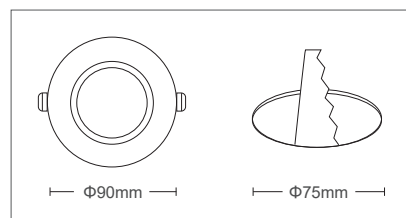

### GENERAL INFORMATION

OLA E is a single recessed ceiling spot lighting fixture family operating with, 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

GU10 lampholder included in the package.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in, white mat with white reflector, black mat with black reflector and white mat with black mat reflector.




## OLA E



2012590 - White body & white reflector

2012580 - Black body & black reflector

2012600 - White body & black reflector

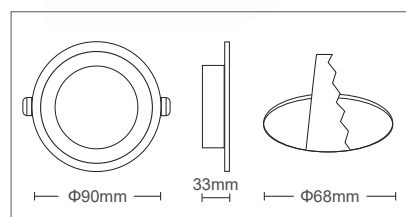


## GENERAL INFORMATION

DONNA X1 is a single recessed ceiling spot lighting fixture operating with, 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

GU10 lampholder included in the package.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in, sand white & sand black.

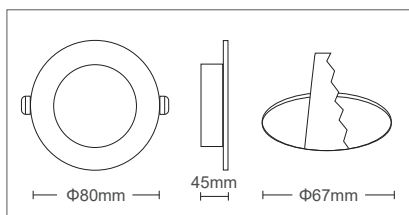

GU10 lampholder included in the package



2012730 - White body

2012720 - Black body

## CEILING RECESSED SPOT FIXTURES



■ Sand black

□ Sand white

## DONNA X1

## GENERAL INFORMATION


DONNA X2 is a single recessed ceiling spot lighting fixture operating with, 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.

GU10 lampholder included in the package.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in, sand white & sand black.

PC reflector with special UV anti-yellow coating to prevent change of the color.

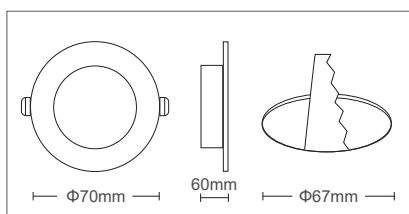

GU10 lampholder included in the package



2012750 - White body

2012740 - Black body



■ Sand black

□ Sand white

## DONNA X2


## CEILING RECESSED SPOT FIXTURES

### GENERAL INFORMATION

PLASY 1 is a single round recessed ceiling spot lighting fixture operating with, 1xLED bulb (not included), PAR16 type, GU10 socket. Is intended for interior use.

GU10 lampholder included in the package. Housing of PC, painted in, sand white & sand black.

A special UV anti-yellow coating is applied to prevent change of the color.

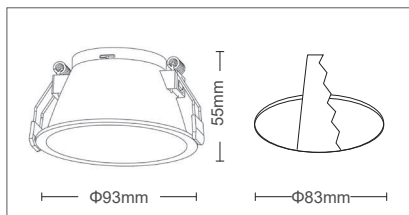

GU10 lampholder included in the package



2026970 - White body

2026980 - Black body



■ Sand black

□ Sand white

## PLASY R


### GENERAL INFORMATION

PLASY 2 is a single square recessed ceiling spot lighting fixture operating with, 1xLED bulb (not included), PAR16 type, GU10 socket. Is intended for interior use.

GU10 lampholder included in the package.

Housing of PC, painted in, sand white & sand black.

A special UV anti-yellow coating is applied to prevent change of the color.

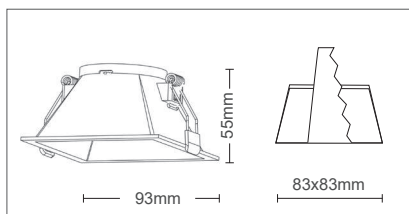

GU10 lampholder included in the package



2026990 - White body

2027000 - Black body



■ Sand black

□ Sand white

## PLASY S

### GENERAL INFORMATION

LUMO W is a single surface wall spot lighting fixture operating with, 1xLED bulb (not included), PAR16 type, GU10 socket.

They are intended for interior use.

Housing of die-cast aluminum, electrostatically painted with sandblasted finishing in, sand white & sand black.

360° horizontal adjustable beam lighting & 90° vertical.

Built in switch on/off.



## LUMO W

■ Sand black

□ Sand white




2101900 - White body

2101910 - Black body

2102250 - Black body with PVC ring



GU10 lampholder included in the package



### GENERAL INFORMATION

LUMO P is a single pendant ceiling spot lighting fixture operating with, 1xLED bulb (not included), PAR16 type, GU10 socket.

Is intended for interior use.


Base for ceiling mounting of aluminium.

Housing of aluminium, electrostatically painted with sandblasted finishing in sand black color.

Cable length of 1000mm which is adjustable .



■ Sand black



GU10 lampholder included in the package



2102300 - Black body with PVC ring

## LUMO P

### GENERAL INFORMATION

ESTELLE is a single ceiling pendant lighting fixture family operating with, 1xLED bulb (not included), E27 socket.

Base for ceiling mounting of aluminium with diameter of 75mm.

Housing of metal sheet, electrostatically painted with sandblasted finishing in various colors.

Fabric cable with length of 1000mm which is adjustable.



## ESTELLE



ESTELLE C



ESTELLE A



ESTELLE D119G



ESTELLE B




ESTELLE D124Z



ESTELLE D124C

|         |                                                                                  |
|---------|----------------------------------------------------------------------------------|
| 7320170 | ESTELLE C - Black body - Gold lampholder - Black fabric cable                    |
| 7320150 | ESTELLE A - Bronze body - Bronze lampholder - Brown fabric cable                 |
| 7320220 | ESTELLE D119G - Roze Gold body - Roze Gold lampholder - Black fabric cable       |
| 7320160 | ESTELLE B - Copper Antique body - Copper Antique lampholder - Brown fabric cable |
| 7320260 | ESTELLE D124Z - Shiny Black body - Black lampholder - Black fabric cable         |
| 7320180 | ESTELLE D124C - Chrome body - Chrome lampholder - Silver fabric cable            |

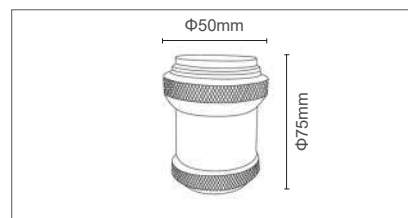

**2024**  
**lighting**  
**electrical**  
**catalog**



# 6

## **BATHROOM & CABINET**


**SURFACE LED LIGHTING FIXTURES**

## GENERAL INFORMATION

OVALINE is a waterproof bathroom lighting fixture, equipped with backlit technology of SANAN LED sources.

Housing of aluminum board & metal sheet electrostatically painted with sandblasted finishing in sand white.

Difusser made by PC.



OVALINE 7



OVALINE 15

## TECHNICAL SPECIFICATIONS

### Power

8W

### Luminous Flux

800LM

### Color Temperature

4000K

CRI 85

Power Factor >0.70

Voltage Range 220-240V

Beam Angle 120°

Protection Class IP44

Working Temperature -20°C/+45°C

Main Material Aluminium & PC



## BATHROOM LED LIGHTS



160°




Nickel mat

## OVALINE

3310670 - Nickel mat 7W 665lm 4000K

3310680 - Nickel mat 14W 1400lm 4000K



120°



Chrome



## ADELLA

ADELLA is a waterproof bathroom lighting fixture, equipped with backlit technology of SANAN LED sources.

Housing of aluminum board & metal sheet painted with sandblasted finishing in chrome.

Difusser made by PC.

It is intended to be installed on the top of the furnitures and not on the mirror or the wall.



2110290 - Chrome

ARIEL is a waterproof bathroom lighting fixture, equipped with backlit technology of SANAN LED sources.


Housing of aluminum board & metal sheet electrostatically painted with sandblasted finishing in silver mat & sand black.

Difusser made by PC.

3 ways of installation: a) on the mirror, b) on the furniture, c) on the wall. For all three different ways of installation the necessary accessories are included in the package.

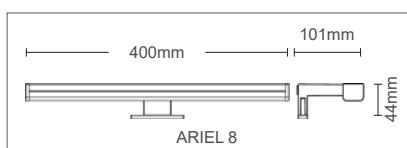

## BATHROOM LED LIGHTS



120°

■ Sand black  
■ Nickel mat



## ARIEL

|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2110250 - Nickel mat  | 8W  | 680lm  | 4000K |
| 2110260 - Black color | 8W  | 680lm  | 4000K |
| 2110270 - Nickel mat  | 12W | 1080lm | 4000K |
| 2110280 - Black color | 12W | 1080lm | 4000K |

## TECHNICAL SPECIFICATIONS

### Power

7W

### Luminous Flux

750LM

### Color Temperature

4000K

### CRI

85

### Power Factor

>0.50

### Voltage Range

220-240V

### Beam Angle

140°

### Protection Class



IP44

### Working Temperature

-20°C/+45°C

### Main Material

Aluminium & PC

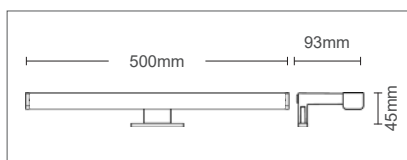

140°

■ Chrome



## CALYPSO

CALYPSO is a waterproof bathroom lighting fixture, equipped with backlit technology of SANAN LED sources.

Housing of aluminum board electrostatically painted with sandblasted finishing in chrome. Difusser made by PC.

It is intended to be installed on the top of the furnitures and not on the mirror or the wall.

2110360 - Chrome



## GENERAL INFORMATION

ARISTA is a waterproof bathroom lighting fixture, equipped with backlit technology of SANAN LED sources.

Housing of aluminum board & metal sheet electrostatically painted with sandblasted finishing in sand white.

Difusser made by PC.

On the side of the fixture there is a switch ON/OFF which gives the option to switch the light ON or OFF without the use of a central switch.



## BATHROOM LED LIGHTS



120°



Sand white



## ARISTA

|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2110320 - White color | 7W  | 700lm  | 4000K |
| 2110330 - White color | 15W | 1500lm | 4000K |



## GENERAL INFORMATION

LORELEI is a waterproof bathroom lighting fixture, equipped with backlit technology of SANAN LED sources.

Housing of aluminum board & metal sheet electrostatically painted with sandblasted finishing in sand white.

Difusser made by PC.

On the side of the fixture there is a switch ON/OFF which gives the option to switch the light ON or OFF without the use of a central switch.



120°



Chrome




## LORELEI



|                  |     |        |       |
|------------------|-----|--------|-------|
| 2110300 - Chrome | 8W  | 800lm  | 4000K |
| 2110310 - Chrome | 15W | 1500lm | 4000K |

### TECHNICAL SPECIFICATIONS

|                     |                |
|---------------------|----------------|
| Power               |                |
| 7W                  |                |
| Luminous Flux       |                |
| 630LM               |                |
| Color Temperature   |                |
| 4000K               |                |
| CRI                 | 80             |
| Power Factor        | >0.50          |
| Voltage Range       | 220-240V       |
| Beam Angle          | 180°           |
| Protection Class    | IP44           |
| Working Temperature | -20°C/+45°C    |
| Main Material       | Aluminium & PC |

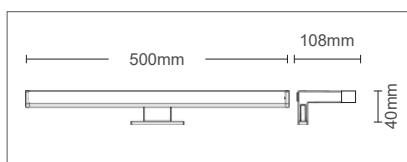

### BATHROOM LED LIGHTS



## CORDELIA

CORDELIA is a waterproof bathroom lighting fixture, equipped with backlit technology of SANAN LED sources.

Housing of aluminum board electrostatically painted with sandblasted finishing in sand white & sand black.

Difusser made by PC.




It is intended to be installed on the top of the furnitures and not on the mirror or the wall.

2110370 - White color

2110380 - Black color

### TECHNICAL SPECIFICATIONS

|                     |                |
|---------------------|----------------|
| Power               |                |
| 6W                  |                |
| Luminous Flux       |                |
| 600LM               |                |
| Color Temperature   |                |
| 4000K               |                |
| CRI                 | 85             |
| Power Factor        | >0.50          |
| Voltage Range       | 220-240V       |
| Beam Angle          | 140°           |
| Protection Class    | IP44           |
| Working Temperature | -20°C/+45°C    |
| Main Material       | Aluminium & PC |

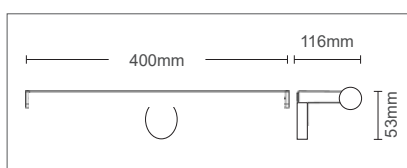

## MENTA

MENTA is a waterproof bathroom lighting fixture, equipped with backlit technology of SANAN LED sources.

Housing of aluminum board & metal sheet electrostatically painted with sandblasted finishing in sand white & chrome.

Difusser made by PC.

3 ways of installation: a) on the mirror, b) on the furniture, c) on the wall. For all three different ways of installation the necessary accessories are included in the package.

2110350 - White color


2110340 - Chrome

## GENERAL INFORMATION

FIT A is a linear cabinet lighting fixture, equipped with backlit technology of SANAN LED sources.

Housing of aluminum board & metal sheet electrostatically painted with sandblasted finishing in white.

Difusser made by PC.



FIT A 18



FIT A 36

## UNDER CABINET LED LIGHTS



## FIT A

|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2313370 - White color | 18W | 1800lm | 4000K |
| 2313380 - White color | 18W | 1836lm | 6400K |
| 2313350 - White color | 36W | 3600lm | 4000K |
| 2313360 - White color | 36W | 3672lm | 6400K |

## GENERAL INFORMATION

LEDLINE P is a linear under cabinet lighting fixture, equipped with backlit technology of SANAN LED sources.


Housing of aluminum board painted white.

Difusser made by PC.


All models are equipped with ON/OFF switch.

A flexible 2pin connector and a plug with cable of 0.8m are included in the package.


Can be interconnected: 30cm & 60cm up to 10pcs with one power supply, 90cm & 120cm up to 6pcs with one power supply.



2313230 / 2313240




2313250 / 2313260



2313270 / 2313280



2313290 / 2313300



## LEDLINE P

|                       |     |        |       |
|-----------------------|-----|--------|-------|
| 2313230 - White color | 4W  | 408lm  | 4000K |
| 2313240 - White color | 4W  | 416lm  | 6000K |
| 2313250 - White color | 8W  | 816lm  | 4000K |
| 2313260 - White color | 8W  | 832lm  | 6000K |
| 2313270 - White color | 12W | 1080lm | 4000K |
| 2313280 - White color | 12W | 1128lm | 6000K |
| 2313290 - White color | 16W | 1536lm | 4000K |
| 2313300 - White color | 16W | 1568lm | 6000K |

# 7

## **LED STRIPS**

**LED STRIPS, TRANSFORMERS,  
CONTROLLERS & PROFILES**



## GENERAL INFORMATION

STRIPILED is a family of double PCB Flexible LED strips (SMD 2835, 60 LED/m), available with monochromatic color temperature, warm white, neutral white or cool white & colorful, red, green, blue, non waterproof (IP20).

Total length of the roll is 5m.

Power supply cable at each side,

For better results and avoid voltage reduction is recommended to connect both edges of the strip to electricity.

Sectionable every 50mm or multiple of this size.

|         |        |         |       |
|---------|--------|---------|-------|
| 5530130 | 3.6W/m | 330lm/m | 3000K |
| 5530135 | 3.6W/m | 330lm/m | 4000K |
| 5530140 | 3.6W/m | 330lm/m | 6000K |

## FLEXIBLE LED STRIPS



## STRIPILED A 3.6W

## GENERAL INFORMATION

STRIPILED PLUS is an advanced double PCB Flexible LED strips (SMD 2835, 120 LED/m), available with monochromatic color temperature, warm white, neutral white or cool white, non waterproof (IP20).

Total length of the roll is 5m.

Power supply cable at each side,

Voltage loss after 5m is no more than 5-8%.

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.

|         |        |         |       |
|---------|--------|---------|-------|
| 5501191 | 9.6W/m | 960lm/m | 3000K |
| 5501196 | 9.6W/m | 960lm/m | 4000K |
| 5501201 | 9.6W/m | 960lm/m | 6000K |



## STRIPILED PLUS 9.6W

## GENERAL INFORMATION

STRIPILED PLUS is an advanced double PCB Flexible LED strips (SMD 2835, 180 LED/m), available with monochromatic color temperature, warm white, neutral white or cool white, non waterproof (IP20).

Total length of the roll is 5m.

Power supply cable at each side,

Voltage loss after 5m is no more than 5-8%.

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.

|         |       |          |       |
|---------|-------|----------|-------|
| 5540420 | 18W/m | 1840lm/m | 3000K |
| 5540430 | 18W/m | 1840lm/m | 4000K |
| 5540440 | 18W/m | 1840lm/m | 6000K |



## STRIPILED PLUS 18W

## GENERAL INFORMATION

STRIPILED PLUS 7.2W is a double PCB Flexible LED strips (SMD 5050, 30 LED/m), available with multichromatic color temperature, RGB, non waterproof (IP20).  
Total length of the roll is 5m.  
Power supply cable at each side,  
3M adhesive tape is used for better bonding results with surfaces.  
Sectionable every 50mm or multiple of this size.

5501510 7.2W/m 390lm/m RGB

## FLEXIBLE LED STRIPS



## STRIPILED PLUS RGB

## GENERAL INFORMATION

STRIPILED PLUS 14.4W is an advanced double PCB Flexible LED strips (SMD 5050, 60 LED/m), available with multichromatic color temperature, RGB, non waterproof (IP20).  
Total length of the roll is 5m.  
Power supply cable at each side,  
3M adhesive tape is used for better bonding results with surfaces.  
Sectionable every 50mm or multiple of this size.

5501670 14.4W/m 600lm/m RGB



## STRIPILED PLUS RGB

## GENERAL INFORMATION

STRIPILED PLUS 4 in 1 is an advanced double PCB Flexible LED strips (SMD 5050 4 in 1, 60 LED/m), available with monochromatic color temperature, neutral white (4000K) & multichromatic color temperature, RGB, non waterproof (IP20).  
Total length of the roll is 5m.  
Power supply cable at each side,  
3M adhesive tape is used for better bonding results with surfaces.  
Sectionable every 50mm or multiple of this size.

5540450 14.4W/m 1470lm/m RGBNW



## STRIPILED PLUS 4IN1 RGBNW

## FLEXIBLE LED STRIPS

### GENERAL INFORMATION

STRIPILED PLUS is an advanced double PCB Flexible LED strips (SMD 2835, 120 LED/m), available with monochromatic color temperature, warm white, neutral white or cool white, non waterproof (IP20).

Total length of the roll is 5m.

Power supply cable at each side,

Voltage loss after 5m is no more than 5-8%.

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.

|         |        |         |       |
|---------|--------|---------|-------|
| 5540460 | 9.6W/m | 960lm/m | 3000K |
| 5540470 | 9.6W/m | 960lm/m | 4000K |
| 5540480 | 9.6W/m | 960lm/m | 6000K |



## STRIPILED PLUS 9.6W

### GENERAL INFORMATION

STRIPILED PLUS is an advanced double PCB Flexible LED strips (SMD 2835, 180 LED/m), available with monochromatic color temperature, warm white, neutral white or cool white, non waterproof (IP20).

Total length of the roll is 5m.

Power supply cable at each side,

Voltage loss after 5m is no more than 5-8%.

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.

|         |       |          |       |
|---------|-------|----------|-------|
| 5540620 | 18W/m | 1840lm/m | 3000K |
| 5540630 | 18W/m | 1840lm/m | 4000K |
| 5540640 | 18W/m | 1840lm/m | 6000K |



## STRIPILED PLUS 18W

### GENERAL INFORMATION

STRIPILED PLUS 14.4W is an advanced double PCB Flexible LED strips (SMD 5050, 60 LED/m), available with multichromatic color temperature, RGB, non waterproof (IP20).

Total length of the roll is 5m.

Power supply cable at each side,

For better results and avoid voltage reduction 3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.

|         |         |         |     |
|---------|---------|---------|-----|
| 5540500 | 14.4W/m | 600lm/m | RGB |
|---------|---------|---------|-----|



## STRIPILED PLUS RGB

## FLEXIBLE LED STRIPS

### GENERAL INFORMATION

STRIPILED PLUS 4 in 1 is an advanced double PCB Flexible LED strips (SMD 5050 4 in 1, 60 LED/m), available with monochromatic color temperature, neutral white (4000K) & multichromatic color temperature, RGB, non waterproof (IP20).

Total length of the roll is 5m.

Power supply cable at each side,

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.



5540490 14.4W/m 1470lm/m RGBNW

## STRIPILED PLUS 4IN1 RGBNW

### GENERAL INFORMATION

STRIPILED PLUS COB is an advanced double PCB Flexible LED strips (SMD 2835, 320 LED/m), available with monochromatic color temperature, warm white, neutral white or cool white, non waterproof (IP20).

Total length of the roll is 5m.

Power supply cable at each side,

Voltage loss after 5m is no more than 5%.

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.



|         |       |          |       |
|---------|-------|----------|-------|
| 5540560 | 12W/m | 1200lm/m | 3000K |
| 5540570 | 12W/m | 1200lm/m | 4000K |
| 5540580 | 12W/m | 1200lm/m | 6000K |

## STRIPILED PLUS COB 12W

### GENERAL INFORMATION

STRIPILED PLUS COB is an advanced double PCB Flexible LED strips (SMD 2835, 320 LED/m), available with monochromatic color temperature, warm white, neutral white or cool white, non waterproof (IP20).


Total length of the roll is 5m.

Power supply cable at each side,

Voltage loss after 5m is no more than 5%.

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.



|         |       |          |       |
|---------|-------|----------|-------|
| 5540590 | 12W/m | 1320lm/m | 3000K |
| 5540600 | 12W/m | 1320lm/m | 4000K |
| 5540610 | 12W/m | 1320lm/m | 6000K |

## STRIPILED PLUS COB 12W

## FLEXIBLE WATERPROOF LED STRIPS

### GENERAL INFORMATION

STRIPILED PLUS is an advanced double PCB Flexible LED strips (SMD 2835, 120 LED/m), available with monochromatic color temperature, warm white, neutral white or cool white, waterproof (IP65) **with silicone spray**.

Total length of the roll is 5m.

Power supply cable at each side,

Voltage loss after 5m is no more than 5-8%.

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.

|         |        |         |       |
|---------|--------|---------|-------|
| 5540650 | 9.6W/m | 960lm/m | 3000K |
| 5540660 | 9.6W/m | 960lm/m | 4000K |
| 5540670 | 9.6W/m | 960lm/m | 6000K |



120°

Silicone spray

## STRIPILED PLUS 9.6W

### GENERAL INFORMATION

STRIPILED PLUS is an advanced double PCB Flexible LED strips (SMD 2835, 180 LED/m), available with monochromatic color temperature, warm white, neutral white or cool white, waterproof (IP65) **with silicone spray**.

Total length of the roll is 5m.

Power supply cable at each side,

Voltage loss after 5m is no more than 5-8%.

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.

|         |       |          |       |
|---------|-------|----------|-------|
| 5540700 | 18W/m | 1840lm/m | 3000K |
| 5540710 | 18W/m | 1840lm/m | 4000K |
| 5540720 | 18W/m | 1840lm/m | 6000K |



120°

Silicone spray

## STRIPILED PLUS 18W

### GENERAL INFORMATION

STRIPILED PLUS 7.2 & 14.4W is an advanced double PCB Flexible LED strips (SMD 5050, 30 & 60 LED/m), available with multichromatic color temperature, RGB, waterproof (IP65) **with silicone spray**.

Total length of the roll is 5m.

Power supply cable at each side,

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.

|         |         |         |     |
|---------|---------|---------|-----|
| 5540680 | 7.2W/m  | 330lm/m | RGB |
| 5540690 | 14.4W/m | 600lm/m | RGB |



120°

Silicone spray

## STRIPILED PLUS RGB

## FLEXIBLE WATERPROOF LED STRIPS

### GENERAL INFORMATION

STRIPIED PLUS is an advanced double PCB Flexible LED strips (SMD 2835, 120 LED/m), available with monochromatic color temperature, warm white, neutral white or cool white, waterproof (IP65) **with silicone spray**.

Total length of the roll is 5m.

Power supply cable at each side,

Voltage loss after 5m is no more than 5-8%.

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.

|         |        |         |       |
|---------|--------|---------|-------|
| 5540760 | 9.6W/m | 960lm/m | 3000K |
| 5540770 | 9.6W/m | 960lm/m | 4000K |
| 5540780 | 9.6W/m | 960lm/m | 6000K |



Silicone spray

## STRIPIED PLUS 9.6W

### GENERAL INFORMATION

STRIPIED PLUS is an advanced double PCB Flexible LED strips (SMD 2835, 180 LED/m), available with monochromatic color temperature, warm white, neutral white or cool white, waterproof (IP65) **with silicone spray**.

Total length of the roll is 5m.

Power supply cable at each side,

Voltage loss after 5m is no more than 5-8%.

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.

|         |       |          |       |
|---------|-------|----------|-------|
| 5540730 | 18W/m | 1840lm/m | 3000K |
| 5540740 | 18W/m | 1840lm/m | 4000K |
| 5540750 | 18W/m | 1840lm/m | 6000K |



Silicone spray

## STRIPIED PLUS 18W

### GENERAL INFORMATION

STRIPIED PLUS 14.4W is an advanced double PCB Flexible LED strips (SMD 5050, 60 LED/m), available with multichromatic color temperature, RGB, waterproof (IP65) with silicone spray.

Total length of the roll is 5m.

Power supply cable at each side,

3M adhesive tape is used for better bonding results with surfaces.

Sectionable every 50mm or multiple of this size.

|         |         |         |     |
|---------|---------|---------|-----|
| 5540790 | 14.4W/m | 600lm/m | RGB |
|---------|---------|---------|-----|



Silicone spray

## STRIPIED PLUS RGB

ZEUS & ODIN are series of 12V constant voltage fanless transformers, for indoor use (IP20). Galvanized steel sheet case, perforated, for cooling by free air convection. Short-circuit and over load protection, auto-recovery if the fault is removed. Screws terminal block, for 0,75 to 2,5 mm<sup>2</sup> diameter of wires, with protective retractable plasti cover.



## ZEUS 25

6240400 25W 2A 12V 104x30x23mm



## ZEUS 36

6240420 36W 3A 12V 120x40x30mm



## ZEUS 60

6240410 60W 5A 12V 158x40x32mm



## ZEUS 100

6240430 100W 8.25A 12V 186x46x35mm



## ODIN 120

6240500 120W 10A 12V 225x53x22mm



## ODIN 150

6240510 150W 12.5A 12V 225x53x22mm



## ZEUS 200 / 250

6240460 200W 16.6A 12V 223x67x42mm  
6240470 250W 21A 12V 223x67x42mm



## ZEUS 360

6240480 360W 30A 12V 225x77x42mm



ZEUS is a series of 24V constant voltage fanless transformers, for indoor use (IP20). Galvanized steel sheet case, perforated, for cooling by free air convection. Short-circuit and over load protection, auto-recovery if the fault is removed. Screws terminal block, for 0,75 to 2,5 mm<sup>2</sup> diameter of wires, with protective retractable plasti cover.



## ZEUS 36

6240610 36W 1.5A 24V 120x41x32mm



## ZEUS 60

6240620 60W 2.5A 24V 158x40x32mm



## ZEUS 100

6240630 100W 4.15A 24V 186x46x35mm



## ZEUS 150

6240650 150W 6.25A 24V 200x59x45mm



## ZEUS 200

6240640 200W 8.35A 24V 225x68x41mm



#### GENERAL INFORMATION

IZY is a series of 12V constant voltage fanless transformers, for indoor & outdoor use (IP44). Plastic housing. Short-circuit and over load protection, auto-recovery if the fault is removed.



IZY 24

6240700 24W 2A 12V 95x50x69mm



#### GENERAL INFORMATION

IZY 2 is a series of 24V constant voltage fanless transformers, for indoor & outdoor use (IP44). Plastic housing. Short-circuit and over load protection, auto-recovery if the fault is removed.



IZY 2 24

6240701 24W 1A 24V 95x50x69mm



IZY 36

6240710 36W 3A 12V 126x56x33mm



IZY 2 36

6240711 36W 1.5A 24V 126x56x33mm



IZY 60

6240720 60W 5A 12V 126x56x33mm



IZY 2 60

6240721 60W 2.5A 24V 126x56x33mm



#### GENERAL INFORMATION

POSEIDON is a series of 12V constant voltage fanless transformers, for outdoor use against dust and water (IP67). Metallic housing. Short-circuit and over load protection, auto-recovery if the fault is removed.



### POSEIDON 36

6240580 36W 3A 12V 28x38x247mm



#### GENERAL INFORMATION

POSEIDON 2 is a series of 24V constant voltage fanless transformers, for outdoor use against dust and water (IP67). Metallic housing. Short-circuit and over load protection, auto-recovery if the fault is removed.



### POSEIDON 2 36

6240800 36W 1.5A 24V 28x38x247mm



### POSEIDON 60

6240560 60W 5A 12V 30x50x123mm



### POSEIDON 2 60

6240810 60W 2.5A 24V 30x50x123mm



### POSEIDON 100

6240570 100W 8.1A 12V 37x50x200mm




### POSEIDON 2 100

6240820 100W 4.1A 24V 37x50x200mm

### GENERAL INFORMATION

MAESTRO is a family of led strip controllers. MAESTRO 4 is a 3 channel touch controller with RF communication with the remote control. The remote control operates with high precision. Maximum distance 20m in open spaces. Is used it to control RGB LED strips by adjusting its brightness and color. The maximum load is 6A, 72W on 12V & 144W on 24V. Operating with batteries (are not including).



6210130 6A MAX 12-24V RF

## MAESTRO 4 RGB

### GENERAL INFORMATION

MAESTRO is a family of led strip controllers. MAESTRO 3 is a 3 channel controller with 20 preset keys & RF communication with the remote control. The remote control operates with high precision. Maximum distance 20m in open spaces. Is used it to control RGB LED strips by adjusting its brightness and color. The maximum load is 6A, 72W on 12V & 144W on 24V. Operating with batteries (are not including).



6210120 6A MAX 12-24V RF

## MAESTRO 3 RGB

### GENERAL INFORMATION

MAESTRO is a family of led strip controllers. MAESTRO 2 is a 4 channel controller with 40 preset keys & RF communication with the remote control. The remote control operates with high precision. Maximum distance 20m in open spaces. Is used it to control **RGBW** LED strips by adjusting its brightness and color. The maximum load is 6A, 72W on 12V & 144W on 24V. Operating with batteries (are not including).




6210110 6A MAX 12-24V RF

## MAESTRO 2 RGBW

### GENERAL INFORMATION

MAESTRO is a family of led strip controllers. MAESTRO 1 is a 3 channel controller with 24 preset keys & IR communication with the remote control. The remote control operates with high precision. Maximum distance 5m in open spaces. Is used it to control RGB LED strips by adjusting its brightness and color. The maximum load is 6A, 72W on 12V & 144W on 24V. Operating with batteries (are not including).



6210100 6A MAX 12-24V IR

## MAESTRO 1 RGB

### GENERAL INFORMATION

AMPLI RGB is an amplifier for led strips. Used for DC12V 4 pin 5050 RGB LED strips & DC24V 4 pin 5050 RGB LED strips. The amplifier is common anode. This is normally used for RGB LED lights, but also you can use it for monochromatic/simple color LED (connecting each color on inch channel). Multiple Amplifiers can be used in a daisy chain. The maximum load is 12A, 144W on 12V & 288W on 24V.



6210080 12A MAX 12-24V

## AMPLI RGB

### GENERAL INFORMATION

DIMMONO is a 1 channel controller with IR communication with the remote control. Mainly used to adjust the brightness of single color LED Strips or MR16 led spots. Compatible with DC 12-24V Single Color LED light Strip (RGB led strips not available). The maximum load is 8A, 96W on 12V & 192W on 24V. Operating with batteries (including).




6210070 8A MAX 12-24V RF



## DIMMONO

### GENERAL INFORMATION

PROFLEX is a family of aluminium profiles used for led strips. Made of anodized aluminium with polycarbonate opal diffuser with high permeability. Including 2 end caps.




9930030 22.5x16.5x7x2000mm

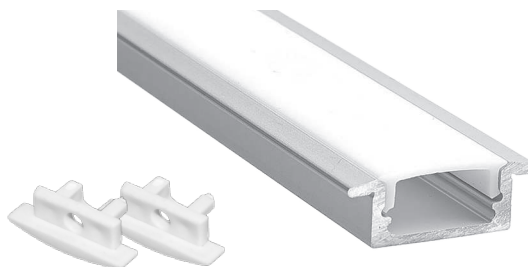


## PROFLEX R F02

### GENERAL INFORMATION

PROFLEX is a family of aluminium profiles used for led strips. Made of anodized aluminium with polycarbonate opal diffuser with high permeability. Including 2 end caps and 4 clips.

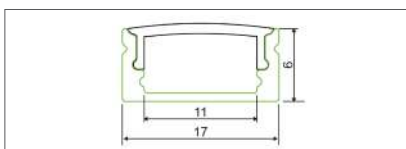


9930010 17x6x2000mm





## PROFLEX S F01

### GENERAL INFORMATION

PROFLEX is a family of aluminium profiles used for led strips. Made of anodized aluminium with polycarbonate opal diffuser with high permeability. Including 2 end caps and 4 clips.

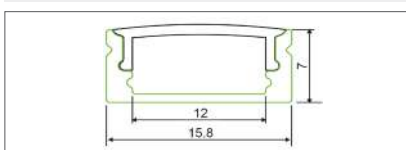


9930020 15.8x7x2000mm

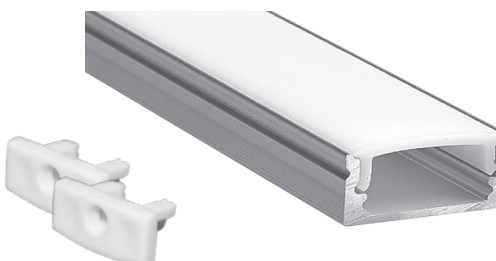



## PROFLEX X F02

### GENERAL INFORMATION

PROFLEX is a family of aluminium profiles used for led strips. Made of anodized aluminium with polycarbonate opal diffuser with high permeability. Including 2 end caps and 4 clips.

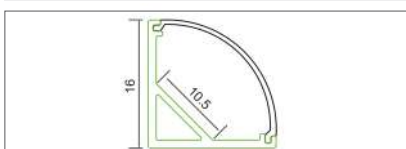


9930040 16x16x2000mm

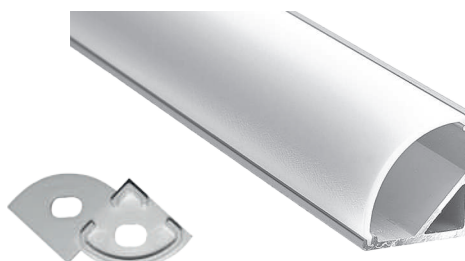


## PROFLEX XS F41

### GENERAL INFORMATION

PROFLEX TRS is a family of trimless aluminium profiles used for led strips. Made of anodized aluminium with polycarbonate opal difusser with high permeability.




9930031 71.5x35x27x2000mm

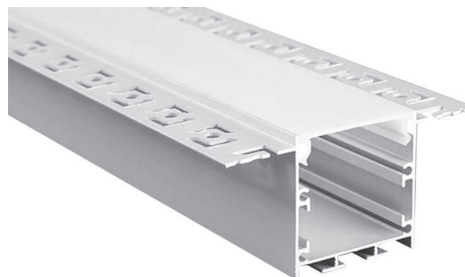


## PROFLEX TRS 01

### GENERAL INFORMATION

PROFLEX TRS is a family of trimless aluminium profiles used for led strips. Made of anodized aluminium with polycarbonate opal difusser with high permeability. Including 2 end caps.



9930032 56x15x12,5x2000mm

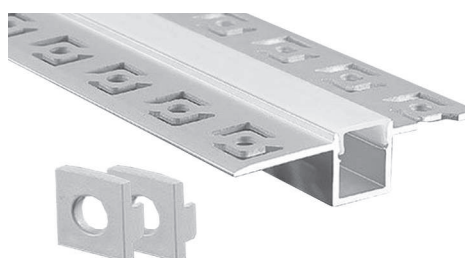

## PROFLEX TRS 02

### GENERAL INFORMATION

CONNELES are straight connectors for the most common led strips in the market. Available for Monochrome 2835, 5050 with pins inside and for RGB with 4 pins inside.



5520160



5520170



5520180



|         |      |            |       |
|---------|------|------------|-------|
| 5520160 | 2835 | MONOCHROME | 10PCS |
| 5520170 | 5050 | MONOCHROME | 10PCS |
| 5520180 | 5050 | RGB        | 10PCS |

## CONNELES