



UST03 Lotus

Lotus offers a perfect blend of style and functionality, making it an ideal choice for architectural designers.



120 lm/W



IP66



IK08



1-10V



10KV



DALI 2.0

A Modern Display Inspired by Nature

Lotus is a post top LED light that recognizes the crucial role of lighting in shaping a city's aesthetics and the trend of urban differentiation. Its design takes inspiration from the iconic Guest-Greeting Pine trees that grow vertically out of the rocks in China's Huangshan mountains.

Through continuous optimization, the Lotus has evolved into a modern fixture that not only enhances visual appeal but also offers excellent performance, making it a perfect choice for urban designers seeking to elevate the visual appeal of their projects.



Reliable Design

1. Aesthetic appeal with a smooth curvature effectively prevents the accumulation of dust and leaves, creating a tidy impression.




2. Tempered glass cover with optic lens for durable protection.



3. Driver is installed into the pole for easier maintenance.



4. Available for 60/76mm pole diameters suit for various projects.

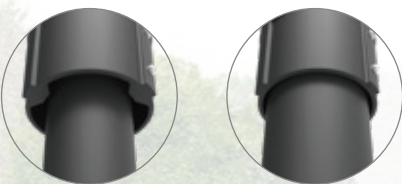


60mm / 76mm




Versatile Professional Optics for Diverse Applications

With the UST03 Lotus LED Post Top light, you can meet the diverse lighting needs of various projects with different light distributions.

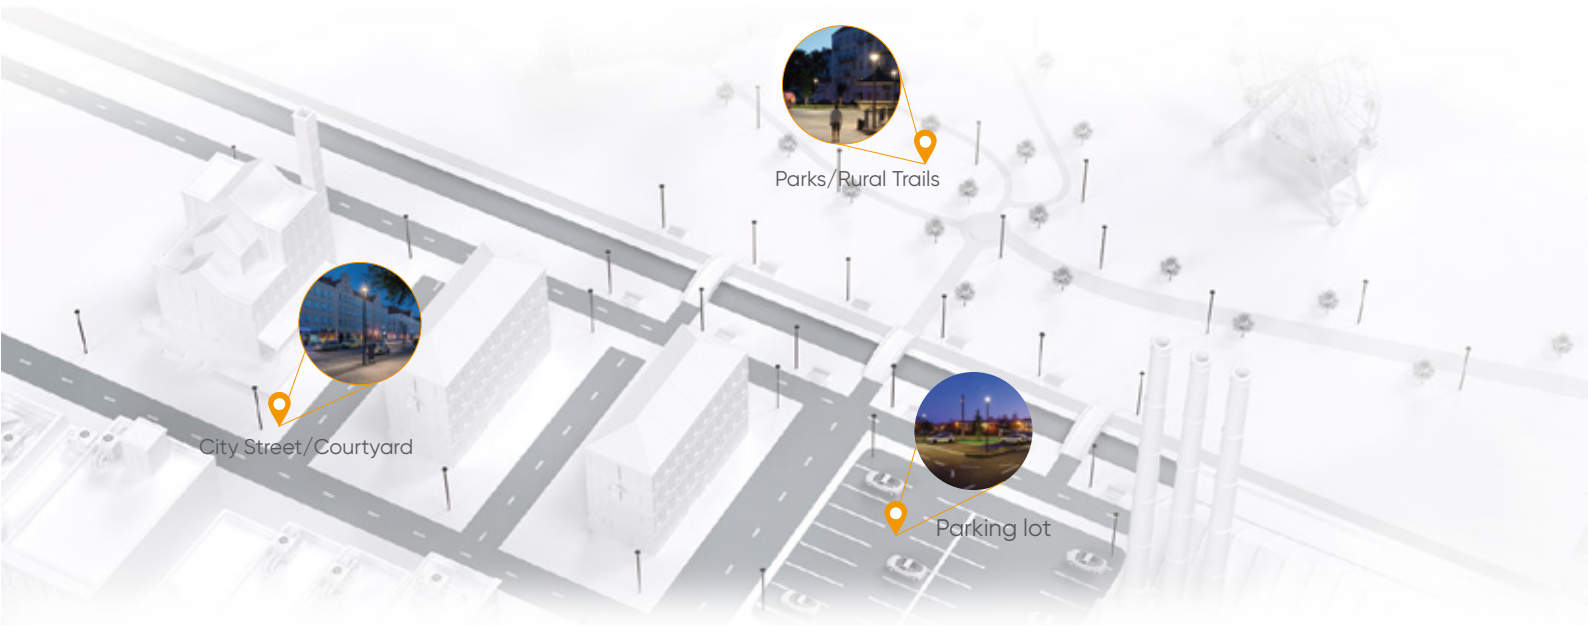

Asymmetric Lighting Designs

Our asymmetric optic lenses are precisely engineered to enhance the lighting ambiance of streetscapes, gardens with pathways, and other outdoor environments, providing optimal illumination and visual comfort.

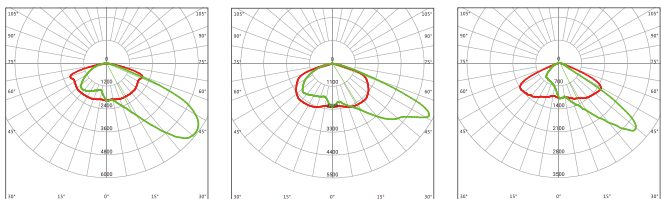



R01203

R01204

R01207

Symmetrical Lighting Designs


Our symmetrical lighting designs are ideal for open areas, such as parking lots, campuses, gardens, and gathering areas, providing uniform illumination and enhanced visibility.

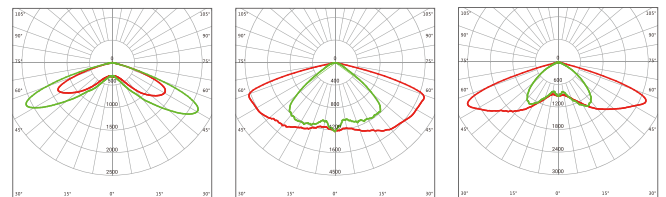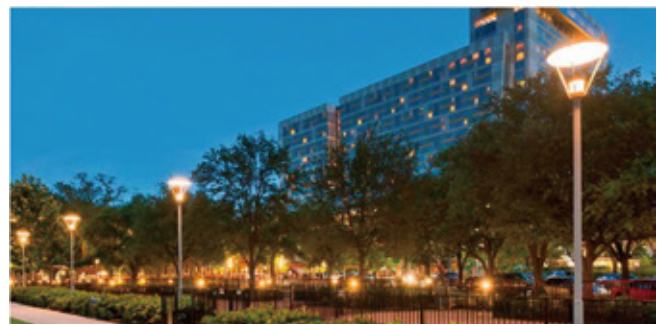

R01201

R01205

R01208



R01209



UST03 Product Range

Model No	UST03-040	UST03-060	UST03-075	UST03-100
Power Consumption ($\pm 5\%$)	40W($\pm 10\%$)	60W	75W	100W
Input Voltage	100-240VAC /100-277VAC,50 / 60 Hz			
Control	1-10V/DALI			
Luminous Flux($\pm 10\%$)	4800lm	7200LM	9000lm	12000lm
Efficacy (4000K Ra70)	120lm/W			
Beam Angle	R01201/R01203/R01204/R01205/R01207/R01208/R01209			
CCT & CRI	4000K (5000K optional)/ Ra70 (Ra80 optional)			
Protection	IP66, IK08			
Operating Temp	-30°C to + 50°C			
Warranty	5 years			

Applications



Residential Area



Public Square



Park



Private Garden



Walkway

Accessories



Post top mount adaptor