

LIPAL
LIGHTING

Infree system quick-plug



LIPAL LIGHTING

About

Infree is derived from infinite and free connections, which bring unlimited applications, and we have everything you need at Infree.

Flood tubes and grille tubes, are available without rim, wide rim, and thin rim variants; tube-shaped fixtures with swivel functions for uplighting, downlighting, wall washers, and spotlight for accent lighting; and an infinite variety of daring styles to explore.

The new snap-in construction allows the entire system to be flexibly combined to create any shape you want: horizontal and vertical connections, multi-angle extensions, cubes, hexagons, and an infinite number of other shapes, allowing Infree to be used in a variety of spaces including high-end hospitality, restaurants, retail, corporate offices, and residential spaces.

Customize your unique application with Infree right now!















消火栓
FIRE HYDRANT
火警
警: 119


中山市王港金属制品有限公司









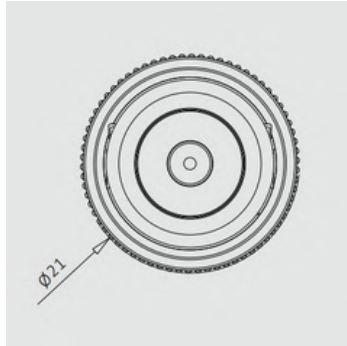

$\varnothing 21$ mm tube



Snap-in easy install
0-360° rotatable







Various mounting
accessories
available




Wide and narrow
covers available

Powerful DIY system, free combination of various installation methods

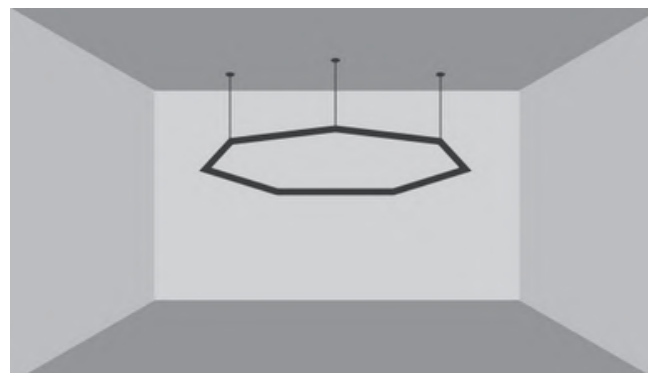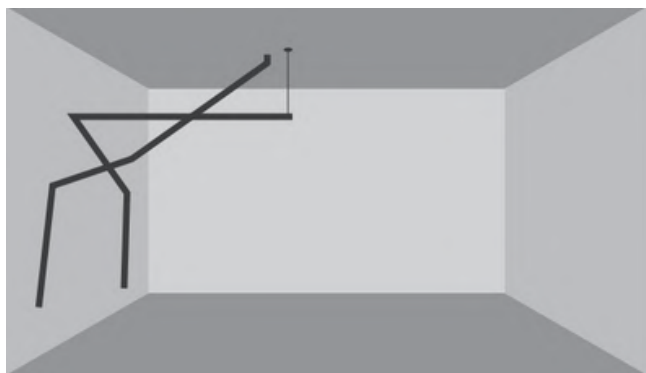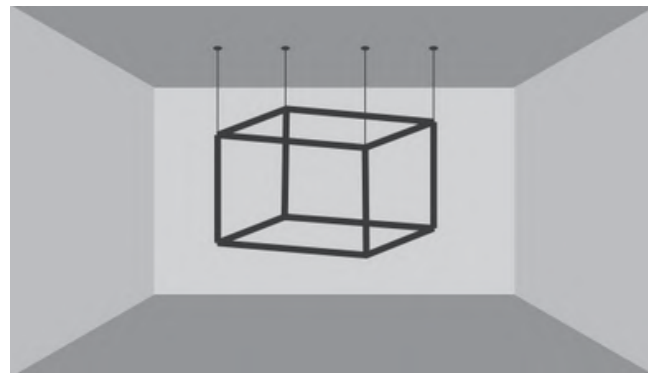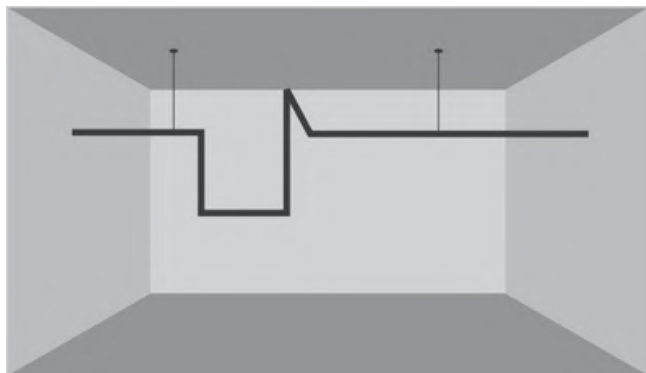


Infree Tube

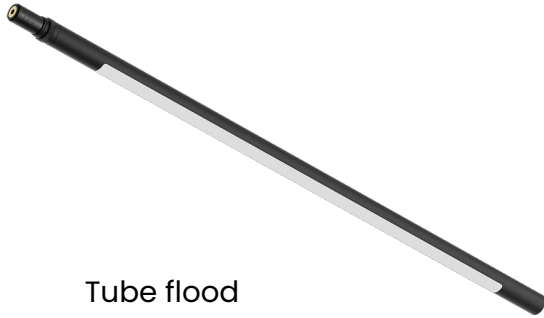


Tube flood


LED Chip : SMD
 Driver : 24V/48V external
 Body Material : 6063 Aluminum / Acrylic / ABS
 Reflector : Polycarbonate
 Input Voltage : 24V/48V(dim)
 Installation : Suspension Mounting
 Surface Color : Sand black/Sand white/Customized

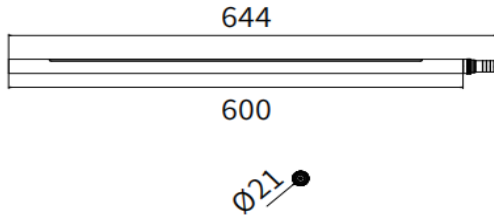

INFREE-TF60

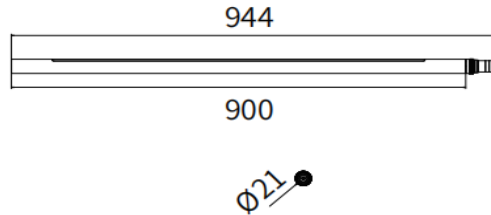

INFREE-TF90

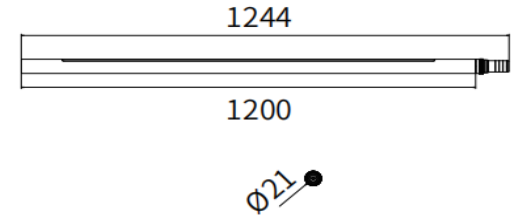


INFREE-TF120

PRODUCT PARAMETERS




Code	Power	Lumen	Beam Angle	CRI	CCT	Net Weight
INFREE-TF60	9-15W					/
INFREE-TF90	13-22W	/	120°	Ra80/Ra90	27K/30K/40K/50K/60K	/
INFREE-TF120	18-30W					/

Infree Tube

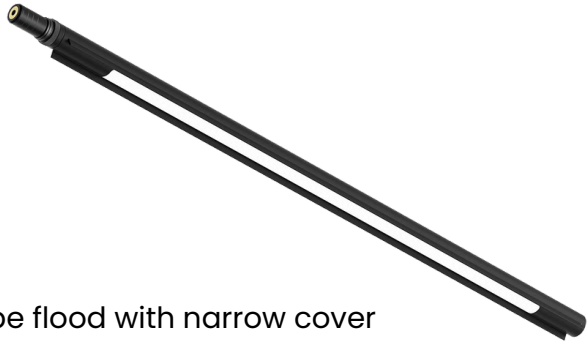

Tube flood with narrow cover


LED Chip : SMD
 Driver : 24V/48V external
 Body Material : 6063 Aluminum / Acrylic / ABS
 Reflector : Polycarbonate
 Input Voltage : 24V/48V(dim)
 Installation : Suspension Mounting
 Surface Color : Sand black/Sand white/Customized

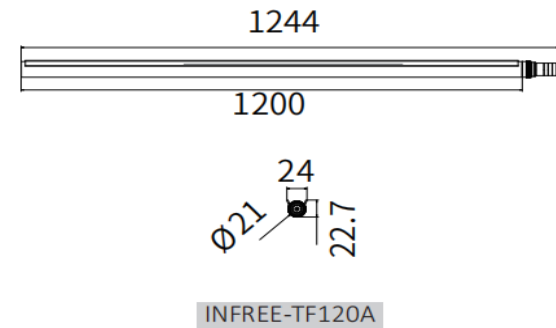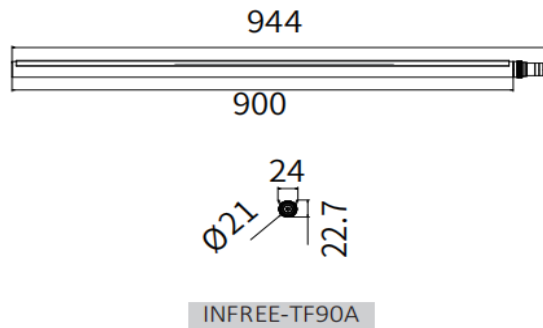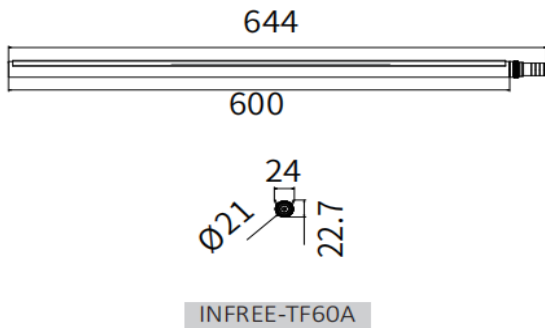

PRODUCT PARAMETERS

Code	Power	Lumen	Beam Angle	CRI	CCT	Net Weight
INFREE-TF60A	9-15W					/
INFREE-TF90A	13-22W	/	120°	Ra80/Ra90	27K/30K/40K/50K/60K	/
INFREE-TF120A	18-30W					/

Infree Tube

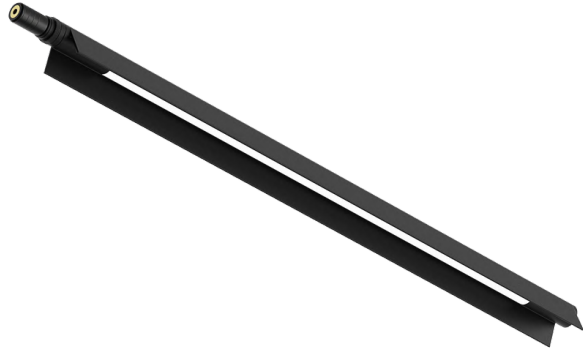

Tube flood with wide cover

LED Chip : SMD

Driver : 24V/48V external


Body Material : 6063 Aluminum / Acrylic / ABS

Reflector : Polycarbonate

Input Voltage : 24V/48V(dim)

Installation : Suspension Mounting

Surface Color : Sand black/Sand white/Customized

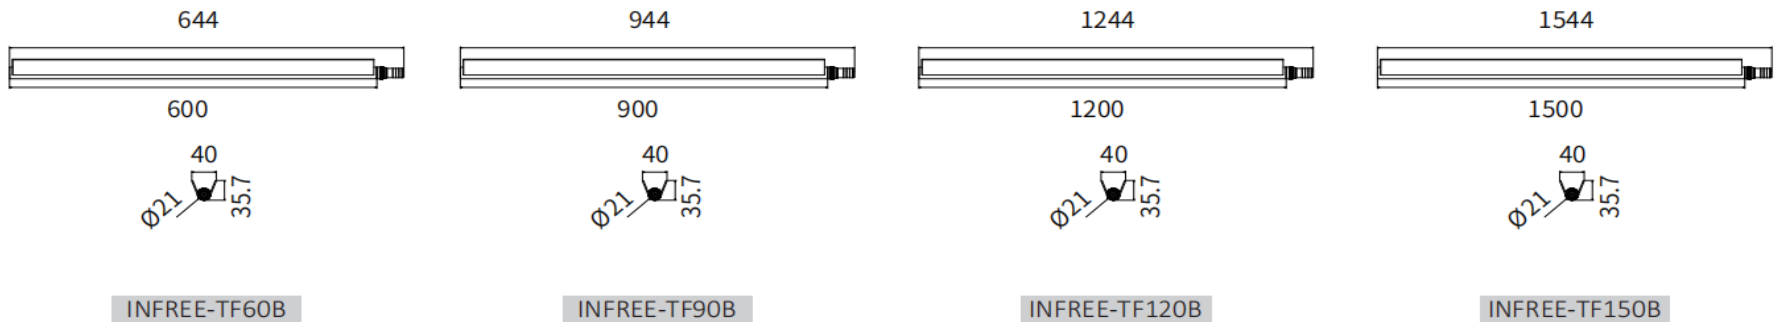

PRODUCT PARAMETERS

Code	Power	Lumen	Beam Angle	CRI	CCT	Net Weight
INFREE-TF60B	6W					/
INFREE-TF90B	10W					/
INFREE-TF120B	15W	/	120°	Ra80/Ra90	27K/30K/40K/50K/60K	/
INFREE-TF150B	22-37W					/

Infree Tube



Tube grille

LED Chip : SMD

Driver : 24V/48V external



Body Material : 6063 Aluminum / ABS

Reflector : Polycarbonate

Input Voltage : 24V/48V(dim)

Installation : Suspension Mounting

Surface Color : Sand black/Sand white/Customized

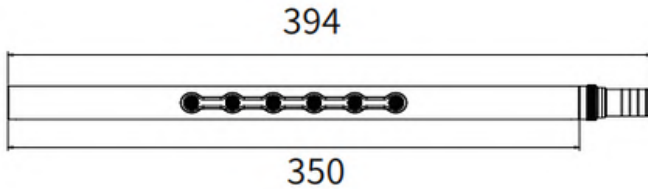

PRODUCT PARAMETERS


Code	Power	Lumen	Beam Angle	CRI	CCT	Net Weight
INFREE-TG30	6W	/	12°/24°/36°	Ra80/Ra90	27K/30K/40K/50K/60K	/

Infree Tube



Tube grille

LED Chip : SMD
 Driver : 24V/48V external
 Body Material : 6063 Aluminum / ABS
 Reflector : Polycarbonate
 Input Voltage : 24V/48V(dim)
 Installation : Suspension Mounting
 Surface Color : Sand black/Sand white/Customized

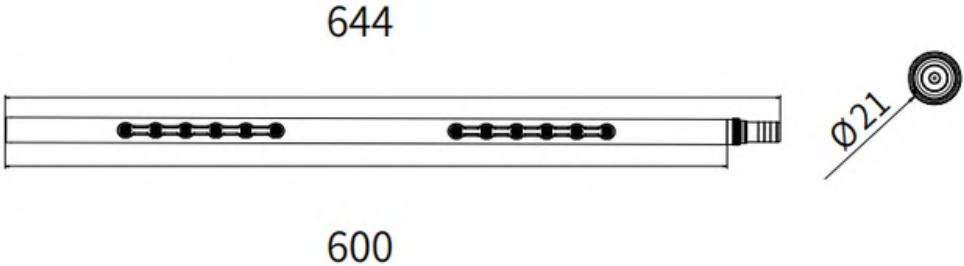

PRODUCT PARAMETERS

Code	Power	Lumen	Beam Angle	CRI	CCT	Net Weight
INFREE-TG60	12W	/	12°/24°/36°	Ra80/Ra90	27K/30K/40K/50K/60K	/

Infree Tube



Tube grille with narrow cover

LED Chip : SMD

Driver : 24V/48V external



Body Material : 6063 Aluminum / ABS

Reflector : Polycarbonate

Input Voltage : 24V/48V(dim)

Installation : Suspension Mounting

Surface Color : Sand black/Sand white/Customized

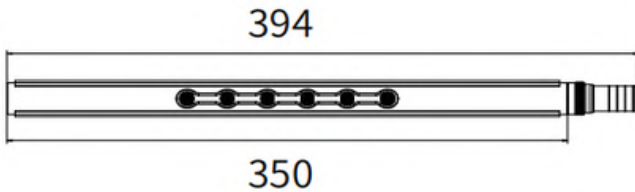

PRODUCT PARAMETERS



Code	Power	Lumen	Beam Angle	CRI	CCT	Net Weight
INFREE-TG30A	6W	/	12°/24°/36°	Ra80/Ra90	27K/30K/40K/50K/60K	/

Infree Tube



Tube grille with narrow cover

LED Chip : SMD
Driver : 24V/48V external
Body Material : 6063 Aluminum / ABS
Reflector : Polycarbonate
Input Voltage : 24V/48V(dim)
Installation : Suspension Mounting
Surface Color : Sand black/Sand white/Customized

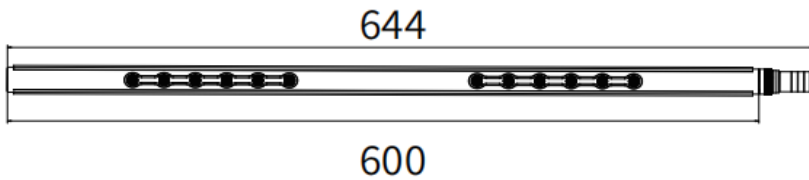

PRODUCT PARAMETERS


Code	Power	Lumen	Beam Angle	CRI	CCT	Net Weight
INFREE-TG60A	12W	/	12°/24°/36°	Ra80/Ra90	27K/30K/40K/50K/60K	/

Infree Spot




Spotlight

LED Chip : SMD
 Driver : 24V/48V external
 Body Material : 6063 Aluminum / ABS
 Reflector : Polycarbonate
 Input Voltage : 24V/48V(dim)
 Installation : Suspension Mounting
 Surface Color : Sand black/Sand white/Customized

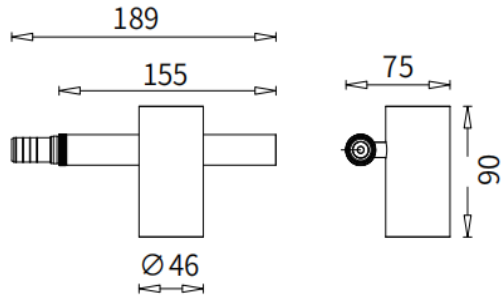


INFREE-S45

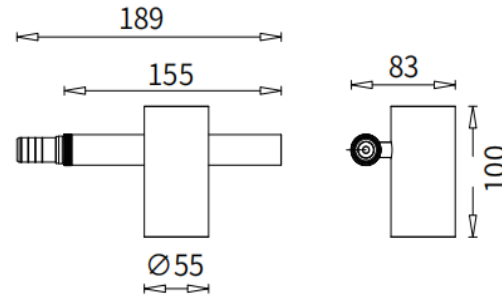

INFREE-S55

PRODUCT PARAMETERS

Code	Power	Lumen	Beam Angle	CRI	CCT	Net Weight
INFREES45	5-10W	/	12°/24°/36°	Ra80/Ra90	27K/30K/40K/50K/60K	/
INFREE-S55	8-15W	/				/

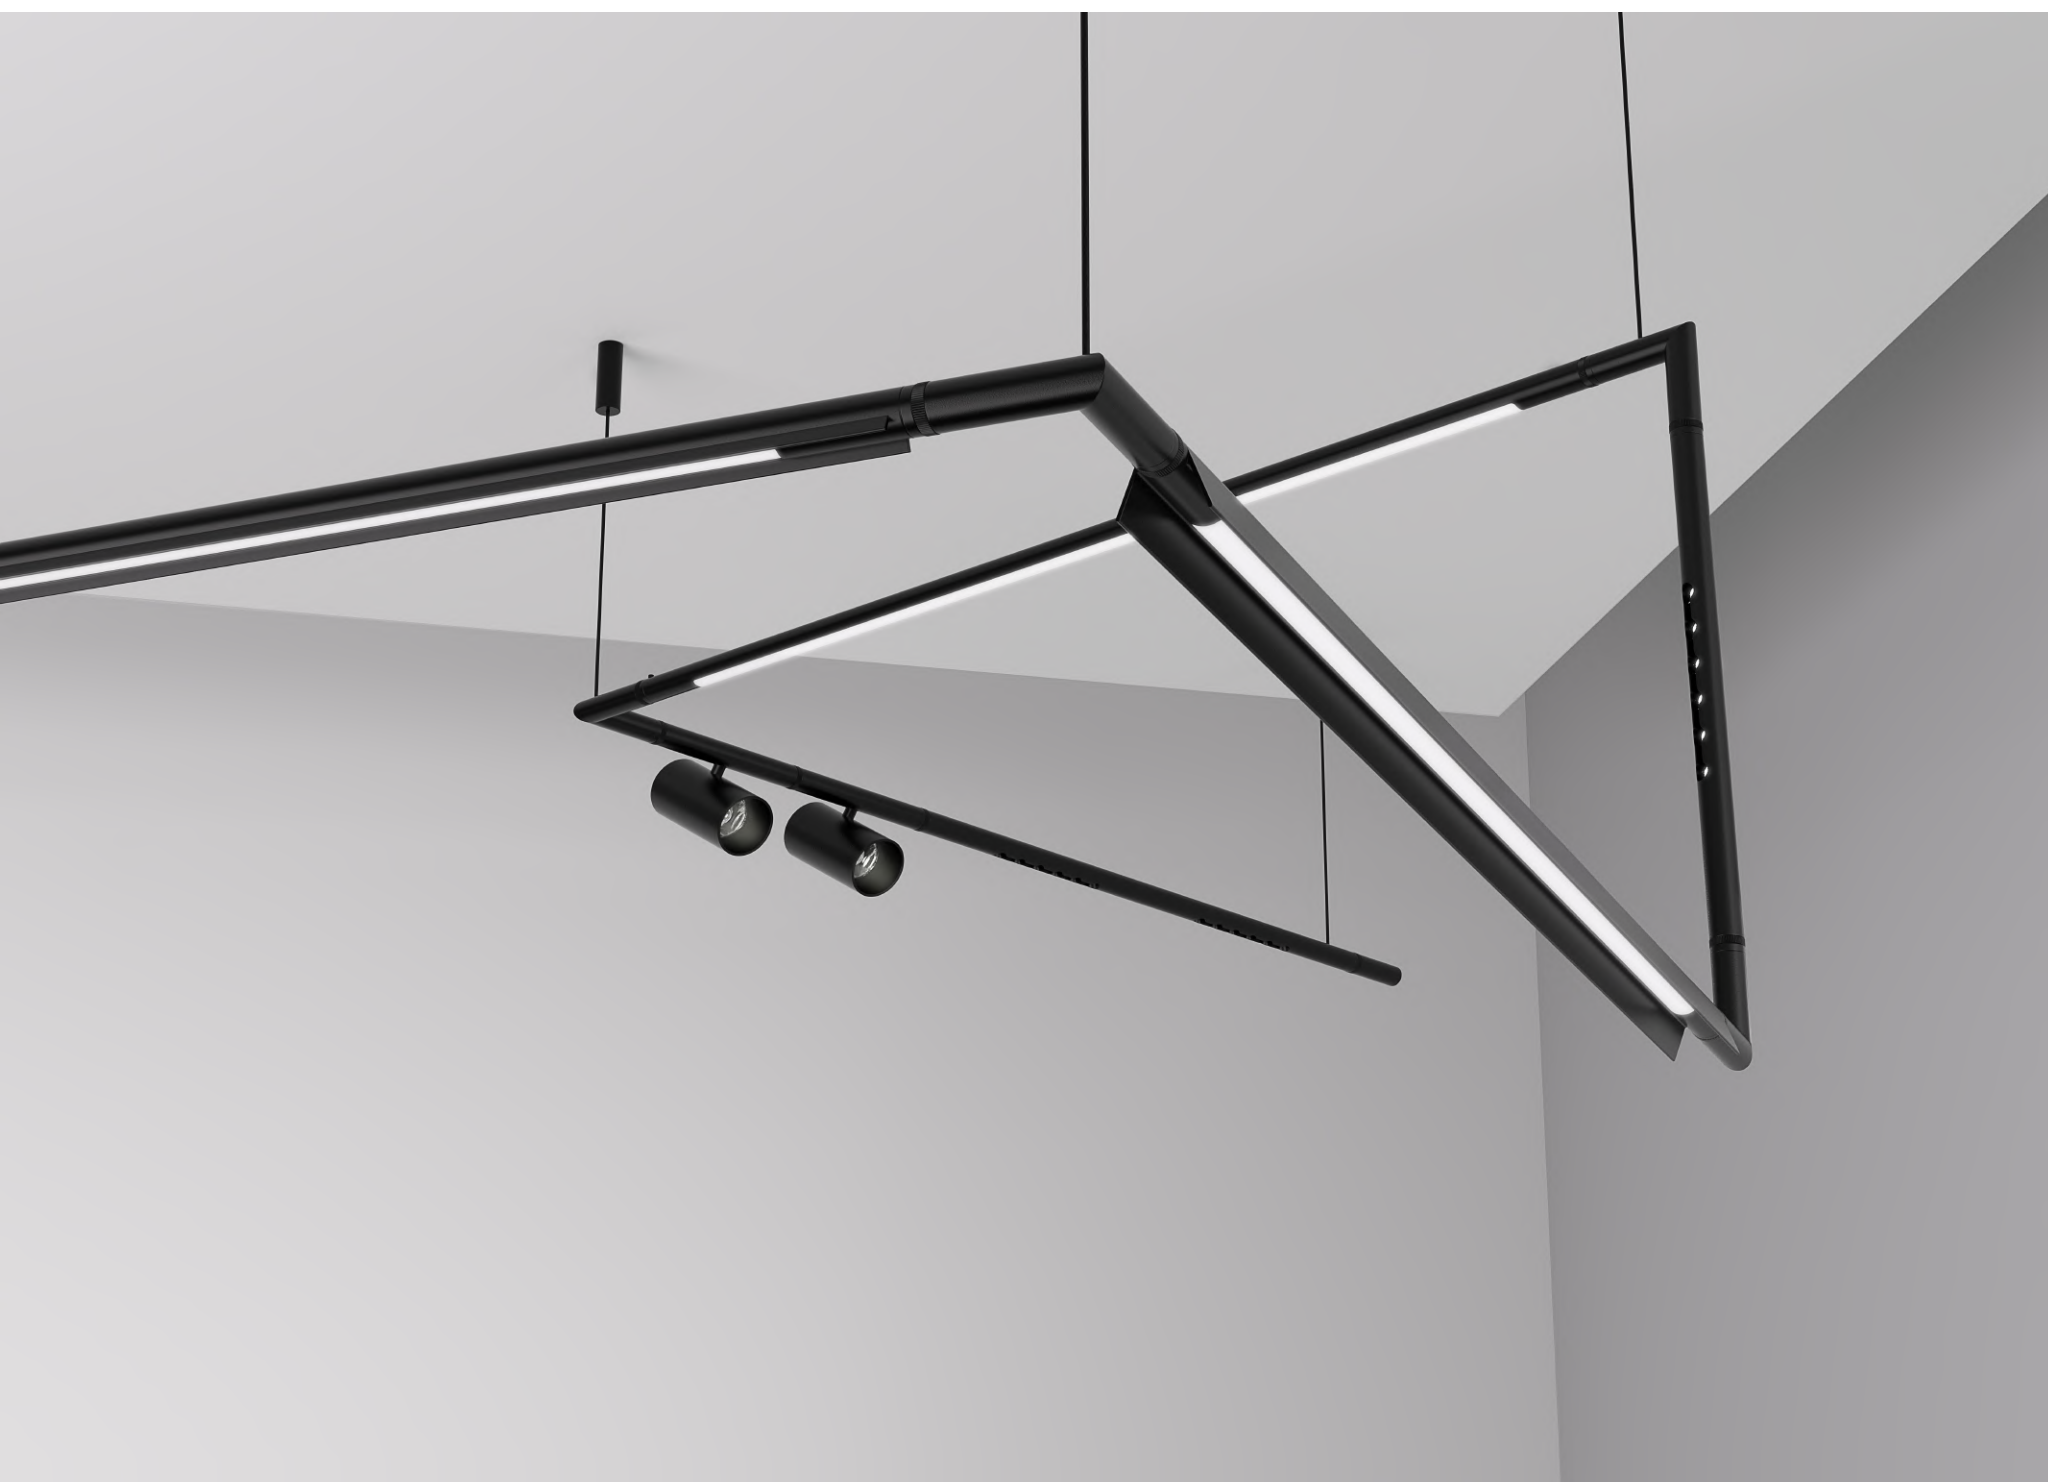



Glass bulb

Infree bulb

LED Chip : SMD

Driver : 24V/48V external


Body Material : 6063 Aluminum / ABS

Reflector : Polycarbonate

Input Voltage : 24V/48V(dim)

Installation : Suspension Mounting


Surface Color : Sand black/Sand white/Customized

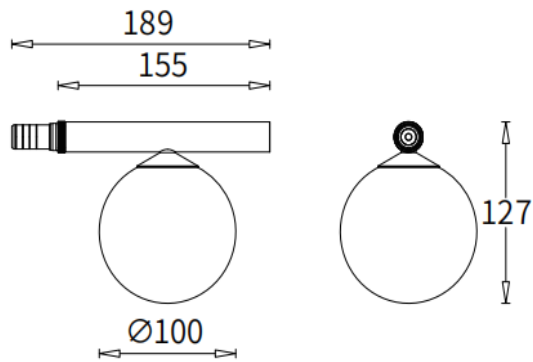


PRODUCT PARAMETERS

Code	Power	Lumen	Beam Angle	CRI	CCT	Net Weight
INFREE-G100	5W	/	360°	Ra80/Ra90	27K/30K/40K/50K/60K	/

Infree Bulb

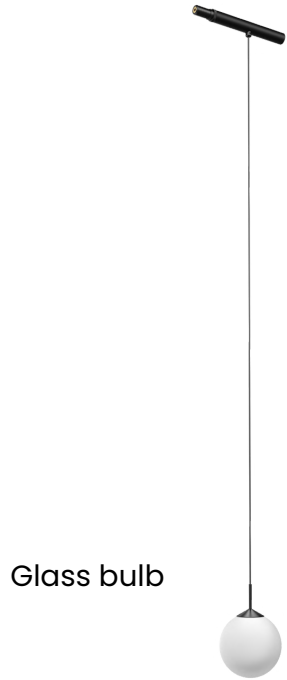


LED Chip : SMD
Driver : 24V/48V external
Body Material : 6063 Aluminum / ABS
Reflector : Polycarbonate
Input Voltage : 24V/48V(dim)
Installation : Suspension Mounting
Surface Color : Sand black/Sand white/Customized

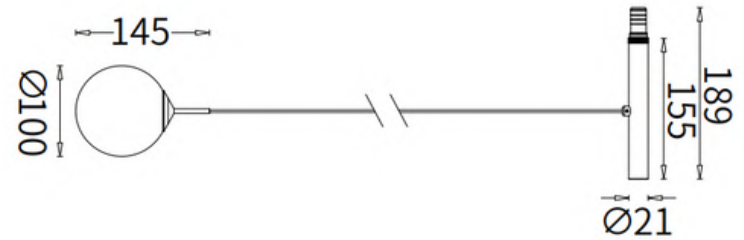


PRODUCT PARAMETERS

Code	Power	Lumen	Beam Angle	CRI	CCT	Net Weight
INFREE-G100P	5W	/	360°	Ra80/Ra90	27K/30K/40K/50K/60K	/


ACCESSORIES

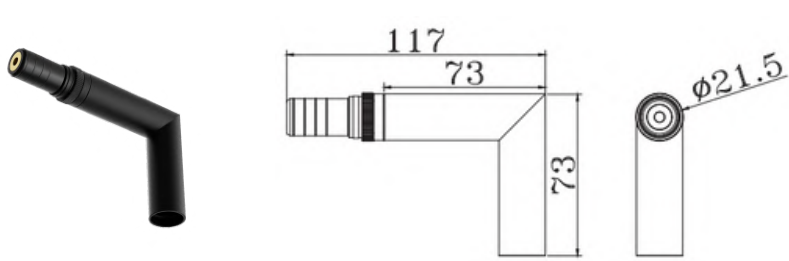


INFREE L connector / Infree-LC

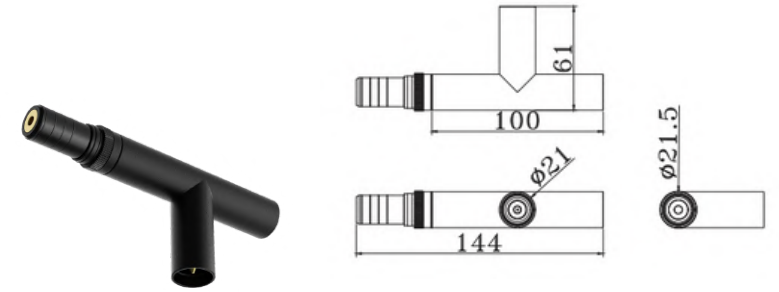


INFREE T connector / Infree-TC

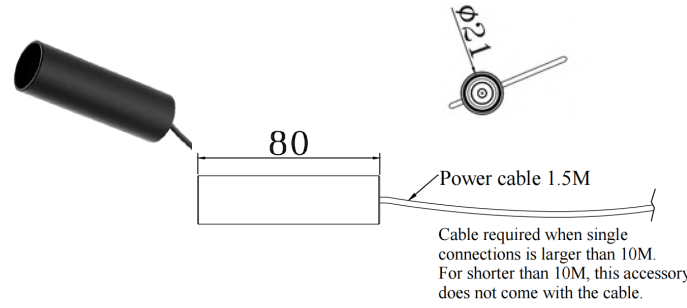

INFREE Male plug / Infree-MP

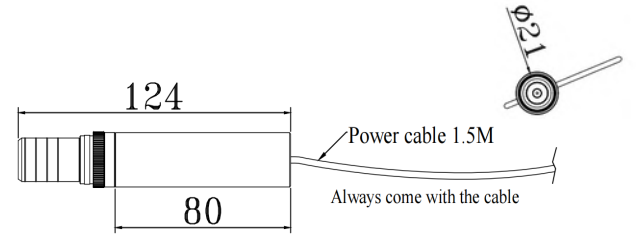

INFREE Female plug / Infree-FP

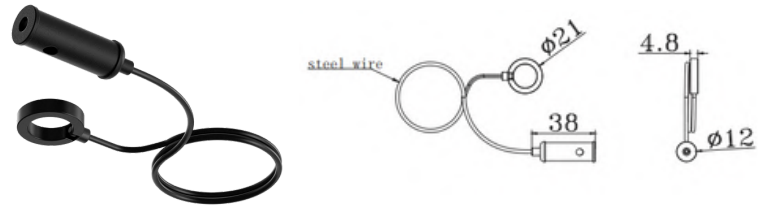

INFREE Suspension kit / Infree-SK1



INFREE 2/3/4 way connector



INFREE Driver box/ Infree-DB

coming next



Get more information now

By checking the link provided below, you can obtain specifics about any Infree system product! Including parameters, dimensions, test results, etc.

<https://www.lipal.cn/product-category/lighting-systems/infree-24v-quick-plug/>

