


LF.FX - TS




MODEL NO.	LFS-97.001	LFS-97.002	LFS-97.003
SIZE (mm)	Ø49 x H135	Ø68 x H170	Ø85 x H180
TYPE OF LED	LED COB	LED COB	LED COB
INPUT POWER	MAX 15W	MAX 25W	MAX 35W
COLOR RENDERING INDEX	90 Ra	90 Ra	90 Ra
COLOR TEMPERATURE	3000K / 4000K / 5000K	3000K / 4000K / 5000K	3000K / 4000K / 5000K
LUMINOUS FLUX	24°: 1,252 lm 32°: 1,308 lm 50°: 1,123 lm	19°: 1,596 lm 24°: 1,923 lm 35°: 2,263 lm 60°: 2,448 lm	19°: 3,183 lm 30°: 3,374 lm 42°: 3,356 lm 54°: 3,255 lm
BEAM ANGLE	24° / 32° / 50°	19° / 24° / 35° / 60°	19° / 30° / 42° / 54°
INPUT VOLTAGE	DC 36V	DC 36V	DC 36V
APPLICATION DRIVER	CONSTANT CURRENT TYPE	CONSTANT CURRENT TYPE	CONSTANT CURRENT TYPE
OPERATING TEMPERATURE RANGE	-20 to +40°C	-20 to +40°C	-20 to +40°C
MATERIAL	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM

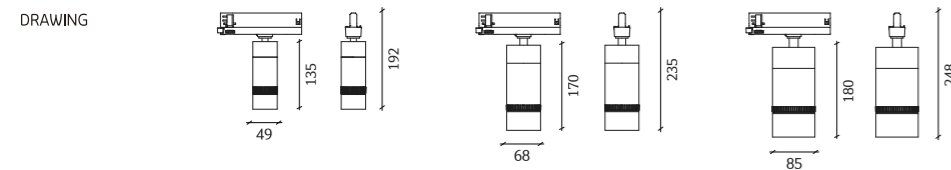

LF.FX - TI




MODEL NO.	LFS-97.004	LFS-97.005	LFS-97.006
SIZE (mm)	Ø49 x H137	Ø68 x 172	Ø85 x H182

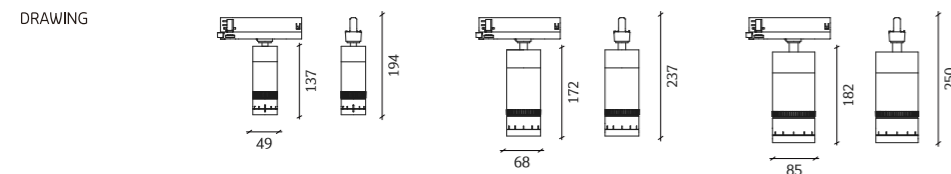


Other specifications are the same as the basic product.

LIGHT DISTRIBUTION CURVE

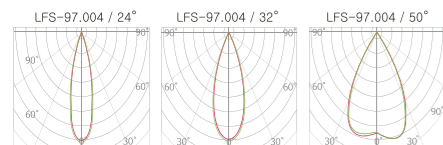

ACCESSORIES



NEW PRODUCT SERIES 2026



LFLIGHTING
www.lflighting.co.kr




LF.FX

MODELLE SYSTEM


LF.FX - CORE




MODEL NO.	LFF-00.01	LFF-00.02	LFF-00.03
SIZE (mm)	Ø49 x H95	Ø68 x H120	Ø85 x H120
TYPE OF LED	LED COB	LED COB	LED COB
INPUT POWER	MAX 15W	MAX 25W	MAX 35W
COLOR RENDERING INDEX	90 Ra	90 Ra	90 Ra
COLOR TEMPERATURE	3000K / 4000K / 5000K	3000K / 4000K / 5000K	3000K / 4000K / 5000K
LUMINOUS FLUX	24°: 1,402 lm 32°: 1,473 lm 50°: 1,246 lm	19°: 1,628 lm 24°: 1,961 lm 35°: 2,294 lm 60°: 2,496 lm	19°: 3,245 lm 30°: 3,440 lm 42°: 3,421 lm 54°: 3,318 lm
BEAM ANGLE	24° / 32° / 50°	19° / 24° / 35° / 60°	19° / 30° / 42° / 54°
INPUT VOLTAGE	DC 36V	DC 36V	DC 36V
APPLICATION DRIVER	CONSTANT CURRENT TYPE	CONSTANT CURRENT TYPE	CONSTANT CURRENT TYPE
OPERATING TEMPERATURE RANGE	-20 to +40°C	-20 to +40°C	-20 to +40°C
MATERIAL	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM

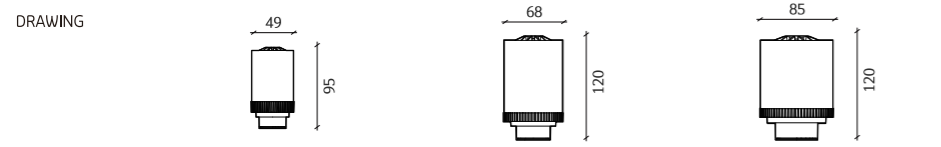

LIGHT DISTRIBUTION CURVE

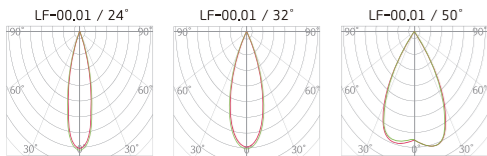

ACCESSORIES



SPECIAL MODULE



FULL SPECTRA

MODEL NO.	LFF-00.011 / LFF-00.021 / LFF-00.031
MODULE SIZE	Ø50, Ø60, Ø80
INPUT VOLTAGE	36V DC
CRI	98
TM-30 (Rf)	98
JND Qty (Rf, csi ≥ 92)	98



DIRECT MODULE

MODEL NO.	LFF-00.022 / LFF-00.032
MODULE SIZE	Ø60, Ø80
INPUT VOLTAGE	AC 220-240V / 50-60Hz
OUTPUT VOLTAGE	36V DC
PRODUCT FEATURES	BUILT-IN DRIVERS



DIMMING


MODEL NO.	LFF-00.013 / LFF-00.023 / LFF-00.033
MODULE SIZE	Ø50, Ø60, Ø80
INPUT VOLTAGE	36V DC
APPLICATION DRIVER	CONSTANT CURRENT TYPE
COLOR TEMPERATURE	2700K ~ 6500K (Color temperature control)

Other specifications are the same as the basic product.

LF.FX - DZ



MODEL NO.	LFD-97.001	LFD-97.002	LFD-97.003
SIZE (mm)	Ø66 x H120	Ø86 x H151	Ø64 x H92
TYPE OF LED	LED COB	LED COB	LED COB
INPUT POWER	MAX 15W	MAX 25W	MAX 35W
COLOR RENDERING INDEX	90 Ra	90 Ra	90 Ra
COLOR TEMPERATURE	3000K / 4000K / 5000K	3000K / 4000K / 5000K	3000K / 4000K / 5000K
LUMINOUS FLUX	24°: 1,217 lm 34°: 1,270 lm 50°: 1,090 lm	19°: 1,550 lm 24°: 1,868 lm 35°: 2,198 lm 60°: 2,378 lm	19°: 3,091 lm 30°: 3,276 lm 42°: 3,259 lm 54°: 3,161 lm
BEAM ANGLE	24° / 34° / 50°	19° / 24° / 35° / 60°	19° / 30° / 42° / 54°
INPUT VOLTAGE	DC 36V	DC 36V	DC 36V
APPLICATION DRIVER	CONSTANT CURRENT TYPE	CONSTANT CURRENT TYPE	CONSTANT CURRENT TYPE
OPERATING TEMPERATURE RANGE	-20 to +40°C	-20 to +40°C	-20 to +40°C
MATERIAL	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM

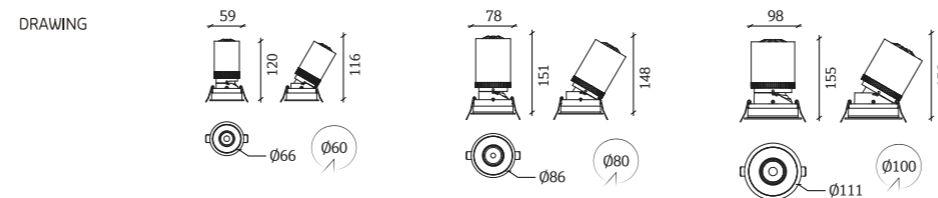


LF.FX - DZs



MODEL NO.	LFD-97.011	LFD-97.012	LFD-97.013
SIZE (mm)	□66 x H92	□86 x H155	□111 x H159
DRAWING	59x122x118 □66 60	78x155x151 □86 80	98x159x160 □111 100

Other specifications are the same as the circular product.


LIGHT DISTRIBUTION CURVE

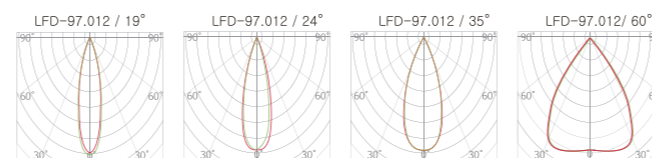

LF.FX - DH




MODEL NO.	LFD-97.004	LFD-97.005	LFD-97.006
SIZE (mm)	Ø61 x H116	Ø83 x H148	Ø102 x H151
TYPE OF LED	LED COB	LED COB	LED COB
INPUT POWER	MAX 15W	MAX 25W	MAX 35W
COLOR RENDERING INDEX	90 Ra	90 Ra	90 Ra
COLOR TEMPERATURE	3000K / 4000K / 5000K	3000K / 4000K / 5000K	3000K / 4000K / 5000K
LUMINOUS FLUX	24°: 1,262 lm 32°: 1,335 lm 50°: 1,114 lm	19°: 1,436 lm 24°: 1,763 lm 32°: 2,266 lm 50°: 2,346 lm	19°: 2,892 lm 24°: 3,242 lm 32°: 3,231 lm 50°: 3,165 lm
BEAM ANGLE	24° / 32° / 50°	19° / 26° / 34° / 60°	19° / 28° / 36° / 53°
INPUT VOLTAGE	DC 36V	DC 36V	DC 36V
APPLICATION DRIVER	CONSTANT CURRENT TYPE	CONSTANT CURRENT TYPE	CONSTANT CURRENT TYPE
OPERATING TEMPERATURE RANGE	-20 to +40°C	-20 to +40°C	-20 to +40°C
MATERIAL	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM

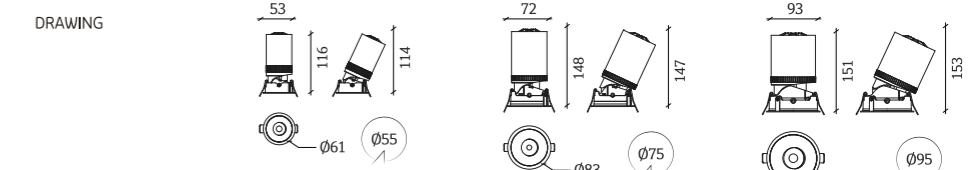

DEPXA



MODEL NO.	LFD-97.007	LFD-97.008	LFD-97.009
SIZE (mm)	Ø60 x H72	Ø75 x H91	Ø105 x H129
TYPE OF LED	LED COB	LED COB	LED COB
INPUT POWER	MAX 10W	MAX 15W	MAX 20W
COLOR RENDERING INDEX	90 Ra	90 Ra	90 Ra
COLOR TEMPERATURE	3000K / 4000K / 5000K	3000K / 4000K / 5000K	3000K / 4000K / 5000K
BEAM ANGLE	24° / 36° / 50°	24° / 36° / 50°	24° / 36° / 50°
INPUT VOLTAGE	DC 36V	DC 36V	DC 36V
APPLICATION DRIVER	CONSTANT CURRENT TYPE	CONSTANT CURRENT TYPE	CONSTANT CURRENT TYPE
OPERATING TEMPERATURE RANGE	-20 to +40°C	-20 to +40°C	-20 to +40°C
MATERIAL	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM	BODY : PC, ALUMINUM LENS : PMMA, PC HEAT SINK : ALUMINUM

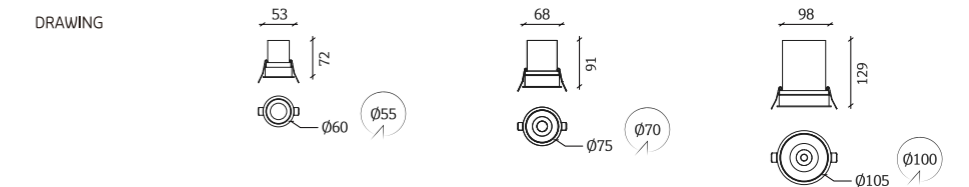

REFLECTOR

