



JISO
ILUMINACION
SPAIN
NEWS
2026

MAGNETIC 48V

LINEAR SYSTEMS | INDOOR

WIDE RANGE OF LUMINAIRES

New options available in CCT
 Finishes: Technical White and Black




LOW
 VOLTAGE
 48V

Collection adaptable to multifunctional spaces such as restaurants, shops and different areas.

New options available for our magnetic system, suitable for surface, recessed and suspended installations.

We offer multiple installation options, as well as a wide variety of luminaires with different power levels (from 3W to 30W), which can be replaced at any time and can also be powered from a single power supply.

	W	
MIKROTEC	-03 -06	
AKLY M	-05 -10 -20	
ALUDOT	-06 -12	
DIRIDOT	-06 -12	
MILKY P	-20	
MILKY L	-20	
FLUKI	-20	

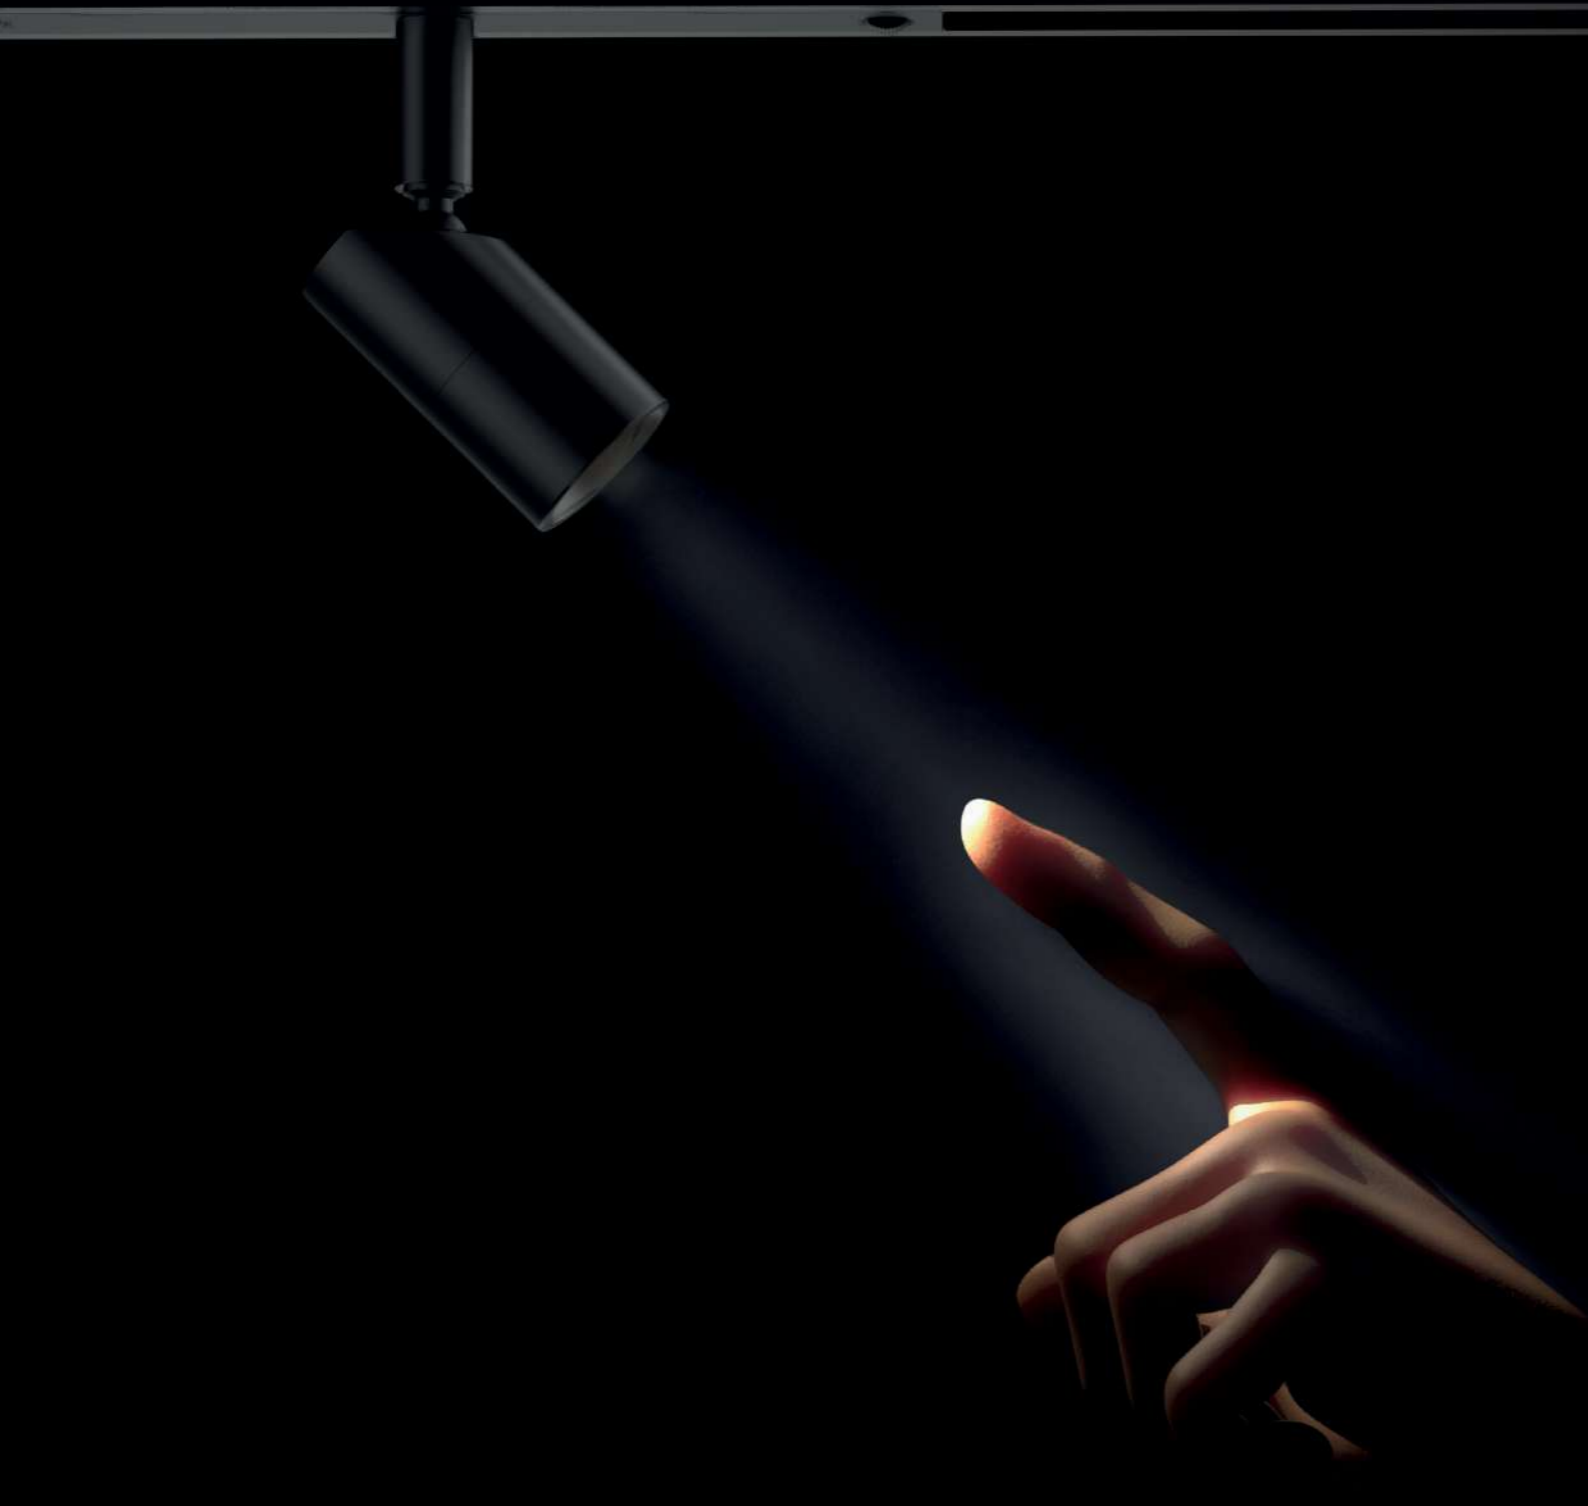


MIKROTEC 03



7IM724 03 - 2010 - 01
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7IM724	03	20 ON/OFF 40 DALI	I 24°	0 CCT Switch 2700K 159 lm system 270-330 lm source 3000K 189 lm system 270-330 lm source 4000K 182 lm system 270-330 lm source	01 90




LED SMD | CRI >90 | RG1 | MAC Adam <4 | 54.000H L80B10 | 90-110 lm/W | UGR <19

MIKROTEC 06



7IM724 06 - 2010 - 01
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7IM724	06	20 ON/OFF 40 DALI	I 24°	0 CCT Switch 2700K 321 lm system 684-762 lm source 3000K 408 lm system 684-762 lm source 4000K 411 lm system 684-762 lm source	01 90



LED COB | CRI >90 | RG1 | MAC Adam <3 | 54.000H L80B10 | 114-127 lm/W | UGR <19



INDOOR

AKLY I Magnetic 48V. Luminaire with Integrated LED


AKLY M05



7IM715 05 - 20 M 0 - 01
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7IM715	05	20 ON/OFF 40 DALI	M 38°	0 CCT Switch 2700K 343 lm system 630 lm source 3000K 374 lm system 702 lm source 4000K 518 lm system 702 lm source	01 90

LED COB | CRI >90 | RG1 | MAC Adam <3 | 54.000H L80B10 | 140 lm/W | UGR <19



INDOOR

Luminaire with Integrated LED. Magnetic 48V I AKLY


AKLY M10



7IM715 10 - 20 M 0 - 01
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7IM715	10	20 ON/OFF 40 DALI	M 38°	0 CCT Switch 2700K 686 lm system 1002 lm source 3000K 818 lm system 1116 lm source 4000K 820 lm system 1116 lm source	01 90

LED COB | CRI >90 | RG1 | MAC Adam <3 | 54.000H L80B10 | 112 lm/W | UGR <19




AKLY M20



7IM715 20 - 20 M 0 - 01
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7IM715	20	20 ON/OFF 40 DALI	M 38°	0 CCT Switch 2700K 1471 lm system 2155 lm source 3000K 1665 lm system 2420 lm source 4000K 1593 lm system 2420 lm source	01 90

LED COB | CRI >90 | RG1 | MAC Adam <3 | 54.000H L80B10 | 121 lm/W | UGR <19



Basic information; for updated and more accurate details, please refer to the technical datasheet at www.jisoiluminacion.com

INDOOR

ALUDOT | Magnetic 48V. Luminaire with Integrated LED



INDOOR

Luminaire with Integrated LED. Magnetic 48V | ALUDOT


ALUDOT 06



71M722 06 - 20 M 0 - 01
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
71M722	06	20 ON/OFF 40 DALI	M 38°	0 CCT Switch 2700K 288 lm system 380 lm source 3000K 380 lm system 525 lm source 4000K 327 lm system 294 lm source	01

LED SMD | CRI >90 | MAC Adam <4 | 54,000H L80B10 | UGR <19




ALUDOT 12



71M722 12 - 20 M 0 - 01
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
71M722	12	20 ON/OFF 40 DALI	M 38°	0 CCT Switch 2700K 674 lm system 730 lm source 3000K 806 lm system 1329 lm source 4000K 748 lm system 787 lm source	01

LED SMD | CRI >90 | MAC Adam <4 | 54,000H L80B10 | UGR <19

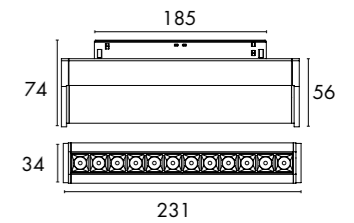

Basic information; for updated and more accurate details, please refer to the technical datasheet at www.jisoiluminacion.com



INDOOR

Luminaire with Integrated LED. Magnetic 48V | DIRIDOT


DIRIDOT 06



7IM723 06 - 20 M 0 - 01
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7IM723	06	20 ON/OFF 40 DALI	M 38°	0 CCT Switch 2700K 288 lm system 380 lm source 3000K 380 lm system 525 lm source 4000K 327 lm system 294 lm source	01 90

LED SMD CRI >90 MAC Adam <4 54.000H L80B10 UGR <19




DIRIDOT 12



7IM723 12 - 20 M 0 - 01
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7IM723	12	20 ON/OFF 40 DALI	M 38°	0 CCT Switch 2700K 674 lm system 730 lm source 3000K 806 lm system 1329 lm source 4000K 748 lm system 787 lm source	01 90

LED SMD CRI >90 MAC Adam <4 54.000H L80B10 UGR <19

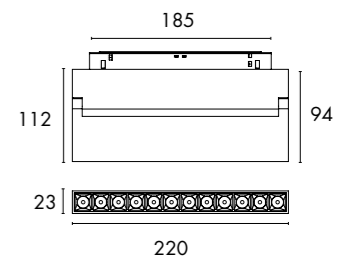

Basic information; for updated and more accurate details, please refer to the technical datasheet at www.jisoiluminacion.com



INDOOR

Luminaire with Integrated LED. Magnetic 48V | MILKY


MILKY L20



71M720 20 - 20 S 0 - 01
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
71M720	20	20 ON/OFF 40 DALI	S 100°	0 CCT Switch 2700K 607 lm system 1957 lm source 3000K 683 lm system 2198 lm source 4000K 664 lm system 2129 lm source	01 90

LED SMD | CRI >90 | RG1 | MAC Adam <3 | 50.000H L70B10 | UGR <19 | 1/20

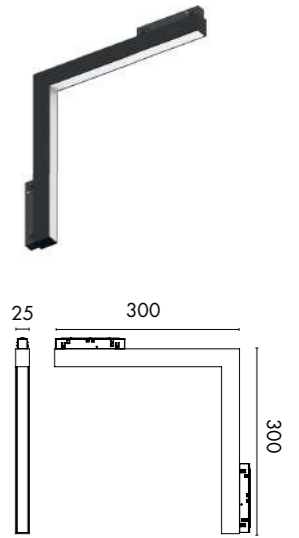


MILKY P20



71M721 20 - 20 S 0 - 01
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
71M721	20	20 ON/OFF 40 DALI	S 100°	0 CCT Switch 2700K 608 lm system 1922 lm source 3000K 683 lm system 2182 lm source 4000K 664 lm system 2106 lm source	01 90

LED SMD | CRI >90 | RG1 | MAC Adam <3 | 50.000H L70B10 | UGR <19 | 1/20

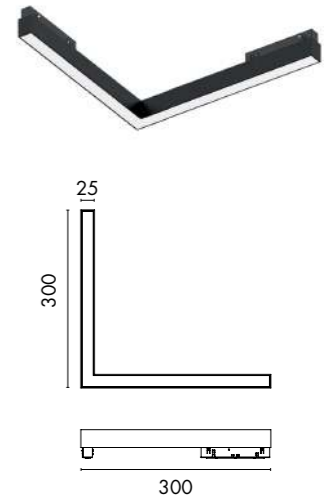

Basic information; for updated and more accurate details, please refer to the technical datasheet at www.jisoiluminacion.com

INDOOR

FLUKI I Magnetic 48V. Luminaire with Integrated LED

INDOOR

Luminaire with Integrated LED. Magnetic 48V I FLUKI



FLUKI 20



7IM717 20 - 20 Z 0 - 01
1 2 3 4 5 6

1 - Model	2 - Power (W)	3 - Driver	4 - Degree	5 - Kelvin	6 - Color
7IM717	20	20 ON/OFF 40 DALI	Z 360°	0 CCT Switch 2700K 1393 lm system 1553 lm source 3000K 1610 lm system 2274 lm source 4000K 1530 lm system 1704 lm source	01

LED SMD CRI >90 RG1 MAC Adam <3 50.000H L70B10 1/20

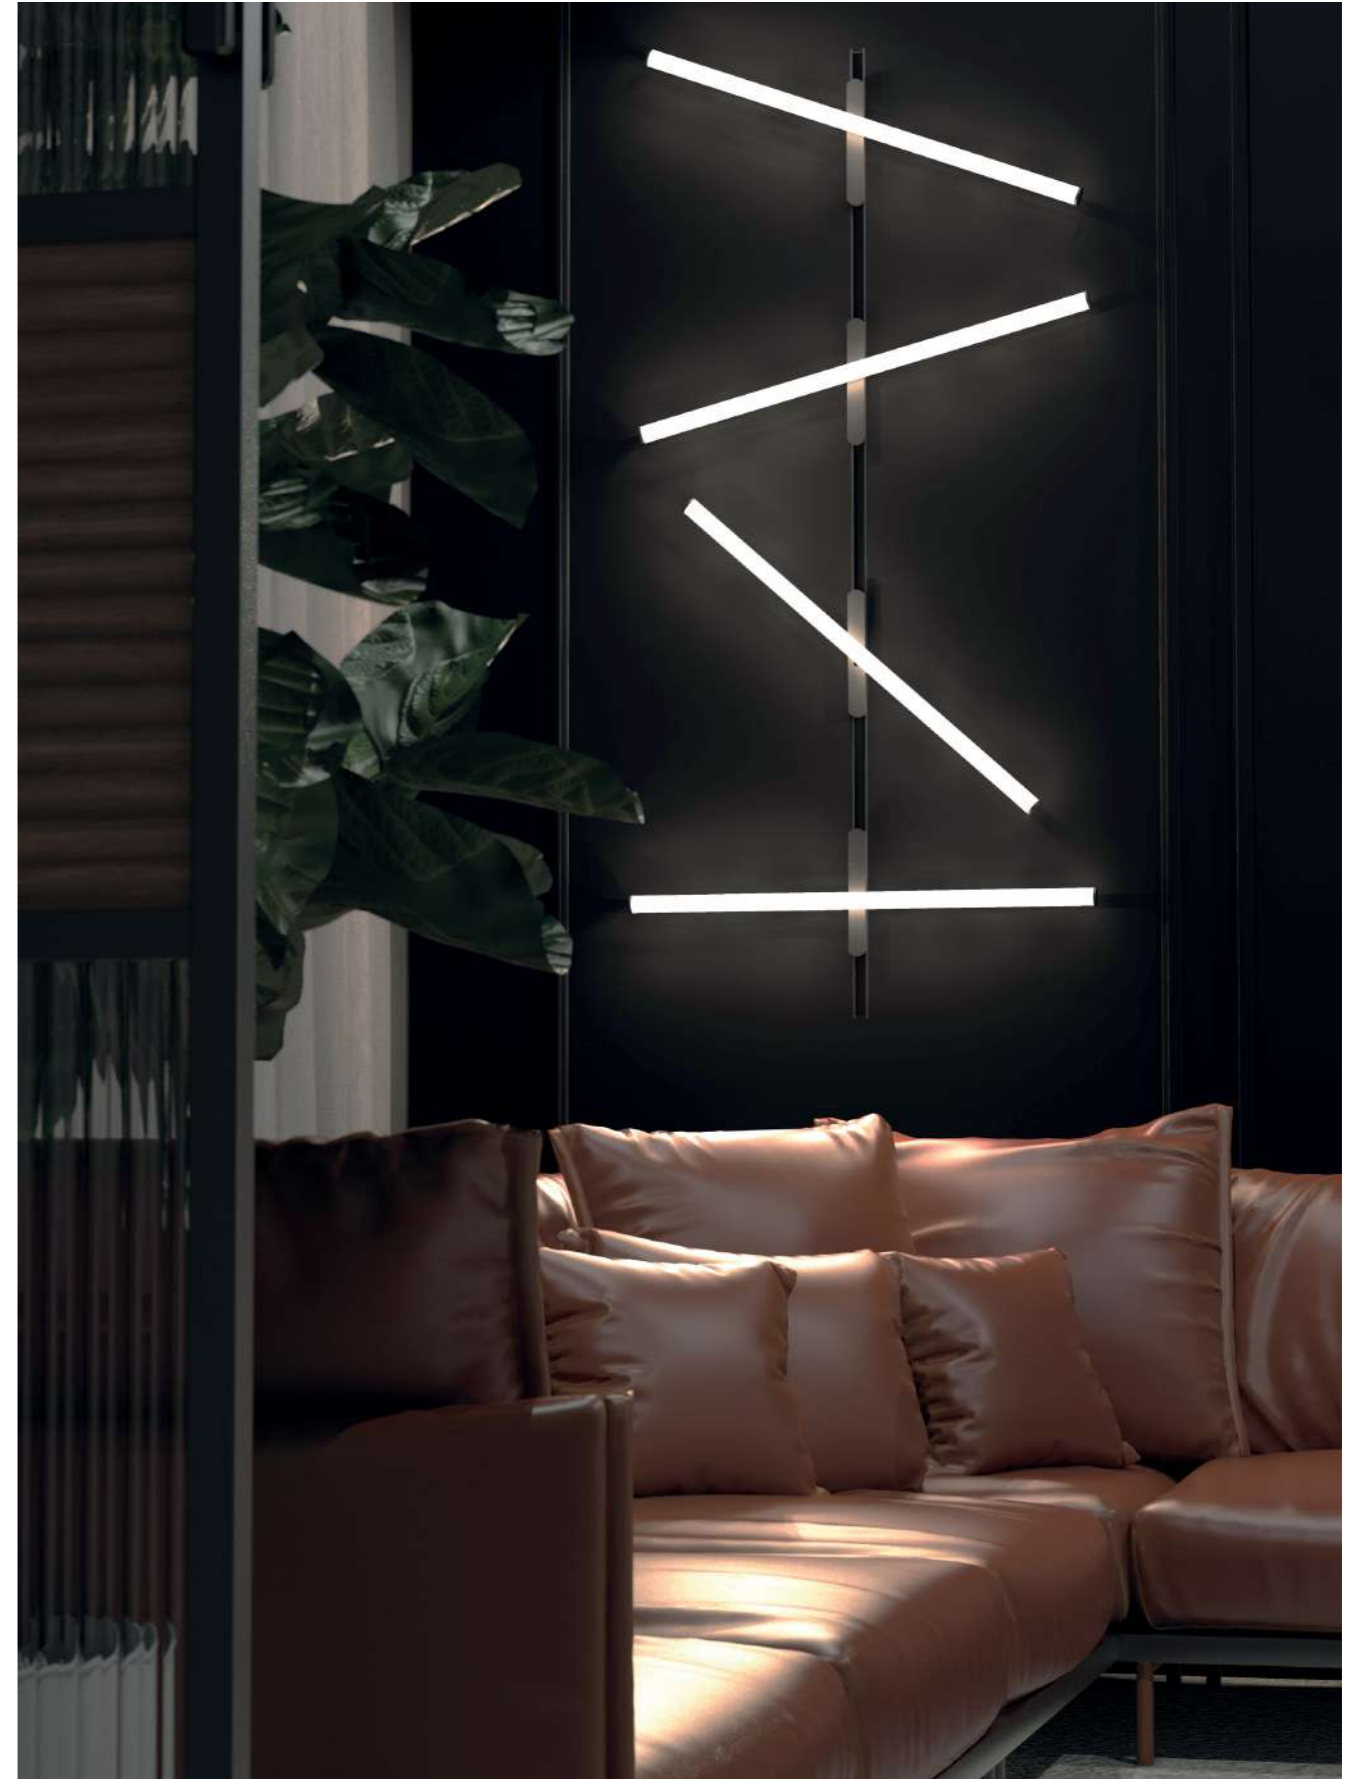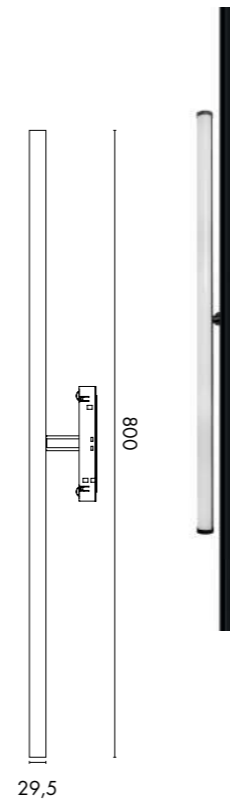

Basic information; for updated and more accurate details, please refer to the technical datasheet at www.jsoiluminacion.com

THANK YOU!

Address

Pol. Ind La Pahlilla
C/ Fuente de Corachán 223.
Chiva - Valencia - Spain

Phone&Email

P. +34 96 252 30 61
spain@jisoiluminacion.com

Website

www.jisoiluminacion.com

JISO
ILUMINACION
SPAIN
NEWS
2026

MAGNETIC 48V

LINEAR SYSTEMS | INDOOR