

GYŌ

行 ART OF LIGHT

Als verlichting een beleving wordt.

Een nieuwe visie op architecturale verlichting.

Met Gyo creëren we intelligente oplossingen voor milieuvriendelijke verlichting met een tijdloos design en geavanceerde technologie.

Gyo onderscheidt zich door zijn veelzijdigheid aan combinatiemogelijkheden, waardoor je steeds het perfecte licht beschikbaar hebt waar u zich ook bevindt en hoe uw stemming ook is.

De Gyo producten zijn ontwikkeld en geproduceerd volgens de filosofie van de Japanse Takumi meesters, door het streven naar het beste resultaat creëer je een uitzonderlijk product.


Lighting becomes an experience.

A innovative vision on architectural lighting.

With Gyo we create intelligent solutions for environmentally friendly lighting with a timeless design and advanced technology.

Gyo distinguishes itself by its versatility of combination options. This gives the perfect light in every location, room, place, for every mood.

The Gyo products are developed and produced according to the philosophy of the Japanese Takumi masters: only by striving for the best result you will end up with an exceptional product.

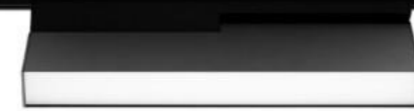

NIKKO FLOOD

MAGNETISCH

Het MAGNI systeem zorgt voor een flexibele lichtbeleving. Lichtarmaturen met een tijdloos design en voorzien van een magnetische adapter kunnen met één handbeweging van positie veranderd worden om uw lichtbeleving aan te passen aan de noodzaak.

TRACKS

De basis is een compact elegant profiel voorzien van een contactlijn welke zorgt voor DC voeding, standaard 24V en (48V optioneel voor grote vermogens) en sturing voor het dimmen via TRIAC, 1-10V, DALI, compatibel met CASAMBI. Het profiel kan zowel als opbouw, naadloze inbouw of hangend geïnstalleerd worden.

ARMATUREN

De esthetisch en energiebesparende armaturen zijn voorzien van kwaliteitsvolle componenten, de lichtbron is een hoogwaardige Led met hoge CRI waarden en Lumen-Watt verhouding. De drivers zijn voorzien van de nieuwste technologieën welke u toelaten te werken met huidige en toekomst gerichte intelligente toepassingen. De afwerking in zwart, wit poederlak of gepolijst messing zorgen voor een designvol verlichtingsobject.



Casambi ready



5 year warranty



MITO FLOOD

MAGNETIC

The MAGNI system provides a flexible light experience. Light fixtures with a timeless design and equipped with a magnetic adapter can be moved with one hand movement to adapt the light experience one needs at the chosen spot in the room.

TRACKS

The base is a compact elegant profile with a contact line that provides DC power, standard 24V and (48V optional for large power) and control for dimming via TRIAC, 1-10V, DALI, compatible with CASAMBI. The profile can be installed as a surface-mounted, seamlessly inserted installation or suspended.

LUMINAIRES

The aesthetic and energy-saving luminaires are equipped with high-quality components, the light source is a high-quality LED with high CRI values and an optimal Lumen-Watt ratio. The drivers are equipped with the latest technologies, allowing you to work with current and future-oriented intelligent applications. The finish in black/white powder lacquer or polished brass results in a designer quality lighting object.



Casambi ready



5 year warranty




OGI



MITO BEAM

NIKKO BEAM

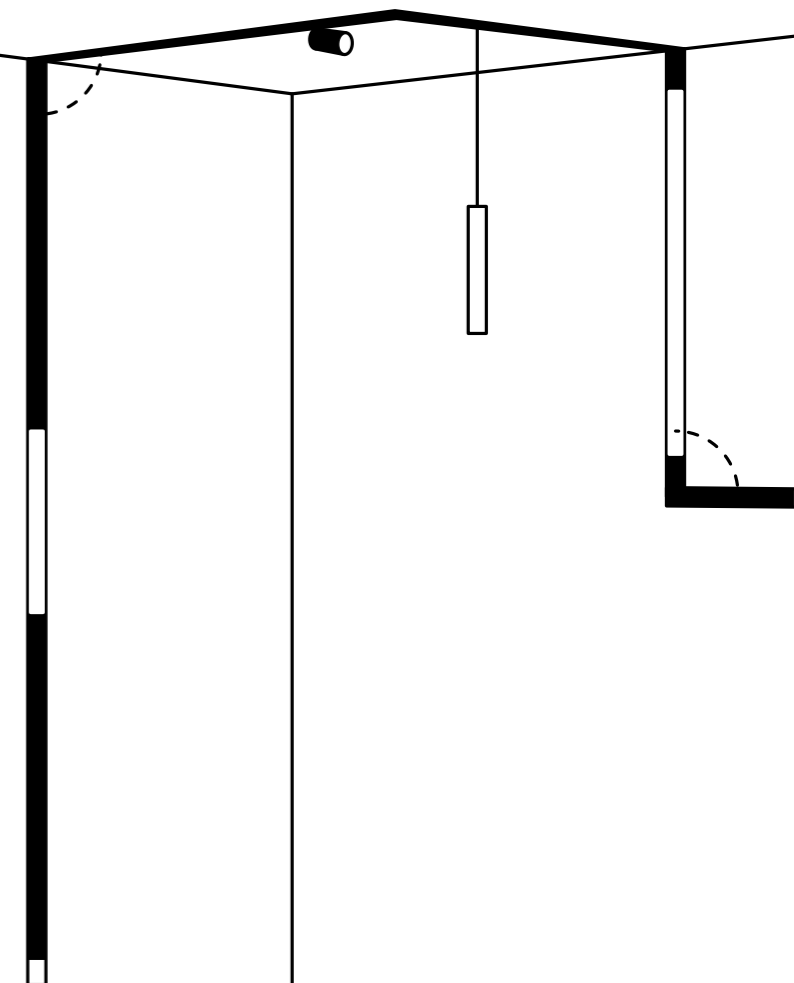




OGI

SIZE	Ø 35*80
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Cree
CRI	> 90
BEAM	20° / 30° / 40° / 60°
LUMEN	400 Lm
VOLT	24V / 48V
WATT	5W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	Yes (95° - 360°)


Ⓐ A-label * No flicker Ⓢ 50.000 h

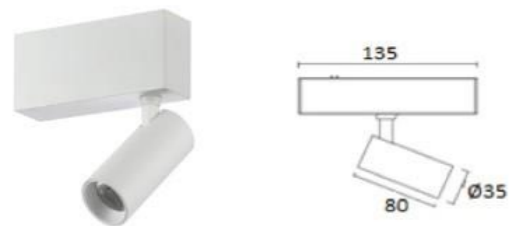

OGI TWIN

SIZE	Ø 35*80
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Cree
CRI	> 90
BEAM	20° / 30° / 40° / 60°
LUMEN	2x400 Lm
VOLT	24V / 48V
WATT	2x5W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	Yes (95° - 360°)


Ⓐ A-label * No flicker Ⓢ 50.000 h

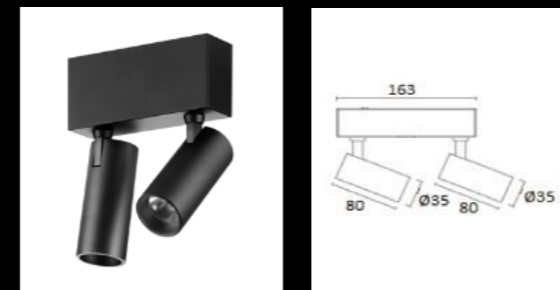

OGI PLUS

SIZE	Ø 50*140
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Cree
CRI	> 90
BEAM	18° / 24° / 36°
LUMEN	800 Lm
VOLT	24V / 48V
WATT	10W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	Yes (95° - 360°)


Ⓐ A-label * No flicker Ⓢ 50.000 h

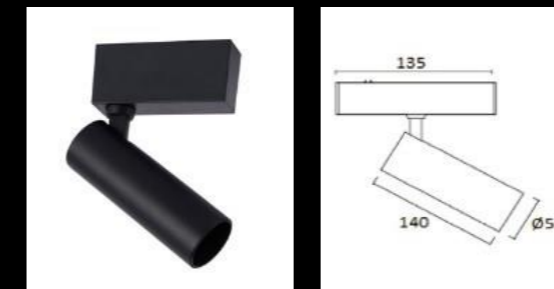

OGI PENDANT

SIZE	Ø 50*250
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Cree
CRI	> 90
BEAM	18° / 24° / 36°
LUMEN	800 Lm
VOLT	24V / 48V
WATT	10W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	No


Ⓐ A-label * No flicker Ⓢ 50.000 h

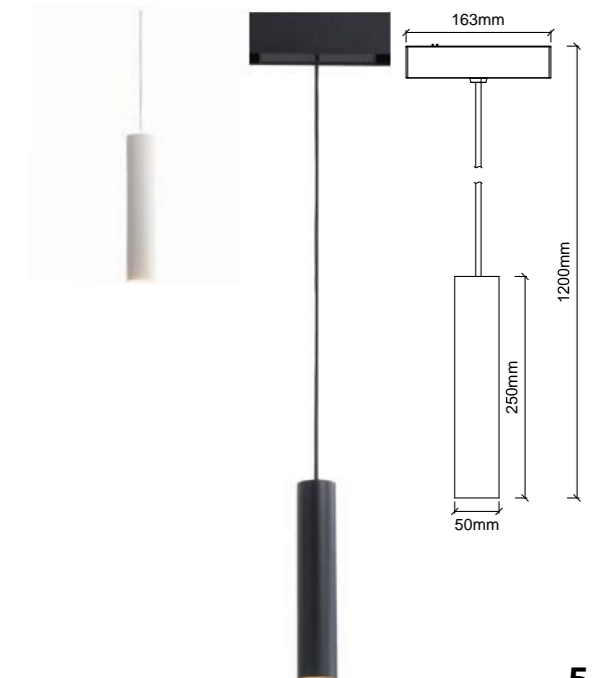

SENDAI

SIZE	Ø 65 / Ø 92
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Cree
CRI	> 90
BEAM	10° / 20° / 30°
LUMEN	400 Lm / 750 Lm
VOLT	24V / 48V
WATT	8W / 15W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	Yes (95° - 360°)

Ⓐ A-label * No flicker Ⓢ 50.000 h




6

NARA

SIZE	50*50
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Osram
CRI	> 90
BEAM	15° / 24° / 36°
LUMEN	800 Lm
VOLT	24V / 48V
WATT	10W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	Yes (95° - 360°)


Ⓐ A-label * No flicker Ⓢ 50.000 h

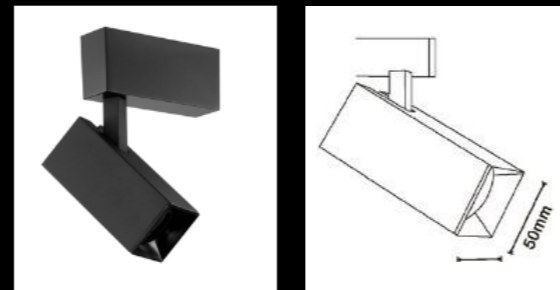

TAMA

SIZE	Ø 150
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Osram
CRI	> 90
BEAM	360°
LUMEN	300 Lm
VOLT	24V / 48V
WATT	5W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	No


Ⓐ A-label * No flicker Ⓢ 50.000 h

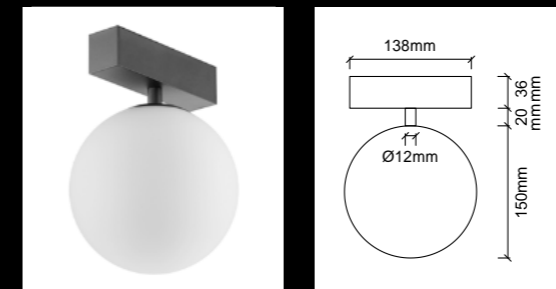


7




4W: 84*34*181



8W: 163,5*34*181



16W: 322,5*34*181



NIKKO BEAM

SIZE	84*34*181 / 163,5*34*181 / 322,5*34*181
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Osram
CRI	> 90
BEAM	12° / 34° / 48°
LUMEN	240 Lm / 480 Lm / 960 Lm
VOLT	24V / 48V
WATT	4W / 8W / 16W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	Yes (95°)



A-label No flicker 50.000 h

NIKKO FLOOD


SIZE	84*34*181 / 163,5*34*181 / 322,5*34*181
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Osram
CRI	> 90
BEAM	120°
LUMEN	200 Lm / 400 Lm / 800 Lm
VOLT	24V / 48V
WATT	4W / 6W / 12W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	Yes (95°)

A-label No flicker 50.000 h


4W: 84*34*181




6W: 163,5*34*181




12W: 322,5*34*181

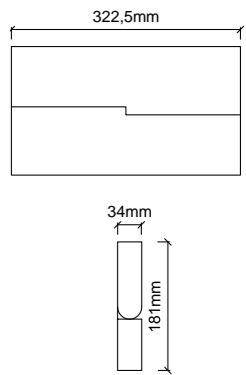


1W: 34*34*55,5




4W: 83,5*34*55,5



8W: 163*34*55,5



16W: 322*34*54



MITO BEAM

SIZE	34*34*55,5 / 83,5*34*55,5 / 163*34*55,5 / 322*34*54
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Osram
CRI	> 90
BEAM	12° / 34° / 48°
LUMEN	105 Lm / 240 Lm / 480 Lm / 960 Lm
VOLT	24V / 48V
WATT	1W / 4W / 8W / 16W
DIMMING	Triac / 1-10V / Dali (Except: 34*34*55,5 / 83,5*34*55,5)
ADJUSTABLE	No


Ⓐ A-label ✱ No flicker ⌚ 50.000 h

MITO FLOOD


SIZE	83,5*34*55,5 / 163*34*55,5 / 322*34*55,5 / 640*34*55,5 / 958*34*54
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Osram
CRI	> 90
BEAM	120°
LUMEN	200 Lm / 350 Lm / 650 Lm / 1300 Lm / 1950 Lm
VOLT	24V / 48V
WATT	4W / 7W / 13W / 26W / 39W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	No

Ⓐ A-label ✱ No flicker ⌚ 50.000 h


4W: 83,5*34*55,5




7W: 163*34*55,5




13W: 322*34*55,5





26W: 640*34*55,5





39W: 958*34*54





8W: 138*34*55,5



16W: 270*34*55,5



24W: 400*34*55,5



KOYA WASH



SIZE	138*34*55,5 / 270*34*55,5 / 400*34*55,5
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Osram
CRI	> 90
BEAM	120°
LUMEN	400 Lm / 800 Lm / 1200 Lm
VOLT	24V / 48V
WATT	8W / 16W / 24W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	No

Ⓐ A-label ✱ No flicker ⌚ 50.000 h

KOYA BEAM

SIZE	322,5*34*183
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Osram
CRI	> 90
BEAM	12° / 34° / 48°
LUMEN	960 Lm
VOLT	24V / 48V
WATT	12W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	No


Ⓐ A-label ✱ No flicker ⌚ 50.000 h

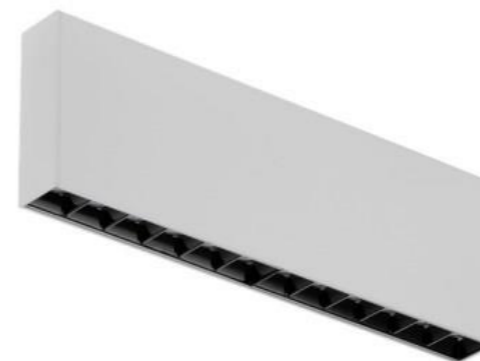

KOYA FLOOD

SIZE	322,5*34*183
FINISH	Sandy Black / Sandy White
COLOR TEMP.	2700K / 3000K / 4000K
LED	Osram
CRI	> 90
BEAM	120°
LUMEN	720 Lm
VOLT	24V / 48V
WATT	13W
DIMMING	Triac / 1-10V / Dali
ADJUSTABLE	No


Ⓐ A-label ✱ No flicker

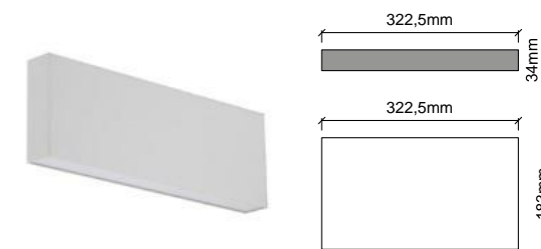





MAGNI TRACK SURFACE

SIZE	1m / 2m / 3m
FINISH	Sandy Black / Sandy White
INSTALLATION	Surface / Pendant / Recessed
WATT	200W max
DIMMING	Triac / 1-10V / Dali

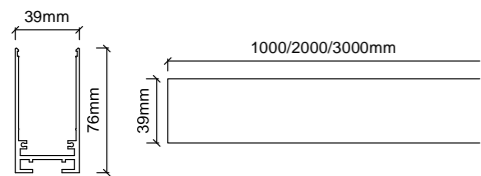


MAGNI TRACK RECESSED

SIZE	1m / 2m / 3m
FINISH	Sandy Black / Sandy White
INSTALLATION	Recessed
WATT	200W max
DIMMING	Triac / 1-10V / Dali

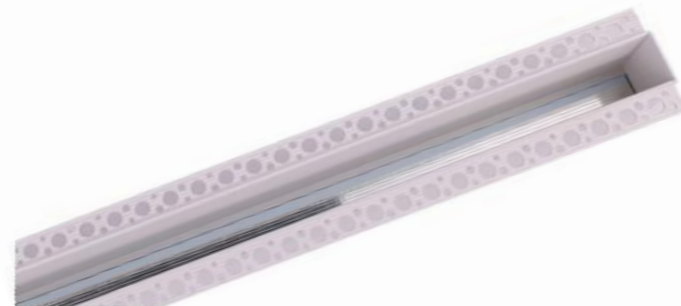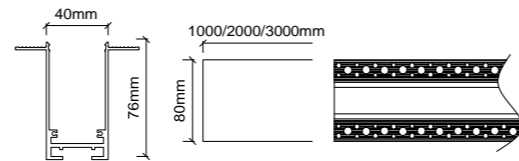

MAGNI TRACK PENDANT

SIZE	Ø 80
FINISH	Sandy Black / Sandy White
INSTALLATION	Pendant mounting kit for magnetic track, includes 2 sets

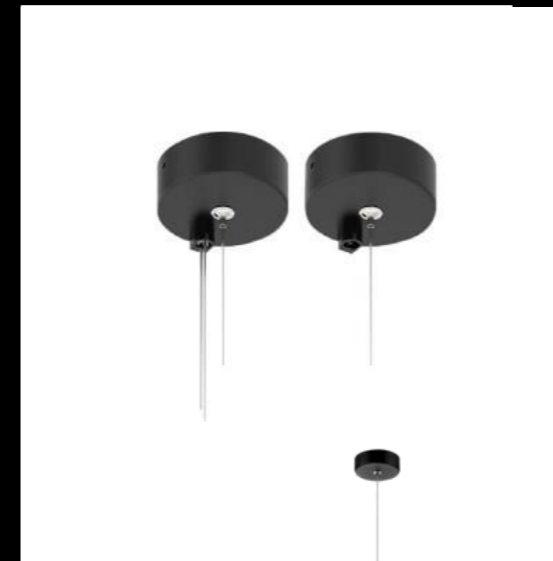

MAGNI TRACK FLEXI LED

SIZE	1m / 2m / 3m
FINISH	Sandy Black / Sandy White
INSTALLATION	Surface / Pendant / Recessed
DIMMING	Triac / 1-10V / Dali

Sfeer creëren met egale lijnverlichting

De combinatie van led strips met het magni track profiel zorgen voor sfeervolle accent, achtergrond, of functionele verlichting.

Create a unique atmosphere with uniform line lighting

The combination of LED strips with the magni track profile allow you to create atmospheric accent, background, or functional lighting.





CURVE

Curve geeft de lichtontwerper en interieuradviseur de pure inspiratie om een strak en tijdloos verlichtingsconcept te realiseren. De individuele behoefte aan licht worden gecombineerd met een functionele esthetiek.

Curve inspires purity, enabling the lighting designer and interior advisor to create a sleek and timeless lighting concept. The individual need for light is here combined with a functional aesthetic.



OGI CURVE

Ø 35*80
Sandy Black / Sandy White / Brass
20° / 30° / 40° / 60°
400 Lm / 5W

OGI TWIN CURVE

Ø 35*80
Sandy Black / Sandy White / Brass
20° / 30° / 40° / 60°
2x400 Lm / 2x5W

OGI CURVE

Ø 50*140
Sandy Black / Sandy White / Brass
18° / 24° / 36°
800 Lm / 10W

SENDAI CURVE

Ø 65
Sandy Black / Sandy White / Brass
10° / 20° / 30°
640 Lm / 8W

SENDAI CURVE

Ø 92
Sandy Black / Sandy White / Brass
10° / 20° / 30°
1200 Lm / 15W

OGI PENDANT CURVE

Ø 50*250
Sandy Black / Sandy White / Brass
18° / 24° / 36°
800 Lm / 10W

OGI PENDANT CURVE

Ø 35*250
Sandy Black / Sandy White / Brass
20° / 30° / 40° / 60°
400 Lm / 5W

TAMA CURVE

Ø 150
Sandy Black / Sandy White / Brass
360°
300 Lm / 5W

MITO BEAM CURVE

84*34*55,5
Sandy Black / Sandy White / Brass
12° / 24° / 48°
320 Lm / 4W

MITO BEAM CURVE

163*34*55,5
Sandy Black / Sandy White / Brass
12° / 24° / 48°
640 Lm / 8W

MITO FLOOD CURVE

163*34*55,5
Sandy Black / Sandy White / Brass
120°
300 Lm / 7W

PENDANT KIT

Ø 80
Sandy Black / Sandy White / Brass
Pendant mounting kit for full circle profile

NEW SURFACE MOUNTING KIT

Sandy Black / Sandy White / Brass
New surface track mounted for magnetic track

CURVY MAGNI TRACK

Ø 900*39*76
Sandy Black / Sandy White / Brass
Surface / Pendant
200W max
Dimming: Triac / 1-10V / Dali

FULL CIRCLE



1/2 CIRCLE



1/4 CIRCLE



1/8 CIRCLE





RAIL CORNER
L-Corner 90°*90°*76
Sandy Black / Sandy White
Surface / Pendant / Recessed



RAIL CORNER
Inner-Corner 123°*123°*76
Sandy Black / Sandy White
Surface / Pendant / Recessed



RAIL CORNER
Outer-Corner 123°*123°*76
Sandy Black / Sandy White
Surface / Pendant / Recessed



RAIL CORNER
45° Corner 45D°*110
Sandy Black / Sandy White



RAIL CORNER
X Corner 129°*99
Sandy Black / Sandy White



RAIL CORNER
T Corner 129°*159
Sandy Black / Sandy White



RAIL CORNER RECESSED
L-Corner 90°*90°*76
Sandy Black / Sandy White
Recessed



RAIL CORNER RECESSED
Inner-Corner 123°*123°*76
Sandy Black / Sandy White
Recessed



RAIL CORNER RECESSED
Outer-Corner 123°*123°*76
Sandy Black / Sandy White
Recessed



RAIL CORNER RECESSED
T Corner 129°*159
Sandy Black / Sandy White
Recessed



RECESSED KIT
100°*38°*67
Sandy Black / Sandy White
Recessed kit for profile, one pair



PENDANT KIT
Ø 80
Sandy Black / Sandy White
Pendant kit for profile, one pair



TRACK CONNECTOR
113°*32,5°*3
Sandy Black / Sandy White
Track profile connection



POWER PLATE
65°*30
Sandy Black / Sandy White
Electric connection, with 2 pins



DECORATIVE POWER PLATE
65°*30
Sandy Black / Sandy White
For decoration use only



END CAP
76°*39°*1,5
Sandy Black / Sandy White
End cap for magnetic track



TRACK COVER
Track cover 1m
Opal white
Transparency 65%



PIN 3
Sandy Black / Sandy White
Pin connector for electric connection



INPUT TERMINAL
Sandy Black / Sandy White
Input terminal for magnetic track, includes pin connector, track connector and cable



NEW SURFACE MOUNTING KITS
Sandy Black / Sandy White
New surface mounted for magnetic track



DRIVER BOX
280°*125°*60
Sandy Black / Sandy White
Without driver



DRIVER BOX
350°*39°*76
With 200W driver inside
Meanwell Driver

行