

Anker SOLIX X1

Hybrid Energy Storage System



LinkedIn



Website

Email: support@anker.com

Phone: (UK) +44 (0) 1616 056 301 (DE) +49 (800) 000 2522



Anker at a Glance

Anker Innovations is a global leader in smart charging technology and a developer of consumer products for life at home, in the car, and on the go.


Since its founding in 2011, Anker products have sold to more than 140 countries and regions around the world, with more than 200 million users.

Join us as we create powerful and limitless possibilities.



¹Anker is the No. 1 mobile charging brand in the world in terms of the retail sales value in (3 consecutive years of) 2020, 2021, and 2022. Data source: Euromonitor International (Shanghai) Co., Ltd., measured in terms of retail value sales in 2020, 2021, and 2022, based on research conducted in October 2023. Mobile charging brands are defined as brands if more than 75% of their retail sales are contributed by mobile phone charging products. Mobile phone charging products include chargers, wireless chargers, power banks, and charging cables, and these accessories can also be used for other consumer electronics devices.

²Data source: Euromonitor International (Shanghai) Co., Ltd., measured in terms of brands' retail sales value (USD million) globally in 2024. Plug-and-play balcony solar battery storage includes both all-in-one types with built-in micro inverters and standalone types connected to external inverters. Both types enable users to install and use immediately at home. Research completed in February 2025.

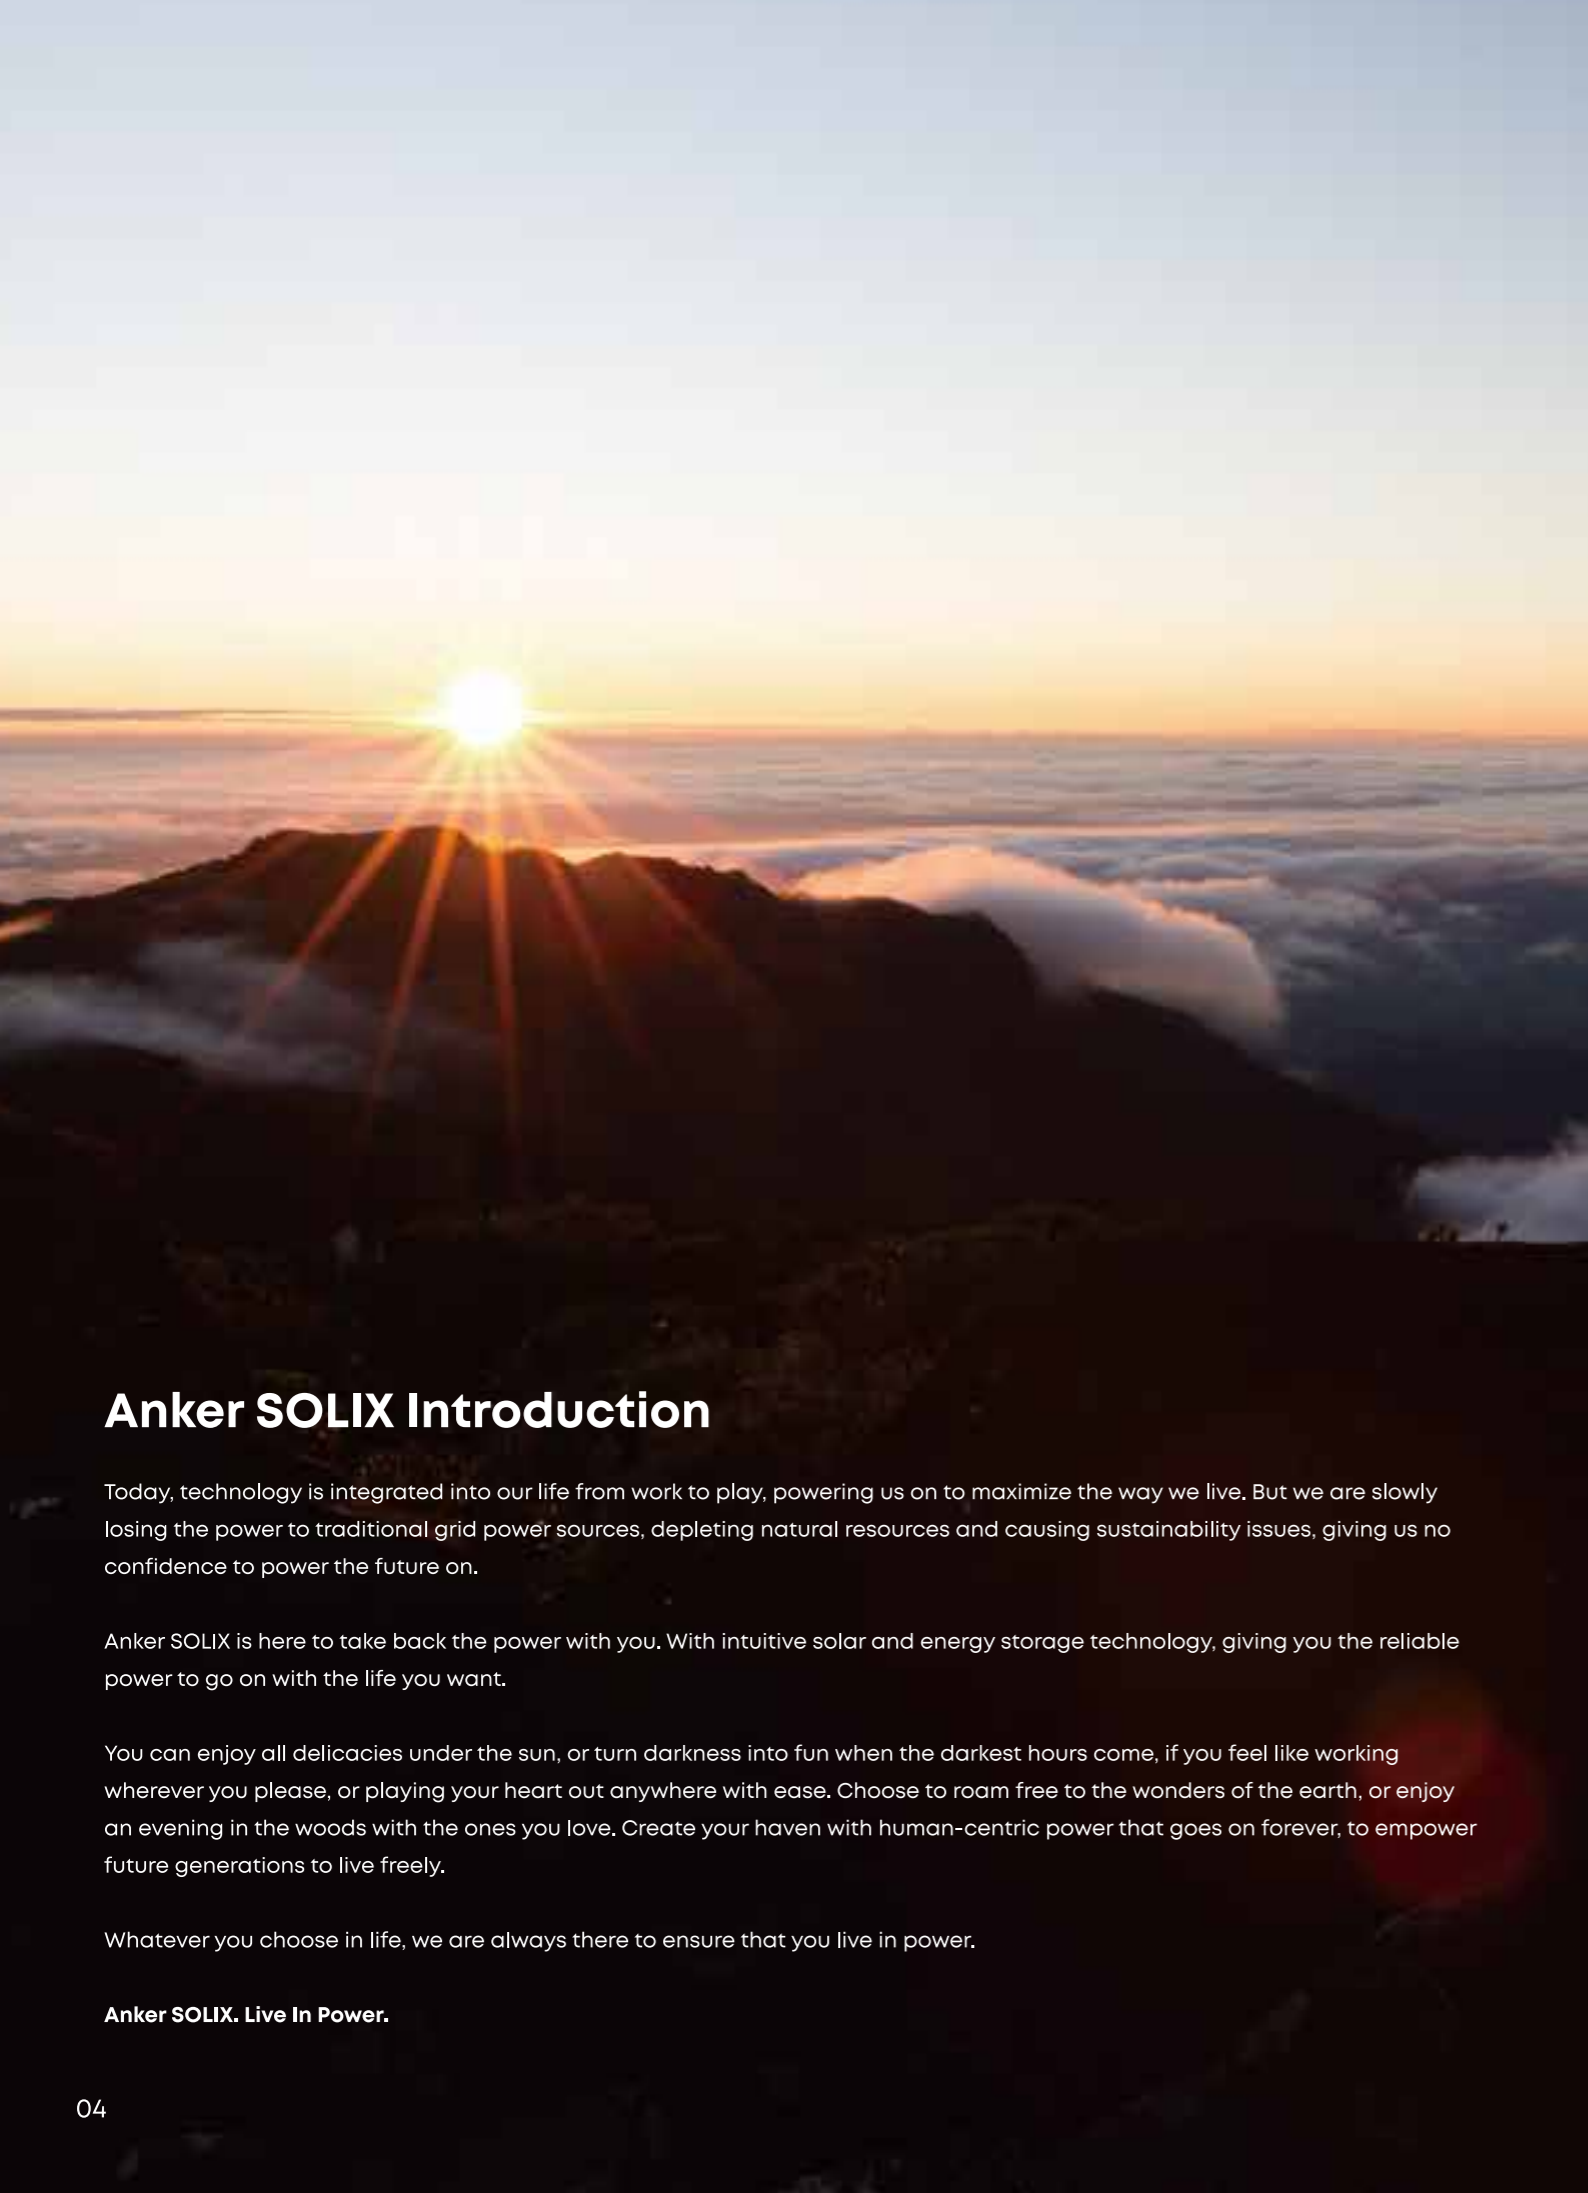

Anker SOLIX Introduction

Today, technology is integrated into our life from work to play, powering us on to maximize the way we live. But we are slowly losing the power to traditional grid power sources, depleting natural resources and causing sustainability issues, giving us no confidence to power the future on.

Anker SOLIX is here to take back the power with you. With intuitive solar and energy storage technology, giving you the reliable power to go on with the life you want.

You can enjoy all delicacies under the sun, or turn darkness into fun when the darkest hours come, if you feel like working wherever you please, or playing your heart out anywhere with ease. Choose to roam free to the wonders of the earth, or enjoy an evening in the woods with the ones you love. Create your haven with human-centric power that goes on forever, to empower future generations to live freely.

Whatever you choose in life, we are always there to ensure that you live in power.

Anker SOLIX. Live In Power.

Live In Power

eXtreme Series



Effortless Series



Flex Series



Camping Series



Power for the Extreme




Reduce Utility Bills









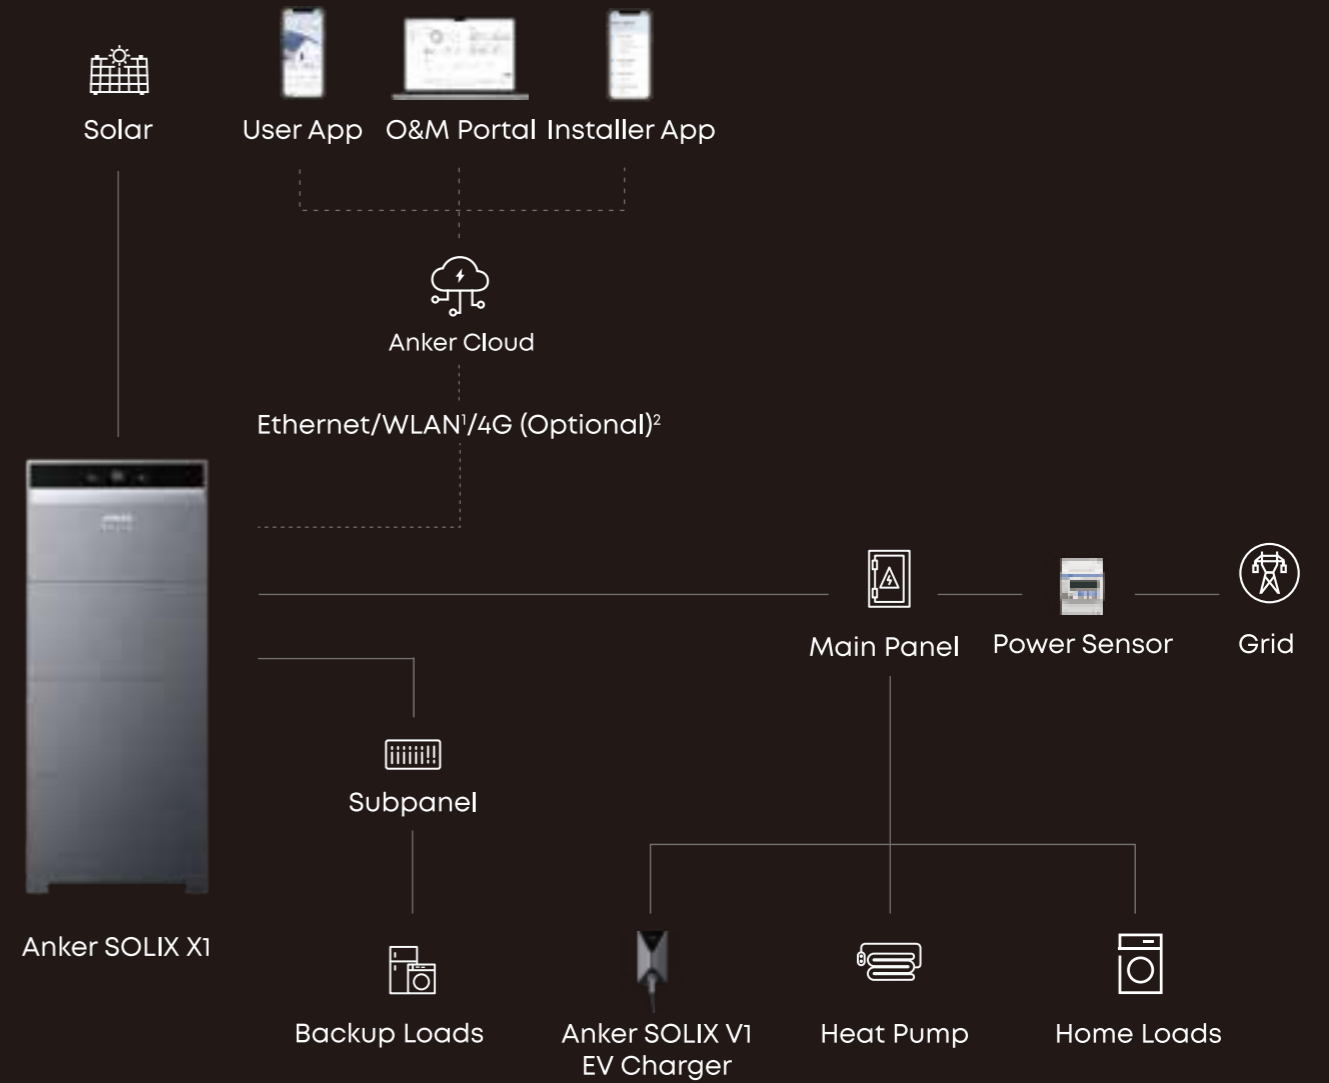


24/7 Power Backup



Self-Consumption



What Anker SOLIX Offers

- 
Anker SOLIX X1 Power Module
5-12kW (Three-Phase)
3.68-6kW (Single-Phase)
- 
Anker SOLIX X1 Battery Module
- 
Anker SOLIX V1 EV Charger
Optional
- 
Power Sensor
100A
250A (Optional)
- 
O&M Portal
- 
User App
- 
Installer App
- 
WLAN Dongle
- 
Mobile Dongle
Optional

Images are for demonstration purposes only. Please refer to the Anker SOLIX website for product availability.

¹For WLAN, use the included WLAN dongle. It also supports an Ethernet connection.

²4G communication functions are available through Anker Mobile Dongle (optional).

All-in-One Design



Inspired by the Break of Dawn



Elegance for Any Home



15 cm, Ultra Thin



Starry Night Screen



2,000kWh+ More Power¹

With Innovative Energy Optimizer



Make Your Home Self-Sufficient

Modular Design

5kWh-180kWh¹



Unites Your Home Energy



24/7 Whole-Home Backup

10 ms UPS Switchover




¹Images are for demonstration purposes only.

¹Calculation based on XI's 15kWh batteries compared to a traditional home battery over 10 years.

¹Refers exclusively to the Three-Phase Hybrid system, which supports up to six systems in parallel and is planned for release in Q4 2025. The Hybrid Single-Phase system will support parallel connections of up to three systems and is planned for release in Q2 2025. In off-grid scenarios, the Three-Phase system supports up to two systems in parallel, while the Single-Phase system supports only single-system output. Please visit AnkerSOLIX.com for the most up-to-date information on product availability and specifications.

Reliable System with 10-Year Warranty

Extreme Performance from -20°C to 55°C

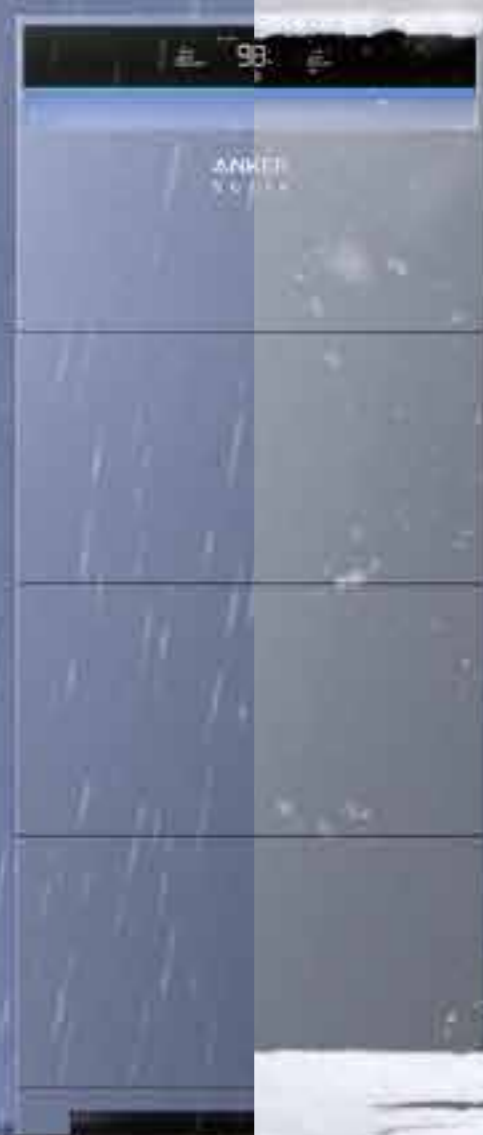

LFP Batteries



Auto-Isolation of Abnormal Batteries



0V Shutdown


C5-M Anti-Corrosion Rating

Special Powder Coating

Chemical Passivation Layer

Integrated Die-Cast Aluminum Substrate

Double-Layer Sealing Strip

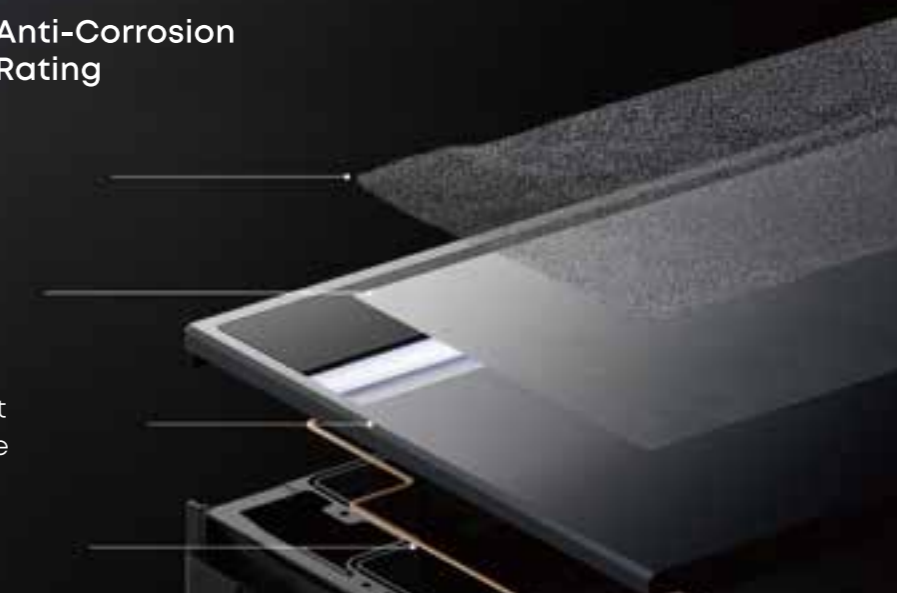

IP66



Enjoy the Most User-Friendly Interface, the Anker App

UX
DESIGN
AWARDS

nominated
2024



Intuitive User Experience

Anker SOLIX Professional
O&M Portal



Anker App



Manage All
Your Data



Summarize by
History



Customized
Data Viewing



Earnings at
Your Fingertips



| Power Module Hybrid Single-Phase Energy Storage System



Model	XI-H3.68K-S	XI-H4.6K-S	XI-H5K-S	XI-H6K-S
Battery Input				
Battery Type	LFP			
Charge Voltage Range	390-550VDC			
Discharge Voltage Range	370-500VDC			
Battery Capacity	5-30kWh			
PV Input				
Max Input Power	7.36kW	9.2kW	10kW	12kW
Max Input Voltage	600VDC			
Operating Voltage Range	80-550VDC			
Start-Up Voltage	100VDC			
MPPT Voltage Range	80-550VDC			
Rated Input Voltage	360VDC			
Max Input Current	16/16ADC			
Isc PV Array Short Circuit Current	20/20ADC			
Number of MPPTs	2			
Number of Strings per MPPT	1			
AC Output (On-Grid)				
Rated Output Power	3.68kW	4.6kW	5kW	6kW
Max Output Apparent Power	4kVA	5kVA	5.5kVA	6.6kVA
Max Units in Parallel ¹	3			
Rated Output Voltage	220/230/240VAC			
Rated Frequency	50/60 Hz			
Power Factor	0.8 ind - 0.8 cap			
THDI (@Rated Power)	< 3%			
AC Output (Off-Grid)				
Rated Output Power	3.68kW	4.6kW	5kW	6kW
Max Output Apparent Power	4kVA	5kVA	5.5kVA	6.6kVA
Peak Output Apparent Power (Duration)	7.2kVA (10 s)	10kVA (10 s)	10kVA (10 s)	10kVA (10 s)
Max Units in Parallel ¹	1			
Rated Output Voltage	220/230/240VAC			
Rated Frequency	50/60 Hz			
THDU (@Linear Load)	< 2%			
Switch Time	< 10 ms			
AC Input				
Max Input Apparent Power	7.2kVA	10kVA	10kVA	10kVA
Efficiency				
Max Efficiency	97.4%	97.5%	97.4%	97.6%
European Efficiency	96.5%	96.7%	96.7%	97.1%
Connectivity				
Internet Connectivity	Wi-Fi, Bluetooth, Ethernet, 4G (Optional)			
Other Specifications				
Weight	19 kg			
W×H×D Dimensions	670 × 335 × 150 mm			
Noise	≤ 30 dB ²			
Mounting Options	Ground or Wall ³			
Operation Temperature	-25°C to 60°C ⁴			
Relative Humidity	0 to 100%			
Max Operating Altitude	Up to 4,000 m, Power Derates from 2,000 m			
Ingress Protection Rating	IP66			
Warranty	10 Years Limited ⁵			
Compliance Information (More Information Available Upon Request)				
Grid Connection Certifications	VDE-AR-N 4105, DIN VDE V 0124-100 (VDE V 0124-100), CEI 0-21, G99/1-9, G99/NI, C10/C11, NTS 2021 V2.1, UNE 2170021, UNE 217002, RD647, AS/NZS 4777.2, EN 50549-1, EN 50549-10, Order no 208, DTIS-230206-BRL			
Safety	EN IEC 62109-1, EN IEC 62109-2, AS 60947.3			
EMC	EN IEC 61000-6-1, EN IEC 61000-6-3			

Disclaimer: The product specifications and details contained in this brochure are based on preliminary information and are subject to change without notice. The actual product features and specifications may vary upon its official release.

¹Parallel connections of systems are planned for future release. Please refer to AnkerSOLIX.com for availability.
²Tested in the Anker laboratory at a 1 m distance and under typical scenarios.
³Additional rack required for wall mounting.
⁴Power derates once ambient temperature exceeds 45°C.
⁵Refer to Anker SOLIX X1 Home Energy Storage System Warranty Policy for details.

| Power Module Hybrid Three-Phase Energy Storage System



Model	XI-H5K-T	XI-H8K-T	XI-H10K-T	XI-H12K-T
Battery Input				
Battery Type	LFP			
Voltage Range	350-450VDC			
Battery Capacity	5-30kWh			
PV Input				
Max Input Power	10kW	16kW	20kW	24kW ¹
Max Input Voltage	1,000VDC			
Operating Voltage Range	140-1,000VDC			
Start-Up Voltage	160VDC			
MPPT Voltage Range	14 - 950VDC			
Rated Input Voltage	600VDC			
Max Input Current	16/16ADC			
Isc PV Array Short Circuit Current	20/20ADC			
Number of MPPTs	2			
Number of Strings per MPPT	1			
AC Output (On-Grid)				
Rated Output Power	5kW	8kW	10kW	12kW
Max Output Apparent Power	5.5kVA	8.8kVA	11kVA	13.2kVA
Max Units in Parallel ¹	6			
Rated Output Voltage	220/380VAC, 230/400VAC, 3L+N+PE			
Rated Frequency	50/60 Hz			
Power Factor	0.8 ind - 0.8 cap			
THDI (@Rated Power)	< 2%			
AC Output (Off-Grid)				
Rated Output Power	5kW	8kW	10kW	12kW
Max Output Apparent Power	5.25kVA	8.4kVA	10.5kVA	12.6kVA
Peak Output Apparent Power (Duration)	10kVA (10 s)	16kVA (10 s)	20kVA (10 s)	20kVA (10 s)
Max Units in Parallel	2			
Rated Output Voltage	220/380 VAC, 230/400VAC, 3L+N+PE			
Rated Frequency	50 / 60 Hz			
THDU (@Linear Load)	< 2%			
Switch Time	< 10 ms (Typical)			
AC Input				
Max Input Apparent Power	20kVA			
Efficiency				
Max Efficiency	97.9%	98.0%	98.0%	98.0%
European Efficiency	96.0%	97.1%	97.4%	97.5%
Connectivity				
Internet Connectivity	Wi-Fi, Bluetooth, Ethernet, 4G (Optional)			
Other Specifications				
Weight	30 kg			
W×H×D Dimensions	670 × 450 × 150 mm			
Noise	≤ 30 dB ²			
Mounting Options	Ground or Wall ³			
Operation Temperature	-25°C to 60°C ⁴			
Relative Humidity	0 to 100%			
Max Operating Altitude	Up to 4,000 m, Power Derates from 2,000 m			
Ingress Protection Rating	IP66			
Warranty	10 Years Limited ⁵			
Compliance Information (More Information Available Upon Request)				
Grid Connection Certifications	VDE-AR-N 4105, DIN VDE V 0124-100 (VDE V 0124-100), Austria OVE Directive R25 deviation based on VDE 4105, EN 50549-1 / 2, EHS 2018:2, RfG, NC RfG, PTPIREE, C10/11, NTS 2021 V2.1, UNE 2170021, UNE 217002, PPDS: 2022, AS/NZS 4777.2, G99/1-9, G99/NI, DTIS-230206-BRL, NA/EEA-NE7 - CH 2020			
Safety	EN IEC 62109-1, EN IEC 62109-2.			
EMC	EN IEC 61000-6-1:2019, EN IEC 61000-6-3:2021, EN 62920:2017/A1:2021			

Disclaimer: The product specifications and details contained in this brochure are based on preliminary information and are subject to change without notice. The actual product features and specifications may vary upon its official release.

¹Power derates once ambient temperature exceeds 35°C. This value reflects the maximum power capability of the PV inverter interface. Actual power varies depending on the PV panel open circuit voltage and power rating.
²Parallel connections of systems are planned for future release. Please refer to AnkerSOLIX.com for availability.
³Tested in the Anker laboratory at a 1 m distance and under typical scenarios.
⁴Additional rack required for wall mounting.
⁵Power derates once ambient temperature exceeds 45°C.
Refer to Anker SOLIX X1 Home Energy Storage System Warranty Policy for details.

| Battery Module



Model	XI-B5-H
Performance Specifications	
Battery Energy ¹	5kWh
Battery Type	Li-Ion (LFP)
Battery Voltage Range	350-550VDC
Maximum Charge / Discharge Power	3kW
Maximum Charge / Discharge Current	7.6A
Other Specifications	
W×H×D Dimensions	670 × 360 × 150 mm
Weight	51 kg
Ingress Protection Rating	IP66
Operating Temperature	-20°C to 55°C
Maximum Operating Altitude	Up to 4,000 m, Power Derates from 2,000 m
Warranty	10 Years ²
Compliance Information	
Certifications	IEC 62619, IEC 62040-1, VDE-AR-E 2510-50, UN38.3

¹The initial capacity (design capacity) of an expansion battery is 5kWh. The actual capacity may vary depending on environmental conditions, such as temperature, transportation methods, and storage conditions.
²Refer to Anker SOLIX XI Home Energy Storage System Warranty Policy for details.

| System Parameters Hybrid Single-Phase Energy Storage System



Battery Modules	1	2	3	4 ²	5 ²	6 ²
Energy Capacity	5kWh	10kWh	15kWh	20kWh	25kWh	30kWh
Weight ¹	73.5 kg	124.5 kg	175.5 kg	232 kg	283 kg	334 kg
W×H×D Dimensions ²	670 × 765 × 150 mm	670 × 1,125 × 150 mm	670 × 1,485 × 150 mm	670 × 1,485 × 150 mm 670 × 482 × 150 mm	670 × 1,485 × 150 mm 670 × 842 × 150 mm	670 × 1,485 × 150 mm 670 × 1,202 × 150 mm

¹Includes floor mounting base and top cover.
²Two column installation.

| System Parameters Hybrid Three-Phase Energy Storage System



Battery Modules	1	2	3	4 ²	5 ²	6 ²
Energy Capacity	5kWh	10kWh	15kWh	20kWh	25kWh	30kWh
Weight ¹	84.5 kg	135.5 kg	186.5 kg	243 kg	294 kg	345 kg
W×H×D Dimensions ²	670 × 880 × 150 mm	670 × 1,240 × 150 mm	670 × 1,600 × 150 mm	670 × 1,600 × 150 mm 670 × 482 × 150 mm	670 × 1,600 × 150 mm 670 × 842 × 150 mm	670 × 1,600 × 150 mm 670 × 1,202 × 150 mm

¹Includes floor mounting base and top cover.
²Two column installation.

| Power Sensor



Model	DTSU666	DDSU666
Power Supply		
Grid Connection Type	3P4W	1P2W
Frequency	50 / 60Hz	
Nominal Voltage	3×220/380V-3×240/415V	220-240V
Measurement Range		
Current Range	0-100A	0-250A
Voltage Range	3×57.7/100V- 3×288/500V	
Accuracy		
Voltage Accuracy	Class B (Class 1)	
Current Accuracy		
Power Accuracy		
Frequency Accuracy		
General Specifications		
H×W×D Dimensions	100 × 72 × 65.5 mm	100 × 36 × 65.5 mm
Weight	0.3 kg	0.18 kg
Storage Temperature Range	-40°C to 70°C	
Operating Temperature Range	-25°C to 55°C	
Relative Humidity Range	0 to 95%	
Ingress Protection Rating	IP51	
Installation Method	DIN Rail 35 mm	
Communication		
Interface	RS485	
Baud Rate	1200/2400/4800/9600/19200/38400/115200 bps	1200/2400/4800/9600/ 19200/115200 bps
Protocol	Modbus RTU	
Other Specifications		
Accessories	3 CT 100A / 40mA (6 m)	3 CT 250A / 50mA (6 m)
		1 CT 100A / 40mA (6 m)

WLAN Dongle

Model	DG-WF-H
Standard	2.4 GHz 802.11b/g/n Compatibility
Security	802.11i (WPA, WPA2)
Data Rate	Up to 150 Mbps (Theoretical Value)
TX Power	16.5 dBm @ CCK, 16.5 dBm @ OFDM, 16.5 dBm @ MCS
Sensitivity	-88 dBm @ CCK, -75 dBm @ OFDM, -69 dBm @ MCS
Ethernet	
Standard	IEEE 802.3 for 10BaseT, IEEE 802.3u for 100BaseTX
Speed	10/100 Mbps, Auto MDI/MDIX
Bluetooth	
Standard	Bluetooth v4.2 BLE
Range	10 m
Speed	1 Mbps (Theoretical Value)
Interface	
RS-485	1 Port
Input Voltage	8VDC
Environment	
Operating Temperature	-40°C to 70°C
Storage Temperature	-40°C to 85°C
Humidity	5% to 95% Non-Condensing
Connector	
Pin 1	V+
Pin 2	RS-485 B (D-)
Pin 3	RS-485 A (D+)
Pin 4	GND
Mechanical Specifications	
Dimensions	102 × 50 × 35 mm
Ingress Protection Rating	IP65

Mobile Dongle

Model	VD-606L8-WB-AK	VD-606L7-WB-AK
Cellular Networks		
Frequencies	LTE UE-Cat.4, LTE FDD: B1/B3/B5/B7/B8/B20/B28, LTE TDD: B38/B40/B41, WCDMA: B1/B5/B8, GSM: 900/1800 MHz	LTE FDD: B1/B2/B3/B4/B5/B7/B8/B28, LTE TDD: B40, WCDMA: B1/B2/B4/B5/B8, GSM: B2/B3/B5/B8
Speed	Max 150Mbps (DL), Max 50Mbps (UL)	
Antenna	Built-In, LDS, Gain: 3.87 dBi	
TX Power	19 dBm ± 2 dB	
Sensitivity	-92dBm ± 2dB at FDD of 10 m	
Bluetooth		
Standard	Bluetooth v4.2 BLE Specification	
Operational Range	Max 30 m ¹	
Speed	1 Mbps ¹	
Interface		
RS-485	1	
Power	Input Voltage: 5 - 12VDC, Consumption: 4.5W	
Environment		
Operating Temperature	-40°C to 70°C	
Storage Temperature	-40°C to 85°C	
Humidity	5% to 95% Non-Condensing	
LED Indicators		
Power	Off: Powered Off, On: Power Supplied from DC Input	
Network	Off: Powered Off, On: Connected to Internet, Flashing: Disconnected from Internet	
Mechanical		
W×H×D Dimensions	107 × 49 × 36.8 mm	
Case Material	Plastic	
Ingress Protection Rating	IP65	
Warranty		
Dongle Warranty	5 Years ²	

¹Measured under laboratory conditions.

²Refer to Anker SOLIX X1 Home Energy Storage System Warranty Policy for details.

Anker (User App)

App Features	
Operating System	Android and iOS
Rapid Battery Charging	Yes
SOC Setting	0 - 100%
Power Sources Monitor	Working Status, Power Flow
Historical Data	Daily, Weekly, Monthly, Yearly
Grid Charging	Yes
Account Security	Password Verification Support
EMS Modes	Self-Consumption
	Time of Use
	Rapid Battery Charging

Anker SOLIX Professional (Installer App)

App Features		
Power Site Management	Power Site Lists	Search / System ID / Device Location / System Name
		Add System / Delete System
System Build	Collect Owner Details	Location Map
	Search Device (Via Bluetooth)	Self-Search / Scan Code to Connect
	Configure System Network	Multiple Network Connections
	Add Devices	Add Devices
System Configuration	Update System	Update System
	Select Grid Code	Add Devices
	Configure Meter	Grid Parameter
	Power On System	Configure Meter
System Testing	Wiring Inspection	Power On System
		Ground Fault Detection
	On-Grid and Off-Grid Functions	On-Grid Function
		Off-Grid Function
Post Commissioning	Delivery	Validation Code / Enter Email
	EMS Strategy	Self-Consumption
		Time of Use
		Rapid Battery Charging
		Storm Guard
	External Device Configuration	Heat Pumps and Generators

Anker SOLIX Professional (O&M Portal)

Web Features		
Intelligent Monitoring	System List	System Status
		System Data
	System Map	Battery Installation Data
		Map
		System List Display
		Search
	System Monitoring	Map
		Basic Data
		System Monitor Entry
		System Overview
EV Charger		
Energy Statistics		
Fault Management	Fault Information Management and Push	Device Details
		Fault Information
		Fault List
		Fault Push Configuration
System Management	User Management and Permission Allocation	Fault Push Information
		User Management
		Role Type Management
		Role Management
		Organization Management

Anker SOLIX in Europe 2025



50+ Employees

4 Offices (4 More Planned)

11 Warehouses



Local Sales Team



Local Warehouses



Local Service Team



Local Call Center

ANKER SOLIX