



KINTO
Tyres

キントータイヤ



2025
CATALOGUE

| BRAND BACKGROUND

Kinto Tyres began as a passion project to create affordable tyres with superior quality. Being avid drivers, the founders realized the utmost importance of having high quality tyres for the sake of safety and efficiency. That is why we subject our tyres to the highest standard of quality checking in the world.

Being a wholly Japanese owned company which the strictest testing has been implemented to ensure that all the following categories meet our standard and expectations.

- ▶ *Wet / Dry Handling and Braking*
- ▶ *High Speed Stability*
- ▶ *Cornering Grip*
- ▶ *Traction*
- ▶ *Aquaplaning*
- ▶ *Fuel Consumption*
- ▶ *Durability*

Certificate and Accreditation

- ▶ *ECE (Economic Commission of Europe)*
- ▶ *DOT (Department of Transportation, United States)*
- ▶ *CCC (China Compulsory Certificate)*
- ▶ *TISI (Thai Industrial Standards Institute)*
- ▶ *GSO (GCC Standardization Organization)*
- ▶ *SASO (The Saudi Standards, Metrology and Quality Organization)*
- ▶ *PS (Philippine Standard Quality and/or Safety Mark)*
- ▶ *VR (Vietnam Register Quality and Safety Management)*

Kinto Tyres is engineered with the best combination of properties to tackle a multitude of challenges, improve the driving experience, and enhance the comfortable riding quality.

Tyres are often overlooked, but extremely important part of your vehicle's performance.

For your enjoyable driving experience, think of Kinto Tyres!

KAIJU-2



X-68+



FUERTE K99



FALCO 588



FORZA 001



V-36



PRESTIGE
P07

ST-51



SC-901



SC-900



ST-55



PRESA M/T



SM-1



SM-5



SW-89



SW-99





PRESTIGE P07

Twist Edge-Cutting Technology

This innovation controls block stiffness by cutting the edges, preventing uneven wear and extending tire life.

Precise Groove Arrangement

With an optimized groove arrangement, we reduce harsh noise, providing a smoother and quieter driving experience.

Staggered Groove & Sipe Arrangement

This design enhances steering stability and contributes to a quieter and more comfortable ride.

LUXURY PERFORMANCE WITH A DRAMATIC SILENCE

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
175/65R14**	86 XL	530	H	5J	177	584	340	280 AA A
185/65R14	90 XL	600	H	5 1/2J	189	596	340	280 AA A
185/55R15	86 XL	530	V	6J	184	585	340	280 AA A
185/60R15	88 XL	560	H	5 1/2J	189	603	340	280 AA A
185/65R15	92 XL	630	H	5 1/2J	189	621	340	280 AA A
195/55R15	89 XL	580	V	6J	201	595	340	280 AA A
195/60R15	92 XL	630	H	6J	201	615	340	280 AA A
195/65R15	95 XL	690	H	6J	201	635	340	280 AA A
185/55R16	87 XL	545	V	6J	201	609	340	280 AA A
195/60R16	93 XL	650	H	6J	201	640	340	280 AA A
205/55ZR16	94 XL	670	W	6 1/2J	214	632	340	280 AA A
215/55R16**	97 XL	730	H	7J	226	642	340	280 AA A
215/60R16**	96 XL	710	H	6J	209	652	340	280 AA A
205/45ZR17	88 XL	560	W	7J	206	616	340	280 AA A
215/45ZR17	91 XL	615	W	7J	213	626	340	280 AA A
215/50ZR17**	95 XL	690	W	7J	226	648	340	280 AA A
215/55ZR17	98 XL	750	W	7J	226	668	340	280 AA A
215/60ZR17**	96 XL	710	W	7J	215	690	340	280 AA A
225/55ZR17	101 XL	825	W	7J	223	680	340	280 AA A
215/55ZR18	99 XL	775	V	7J	215	693	340	280 AA A
225/45ZR18	95 XL	690	V	7 1/2J	225	659	340	280 AA A

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
225/50ZR18**	99 XL	775	W	7J	223	683	340	280AA A
235/45ZR18	98 XL	750	W	8J	236	669	340	280AA A
235/50ZR18	101 XL	825	W	7 1/2J	245	693	340	280AA A
235/60ZR18**	103 XL	875	W	8J	225	739	340	280AA A
245/45ZR18**	100 XL	800	W	8J	243	677	340	280AA A
225/55ZR19**	99 XL	775	V	8J	240	731	340	280AA A

**COMING SOON

KAIJU-2



Get to The Trail Peacefully

Variable Pitch Tread Pattern – Advanced sound equipment was used to create a pattern that provides a quiet and smooth highway ride.

Off-Road Performance

The lugs on the shoulder are staggered to improve traction in deep sand and loose dirt.

Performances in Every Condition

Angled, lateral voids were engineered to channel away water in wet conditions and provide forward stability in dry conditions.

MEET YOUR EVERYDAY ON AND OFF-ROAD ADVENTURES

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
245/70R16	111 XL	1090	T	7J	248	750	350	560 A B
255/70R16	115 XL	1030	T	7J	255	763	350	560 A B
265/70R16	116 XL	1250	T	8J	272	778	350	560 A B
265/75R16	116 XL	1250	T	7 1/2J	267	804	350	560 A B
265/65R17	116 XL	1250	T	8J	272	776	350	560 A B
265/70R17	115 XL	1215	T	8J	256	802	350	560 A B
285/70R17	116	1250	T	8 1/2J	292	838	350	560 A B
265/60R18	114 XL	1180	T	8J	272	775	350	560 A B
275/65R18	116 XL	1250	T	8J	275	815	350	560 A B
265/50R20	111 XL	1090	T	8 1/2J	277	774	350	560 A B
275/55R20	117 XL	1285	T	8 1/2J	284	810	350	560 A B

X-68+



Exceptional Handling Performances

Unblock Shoulders - Using circumferentially continuous single shoulder blocks without any gaps, rigidity at the tread is increased responsiveness and ensured a powering grip.

An Evolution in Wet Grip and Improved Dry Grip

Evolutions in tread pattern and tire compounding deliver improved wet performance under a wide variety of conditions.

Sequential Round Grooves - Forces from the surface are spread and dissipated by the round grooves to improve the mileage.

The positioning of the grooves is also effective in draining water on wet surfaces.

ENJOY THE ULTIMATE HANDLING AND GRIP

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
245/45ZR18	100 XL	800	W	8J	243	677	340	280 A A
255/50R18	106 XL	950	V	8J	265	713	340	280 A A
285/40ZR18	101	825	W	9.5J	285	677	300	280 A A

FUERTE K99

Greater Durability and Longer Life

Durable tread compound with reinforced construction stands up to the challenge of heavy loads and extends tread life.

Excellent Wet Grip and Traction

The four wide straight grooves enhance drainage performance and provide exceptional maneuverability and anti-aquaplaning capabilities on wet surfaces.

Extra Powerful Profile

High rigidity and tough. Combination of deep lugs and sipes prevent uneven wear and enhance handling performance.

MEET THE MULTI-PURPOSE NEEDS OF THE MODERN COMMERCIAL VEHICLE

Size	Ply	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)
185R14C	8PR	102/100	900/850	S	5 1/2J	188	652	450
195R14C	8PR	106/104	950/900	S	5 1/2J	206	666	450
205/70R15C	8PR	106/104	950/900	S	6J	205	669	450
215/70R15C	8PR	109/107	1030/975	S	6 1/2J	215	683	450
215/65R16C	8PR	109/107	950/900	S	6J	215	685	450
215/70R16C	8PR	108/106	950/900	S	6J	215	707	450
235/65R16C	8PR	121/119	1215/1150	S	6J	235	712	450



FALCO 588

Directional Tread Pattern & Shoulder Block

Staggered tread blocks maximize traction and handling, improves ride comfort by reducing road noise.

Stabilize tread blocks for better braking performance and a quieter ride.

Lightning Grooves & Arrowhead Tapers

Enable better water evacuation resulting in better wet performance.

Deliver increased tread block stiffness resulting in better straight-line driving stability.

Dynamic Directional, All-Season Tread Pattern

Provides a good balance between wet traction, dry handling and performance-based looks.

PERFECT BALANCE OF DYNAMIC LOOK AND SPORT-ORIENTED PERFORMANCE

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
265/65R17	116 XL	1250	H	8J	272	776	300	420 A A
265/60R18	114 XL	1180	V	8J	272	775	300	420 A A
265/50ZR20	111 XL	1090	W	8.5J	265	774	340	420 A A

FORZA 001

"A" Shape & Aggressive Groove

Aggressive and dynamic thread patterns don't just deliver great looks – they also deliver superb handling, increased handling stability provides powerful traction in dry conditions.

Triple & Half Groove

Optimises overall rigidity and quickens initial steering response, take corners and brake with more confidence and control on both wet and dry road surfaces.

Wide Centre Rib and Curved Groove Wall

Stiffens instantaneously in reaction to road conditions for greater driving pleasure, strengthens lateral rigidity for precise cornering performance.

Pulse Groove and Silica Tread Compound

Provides better drainage and anti-hydroplaning performance, improved fuel efficiency and wet traction.

DELIVER A THRILLING RIDE WITH MAXIMUM PRECISION

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
185/55R15	86 XL	530	V	6J	194	585	340	280 AA A
195/50R15	82	475	V	6J	201	577	300	280 AA A
195/55R15	85	515	V	6J	201	595	300	280 AA A
195/50R16	88 XL	560	V	6J	201	602	340	280 AA A
205/50ZR16	91 XL	615	W	7J	205	611	340	280 AA A
205/45ZR17	88 XL	560	W	7J	206	616	340	280 AA A
215/45ZR17	91 XL	615	W	7J	213	626	340	280 AA A
225/45ZR18	95 XL	690	W	7 1/2J	225	659	340	280 AA A
235/40ZR18	95 XL	690	W	8 1/2J	241	645	340	280 AA A

V-36



Precision Through The Turns

The large outer shoulder blocks are designed to increase surface contact and provide improved traction while cornering.

Impressive Wet Traction

Deep circumferential grooves work in unison with the slanted three-dimensional tread blocks to evacuate water. This helps maintain contact with the road, provides increased wet traction, and prevents aquaplaning.

Glue to The Pavement

The outer shoulder is made of large reinforced tread blocks, which increase the amount of surface area contacting the road. This assists with dry performance and cornering.

FEEL THE GREATER STABILITY AND CONTROL

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
195/50R15	82	475	V	6J	201	577	300	320 A A
195/55R15	85	515	V	6J	201	595	300	320 A A
225/50R15	95 XL	690	V	7J	233	607	340	320 A A
245/45ZR18	100 XL	800	W	8J	243	677	340	320 A A
255/50R18	106 XL	950	V	8J	265	713	340	320 A A
255/55R18	109 XL	1030	V	8J	265	737	340	320 A A
265/60R18	110	1060	H	8J	272	775	300	320 A A
275/40ZR18	103 XL	875	W	9 1/2J	278	677	340	320 A A
285/45ZR18	107 XL	975	W	9 1/2J	285	677	340	320 A A
265/50R20	107	975	V	8 1/2J	277	774	300	320 A A

ST-51



Quiet and Comfort

Optimized variable pitch combination design reduces noise effectively and brings dynamic driving experience.

Variable 3D pattern groove design provides comfortable and smooth riding moment.

Handling Accurateness

Structural reinforcement of pattern groove bottom improves handling stability. In between tortuous groove and steel design promote excellent traction performance.

Excellent Braking Performance and Durability

High density slots design and special formula shortens braking distance either in dry and wet conditions.

Unique durable tread formula ensures greater tread life, and provides excellent dry and wet braking performance, drives with confidence.

LONGEVITY AND PERFORMANCE ON HIGHWAY

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
235/75R15	109 XL	1030	T	6 1/2J	235	733	340	420 A A
215/65R16	98	750	H	6 1/2J	221	686	300	420 A A
215/70R16	100	800	H	6 1/2J	221	708	300	420 A A
245/70R16	111 XL	1090	T	7J	248	750	340	420 A A
265/70R16	112 XL	1120	T	8J	265	777	300	420 A A
215/60R17	96	710	V	6 1/2J	221	690	300	420 A A
225/60R17	99	775	V	6 1/2J	228	702	300	420 A A
225/65R17	102	850	T	6 1/2J	228	724	300	420 A A
265/65R17	112	1120	T	8J	272	776	300	420 A A
265/70R17	115	1215	T	8J	272	804	300	420 A A
235/55R18	104 XL	900	V	7 1/2J	245	715	340	420 A A
235/60R18	107 XL	975	V	7J	240	739	340	420 A A
265/60R18	110	1060	H	8J	272	775	300	420 A A
275/55R20	117 XL	1285	T	8 1/2J	284	810	340	420 A A
275/60R20	115	1215	T	8J	279	838	300	420 A A

SC-901



Longer Driving Mileage

Wear-resistance tread formula can effectively improve mileage and service life.
Tread reinforced block reduces rolling resistance for fuel-saving.

Safety on Wet Surface

Wide drainage groove design is adopted to improve drainage performance of wet and slippery environment.
Continuous steamlined transverse pattern grooves evacuate water more effectively.

Confident Handling on Dry Condition

The herringbone grooves cut the water film productively, safety on both wet and dry conditions.

High tenacity cord in framework better strengthens and increases the anti-damage ability.

COST-EFFECTIVE WITH LONG ENDURANCE

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
155/65R13	73	365	T	4 1/2J	157	532	300	360 A A
155/70R13	75	387	T	4 1/2J	157	548	300	360 A A
155/80R13	79	437	T	4 1/2J	157	578	300	360 A A
165/65R13	77	412	T	5J	170	544	300	360 A A
165/70R13	79	437	T	5J	170	562	300	360 A A
165/80R13	83	487	T	4 1/2J	165	594	300	360 A A
175/70R13	82	475	T	5J	177	576	300	360 A A
185/70R13	86	530	T	5 1/2J	189	590	300	360 A A
155/65R14	75	387	T	4 1/2J	157	558	300	360 A A
165/55R14	72	335	V	5J	165	538	300	360 A A
165/60R14	75	387	H	5J	170	554	300	360 A A
165/65R14	79	437	T	5J	170	570	300	360 A A
165/70R14	85 XL	515	T	5J	170	588	300	360 A A
175/65R14	86 XL	475	H	5J	177	584	300	360 A A
175/70R14	84	500	T	5J	177	602	300	360 A A
185/55R14	80	450	H	6J	194	560	300	360 A A
185/60R14	82	475	H	5 1/2J	189	578	300	360 A A
185/65R14	86	530	H	5 1/2J	189	596	300	360 A A
185/70R14	88	560	T	5 1/2J	189	616	300	360 A A

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
195/60R14	86	530	H	6J	201	590	300	360 A A
195/70R14	91	615	T	6J	201	630	300	360 A A
175/65R15	84	500	H	5J	177	609	300	360 A A
185/55R15	82	475	V	6J	194	585	300	360 A A
185/60R15	88 XL	560	H	5 1/2J	189	603	300	360 A A
185/65R15	88	560	H	5 1/2J	189	621	300	360 A A
195/50R15	82	475	V	6J	201	577	300	360 A A
195/55R15	85	515	V	6J	201	595	300	360 A A
195/60R15	88	560	V	6J	201	615	300	360 A A
195/65R15	91	615	V/H	6J	201	635	300	360 A A
205/60R15	91	615	V	6J	209	627	300	360 A A
205/65R15	94	670	H	6J	209	647	300	360 A A
205/70R15	96	710	T	6J	209	710	300	360 A A
215/65R15	100 XL	800	H	6 1/2J	221	661	340	360 A A
215/70R15	98	750	T	6 1/2J	221	683	300	360 A A
225/60R15	96	710	V	6 1/2J	228	651	300	360 A A
195/50R16	88	560	V	6J	201	602	300	360 A A
195/55R16	87	545	V	6J	201	620	300	360 A A
195/60R16	89	580	V/H	6J	201	640	300	360 A A
205/60R16	92	630	V	6J	209	652	300	360 A A
215/60R16	95	690	T	6 1/2J	221	664	300	360 A A
215/65R16	98	750	T	6 1/2J	221	686	300	360 A A

SC-900



Comfortable at High Speeds

Optimized irregular pitch spread had reduced driving noise to the utmost. Outer broad shoulder tread pattern provides enough ground contact area for high-speed steering and turning.

Accurate Handling

Asymmetrical pattern guarantees excellent curve grip power, and in the meanwhile disperses touchdown pressure.

Three longitudinal continuous ridges had ensured accurate handling performance.

Wet Surface Drainage Performance

Under wetland circumstances, four wide drainage longitudinal grooves remove water quickly and efficiently prevent tire lateral skating.

QUIETER, SAFER AND SMOOTHER JOURNEY

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
185/55R16	83	487	V	6J	194	610	300	380 A A
195/45ZR16	84 XL	500	V	6 1/2J	195	582	340	380 A A
195/55R16	87	545	V	6J	201	620	300	380 A A
205/45ZR16	87 XL	545	W	7J	206	590	340	380 A A
205/55R16	91	615	V/W	6 1/2J	214	632	300	380 A A
205/60R16	92	630	H	6J	209	652	300	380 A A
205/65R16	95	690	H	6J	209	672	300	380 A A
215/45ZR16	90 XL	600	V	7J	213	600	340	380 A A
215/55ZR16	97 XL	730	W	7J	226	642	340	380 A A
215/60R16	95	690	H	6 1/2J	221	664	300	380 A A
225/50R16	92	630	W	7J	233	632	300	380 A A
225/55ZR16	99 XL	775	W	7J	233	654	340	380 A A
225/60R16	98	750	V	6 1/2J	228	676	300	380 A A
235/60R16	100	800	H	7J	240	688	300	380 A A
205/40ZR17	84 XL	500	W	7 1/2J	212	596	340	380 A A
205/45ZR17	88 XL	560	W	7J	206	616	340	380 A A
205/50ZR17	93 XL	650	W	6 1/2J	214	638	340	380 A A
205/55ZR17	95 XL	690	W	6 1/2J	213	657	340	380 A A
215/40ZR17	87 XL	545	W	7 1/2J	218	604	340	380 A A
215/45ZR17	91 XL	615	W	7J	213	626	340	380 A A
215/50ZR17	95 XL	690	W	7J	226	648	340	380 A A
215/55ZR17	98 XL	750	W	7J	226	668	340	380 A A
225/45ZR17	94 XL	670	W	7 1/2J	225	634	340	380 A A

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
225/50ZR17	98 XL	750	W	7J	233	658	340	380 A A
225/55ZR17	101 XL	825	W	7J	233	680	340	380 A A
235/45ZR17	97 XL	730	W	8J	236	644	340	380 A A
235/50ZR17	100 XL	800	W	7 1/2J	245	668	340	380 A A
235/55ZR17	103 XL	875	W	7 1/2J	245	690	340	380 A A
245/40ZR17	95 XL	690	W	8 1/2J	248	628	340	380 A A
245/45ZR17	99 XL	775	W	8J	243	652	340	380 A A
215/40ZR18	89 XL	580	W	7 1/2J	218	629	340	380 A A
215/45ZR18	93 XL	650	Y	7J	213	651	340	380 A A
215/55ZR18	99 XL	775	V	7J	226	693	340	380 A A
225/40ZR18	92 XL	630	W	8J	230	637	340	380 A A
225/45ZR18	95 XL	690	Y	7 1/2J	225	659	340	380 A A
225/50ZR18	99 XL	775	W	7J	233	683	340	380 A A
235/40ZR18	95 XL	690	W	8 1/2J	241	645	340	380 A A
235/45ZR18	98 XL	750	W	8J	236	669	340	380 A A
235/50ZR18	101 XL	825	W	7 1/2J	245	693	340	380 A A
245/40ZR18	97 XL	730	W	8 1/2J	248	653	340	380 A A
245/45ZR18	100 XL	800	W	8J	243	677	340	380 A A
255/35ZR18	94 XL	670	Y	9J	260	635	340	380 A A
255/40ZR18	99 XL	775	W	8 1/2J	255	661	340	380 A A
255/45ZR18	103 XL	875	W	8 1/2J	258	684	340	380 A A
255/55ZR18	109 XL	1030	W	8 1/2J	255	737	340	380 A A
265/35ZR18	97 XL	730	Y	9 1/2J	269	643	340	380 A A
225/35ZR19	88 XL	560	W	8J	230	641	340	380 A A
225/40ZR19	93 XL	650	W	8J	230	663	340	380 A A
225/45ZR19	96 XL	710	Y	7 1/2J	223	683	340	380 A A
235/35ZR19	91 XL	615	W	8 1/2J	241	647	340	380 A A
235/55ZR19	105 XL	925	Y	8 1/2J	235	741	340	380 A A
245/35ZR19	93 XL	650	Y	8 1/2J	248	655	340	380 A A
245/40ZR19	98 XL	750	W	8 1/2J	248	679	340	380 A A
245/45ZR19	102 XL	850	W	8J	243	703	340	380 A A
255/35ZR19	96 XL	710	Y	9J	256	659	340	380 A A
255/40ZR19	100 XL	800	W	9J	259	684	340	380 A A
255/50ZR19	107 XL	975	W	8J	264	734	340	380 A A
255/55ZR19	111 XL	1090	W	8J	265	763	340	380 A A
275/35ZR19	100 XL	800	Y	9 1/2J	274	677	340	380 A A
275/40ZR19	105 XL	925	W	9 1/2J	273	703	340	380 A A
225/35ZR20	93 XL	650	W	8J	230	666	340	380 A A
245/30ZR20	95 XL	690	Y	8 1/2J	246	657	340	380 A A
245/35ZR20	95 XL	690	W	8 1/2J	248	680	340	380 A A
245/40ZR20	99 XL	775	W	8 1/2J	248	704	340	380 A A
245/45ZR20	103 XL	875	W	8J	243	728	340	380 A A
255/35ZR20	97 XL	730	Y	9J	260	686	340	380 A A
255/50ZR20	109 XL	1030	V	8 1/2J	255	764	340	380 A A
265/50ZR20	111 XL	1090	W	9 1/2J	265	774	340	380 A A
275/40ZR20	106 XL	950	W	9 1/2J	278	728	340	380 A A
275/45ZR20	110 XL	1060	Y	9J	275	755	340	380 A A
275/55ZR20	117 XL	1285	W	9 1/2J	275	810	340	380 A A
275/60ZR20	115 XL	1215	W	9 1/2J	279	838	340	380 A A
285/50ZR20	116 XL	1250	V	9J	297	794	340	380 A A
315/35ZR20	110 XL	1060	Y	11J	315	728	340	380 A A

ST-55



Superior Dynamic Performance

Dynamic appearance, while providing more excellent drainage and prevent aquaplaning.

Wide pattern blocks with wide pattern grooves, sharp appearance with sporty feelings.

Driving Safety

Four broad main grooves are engineered to play a significant role in drainage and anti-skid.

Asymmetric pattern with leading edge in handling performance both of wet and dry conditions.

Predictable Cornering

The specifically formulated tread compound and reinforced internal construction were engineered to emphasize dry road response, traction, handling and high-speed capabilities.

PURE STREET PERFORMANCE

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
265/50R20	111 XL	1090	V	8 1/2J	277	774	340	400 A A
235/30R22	90 XL	600	W	8 1/2J	242	701	340	400 A A
265/35R22	102 XL	850	V	9 1/2J	271	745	340	400 A A
265/40R22	106 XL	950	V	9 1/2J	271	771	340	400 A A
305/40R22	114 XL	1180	V	11J	313	803	340	400 A A
305/45R22	118 XL	1320	V	10J	303	833	340	400 A A
305/35R24	112 XL	1120	V	11J	313	824	340	400 A A

PRESA M/T

Durable Large Blocks

Large blocks for rough appearances, provide more contact point with the road surface for better handling while minimizing noise.

Unique Shoulder Tread Layout

Aggressive shoulder to sidewall blocks for better traction.

Wide and functional shoulder layout provides exceptional off-road capability while maintaining great on-road performance.

Ply Reinforced Sidewall & Stone Ejectors

Optimized 3-ply construction ensures excellent steering stability and side-cut resistance.

Protect the grooves from stone drilling while maintaining traction.

GO-ANYWHERE PERFORMANCE WITH AMAZING TRACTION

Size	Ply	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)
215/75R15LT	6PR	100/97	800/730	Q	6J	215	703	248
235/75R15LT	6PR	104/101	900/825	Q	6 1/2J	235	733	248
30X9.50R15LT	6PR	104	900	Q	7 1/2J	241	762	241
235/85R16LT	10PR	120/116	1400/1250	Q	6 1/2J	235	812	345
245/75R16LT	10PR	120/116	1400/1250	Q	7J	248	780	345
265/75R16LT	10PR	123/120	1550/1400	Q	7 1/2J	267	810	345
245/75R17	-	112	1120	S	7J	248	800	248
255/75R17LT	6PR	111/108	1090/1000	Q	7J	255	814	345
265/65R17LT	10PR	120/117	1400/1285	Q	8J	265	776	345
265/70R17LT	8PR	118/115	1320/1215	Q	8J	272	810	345
285/65R17	-	116	1250	S	8 1/2J	285	802	248
265/60R18	10PR	110	1060	S	8J	272	775	240
285/60R18	-	116	1250	S	8 1/2J	285	799	248

SM-1

Outstanding Using Mileage

Big lateral tread block in the middle, as well as wear formula design provide outstanding using mileage.

Driving Stability with a Heavy Load

Strengthened shoulder design works effectively on stability when heavy loading.

Promoted Traction Performance

Zigzag main grooves on the left and right promote traction performance and better adapt tires on bad road conditions.

MORE MILEAGE THROUGH LONG PERIOD OF WEARING

Size	Ply	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)
165R13C	6PR	89/88	615/580	S	4.50B	167	596	375
185R14C	8PR	102/100	850/800	R	5 1/2J	189	652	450
195R14C	8PR	106/104	950/900	R	5 1/2J	198	666	450
195R15C	8PR	106/104	950/900	N	5 1/2J	198	690	450
195/70R15C	8PR	104/102	755/710	R	6J	201	655	450
205/70R15C	8PR	106/104	950/900	R	6J	206	669	450
225/70R15C	8PR	112/110	975/875	S	6 1/2J	228	697	450
215/75R16C	8PR	116/114	1250/1180	R	6J	216	728	475
245/75R16C	10PR	120/116	1400/1250	S	7J	248	774	550
265/70R17C	6PR	112/109	1320/1215	S	8J	272	804	450

SM-5

Strong Grip Power

Zigzag ditch pattern is appropriate for a variety of harsh road conditions. Continuous inclined groove design offers an excellent drainage function as well as a stable grip.

Stiff and Sharp Shoulder

Zigzag tooth shoulder design provides strong grip and traction capacity, even in muddy field.

Thick three-dimensional sidewall protection structure strengthens cutting resistance and protects sidewall against impacts.

Balanced Off-Road and On-Road Performance

Variable pitch combination reduces noise at high speed. Reinforced tire structure and multi-layer matrix material work together to improve tire strength.

BALANCE PERFORMANCE OVER VARIOUS TERRAINS

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)	UTQG
235/70R16	106	950	T	7J	240	736	300	560 A B
265/70R16	112	1120	T	8J	272	778	300	560 A B
275/70R16	114	1180	S	8J	279	792	300	560 A B
265/65R17	112	1120	S	8J	272	776	300	560 A B
275/65R17	115	1215	S	8J	279	790	300	560 A B
285/65R17	116	1250	S	8 1/2J	292	802	300	560 A B
265/40R18	101 XL	825	V	9 1/2J	271	669	340	560 A B



SW-89

Durable Large Blocks

Large blocks for rough appearances, provide more contact point with the road surface for better handling while minimizing noise.

Unique Shoulder Tread Layout

Aggressive shoulder to sidewall blocks for better traction.

Wide and functional shoulder layout provides exceptional off-road capability while maintaining great on-road performance.

Ply Reinforced Sidewall & Stone Ejectors

Optimized 3-ply construction ensures excellent steering stability and side-cut resistance.

Protect the grooves from stone drilling while maintaining traction.

HIGH-SPEED TRAVEL ON SNOW AND ICE

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)
185/60R15	84	500	T	5 1/2J	189	603	300
185/65R15	88	560	T	5 1/2J	189	621	300
195/55R15	85	515	T	6J	201	595	300
195/60R15	88	560	T	6J	201	615	300
195/65R15	91	615	T	6J	201	635	300
205/65R15	94	670	T	6J	209	647	300
205/55R16	91	615	H	6 1/2J	214	632	300
205/60R16	96 XL	710	H	6J	209	652	340
215/55R16	97 XL	730	H	7J	226	642	340
215/60R16	95	690	H	6 1/2J	221	664	300
225/55R16	99 XL	775	T	7J	233	654	340
215/50R17	95 XL	690	H	7J	226	648	340
215/55R17	98 XL	750	H	7J	226	668	340
225/45R17	94 XL	670	H	7 1/2J	225	634	340
225/50R17	98 XL	750	H	7J	233	658	340
225/55R17	101 XL	825	H	7J	233	680	340
245/45R18	100 XL	800	H	8J	243	677	340

SW-99

Excellent Snow Traction

Advanced tread design provides hundreds of biting edges for confident snow traction.

Competitive Ice Traction

Cavity shape removes water film from the ice surface and delivers micro-edge effects.

Predictable Handling

Distinctive uni-directional tread design enhances road contact for better handling.

Zigzag shaped circumferential grooves create more edges around the tire to grip snow.


DRIVING SAFELY ON SNOW AND ICE

Size	Loading Index	Load Capacity (kg)	Speed Rating	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Pressure (kPa)
215/65R16	98	750	T	6 1/2J	221	686	300
215/70R16	100	800	T	6 1/2J	221	708	300
235/70R16	106	950	T	7J	240	736	300
245/70R16	107	975	T	7J	248	750	300
215/60R17	96	710	T	6 1/2J	221	690	300
225/60R17	99	775	T	6 1/2J	228	702	300
255/60R17	106	950	H	7 1/2J	260	738	300
225/65R17	102	850	T	6 1/2J	228	724	300
265/65R17	112	1120	T	8J	272	776	300
235/55R18	104 XL	900	H	7 1/2J	245	715	340
255/55R18	109 XL	1030	H	8J	265	737	340
235/60R18	107 XL	975	H	7J	240	739	340
265/60R18	110	1060	H	8J	272	775	300
285/60R18	120 XL	1400	T	8 1/2J	292	799	340
245/55R19	103	875	V	7 1/2J	253	753	300
255/55R19	111 XL	1090	H	8J	265	763	340
275/45R20	110 XL	1060	H	9J	273	756	340

Sidewall Information

A variety of information about a tire appears on its sidewall. Knowing how to identify the markings can be useful when choosing a tire.

- 1 KINTO: Brand Name
- 2 FORZA 001: Pattern Name
- 3 235/40ZR18 : Tire Size Designation
- 4 Country of Origin
- 5 Identification Serial Number
- 6 Max Load, Max Press
- 7 Safety Warning



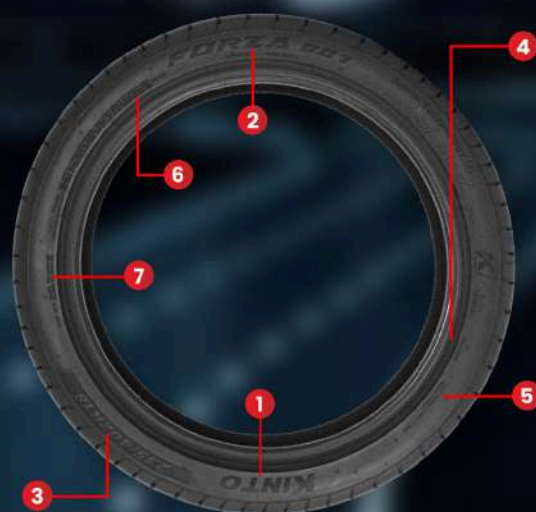


Asymmetrical tread pattern and specified tire rotation

Tires with a directional pattern need to be mounted according to the indications on the sidewalls to ensure maximum performance.


Make sure you take note of the directional pattern when mounting the tire.

Unidirectional tread pattern

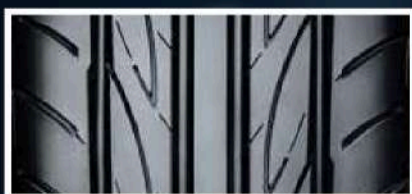

Sidewalls indicate whether they should face inwards or outwards.

Asymmetrical tread pattern Side facing outwards (inwards)

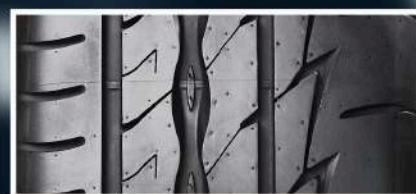

It is vital to take note of the arrow when rotating tires to ensure that the tires are mounted in the correct direction.

Basic Tire Knowledge

How to Read Tire Size

P195 / 55 R 15 85V

12 1 2 3 4 5 6

235 / 40 ZR 18 95W

1 2 7 4 5 6

195 R 14C 106/104S

1 3 4 11 10 5

30 x 9.50 R 15 LT 104Q

8 9 3 4 13 5 6

1 Nominal section width (mm)

This refers to the width of the tire excluding design and lettering on the sidewall, etc.
*Does not include rim guard.

2 Aspect ratio (series,%)

This figure indicates the ratio of a tire's height

Aspect ratio(%) =
Tire height ÷ tire width × 100

3 Construction code

"R" stands for radial structure.

4 Nominal rim diameter (inches)

Refers to the diameter of the wheel rim suitable for the tire. The term "tire's inner diameter" is also used.

5 Load Index (LI)

An index expressing the maximum load permitted for a tire under established conditions.

6 Speed symbol

This indicates the maximum permissible speed in symbols under established conditions.

7 Speed category

(ZR: over 240km/h)

8 Nominal outside diameter

(inches)

9 Nominal section width

(inches)

10 Load Index: Single/Dual

11 C: Commercial vehicle

Complies with ETRTO (European tire regulations).

12 Passenger Car Tire

Complies with TRA (North American tire regulations).

13 LT: Light Truck

Complies with JATMA (Japanese tire regulations) or TRA (North American tire regulations).



Speed Symbol

The speed symbol refers to the maximum speed capability of a tire. It is only valid for a tire that is properly inflated and loaded within the limits of the assigned load index.

Speed Symbol	Speed (km/h)
N	140
P	150
Q	160
R	170
S	180
T	190
H	210
V	240
W	270
Y	300
(Y)	Over 300
Speed Category	Speed (km/h)
ZR	Over 240

LIST OF LOAD CAPACITY BY AIR PRESSURE

TIRE AIR PRESSURE FOR PASSENGER CARS-LOAD CAPACITY CORRESPONDENCE TABLE AIR PRESSURE (kPa)

LI		kPa							
		180	190	200	210	220	230	240	250
	68	265	275	285	290	300	305	315	
	69	275	285	290	300	310	315	325	
	70	285	290	300	310	320	325	335	
	71	290	300	310	320	330	335	345	
	72	300	310	320	330	335	345	355	
	73	310	320	330	340	345	355	365	
	74	315	325	335	345	355	365	375	
	75	325	340	350	360	370	375	387	
	76	Not available for passenger car							
	77	350	360	370	380	390	400	412	
	78	Not available for passenger car							
	79	370	380	395	405	415	425	437	
	80	380	395	405	415	430	440	450	
185/55R14	80	345	360	375	390	405	420	435	450
	81	390	405	415	425	440	450	462	
195/45R17	81	355	370	385	400	415	430	445	462
	82	400	415	425	440	450	465	475	
185/55R15	82	365	380	395	415	430	445	460	475
	83	410	425	440	450	465	475	487	
185/55R16	83	375	390	405	425	440	455	470	487
	84	425	435	450	460	475	490	500	
175/65R15	84	385	400	420	435	450	470	485	500
	85	435	450	465	475	490	500	515	
195/55R15	85	395	415	430	450	465	480	500	515
	86	450	460	475	490	505	515	530	
205/50R15	86	410	425	440	460	480	495	515	530
185/60R16	86	410	425	440	460	480	495	515	530
	87	460	475	490	505	520	530	545	
195/55R16	87	420	440	455	475	490	510	525	545
	88	475	490	505	520	530	545	560	
205/55R15	88	430	450	470	485	505	525	540	560
	89	490	505	520	535	550	565	580	
245/35R19	89	445	465	485	505	525	545	560	580
205/50R18	89	445	465	485	505	525	545	560	580
	90	505	525	540	555	570	585	600	
235/40R17	90	460	480	500	520	540	560	580	600
	91	520	535	555	570	585	600	615	
235/40R18	91	520	535	555	570	585	600	615	
225/45R17	91	475	495	515	535	555	575	595	615
205/55R16	91	475	495	515	535	555	575	595	615
	92	530	550	565	585	600	615	630	
255/35R19	92	530	550	565	585	600	615	630	
235/40R19	92	530	550	565	585	600	615	630	
225/45R19	92	485	505	525	550	570	590	610	630
215/50R18	92	485	505	525	550	570	590	610	630
195/65R16	92	485	505	525	550	570	590	610	630
	93	550	565	585	600	620	635	650	
255/35R20	93	550	565	585	600	620	635	650	
215/55R16	93	500	520	545	565	585	610	630	650
	94	565	585	600	620	635	655	670	
265/35R19	94	565	585	600	620	635	655	670	
235/45R17	94	515	540	560	585	605	625	650	670
215/55R17	94	585	600	620	640	655	675	690	
	95	585	600	620	640	655	675	690	
265/35R20	95	585	600	620	640	655	675	690	
245/40R20	95	530	555	575	600	625	645	670	690
215/55R18	95	530	555	575	600	625	645	670	690
225/55R16	95	530	555	575	600	625	645	670	690

LI		kPa							
		180	190	200	210	220	230	240	250
	96	600	620	640	655	675	695	710	
275/35R19	96	545	570	595	620	640	665	685	710
245/40R21	96								
255/40R19	96								
205/70R15	96								
	97	615	635	655	675	695	710	730	
295/30R20	97	560	585	610	635	660	685	705	730
255/40R20	97								
225/55R17	97								
	98	635	655	675	695	715	730	750	
245/45R19	98	575	600	625	650	675	700	725	750
255/55R18	98								
	99	655	675	695	715	735	755	775	
305/30R20	99	595	620	650	675	700	725	750	775
275/35R21	99								
245/45R20	99								
235/50R19	99								
225/55R19	99								
	100	675	700	720	740	760	780	800	
285/35R20	100	615	640	670	695	720	750	775	800
245/50R18	100								
235/55R18	100								
215/70R16	100								
245/50R19	101	665	690	715	735	760	780	805	825
235/55R19	101								
215/70R17	101								
275/40R20	102	685	710	735	760	780	805	830	850
245/50R20	102								
235/55R20	102								
225/65R17	102								
215/80R15	102								
	103	740	765	785	810	830	855	875	
235/60R18	103	705	730	755	780	805	830	850	875
225/70R16	103								
	104	760	785	810	830	855	880	900	
	105	780	805	830	855	880	900	925	
255/55R18	105	745	775	800	825	850	875	900	925
245/60R18	105								
235/65R18	106	765	795	820	850	875	900	925	950
235/70R16	106								
	107	825	850	875	900	925	950	975	
245/60R20	107	190	815	845	870	895	925	950	975
	108	845	870	900	925	950	975	1000	
	109	870	900	925	955	980	1005	1030	
265/55R19	109	830	860	890	920	950	975	1005	1030
	110	895	925	955	980	1000	1035	1060	
275/50R21	110	855	885	915	945	975	1005	1030	1060
	111	880	910	945	975	1005	1030	1060	1090
	112	945	975	1005	1035	1065	1090	1120	
285/50R20	112								
265/70R15	112	905	935	970	1000	1030	1060	1090	1120
	113	930	960	995	1025	1060	1090	1120	1150
	114	995	1030	1060	1090	1120	1150	1180	
	115	980	1015	1050	1085	1120	1150	1185	1215
	116	1010	1045	1080	1115	1150	1185	1215	1250

[Unit of load capacity is KG]

EXTRA LOAD or REINFORCED

kPa

LI	200	210	220	230	240	250	260	270	280	290
76	295	310	320	330	345	355	365	380	390	400
77	305	320	330	340	355	365	380	390	400	412
78	315	330	340	355	365	380	390	400	415	425
79	325	340	350	365	375	390	400	415	425	437
80	335	350	360	375	385	400	410	425	440	450
81	345	355	370	375	395	410	425	435	450	462
82	355	365	380	385	410	420	435	450	460	475
83	360	375	390	395	420	430	445	460	475	487
84	370	385	400	405	430	445	460	470	485	500
85	385	400	415	415	445	455	470	485	500	515
86	395	410	425	425	455	470	485	500	515	530
87	405	420	435	435	470	485	500	515	530	545
88	415	435	450	450	480	495	515	530	545	560
89	430	450	465	465	500	515	530	550	565	580
90	445	465	480	480	515	535	550	565	585	600
91	455	475	495	495	530	545	565	580	600	615
92	470	485	505	505	540	560	575	595	615	630
93	485	500	520	520	560	575	595	615	630	650
94	500	520	535	535	575	595	615	635	650	670
95	515	535	555	555	595	615	630	650	670	690
96	525	550	570	570	610	630	650	670	690	710
97	540	565	585	585	625	650	670	690	710	730
98	555	580	600	600	645	665	685	710	730	750
99	575	600	620	620	665	690	710	730	755	775
100	595	620	640	640	690	710	735	755	780	800

kPa

LI	200	210	220	230	240	250	260	270	280	290
101	615	635	660	685	710	735	755	780	800	825
102	630	655	680	705	730	755	780	805	825	850
103	650	675	700	725	750	775	800	825	850	875
104	670	685	720	750	775	800	825	850	875	900
105	685	715	740	770	795	820	850	875	900	925
295/35R20	725	750	775	795	820	840	860	885	905	925
105										
106	705	735	760	790	815	845	870	895	925	950
107	725	755	780	810	840	865	895	920	950	975
108	745	770	800	830	860	890	915	945	970	1000
109	765	795	825	855	885	915	945	975	1000	1030
110	785	820	850	880	910	940	970	1000	1030	1060
111	810	840	875	905	935	970	1000	1030	1060	1090
112	830	865	900	930	965	995	1025	1060	1090	1120
113	855	890	920	955	990	1020	1055	1085	1120	1150
114	875	910	945	980	1015	1050	1080	1115	1145	1180
115	905	940	975	1010	1045	1080	1115	1145	1180	1215
116	930	965	1000	1040	1075	1110	1145	1180	1212	1250
117	955	995	1030	1065	1105	11420	1180	1215	1250	1285
118	980	1020	1060	1095	1135	1170	1210	1245	1285	1320
119	1010	1050	1090	1130	1170	1210	1245	1285	1320	1360
120	1040	1080	1120	1165	1205	1245	1285	1320	1360	1400
121	1075	1120	1160	1205	1245	1290	1330	1370	1410	1450
122	1115	1160	1205	1245	1290	1330	1375	1415	1460	1500
123	1150	1195	1245	1290	1330	1375	1420	1465	1505	1550
124	1190	1235	1285	1330	1375	1420	1465	1510	1555	1600
125	1225	1275	1325	1370	1420	1465	1510	1560	1605	1650

[Unit of load capacity is KG]

TIRES

FOR DRIVING COMFORT

🏠 FUJITA GIKEN CO., LTD.

✉️ INFO@KINTO-TYRES.COM

🌐 KINTO-TYRES.COM

