



# LIFT BEYOND LIMITS

MATERIAL HANDLING TECHNICAL BOOK

# CONTENTS

|                   |                         |                         |                       |                              |                              |
|-------------------|-------------------------|-------------------------|-----------------------|------------------------------|------------------------------|
| About GRI         | Material Handling Tires | Types of Forklift Tires | SRT Tire Construction | Product range overview (SRT) | Product range overview (POB) |
| 1                 | 2                       | 3                       | 4                     | 5                            | 6                            |
| Usage & Solutions | ULTIMATE GREEN XT       | ULTIMATE XT             | PEAKMASTER            | GLOBESTAR WT                 | THE PERFORMER                |
| 7                 | 8-10                    | 11-13                   | 14-16                 | 17-19                        | 20-22                        |
|                   |                         | ULTIMATE POB            | GLOBESTAR POB         | LIFT EX                      |                              |
|                   |                         | 23-25                   | 26-28                 | 29-30                        |                              |




# ABOUT GRI

GRI is a leading manufacturer of High-Grade Specialty Tires, delivering advanced tire solutions globally. With a focus on innovation and sustainability, GRI is committed to meeting the evolving needs of the Agriculture, Construction, and Material Handling segments. GRI concentrates on pushing the boundaries of Specialty Tire technology to meet the dynamic needs of its customers around the world. GRI is devoted to sustainability, environmental responsibility and minimizing its carbon footprint. GRI has operations in 13 countries, sales in over 70 countries worldwide and has been advancing in the expansion of its operations in key countries as well as its tire production and mixing plants in Sri Lanka.

GRI is driven by a vision to move humanity towards making a positive impact on our planet. GRI strives to be a global leader in Specialty Tires with sustainability as a core guiding principle. For two decades, we have been on an exponential growth journey that has continuously focused on high quality, rapid innovation, environmental sustainability, and customer focus. We are committed to green leadership and therefore, focused on driving sustainable sourcing, manufacturing, and product innovation. We strive to nurture and protect the Earth in all aspects of what we do. We work hard on building trusted partnerships, a compelling product portfolio and adding value to our customers.

We believe that **Farmers** who nourish the world, **Construction workers** who build for the next generation, and **Material Handling workers** who move material to supply our needs, are **noble**.

Having built a strong reputation in the Material Handling industry since 2002, GRI has expanded into the Agriculture and Construction segments in 2018. We are a global, multi-national company with a team of over 1,400 people spread across 17 nationalities, united by a shared commitment to excellence and innovation. At GRI, every strategic and tactical decision aims to drive sustainability along with developing premium Specialty Tires. A key goal at GRI is to make an impact on the world that is sustainable, and by doing so, GRI takes into consideration the well-being of not only the current global community, but also the generations to come.

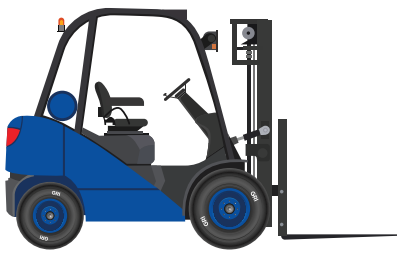

## MATERIAL HANDLING TIRES

GRI Material Handling tires for forklifts are built with high-quality natural rubber and are known for their excellence in heat dissipation, high run-time and low rolling resistance properties. Our tires are designed for maximum stability and safety along with extensive tire life and low energy consumption. Our premium range of solid tires perform brilliantly in extreme operations. Engineered with high-technology using the best quality natural rubber especially for forklift operators who move material to supply our needs.

### OUR PRODUCT RANGE

FORKLIFT - SOLID

ULTIMATE GREEN <sup>XT</sup>    ULTIMATE <sup>XT</sup>

PEAKMASTER    GLOBESTAR WT    THE PERFORMER

FORKLIFT - PRESS ON BANDS (POB)

ULTIMATE <sup>XT</sup> POB    GLOBE ST★R POB

FORKLIFT - PNEUMATIC

LIFT<sup>EX</sup>

EXCAVATOR

GLOBE ST★R

PORT TRAILER

ULTIMATE <sup>XT</sup>    GLOBE ST★R

# TYPES OF FORKLIFT TIRES

## PNEUMATIC

### Pneumatic Tires (Bias)

- Made with inner tube filled with compressed air to keep the tire's shape and support the forklift.
- Bias tires composition includes multiple layers of fabric plies, set one on the other, running diagonally from bead to bead.
- High stability, low acquisition costs and a robust solution for rough industrial usage.

## SOLID


### Solid Resilient Tires (SRT)

- Best for tough applications on slow vehicles or trailers with a high risk of tire damages
- High stability – more stable than pneumatic tires
- Puncture resistant
- Maintenance Free – no pressure checks
- High load carrying capacity
- No down time – do not burst, deflate or go flat

### Press On Band (POB)

- Solid rubber is bonded to a steel band
- Handles tough conditions
- High reliability and safety
- Less rolling resistance
- Runs cooler

### Solid Forklift Tires Formation

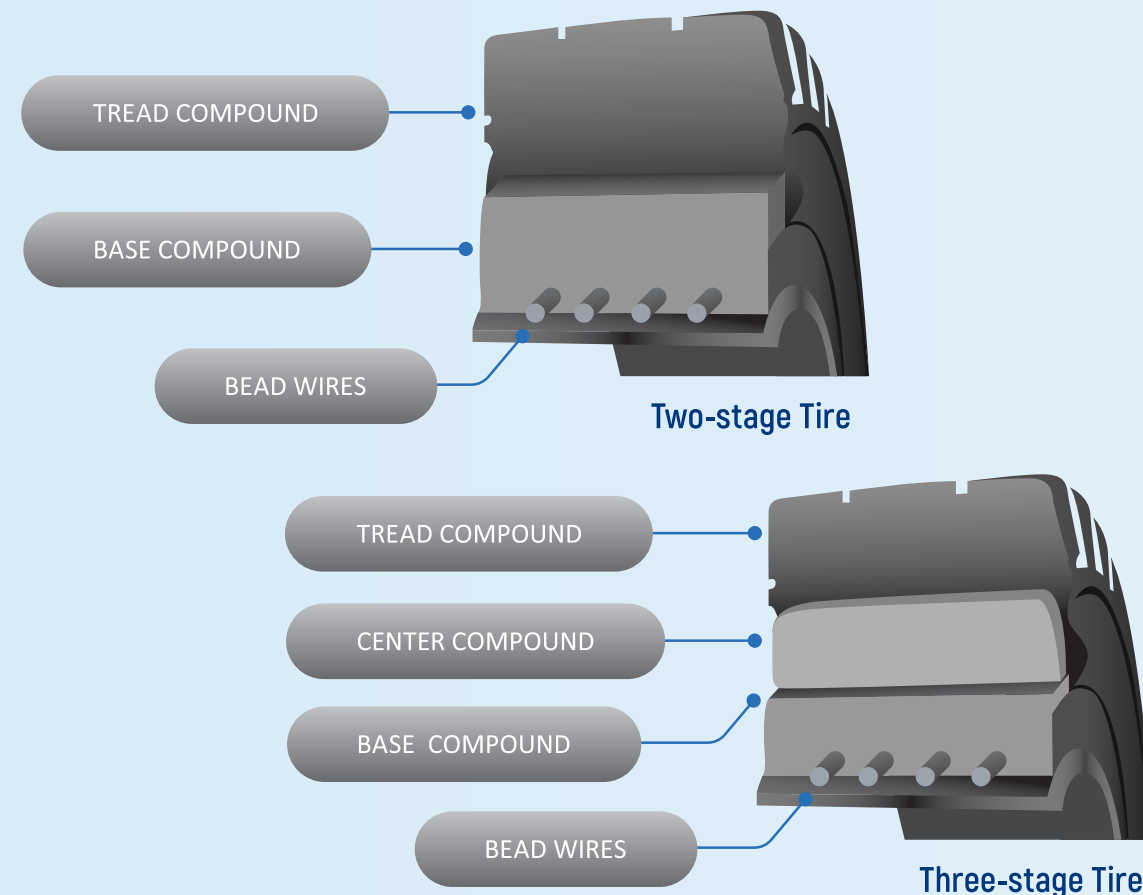

# SRT TIRE CONSTRUCTION

## Tread Compound

- Gives the tire a long service life and ensures a firm grip to the surface.
- Has optimum hardness with excellent chipping & chunking resistance.
- Excellent abrasion resistance tread compound with greater tread volume for extended service life.

## Center Compound


- Gives the tire properties for impact/vibration damping, low rolling resistance and low heat build up.
- Has the lowest heat buildup in all three compounds where the tire will withstand the most severe and aggressive applications without premature failures.

## Base Compound

- Ensures the tire fits firmly on the rim.
- Made of a hard compound in which the bead rings are embedded, ensuring maximum tire stability.

## Bead Wires

- Ensures perfect fitment of the solid tire to the rim. Anchors the tire to the wheel.
- Ensures excellent circumferential rim fit by even stress distribution in tire mounting.

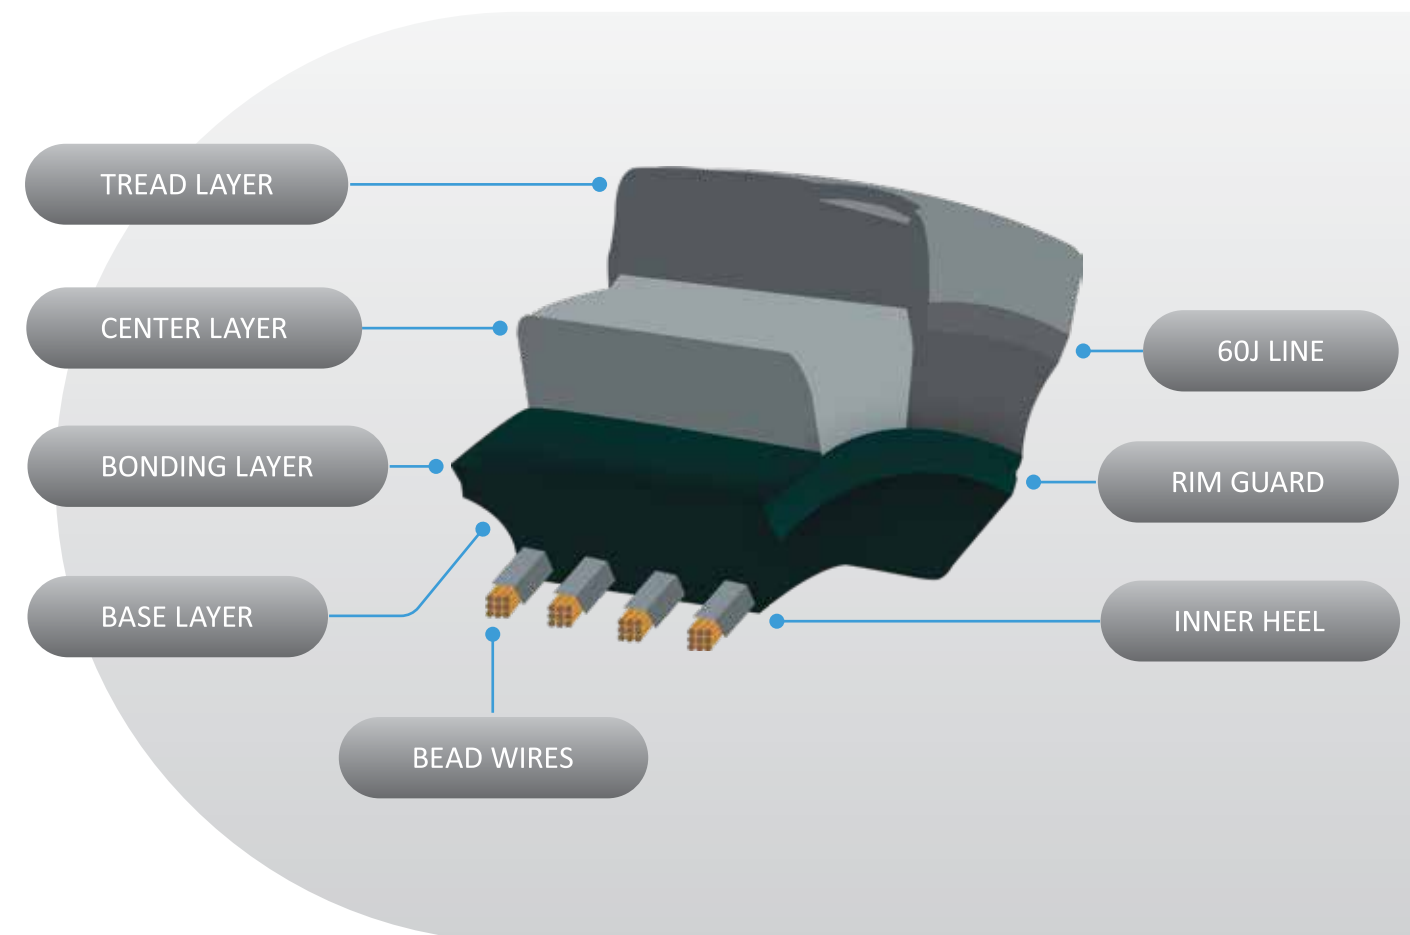

PRODUCT RANGE OVERVIEW (SRT)

| Size Category | Tire Size         |           | Rim Size  | ULTIMATE GREEN XT | ULTIMATE XT | PEAKMASTER | GLOBESTAR WT | THE PERFORMER |
|---------------|-------------------|-----------|-----------|-------------------|-------------|------------|--------------|---------------|
| 4"            | 4.00-4            |           | 2.10 -4   |                   |             | •          | •            |               |
|               | 4.00-4            |           | 2.50-C-4  |                   |             | •          | •            |               |
| 8"            | 4.00-8            |           | 3.00 D-8  | •                 | •           | •          | •            | •             |
|               | 5.00-8            |           | 3.00 D-8  | •                 | •           | •          | •            | •             |
|               | 15x4 1/2-8        | 125/75-8  | 3.00 D-8  | •                 | •           | •          | •            | •             |
|               | 16x6-8            | 150/75-8  | 4.33 R-8  | •                 | •           | •          | •            | •             |
|               | 18x7-8            | 180/70-8  | 4.33 R-8  | •                 | •           | •          | •            | •             |
| 9"            | 140/55-9          |           | 4.00 E-9  | •                 | •           | •          | •            | •             |
|               | 6.00-9            |           | 4.00 E-9  | •                 | •           | •          | •            | •             |
|               | 21x8-9            | 200/75-9  | 6.00 E-9  | •                 | •           | •          | •            | •             |
| 10"           | 180/60-10         |           | 5.00F-10  | •                 | •           |            |              |               |
|               | 6.50-10           |           | 5.00 F-10 | •                 | •           | •          | •            | •             |
|               | 200/50-10         |           | 6.50 F-10 | •                 | •           | •          | •            | •             |
|               | 23x9-10           | 225/75-10 | 6.50 F-10 | •                 | •           | •          | •            | •             |
| 12"           | 7.00-12           |           | 5.00 S-12 | •                 | •           | •          | •            | •             |
|               | 23x10-12          | 250/60-12 | 8.00 G-12 | •                 | •           | •          | •            | •             |
|               | 23x12-12          | 315/45-12 | 10.00G-12 | •                 | •           |            |              |               |
|               | 27x10-12          | 250/75-12 | 8.00 G-12 | •                 | •           | •          | •            | •             |
| 16"           | 7.50-16           |           | 6.00-16   |                   |             | •          |              |               |
| 15"           | 7.00-15           |           | 5.50-15   | •                 | •           | •          | •            | •             |
|               | 7.00-15           |           | 6.00-15   |                   |             |            | •            | •             |
|               | 250-15            | 250/70-15 | 7.00-15   | •                 | •           | •          | •            | •             |
|               | 250-15            | 250/70-15 | 7.50-15   | •                 | •           |            | •            | •             |
|               | 8.15-15 (28x9-15) | 225/75-15 | 7.00-15   | •                 | •           | •          | •            | •             |
|               | 8.25-15           |           | 5.50-15   |                   |             |            | •            | •             |
|               | 8.25-15           |           | 6.50-15   | •                 | •           | •          | •            | •             |
|               | 300-15            | 315/70-15 | 8.00-15   | •                 | •           | •          | •            | •             |
|               | 28x12.5-15        | 355/45-15 | 9.75-15   | •                 | •           | •          |              |               |
|               | 355/50-15         |           | 9.75-15   | •                 | •           |            |              |               |
| 20"           | 355/65-15         |           | 9.75-15   | •                 | •           | •          | •            | •             |
|               | 355/50-20         |           | 10.00-20  | •                 | •           |            |              |               |
|               | 9.00-20           |           | 6.50-20   | •                 | •           |            | •            | •             |
|               | 9.00-20           |           | 7.00-20   | •                 | •           |            | •            | •             |
|               | 10.00-20          |           | 7.00-20   | •                 | •           |            | •            | •             |
|               | 10.00-20          |           | 7.50-20   | •                 | •           |            | •            | •             |
|               | 10.00-20          |           | 8.00-20   | •                 | •           |            | •            | •             |
|               | 11.00-20          |           | 7.50-20   |                   |             |            |              | •             |
|               | 11.00-20          |           | 8.00-20   |                   |             |            |              | •             |
|               | 11.00-20          |           | 8.50-20   |                   |             |            |              | •             |
|               | 12.00-20          |           | 8.00-20   | •                 | •           |            | •            | •             |
|               | 12.00-20          |           | 8.50-20   | •                 | •           |            | •            | •             |
|               | 12.00-20          |           | 10.00-20  | •                 | •           |            | •            |               |
|               |                   |           |           |                   |             |            |              |               |

PRODUCT RANGE OVERVIEW (POB)

| Tyre size        |              | ULTIMATE XT |     | ULTIMATE GREEN XT |     | GLOBESTAR |     |
|------------------|--------------|-------------|-----|-------------------|-----|-----------|-----|
| inch             | mm           | SM          | LUG | SM                | LUG | SM        | LUG |
| 10x4x6 1/2       | 254/102-165  |             |     |                   |     | •         |     |
| 10x5x6 1/2       | 254/127-165  | •           | •   | •                 | •   | •         | •   |
| 10 1/2 x5x 6 1/2 | 267/127-165  |             |     |                   |     | •         |     |
| 10x4 3/4x6 1/2   | 254/121-165  |             |     |                   |     | •         |     |
| 13 1/2x4 1/2x8   | 343/114-203  |             |     |                   |     | •         |     |
| 13 1/2x5 1/2x8   | 343/140-203  | •           | •   | •                 | •   | •         |     |
| 13 1/2x6 1/2x8   | 343/165-203  |             |     |                   |     | •         |     |
| 12 x 4 1/2 x8    | 305/114-203  |             |     |                   |     | •         | •   |
| 14x4 1/2x8       | 356/114-203  | •           | •   | •                 | •   | •         | •   |
| 14x5x10          | 356x127-254  | •           | •   | •                 | •   | •         |     |
| 15x5x11 1/4      | 381/127-286  | •           | •   | •                 | •   | •         |     |
| 15x6x11 1/4      | 381/152-286  |             |     |                   |     | •         |     |
| 16x5x10 1/2      | 406/127-267  | •           | •   | •                 | •   | •         | •   |
| 16x6x10 1/2      | 406/152-267  | •           | •   | •                 | •   | •         | •   |
| 16x7x10 1/2      | 406/178-267  |             |     |                   |     | •         |     |
| 16 1/4x5x11 1/4  | 413/127-286  | •           | •   | •                 | •   | •         |     |
| 16 1/4x6x111/4   | 413/152-286  | •           | •   | •                 | •   | •         | •   |
| 16 1/4x7x111/4   | 413/178-286  |             |     |                   |     | •         |     |
| 18x5x12 1/8      | 457/127-308  |             |     |                   |     | •         |     |
| 18x6x12 1/8      | 457/152-308  | •           | •   | •                 | •   | •         | •   |
| 18x7x12 1/8      | 457/178-308  | •           | •   | •                 | •   | •         | •   |
| 18x8x12 1/8      | 457/203-308  | •           | •   | •                 | •   | •         | •   |
| 18x9x12 1/8      | 457/229-308  |             |     |                   |     | •         | •   |
| 21x7x15          | 533/178-381  | •           | •   | •                 | •   | •         | •   |
| 21x8x15          | 533/203-381  | •           | •   | •                 | •   | •         | •   |
| 21x9x15          | 533/229-381  | •           | •   | •                 | •   |           |     |
| 22x8x16          | 559/203-406  | •           | •   | •                 | •   | •         | •   |
| 22x9x16          | 559/229-406  | •           | •   | •                 | •   | •         | •   |
| 22x10x16         | 559/254-406  |             |     |                   |     | •         |     |
| 22x12x16         | 559/305-406  | •           | •   | •                 | •   | •         |     |
|                  | 645/200-410  |             |     |                   |     | •         |     |
|                  | 645/250-410  |             |     |                   |     | •         |     |
| 28x10x22         | 711/254-559  |             |     |                   |     | •         |     |
| 28x12x22         | 711/305-559  | •           | •   | •                 | •   | •         |     |
| 22x16x16         | 559/406-406  |             |     |                   |     | •         |     |
| 40x16x30         | 1016/406-762 |             |     |                   |     | •         |     |
| 40x20x30         | 1016/508-762 |             |     |                   |     | •         |     |

# USAGE & SOLUTIONS

| GRI Best Solution | ULTIMATE XT                 | PEAKMASTER                     | GLOBESTAR WT                     | THE PERFORMER             |
|-------------------|-----------------------------|--------------------------------|----------------------------------|---------------------------|
| APPLICATION HOURS | 24 hours per day (3 shifts) | 14-16 hours per day (2 shifts) | 10-14 hours per day (1.5 shifts) | 8 hours per day (1 shift) |
| USAGE             | Extremely Hard Use          | High Ambient Use               | Normal Use                       | Normal Use                |
| SURFACE TYPE      | Indoor, Outdoor Surface     | Indoor, Outdoor Surface        | Indoor, Outdoor Surface          | Smooth Surface            |



### Solid Resilient Tires – 60J line

Solid Resilient tires can be worn down to the 60-J line as indicated on the sidewall of the tire. Wearing beyond the 60-J line represents a safety hazard and can lead to unexpected tire failure as well as potential damage to the forklift. The 60-J line is shown by the red line on the image



### Press-On-Band Tires

Smooth Pattern - Most manufacturers say to replace a smooth Press on tire when the overall rubber height reaches 2/3rds of the original rubber height.

Traction Pattern - Similar to a solid tire, a traction tire has a safety line, indicating the tread is gone and the tire should be replaced (see image).



### Pneumatic Tires

Pneumatic tires can be worn until the tread pattern has been worn away, just like car and truck tires. Wearing beyond the tread pattern represents a safety hazard and can lead to unexpected tire failure as well as potential damage to the forklift.



ULTIMATE GREEN XT

The First Environment Friendly Material Handling Tire

# ULTIMATE GREEN XT

ULTIMATE GREEN XT is crafted with **93.5% sustainable and bio-sourced materials**, highlighting GRI's dedication to reducing carbon emissions by 55.8% compared to competitors, all while maintaining exceptional performance. The tire's high percentage of bio-sourced materials not only enhances sustainability but also significantly lowers its impact on climate change.



Available in: • Non-marking • Oil-resistant • Antistatic



24 Hours / 3 shifts operating capacity.



Lowest rolling resistance among the tire range, increases battery life in electric forklifts.



Higher fuel economy in continuous operations to meet high demanding expectations.



High abrasion resistance translates to an extended tire lifespan, minimizing replacement cycles for lower maintenance.



Maximum cornering stability with enhanced traction ensures exceptional control during maneuvering.




Enhanced driver safety and comfort.

Advanced tread compound with Highly Dispersible Silica. Developed for high-intense operations and all surface conditions.

Very low abrasion, reducing particle release and increasing tire life.

Unique tread pattern and optimized lug depth that provide excellent traction.

Recycled Carbon Black in centre.



TREAD COMPOUND

CENTRE COMPOUND

BASE COMPOUND

BEAD WIRES



Reduced Carbon Particles to Environment.



Reduced Solid Waste Generation.



Reduced CO2 Emissions in ICE Forklifts.



Longer Battery Life in Electric Forklifts.

| Tire Size         |           | Rim Size  | Clip on | Profile | Tire Dimensions (mm) |              | Tire Dimensions (inch) |                | Other Vehicles load capacity (Kg) |         | Tire load capacity on forklifts at Max. Speed |             |              |             |
|-------------------|-----------|-----------|---------|---------|----------------------|--------------|------------------------|----------------|-----------------------------------|---------|-----------------------------------------------|-------------|--------------|-------------|
|                   |           |           |         |         | Max width ±1% (mm)   | OD ± 2% (mm) | Max width ±1% (inch)   | OD ± 2% (inch) | 6 Km/h                            | 10 Km/h | 16 Miles/h (Lbs)                              |             | 25 Km/h (Kg) |             |
| inch              | mm        |           |         |         |                      |              |                        |                |                                   |         | Load wheel                                    | Steer wheel | Load wheel   | Steer wheel |
| 4.00-8            |           | 3.00 D-8  | •       | UT      | 106                  | 406          | 4.17                   | 15.98          | 950                               | 860     | 2095                                          | 1610        | 950          | 730         |
| 15x4 1/2-8        | 125/75-8  | 3.00 D-8  | •       | UT      | 114                  | 377          | 4.49                   | 14.84          | 1040                              | 945     | 2295                                          | 1765        | 1040         | 800         |
| 16x6-8            | 150/75-8  | 4.33 R-8  | •       | UT      | 151                  | 411          | 5.94                   | 16.18          | 1455                              | 1360    | 3210                                          | 2535        | 1455         | 1150        |
| 18x7-8            | 180/70-8  | 4.33 R-8  | •       | UT      | 153                  | 453          | 6.02                   | 17.83          | 2145                              | 1945    | 4730                                          | 3640        | 2145         | 1650        |
| 140/55-9          |           | 4.00 E-9  | •       | UT      | 129                  | 375          | 5.08                   | 14.76          | 1170                              | 1060    | 2580                                          | 1986        | 1170         | 900         |
| 6.00-9            |           | 4.00 E-9  | •       | UT      | 137                  | 519          | 5.39                   | 20.43          | 1885                              | 1710    | 4155                                          | 3195        | 1885         | 1450        |
| 21x8-9            | 200/75-9  | 6.00 E-9  | •       | UT      | 186                  | 518          | 7.32                   | 20.39          | 2755                              | 2505    | 6075                                          | 4675        | 2755         | 2120        |
| 180/60-10         |           | 5.00F-10  | •       | UT      | 165                  | 456          | 6.50                   | 17.95          | 2410                              | 2180    | 5314.5                                        | 4079.6      | 2410         | 1850        |
| 6.50-10           |           | 5.00 F-10 | •       | UT      | 160                  | 561          | 6.30                   | 22.09          | 2340                              | 2125    | 5160                                          | 3970        | 2340         | 1800        |
| 200/50-10         |           | 6.50 F-10 | •       | UT      | 190                  | 455          | 7.48                   | 17.91          | 2470                              | 2240    | 5445                                          | 4190        | 2470         | 1900        |
| 23x9-10           | 225/75-10 | 6.50 F-10 | •       | UT      | 200                  | 580          | 7.87                   | 22.83          | 3445                              | 3125    | 7595                                          | 5840        | 3445         | 2650        |
| 7.00-12           |           | 5.00 S-12 | •       | UT      | 171                  | 651          | 6.73                   | 25.63          | 2920                              | 2645    | 6435                                          | 4940        | 2920         | 2240        |
| 23x10-12          | 250/60-12 | 8.00 G-12 | •       | UT      | 233                  | 578          | 9.17                   | 22.76          | 3770                              | 3420    | 8310                                          | 6390        | 3770         | 2900        |
| 23x12-12          | 315/45-12 | 10.00G-12 | •       | UT      | 287                  | 582          | 11.30                  | 22.91          | 4485                              | 4070    | 9890.27                                       | 7607.9      | 4485         | 3450        |
| 27x10-12          | 250/75-12 | 8.00 G-12 | •       | UT      | 237                  | 677          | 9.33                   | 26.65          | 3900                              | 3540    | 8600                                          | 6615        | 3900         | 3000        |
| 7.00-15           |           | 5.50-15   | •       | UT      | 175                  | 722          | 6.89                   | 28.43          | 3545                              | 3215    | 7815                                          | 6005        | 3545         | 2725        |
| 250-15            | 250/70-15 | 7.00-15   | •       | UT      | 221                  | 722          | 8.70                   | 28.43          | 4750                              | 4300    | 10470                                         | 8045        | 4750         | 3650        |
| 28x12.5-15        | 355/45-15 | 9.75-15   | •       | UT      | 292                  | 697          | 11.50                  | 27.44          | 5690                              | 5145    | 12518                                         | 9625        | 5690         | 4375        |
| 355/50-15         |           | 9.75-15   | •       | UT      | 296                  | 710          | 11.81                  | 32.32          | 5690                              | 5165    | 12547.5                                       | 9647.7      | 5690         | 4375        |
| 8.15-15 (28x9-15) | 225/75-15 | 7.00-15   | •       | UT      | 217                  | 691          | 8.54                   | 27.20          | 3900                              | 3540    | 8310                                          | 6390        | 3770         | 2900        |
| 355/65-15         |           | 9.75-15   | •       | UT      | 300                  | 821          | 11.81                  | 32.32          | 7085                              | 6430    | 17190                                         | 13230       | 7800         | 6000        |
| 300-15            | 315/70-15 | 8.00-15   | •       | UT      | 250                  | 824          | 9.84                   | 32.44          | 5850                              | 5310    | 12895                                         | 9920        | 5850         | 4500        |
| 8.25-15           |           | 6.50-15   | •       | UT      | 212                  | 810          | 8.35                   | 31.89          | 4750                              | 4300    | 10470                                         | 8045        | 4750         | 3650        |
| 355/50-20         |           | 10.00-20  | •       | SM      | 315                  | 827          | 11.81                  | 32.32          | 8970                              | 8140    | 19780.5                                       | 15215.8     | 8970         | 6900        |
| 9.00-20           |           | 6.50-20   | •       | UT      | 224                  | 974.2        | 8.82                   | 38.35          | 5400                              | 4905    | 11880                                         | 9900        | 5400         | 4500        |
| 9.00-20           |           | 7.00-20   |         | UT      | 224                  | 974.2        | 8.82                   | 38.35          | 5400                              | 4905    | 11880                                         | 9900        | 5400         | 4500        |
| 10.00-20          |           | 7.50-20   |         | UT      | 255                  | 1016.1       | 10.10                  | 40.00          | 6000                              | 5450    | 13227                                         | 11022       | 6000         | 5000        |
| 10.00-20          |           | 7.50-20   |         | SM      | 255                  | 1016.1       | 10.10                  | 40.00          | 6000                              | 5450    | 13227                                         | 11022       | 6000         | 5000        |
| 10.00-20          |           | 8.00-20   |         | UT      | 255                  | 1016.1       | 10.10                  | 40.00          | 6000                              | 5450    | 13227                                         | 11022       | 6000         | 5000        |
| 12.00-20          |           | 8.00-20   |         | UT      | 269                  | 1090         | 10.68                  | 42.91          | 7560                              | 6865    | 16632                                         | 13860       | 7560         | 6300        |
| 12.00-20          |           | 8.50-20   |         | UT      | 269                  | 1090         | 10.68                  | 42.91          | 7560                              | 6865    | 16632                                         | 13860       | 7560         | 6300        |
| 12.00-20          |           | 10.00-20  |         | UT      | 297.1                | 1090         | 11.70                  | 42.91          | 7800                              | 7085    | 17119.1                                       | 14262.3     | 7800         | 6500        |

ULTIMATE GREEN XT

The Premium Plus Material Handling Tire  
for Extreme Performance

# ULTIMATE XT®

The ULTIMATE XT is a premium plus Material Handling Tire built to serve tough applications. Its innovative design and premium compounds provides outstanding grip and performance even on rough terrains. **Special compound construction with low hysteresis and optimized tread with high tear strength resists** to heat caused separations which ensures the designed tire life with out premature failures.



Available in: • Non-marking • Oil-resistant • Antistatic



**24 Hours / 3 shifts operating capacity.**



**Special tire construction with lower rolling resistance** significantly reduces energy loss.



**Higher fuel economy** in continuous operations to meet high demanding expectations.



**High abrasion resistance with optimized wear volume** translates to an extended tire lifespan, minimizing replacement cycles for lower maintenance.




**Two circumferential angled grooves** deliver outstanding lateral guidance and a remarkably quiet ride.



**Unique tread pattern with greater lug depth** provides excellent traction across all terrains, exceptional riding comfort, and reduced noise generation in electric forklifts.

Excellent tread compound that is ideal for intense working environments under all surface conditions.

Unique tread pattern and optimized lug depth that provide excellent traction.



TREAD COMPOUND  
CENTRE COMPOUND  
BASE COMPOUND  
BEAD WIRES



ULTIMATE XT®

| Tire Size         |           | Rim Size  | Clip on | Profile | Tire Dimensions (mm) |              | Tire Dimensions (inch) |                | Other Vehicles load capacity (Kg) |         | Tire load capacity on forklifts at Max. Speed |             |              |             |
|-------------------|-----------|-----------|---------|---------|----------------------|--------------|------------------------|----------------|-----------------------------------|---------|-----------------------------------------------|-------------|--------------|-------------|
|                   |           |           |         |         |                      |              |                        |                |                                   |         | 16 Miles/h (Lbs)                              |             | 25 Km/h (Kg) |             |
| inch              | mm        |           |         |         | Max width ±1% (mm)   | OD ± 2% (mm) | Max width ±1% (inch)   | OD ± 2% (inch) | 6 Km/h                            | 10 Km/h | Load wheel                                    | Steer wheel | Load wheel   | Steer wheel |
| 4.00-8            |           | 3.00 D-8  | •       | UT      | 106                  | 406          | 4.17                   | 15.98          | 950                               | 860     | 2095                                          | 1610        | 950          | 730         |
| 5.00-8            |           | 3.00 D-8  | •       | UT      | 120                  | 446          | 4.72                   | 17.56          | 1415                              | 1285    | 3120                                          | 2405        | 1415         | 1090        |
| 5.00-8            |           | 3.00 D-8  |         | SM      | 116                  | 446          | 4.57                   | 17.56          | 1415                              | 1285    | 3120.08                                       | 2403.45     | 1415         | 1090        |
| 15x4 1/2-8        | 125/75-8  | 3.00 D-8  | •       | UT      | 114                  | 377          | 4.49                   | 14.84          | 1040                              | 945     | 2295                                          | 1765        | 1040         | 800         |
| 16x6-8            | 150/75-8  | 4.33 R-8  | •       | UT      | 151                  | 411          | 5.94                   | 16.18          | 1495                              | 1360    | 3210                                          | 2535        | 1495         | 1150        |
| 18x7-8            | 180/70-8  | 4.33 R-8  | •       | UT      | 153                  | 453          | 6.02                   | 17.83          | 2145                              | 1945    | 4730                                          | 3640        | 2145         | 1650        |
| 140/55-9          |           | 4.00 E-9  | •       | UT      | 129                  | 375          | 5.08                   | 14.76          | 1170                              | 1060    | 2580                                          | 1986        | 1170         | 900         |
| 6.00-9            |           | 4.00 E-9  | •       | UT      | 137                  | 519          | 5.39                   | 20.43          | 1885                              | 1710    | 4155                                          | 3195        | 1885         | 1450        |
| 6.00-9            |           | 4.00 E-9  |         | SM      | 140                  | 520          | 5.51                   | 20.47          | 1885                              | 1710    | 4156.43                                       | 3197.25     | 1885         | 1450        |
| 21x8-9            | 200/75-9  | 6.00 E-9  | •       | UT      | 186                  | 518          | 7.32                   | 20.39          | 2755                              | 2505    | 6075                                          | 4675        | 2755         | 2120        |
| 180/60-10         |           | 5.00F-10  | •       | UT      | 165                  | 456          | 6.50                   | 17.95          | 2410                              | 2180    | 5314.5                                        | 4079.6      | 2410         | 1850        |
| 6.50-10           |           | 5.00 F-10 | •       | UT      | 160                  | 561          | 6.30                   | 22.09          | 2340                              | 2125    | 5160                                          | 3970        | 2340         | 1800        |
| 200/50-10         |           | 6.50 F-10 | •       | UT      | 190                  | 455          | 7.48                   | 17.91          | 2470                              | 2240    | 5445                                          | 4190        | 2470         | 1900        |
| 23x9-10           | 225/75-10 | 6.50 F-10 | •       | UT      | 200                  | 580          | 7.87                   | 22.83          | 3445                              | 3125    | 7595                                          | 5840        | 3445         | 2650        |
| 7.00-12           |           | 5.00 S-12 | •       | UT      | 171                  | 651          | 6.73                   | 25.63          | 2920                              | 2645    | 6435                                          | 4940        | 2920         | 2240        |
| 23x10-12          | 250/60-12 | 8.00 G-12 | •       | UT      | 233                  | 578          | 9.17                   | 22.76          | 3770                              | 3420    | 8310                                          | 6390        | 3770         | 2900        |
| 23x12-12          | 315/45-12 | 10.00G-12 | •       | UT      | 287                  | 582          | 11.30                  | 22.91          | 4485                              | 4070    | 9890.27                                       | 7607.9      | 4485         | 3450        |
| 27x10-12          | 250/75-12 | 8.00 G-12 | •       | UT      | 237                  | 677          | 9.33                   | 26.65          | 3900                              | 3540    | 8600                                          | 6615        | 3900         | 3000        |
| 7.00-15           |           | 5.50-15   | •       | UT      | 175                  | 722          | 6.89                   | 28.43          | 3545                              | 3215    | 7815                                          | 6005        | 3545         | 2725        |
| 7.00-15           |           | 6.00-15   | •       | UT      | 175                  | 722          | 6.89                   | 28.43          | 3545                              | 3215    | 7815                                          | 6005        | 3545         | 2725        |
| 250-15            | 250/70-15 | 7.00-15   | •       | UT      | 221                  | 722          | 8.70                   | 28.43          | 4750                              | 4300    | 10470                                         | 8045        | 4750         | 3650        |
| 250-15            | 250/70-15 | 7.50-15   | •       | UT      | 221                  | 722          | 8.70                   | 28.43          | 4750                              | 4300    | 10470                                         | 8045        | 4750         | 3650        |
| 8.15-15 (28x9-15) | 225/75-15 | 7.00-15   | •       | UT      | 217                  | 691          | 8.54                   | 27.20          | 3900                              | 3540    | 8580                                          | 6600        | 3900         | 3000        |
| 8.25-15           |           | 6.50-15   | •       | UT      | 212                  | 810          | 8.35                   | 31.89          | 4750                              | 4300    | 10470                                         | 8045        | 4750         | 3650        |
| 300-15            | 315/70-15 | 8.00-15   | •       | UT      | 250                  | 824          | 9.84                   | 32.44          | 5850                              | 5310    | 12895                                         | 9920        | 5850         | 4500        |
| 28x12.5-15        | 355/45-15 | 9.75-15   | •       | UT      | 292                  | 697          | 11.50                  | 27.44          | 5690                              | 5145    | 12518                                         | 9625        | 5690         | 4375        |
| 355/50-15         |           | 9.75-15   | •       | UT      | 296                  | 710          | 11.81                  | 32.32          | 5690                              | 5165    | 12547.5                                       | 9647.7      | 5690         | 4375        |
| 355/65-15         |           | 9.75-15   | •       | UT      | 300                  | 821          | 11.81                  | 32.32          | 7085                              | 6430    | 17190                                         | 13230       | 7800         | 6000        |
| 355/50-20         |           | 10.00-20  | •       | SM      | 315                  | 827          | 11.81                  | 32.32          | 8970                              | 8140    | 19780.5                                       | 15215.8     | 8970         | 6900        |
| 9.00-20           |           | 6.50-20   | •       | UT      | 224                  | 974.2        | 8.82                   | 38.35          | 5400                              | 4905    | 11880                                         | 9900        | 5400         | 4500        |
| 9.00-20           |           | 7.00-20   |         | UT      | 224                  | 974.2        | 8.82                   | 38.35          | 5400                              | 4905    | 11880                                         | 9900        | 5400         | 4500        |
| 10.00-20          |           | 7.50-20   |         | SM      | 255                  | 1016.1       | 10.10                  | 40.00          | 6000                              | 5450    | 13227                                         | 11022       | 6000         | 5000        |
| 10.00-20          |           | 7.50-20   |         | UT      | 255                  | 1016.1       | 10.10                  | 40.00          | 6000                              | 5450    | 13227                                         | 11022       | 6000         | 5000        |
| 10.00-20          |           | 8.00-20   |         | UT      | 255                  | 1016.1       | 10.10                  | 40.00          | 6000                              | 5450    | 13227                                         | 11022       | 6000         | 5000        |
| 12.00-20          |           | 8.00-20   |         | UT      | 269                  | 1090         | 10.68                  | 42.91          | 7560                              | 6865    | 16632                                         | 13860       | 7560         | 6300        |
| 12.00-20          |           | 8.50-20   |         | UT      | 269                  | 1090         | 10.68                  | 42.91          | 7560                              | 6865    | 16632                                         | 13860       | 7560         | 6300        |
| 12.00-20          |           | 10.00-20  |         | UT      | 297.1                | 1090         | 11.70                  | 42.91          | 7800                              | 7085    | 17119.1                                       | 14262.3     | 7800         | 6500        |



PEAKMASTER

The Premium Material Handling Tire  
for Extreme Performance

PEAKMASTER

The PEAKMASTER is a high-performance premium forklift tire designed with advanced natural rubber compounds and superior self-cleaning tread pattern, convenient for most applications.



Available in: • Non-marking • Oil-resistant • Antistatic



16 Hours / 2 shifts operating capacity.



Reduced heat build-up allows for extended continuous operation.



Higher fuel economy in continuous operations to meet high demanding expectations.



High mileage that lasts, reducing the need for frequent replacements and saving time and money.




High abrasion resistance with optimized wear volume translates to an extended tire lifespan, minimizing replacement cycles for lower maintenance.



Two circumferential angled grooves deliver outstanding lateral guidance and a remarkably quiet ride.

Optimized for high intensity applications with an asymmetric tread design.

Wide profile, bold tread pattern and increased tread depth.



TREAD COMPOUND

CENTRE COMPOUND

BASE COMPOUND

BEAD WIRES



| Tire Size         |           | Rim Size  | Clip on | Profile | Tire Dimensions (mm) |              | Tire Dimensions (inch) |                | Other Vehicles load capacity (Kg) |         | Tire load capacity on forklifts at Max. Speed |             |              |             |
|-------------------|-----------|-----------|---------|---------|----------------------|--------------|------------------------|----------------|-----------------------------------|---------|-----------------------------------------------|-------------|--------------|-------------|
|                   |           |           |         |         | Max width ±1% (mm)   | OD ± 2% (mm) | Max width ±1% (inch)   | OD ± 2% (inch) | 6 Km/h                            | 10 Km/h | 16 Miles/h (Lbs)                              |             | 25 Km/h (Kg) |             |
| inch              | mm        |           |         |         |                      |              |                        |                |                                   |         | Load wheel                                    | Steer wheel | Load wheel   | Steer wheel |
| 4.00-4            |           | 2.10-4    | •       | PM      | 99                   | 304          | 3.90                   | 11.97          | 535                               | 485     | 1180                                          | 910         | 535          | 412         |
| 4.00-4            |           | 2.50-C-4  | •       | PM      | 99                   | 304          | 3.90                   | 11.97          | 535                               | 485     | 1180                                          | 910         | 535          | 412         |
| 4.00-8            |           | 3.00 D-8  | •       | PM      | 106                  | 406          | 4.17                   | 15.98          | 950                               | 860     | 2095                                          | 1610        | 950          | 730         |
| 5.00-8            |           | 3.00 D-8  | •       | PM      | 120                  | 446          | 4.72                   | 17.56          | 1415                              | 1285    | 3120                                          | 2405        | 1415         | 1090        |
| 15x4 1/2-8        | 125/75-8  | 3.00 D-8  | •       | PM      | 114                  | 377          | 4.49                   | 14.84          | 1040                              | 945     | 2295                                          | 1765        | 1040         | 800         |
| 16x6-8            | 150/75-8  | 4.33 R-8  | •       | PM      | 151                  | 411          | 5.94                   | 16.18          | 1495                              | 1360    | 3210                                          | 2535        | 1455         | 1150        |
| 18x7-8            | 180/70-8  | 4.33 R-8  | •       | PM      | 153                  | 453          | 6.02                   | 17.83          | 2145                              | 1945    | 4730                                          | 3640        | 2145         | 1650        |
| 140/55-9          |           | 4.00 E-9  | •       | PM      | 129                  | 375          | 5.08                   | 14.76          | 1170                              | 1060    | 2580                                          | 1986        | 1170         | 900         |
| 6.00-9            |           | 4.00 E-9  | •       | PM      | 137                  | 519          | 5.39                   | 20.43          | 1885                              | 1710    | 4155                                          | 3195        | 1885         | 1450        |
| 21x8-9            | 200/75-9  | 6.00 E-9  | •       | PM      | 186                  | 518          | 7.32                   | 20.39          | 2755                              | 2505    | 6075                                          | 4675        | 2755         | 2120        |
| 6.50-10           |           | 5.00 F-10 | •       | PM      | 160                  | 561          | 6.30                   | 22.09          | 2340                              | 2125    | 5160                                          | 3970        | 2340         | 1800        |
| 200/50-10         |           | 6.50 F-10 | •       | PM      | 190                  | 455          | 7.48                   | 17.91          | 2470                              | 2240    | 5445                                          | 4190        | 2470         | 1900        |
| 23x9-10           | 225/75-10 | 6.50 F-10 | •       | PM      | 200                  | 580          | 7.87                   | 22.83          | 3445                              | 3125    | 7595                                          | 5840        | 3445         | 2650        |
| 7.00-12           |           | 5.00 S-12 | •       | PM      | 172                  | 650          | 6.77                   | 25.59          | 2920                              | 2645    | 6435                                          | 4940        | 2920         | 2240        |
| 23x10-12          | 250/60-12 | 8.00 G-12 | •       | PM      | 233                  | 578          | 9.17                   | 22.76          | 3770                              | 3420    | 8310                                          | 6390        | 3770         | 2900        |
| 27x10-12          | 250/75-12 | 8.00 G-12 | •       | PM      | 237                  | 677          | 9.33                   | 26.65          | 3900                              | 3540    | 8600                                          | 6615        | 3900         | 3000        |
| 7.00-15           |           | 5.50-15   | •       | PM      | 180                  | 722          | 7.09                   | 28.43          | 3545                              | 3215    | 7815                                          | 6005        | 3545         | 2725        |
| 7.00-15           |           | 6.00-15   | •       | PM      | 180                  | 722          | 7.09                   | 28.43          | 3545                              | 3215    | 7815                                          | 6005        | 3545         | 2725        |
| 7.50-16           |           | 6.00-16   | •       | PM      | 207                  | 777          | 8.15                   | 30.59          | 3965                              | 3600    | 8740                                          | 6745        | 3965         | 3050        |
| 250-15            | 250/70-15 | 7.00-15   | •       | PM      | 222                  | 722          | 8.74                   | 28.43          | 4750                              | 4300    | 10470                                         | 8045        | 4750         | 3650        |
| 8.15-15 (28x9-15) | 225/75-15 | 7.00-15   | •       | PM      | 217                  | 691          | 8.54                   | 27.20          | 3900                              | 3540    | 8580                                          | 6600        | 3900         | 3000        |
| 8.25-15           |           | 6.50-15   | •       | PM      | 212                  | 810          | 8.35                   | 31.89          | 4750                              | 4300    | 10470                                         | 8045        | 4750         | 3650        |
| 300-15            | 315/70-15 | 8.00-15   | •       | PM      | 250                  | 824          | 9.84                   | 32.44          | 5850                              | 5310    | 12895                                         | 9920        | 5850         | 4500        |
| 28x12.5-15        | 355/45-15 | 9.75-15   | •       | PM      | 292                  | 697          | 11.50                  | 27.44          | 5690                              | 5165    | 12518                                         | 9625        | 5690         | 4375        |
| 355/65-15         |           | 9.75-15   | •       | PM      | 300                  | 819          | 11.81                  | 32.24          | 7085                              | 6430    | 17190                                         | 13230       | 7800         | 6000        |



**GLOBESTAR WT**

## A Long-Lasting, Stable Solid Forklift Tire **GLOBESTAR WT**

GLOBESTAR WT is a universal solid tire having the widest tread among the range. The wide tread and flat design maximizes tire life and stability, even when cornering. Deep lugs provide excellent traction in most working environments.



Available in: • Non-marking • Oil-resistant • Antistatic



**12 Hours / 1.5 shifts operating capacity**



**Extended tread life** means fewer replacements and reduced maintenance costs.



**Contemporary tread design with wide shoulders** provides extended tread life and even wear.



**Widest tread pattern in its class**, combined with a flat crown radius, ensures optimal cornering stability, delivering enhanced comfort.




**Two circumferential angled grooves** deliver outstanding lateral guidance and a remarkably quiet ride.

Natural rubber tread compound that is resilient to cut and chip damage.

Wide tread.

Optimized contact area and wide tread profile with greater lug depth.



TREAD COMPOUND

CENTRE COMPOUND

BASE COMPOUND

BEAD WIRES

| Tire Size         |           | Rim Size  | Clip on | Profile | Tire Dimensions (mm) |              | Tire Dimensions (inch) |                | Other Vehicles load capacity (Kg) |         | Tire load capacity on forklifts at Max. Speed |             |              |             |
|-------------------|-----------|-----------|---------|---------|----------------------|--------------|------------------------|----------------|-----------------------------------|---------|-----------------------------------------------|-------------|--------------|-------------|
|                   |           |           |         |         |                      |              |                        |                |                                   |         | 16 Miles/h (Lbs)                              |             | 25 Km/h (Kg) |             |
| inch              | mm        |           |         |         | Max width ±1% (mm)   | OD ± 2% (mm) | Max width ±1% (inch)   | OD ± 2% (inch) | 6 Km/h                            | 10 Km/h | Load wheel                                    | Steer wheel | Load wheel   | Steer wheel |
| 4.00-4            |           | 2.10 -4   |         | GS-WT   | 97                   | 304          | 3.82                   | 11.97          | 535                               | 485     | 1180                                          | 910         | 535          | 412         |
| 4.00-4            |           | 2.50 C-4  |         | GS-WT   | 97                   | 304          | 3.82                   | 11.97          | 535                               | 485     | 1180                                          | 910         | 535          | 412         |
| 4.00-8            |           | 3.00 D-8  | ●       | GS-WT   | 104                  | 403          | 4.09                   | 15.87          | 950                               | 860     | 2095                                          | 1610        | 950          | 730         |
| 5.00-8            |           | 3.00 D-8  | ●       | GS-WT   | 115                  | 444          | 4.53                   | 17.48          | 1415                              | 1285    | 3120                                          | 2405        | 1415         | 1090        |
| 15x4 1/2-8        | 125/75-8  | 3.00 D-8  | ●       | GS-WT   | 115                  | 374          | 4.53                   | 14.72          | 1040                              | 945     | 2295                                          | 1765        | 1040         | 800         |
| 16x6-8            | 150/75-8  | 4.33 R-8  | ●       | GS-WT   | 138                  | 406          | 5.43                   | 15.98          | 1495                              | 1360    | 3210                                          | 2535        | 1495         | 1150        |
| 18x7-8            | 180/70-8  | 4.33 R-8  | ●       | GS-WT   | 152                  | 451          | 5.98                   | 17.76          | 2145                              | 1945    | 4730                                          | 3640        | 2145         | 1650        |
| 140/55-9          |           | 4.00 E-9  | ●       | GS-WT   | 129                  | 377          | 5.08                   | 14.84          | 1170                              | 1060    | 2580                                          | 1986        | 1170         | 900         |
| 6.00-9            |           | 4.00 E-9  | ●       | GS-WT   | 139                  | 517          | 5.47                   | 20.35          | 1885                              | 1710    | 4155                                          | 3195        | 1885         | 1450        |
| 21x8-9            | 200/75-9  | 6.00 E-9  | ●       | GS-WT   | 179                  | 514          | 7.05                   | 20.24          | 2755                              | 2505    | 6075                                          | 4675        | 2755         | 2120        |
| 6.50-10           |           | 5.00 F-10 | ●       | GS-WT   | 156                  | 563          | 6.14                   | 22.17          | 2340                              | 2125    | 5160                                          | 3970        | 2340         | 1800        |
| 200/50-10         |           | 6.50 F-10 | ●       | GS-WT   | 191                  | 455          | 7.52                   | 17.91          | 2470                              | 2240    | 5445                                          | 4190        | 2470         | 1900        |
| 23x9-10           | 225/75-10 | 6.50 F-10 | ●       | GS-WT   | 197                  | 580          | 7.76                   | 22.83          | 3445                              | 3125    | 7595                                          | 5840        | 3445         | 2650        |
| 7.00-12           |           | 5.00 S-12 | ●       | GS-WT   | 167                  | 645          | 6.57                   | 25.39          | 2920                              | 2645    | 6435                                          | 4940        | 2920         | 2240        |
| 23x10-12          | 250/60-12 | 8.00 G-12 | ●       | GS-WT   | 232                  | 580          | 9.13                   | 22.83          | 3770                              | 3420    | 8310                                          | 6390        | 3770         | 2900        |
| 27x10-12          | 250/75-12 | 8.00 G-12 | ●       | GS-WT   | 243                  | 670          | 9.57                   | 26.38          | 3900                              | 3540    | 8600                                          | 6615        | 3900         | 3000        |
| 7.00-15           |           | 5.50-15   | ●       | GS-WT   | 174                  | 704          | 6.85                   | 27.72          | 3545                              | 3215    | 7815                                          | 6005        | 3545         | 2725        |
| 7.00-15           |           | 6.00-15   | ●       | GS-WT   | 174                  | 704          | 6.85                   | 27.72          | 3545                              | 3215    | 7815                                          | 6005        | 3545         | 2725        |
| 8.15-15 (28x9-15) | 225/75-15 | 7.00-15   | ●       | GS-WT   | 214                  | 680          | 8.43                   | 26.77          | 3900                              | 3540    | 8580                                          | 6600        | 3900         | 3000        |
| 8.25-15           |           | 5.50-15   | ●       | GS-WT   | 209                  | 806          | 8.23                   | 31.73          | 4615                              | 4190    | 10153                                         | 7810        | 4615         | 3550        |
| 8.25-15           |           | 6.50-15   | ●       | GS-WT   | 209                  | 806          | 8.23                   | 31.73          | 4750                              | 4300    | 10470                                         | 8045        | 4750         | 3650        |
| 250-15            | 250/70-15 | 7.00-15   | ●       | GS-WT   | 216                  | 709          | 8.50                   | 27.91          | 4750                              | 4310    | 10470                                         | 8045        | 4750         | 3650        |
| 250-15            | 250/70-15 | 7.50-15   | ●       | GS-WT   | 216                  | 709          | 8.50                   | 27.91          | 4750                              | 4310    | 10470                                         | 8045        | 4750         | 3650        |
| 300-15            | 315/70-15 | 8.00-15   | ●       | GS-WT   | 262                  | 811          | 10.31                  | 31.93          | 5850                              | 5310    | 12895                                         | 9920        | 5850         | 4500        |
| 355/65-15         |           | 9.75-15   | ●       | GS-WT   | 290                  | 819          | 11.42                  | 32.24          | 7085                              | 6430    | 17190                                         | 13230       | 7800         | 6000        |
| 9.00-20           |           | 6.50-10   |         | GS-WT   | 231                  | 970          | 9.09                   | 38.19          | 5400                              | 4905    | 11880                                         | 9900        | 5400         | 4500        |
| 9.00-20           |           | 7.00-20   |         | GS-WT   | 231                  | 970          | 9.09                   | 38.19          | 5400                              | 4905    | 11880                                         | 9900        | 5400         | 4500        |
| 10.00-20          |           | 7.00-20   |         | GS-WT   | 248                  | 1005         | 9.76                   | 39.57          | 6000                              | 5450    | 13230                                         | 11025       | 6000         | 5000        |
| 10.00-20          |           | 7.50-20   | ●       | GS-WT   | 248                  | 1005         | 9.76                   | 39.57          | 6000                              | 5450    | 13230                                         | 11025       | 6000         | 5000        |
| 10.00-20          |           | 8.00-20   | ●       | GS-WT   | 248                  | 1005         | 9.76                   | 39.57          | 6000                              | 5450    | 13230                                         | 11025       | 6000         | 5000        |
| 12.00-20          |           | 7.50-20   |         | GS-WT   | 284                  | 1084         | 11.18                  | 42.68          | 7560                              | 6865    | 16535                                         | 13780       | 7560         | 6300        |
| 12.00-20          |           | 8.00-20   |         | GS-WT   | 284                  | 1084         | 11.18                  | 42.68          | 7500                              | 6810    | 16535                                         | 13780       | 7500         | 6250        |
| 12.00-20          |           | 8.50-20   |         | GS-WT   | 284                  | 1084         | 11.18                  | 42.68          | 7500                              | 6810    | 16535                                         | 13780       | 7500         | 6250        |

GLOBESTAR WT



THE PERFORMER

The Value-Driven Workhorse for Forklifts

THE PERFORMER

The PERFORMER is a budget (two-stage) solid tire designed for forklifts in light intensity applications. It is excellent for intermittent use in all material handling applications which gives value for money.



8 Hours / 1 shifts operating capacity.



High natural rubber tread compound containing black filler with high abrasion resistance delivering high mileage in low intense applications.



Simple symmetric tread design ensures the even wear of the tire throughout the lifespan.




Application suited for machines running in confined spaces on an intermittent basis.



Square bead technology ensures secure and safe fitment both radially and axially and giving rider comfort.

Low abrasion tread compound.

High lug depth and optimized aspect ratio.



TREAD COMPOUND

BASE COMPOUND

BEAD WIRES

| Tire Size         |           | Rim Size  | Clip on | Profile | Tire Dimensions (mm) |              | Tire Dimensions (inch) |                | Other Vehicles load capacity (Kg) |         | Tire load capacity on forklifts at Max. Speed |             |              |             |
|-------------------|-----------|-----------|---------|---------|----------------------|--------------|------------------------|----------------|-----------------------------------|---------|-----------------------------------------------|-------------|--------------|-------------|
|                   |           |           |         |         | Max width ±1% (mm)   | OD ± 2% (mm) | Max width ±1% (inch)   | OD ± 2% (inch) | 6 Km/h                            | 10 Km/h | 16 Miles/h (Lbs)                              |             | 25 Km/h (Kg) |             |
| inch              | mm        |           |         |         |                      |              |                        |                |                                   |         | Load wheel                                    | Steer wheel | Load wheel   | Steer wheel |
| 4.00-8            |           | 3.00 D-8  | •       | GS      | 104                  | 406          | 4.09                   | 15.98          | 950                               | 860     | 2095                                          | 1610        | 950          | 730         |
| 5.00-8            |           | 3.00 D-8  | •       | GS      | 116                  | 446          | 4.57                   | 17.56          | 1415                              | 1285    | 3120                                          | 2405        | 1415         | 1090        |
| 15x4 1/2-8        | 125/75-8  | 3.00 D-8  | •       | GS      | 103                  | 377          | 4.06                   | 14.84          | 1040                              | 945     | 2295                                          | 1765        | 1040         | 800         |
| 16x6-8            | 150/75-8  | 4.33 R-8  | •       | GS      | 139                  | 407          | 5.47                   | 16.02          | 1495                              | 1360    | 3289                                          | 2535        | 1495         | 1150        |
| 18x7-8            | 180/70-8  | 4.33 R-8  | •       | GS      | 150                  | 451          | 6.02                   | 17.76          | 2145                              | 1945    | 4730                                          | 3640        | 2145         | 1650        |
| 6.00-9            |           | 4.00 E-9  | •       | GS      | 139                  | 520          | 5.51                   | 20.47          | 1885                              | 1710    | 4155                                          | 3195        | 1885         | 1450        |
| 21x8-9            | 200/75-9  | 6.00 E-9  | •       | GS      | 174                  | 516          | 6.85                   | 20.31          | 2755                              | 2505    | 6075                                          | 4675        | 2755         | 2120        |
| 6.50-10           |           | 5.00 F-10 | •       | GS      | 153                  | 565          | 6.02                   | 22.24          | 2340                              | 2125    | 5160                                          | 3970        | 2340         | 1800        |
| 200/50-10         |           | 6.50 F-10 | •       | GS      | 188                  | 456          | 7.40                   | 17.95          | 2470                              | 2240    | 5445                                          | 4190        | 2470         | 1900        |
| 23x9-10           | 225/75-10 | 6.50 F-10 | •       | GS      | 188                  | 582          | 7.52                   | 22.80          | 3445                              | 3125    | 7595                                          | 5840        | 3445         | 2650        |
| 7.00-12           |           | 5.00 S-12 | •       | GS      | 164                  | 647          | 6.46                   | 25.47          | 2920                              | 2645    | 6435                                          | 4940        | 2920         | 2240        |
| 23x10-12          |           | 8.00 G-12 | •       | GS      | 234                  | 580          | 9.21                   | 22.83          | 3770                              | 3420    | 8310                                          | 6390        | 3770         | 2900        |
| 27x10-12          | 250/75-12 | 8.00 G-12 | •       | GS      | 232                  | 675          | 9.13                   | 26.50          | 3900                              | 3540    | 8600                                          | 6615        | 3900         | 3000        |
| 7.00-15           |           | 5.50-15   | •       | GS      | 175                  | 705          | 7.01                   | 27.76          | 3545                              | 3215    | 7815                                          | 6005        | 3545         | 2725        |
| 7.00-15           |           | 6.00-15   | •       | GS      | 175                  | 705          | 7.01                   | 27.76          | 3545                              | 3215    | 7815                                          | 6005        | 3545         | 2725        |
| 250-15            | 250/70-15 | 7.00-15   | •       | GS      | 211                  | 712          | 8.43                   | 28.03          | 4750                              | 4300    | 10470                                         | 8045        | 4750         | 3650        |
| 250-15            | 250/70-15 | 7.50-15   | •       | GS      | 211                  | 712          | 8.43                   | 28.03          | 4750                              | 4300    | 10470                                         | 8045        | 4750         | 3650        |
| 8.15-15 (28x9-15) | 225/75-15 | 7.00-15   | •       | GS      | 202                  | 681          | 8.23                   | 26.81          | 3900                              | 3540    | 8580                                          | 6600        | 3900         | 3000        |
| 8.25-15           |           | 5.50-15   | •       | GS      | 194                  | 809          | 7.64                   | 31.85          | 4615                              | 4190    | 10153                                         | 7810        | 4615         | 3550        |
| 8.25-15           |           | 6.50-15   | •       | GS      | 193                  | 809          | 7.60                   | 31.85          | 4750                              | 4300    | 10153                                         | 7810        | 4615         | 3550        |
| 300-15            | 315/70-15 | 8.00-15   | •       | GS      | 243                  | 812          | 9.57                   | 31.97          | 5850                              | 5310    | 12895                                         | 9920        | 5850         | 4500        |
| 9.00-20           |           | 6.50-10   |         | GS      | 225                  | 971          | 8.86                   | 38.23          | 5400                              | 4905    | 11880                                         | 9900        | 5400         | 4500        |
| 9.00-20           |           | 7.00-20   |         | GS      | 225                  | 971          | 8.86                   | 38.23          | 5400                              | 4905    | 11880                                         | 9900        | 5400         | 4500        |
| 10.00-20          |           | 7.00-20   |         | GS      | 250                  | 1006         | 9.84                   | 39.61          | 6000                              | 5450    | 13230                                         | 11025       | 6000         | 5000        |
| 10.00-20          |           | 7.50-20   | •       | GS      | 250                  | 1006         | 9.84                   | 39.61          | 6000                              | 5450    | 13230                                         | 11025       | 6000         | 5000        |
| 10.00-20          |           | 8.00-20   |         | GS      | 250                  | 1006         | 9.84                   | 39.61          | 6000                              | 5450    | 13230                                         | 11025       | 6000         | 5000        |
| 11.00-20          |           | 7.50-20   |         | SM      | 265                  | 1088         | 10.43                  | 42.83          | 7560                              | 6865    | 14420                                         | 12015       | 6540         | 5450        |
| 11.00-20          |           | 8.00-20   |         | SM      | 265                  | 1088         | 10.43                  | 42.83          | 7560                              | 6865    | 14420                                         | 12015       | 6540         | 5450        |
| 11.00-20          |           | 8.50-20   |         | SM      | 265                  | 1088         | 10.43                  | 42.83          | 7560                              | 6865    | 14420                                         | 12015       | 6540         | 5450        |
| 12.00-20          |           | 8.00-20   |         | GS      | 265                  | 1088         | 10.43                  | 42.83          | 7560                              | 6865    | 16632                                         | 13860       | 7560         | 6300        |
| 12.00-20          |           | 8.50-20   |         | GS      | 265                  | 1088         | 10.43                  | 42.83          | 7560                              | 6865    | 16632                                         | 13860       | 7560         | 6300        |

THE PERFORMER

# ULTIMATE XT POB



## ULTIMATE XT POB

ULTIMATE XT POB has a unique tread pattern for traction and perfect for uneven, rough and changing surface conditions. Our smooth press on tires are commonly used for applications where the forklift operates inside on even and dry floors.



Available in: • Non-marking • Oil-resistant • Antistatic



**Reduced heat build-up** allows for extended continuous operation.



**High abrasion resistance** translates to an extended tire lifespan, minimizing replacement cycles for lower maintenance.




**Specialized tread compound** ensures puncture resistance, exceptional wear durability, and one of the lowest costs of ownership.



**Maximum cornering stability with enhanced traction** ensures exceptional control during maneuvering and enhances driver safety and comfort.

Increased Lug depth for longer tire life.

Used global lock bonding process to precision the band.

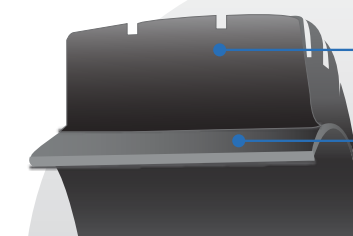

TREAD COMPOUND

STEEL BAND

| Tire Size       |             | Profile |     | Tire load capacity on forklifts at Max. Speed |             |              |             |              |             |
|-----------------|-------------|---------|-----|-----------------------------------------------|-------------|--------------|-------------|--------------|-------------|
|                 |             |         |     | 10 Km/h (Kg)                                  |             | 16 Km/h (Kg) |             | 25 Km/h (Kg) |             |
| inch            | mm          | SM      | LUG | Load wheel                                    | Steer wheel | Load wheel   | Steer wheel | Load wheel   | Steer wheel |
| 10x5x6 1/2      | 254/127-165 | •       | •   | 1010                                          | 830         | 905          | 760         | 735          | 605         |
| 13 1/2x5 1/2x8  | 343/140-203 | •       | •   | 1510                                          | 1240        | 1345         | 1130        | 1095         | 895         |
| 14x4 1/2x8      | 356/114-203 | •       | •   | 1170                                          | 960         | 1045         | 875         | 850          | 695         |
| 14x5x10         | 356x127-254 | •       | •   | 1335                                          | 1095        | 1195         | 1000        | 970          | 795         |
| 15x5x11 1/4     | 381/127-286 | •       | •   | 1390                                          | 1140        | 1240         | 1040        | 1010         | 830         |
| 16x5x10 1/2     | 406/127-267 | •       | •   | 1510                                          | 1240        | 1345         | 1130        | 1095         | 895         |
| 16x6x10 1/2     | 406/152-267 | •       | •   | 1910                                          | 1570        | 1710         | 1435        | 1390         | 1140        |
| 16 1/4x5x11 1/4 | 413/127-286 | •       | •   | 1530                                          | 1250        | 1360         | 1145        | 1105         | 905         |
| 16 1/4x6x111/4  | 413/152-286 | •       | •   | 1920                                          | 1580        | 1715         | 1440        | 1395         | 1140        |
| 18x6x12 1/8     | 457/152-308 | •       | •   | 2100                                          | 1720        | 1870         | 1575        | 1525         | 1250        |
| 18x7x12 1/8     | 457/178-308 | •       | •   | 2550                                          | 2100        | 2280         | 1510        | 1855         | 1520        |
| 18x8x12 1/8     | 457/203-308 | •       | •   | 3000                                          | 2475        | 2680         | 2250        | 2180         | 1790        |
| 21x7x15         | 533/178-381 | •       | •   | 2875                                          | 2350        | 2560         | 2150        | 2085         | 1710        |
| 21x8x15         | 533/203-381 | •       | •   | 3375                                          | 2775        | 3025         | 2540        | 2455         | 2015        |
| 21x9x15         | 533/229-381 | •       | •   | 3900                                          | 3200        | 3475         | 2920        | 2830         | 2320        |
| 22x8x16         | 559/203-406 | •       | •   | 3500                                          | 2875        | 3130         | 2625        | 2545         | 2085        |
| 22x9x16         | 559/229-406 | •       | •   | 4050                                          | 3325        | 3600         | 3025        | 2930         | 2400        |
| 22x12x16        | 559/305-406 | •       | •   | 5625                                          | 4625        | 5030         | 4225        | 4090         | 3350        |
| 28x12x22        | 711/305-559 | •       | •   | 6740                                          | 5540        | 6020         | 5060        | 4900         | 4015        |



GLOBE STAR POB

# GLOBESTAR POB

The GLOBESTAR (POB) is a universal cushion tire crafted with an advanced natural rubber compound that’s vulcanized onto a precision band using an innovative 'globallock' bonding process. Engineered for wear, abrasion, and tear resistance, this tire ensures reduced downtime, high load carrying capacity, superior performance, and enhanced driver comfort.



Available in: • Non-marking • Oil-resistant • Antistatic



**High-performance compound** ensures low rolling resistance, reduces chunking and cutting, providing an exceptional quality-to-price ratio.



**High abrasion resistance** translates to an extended tire lifespan, minimizing replacement cycles for lower maintenance.



**Perfect bonding** with high quality bonding technology keeps rubber and steel intact while working with heavy loads.




**Maximum cornering stability with enhanced traction** delivers outstanding lateral guidance and a remarkably quiet ride.



Wide footprint for better stability

Used global lock bonding process to precision the band.



TREAD COMPOUND

STEEL BAND

| Tire Size        |              | Profile |     | Tire load capacity on forklifts at Max. Speed |             |              |             |              |             |
|------------------|--------------|---------|-----|-----------------------------------------------|-------------|--------------|-------------|--------------|-------------|
|                  |              |         |     | 10 Km/h (Kg)                                  |             | 16 Km/h (Kg) |             | 25 Km/h (Kg) |             |
| inch             | mm           | SM      | LUG | Load wheel                                    | Steer wheel | Load wheel   | Steer wheel | Load wheel   | Steer wheel |
| 10x4x6 1/2       | 254/102-165  | •       |     | 780                                           | 640         | 695          | 585         | 565          | 465         |
| 10x5x6 1/2       | 254/127-165  | •       | •   | 1010                                          | 830         | 905          | 760         | 735          | 605         |
| 10 1/2 x5x 6 1/2 | 267/127-165  | •       |     | 1070                                          | 880         | 960          | 810         | 780          | 640         |
| 10x4 3/4x6 1/2   | 254/121-165  | •       |     | 950                                           | 780         | 845          | 710         | 690          | 565         |
| 13 1/2x4 1/2x8   | 343/114-203  | •       |     | 1150                                          | 940         | 1025         | 860         | 835          | 685         |
| 13 1/2x5 1/2x8   | 343/140-203  | •       |     | 1510                                          | 1240        | 1345         | 1130        | 1095         | 895         |
| 13 1/2x6 1/2x8   | 343/165-203  | •       |     | 1640                                          | 1350        | 1470         | 1230        | 1185         | 975         |
| 12 x 4 1/2 x8    | 305/114-203  | •       | •   | 1040                                          | 855         | 930          | 780         | 755          | 620         |
| 14x4 1/2x8       | 356/114-203  | •       | •   | 1170                                          | 960         | 1045         | 875         | 850          | 695         |
| 14x5x10          | 356x127-254  | •       |     | 1335                                          | 1095        | 1195         | 1000        | 970          | 795         |
| 15x5x11 1/4      | 381/127-286  | •       |     | 1390                                          | 1140        | 1240         | 1040        | 1010         | 830         |
| 15x6x11 1/4      | 381/152-286  | •       |     | 1715                                          | 1410        | 1530         | 1285        | 1245         | 1020        |
| 16x5x10 1/2      | 406/127-267  | •       | •   | 1510                                          | 1240        | 1345         | 1130        | 1095         | 895         |
| 16x6x10 1/2      | 406/152-267  | •       | •   | 1910                                          | 1570        | 1710         | 1435        | 1390         | 1140        |
| 16x7x10 1/2      | 406/178-267  | •       |     | 2325                                          | 1910        | 2070         | 1740        | 1685         | 1380        |
| 16 1/4x5x11 1/4  | 413/127-286  | •       |     | 1530                                          | 1250        | 1360         | 1145        | 1105         | 905         |
| 16 1/4x6x111/4   | 413/152-286  | •       | •   | 1920                                          | 1580        | 1715         | 1440        | 1395         | 1140        |
| 16 1/4x7x111/4   | 413/178-286  | •       |     | 2325                                          | 1900        | 2060         | 1735        | 1680         | 1380        |
| 18x5x12 1/8      | 457/127-308  | •       |     | 1640                                          | 1350        | 1470         | 1230        | 1195         | 980         |
| 18x6x12 1/8      | 457/152-308  | •       | •   | 2100                                          | 1720        | 1870         | 1575        | 1525         | 1250        |
| 18x7x12 1/8      | 457/178-308  | •       | •   | 2550                                          | 2100        | 2280         | 1510        | 1855         | 1520        |
| 18x8x12 1/8      | 457/203-308  | •       | •   | 3000                                          | 2475        | 2680         | 2250        | 2180         | 1790        |
| 18x9x12 1/8      | 457/229-308  | •       | •   | 3450                                          | 2850        | 3090         | 2600        | 2510         | 2060        |
| 21x7x15          | 533/178-381  | •       | •   | 2875                                          | 2350        | 2560         | 2150        | 2085         | 1710        |
| 21x8x15          | 533/203-381  | •       | •   | 3375                                          | 2775        | 3025         | 2540        | 2455         | 2015        |
| 22x8x16          | 559/203-406  | •       | •   | 3500                                          | 2875        | 3130         | 2625        | 2545         | 2085        |
| 22x9x16          | 559/229-406  | •       | •   | 4050                                          | 3325        | 3600         | 3025        | 2930         | 2400        |
| 22x10x16         | 559/254-406  | •       |     | 4575                                          | 3750        | 4080         | 3425        | 3315         | 2720        |
| 22x12x16         | 559/305-406  | •       |     | 5625                                          | 4625        | 5030         | 4225        | 4090         | 3350        |
|                  | 645/200-410  | •       |     | 4810                                          | 3930        | 4180         | 3430        | 3305         | 2745        |
|                  | 645/250-410  | •       |     | 4810                                          | 3930        | 4180         | 3430        | 3305         | 2745        |
| 28x10x22         | 711/254-559  | •       |     | 5470                                          | 4490        | 4880         | 4100        | 3970         | 3255        |
| 28x12x22         | 711/305-559  | •       |     | 6740                                          | 5540        | 6020         | 5060        | 4900         | 4015        |
| 22x16x16         | 559/406-406  | •       |     | 7745                                          | 6360        | 6915         | 5810        | 5625         | 4610        |
| 40x16x30         | 1016/406-762 | •       |     | 12420                                         | 10160       | 10810        | 8870        | 8550         | 7095        |
| 40x20x30         | 1016/508-762 | •       |     | 16120                                         | 13180       | 14020        | 11520       | 11090        | 9210        |

LIFT EX

LIFT EX

A Pneumatic Material Handling Tire engineered for heavy duty use on forklift trucks and other industrial vehicles

- Large footprint & unique tread assures optimal traction in diverse conditions and surfaces.
- Multi layer sidewall & wide rim guard offers high load carrying capacity, machine stability and protection against side impacts.
- Optimum wet/dry ratio with flatter design provides low rolling resistance.
- Superior self-cleaning properties.
- Increased casing strength provides excellent stiffness and long lasting carcass.
- Unique cooler compound for longer run.

| Tire Size | PR   | TT / TL | Valve    | Rim       |           | Unloaded Inflated Dimension |            | LOAD CAPACITY |                           |        |                |        |                    |        |                     |        |              |        | Inflation Pressure |     |  |
|-----------|------|---------|----------|-----------|-----------|-----------------------------|------------|---------------|---------------------------|--------|----------------|--------|--------------------|--------|---------------------|--------|--------------|--------|--------------------|-----|--|
|           |      |         |          |           |           |                             |            | Speed Index   | Forklift Truck            |        |                |        | Other Vehicles     |        |                     |        | Static Load  |        |                    |     |  |
|           |      |         |          |           |           |                             |            |               | Up to 15MPH (A5) / 25KMPH |        |                |        | 5MPH (A2) / 10KMPH |        | 15MPH (A5) / 25KMPH |        | 0MPH / 0KMPH |        |                    |     |  |
|           |      |         |          |           |           |                             |            |               | Max. Load                 |        | Max. Load      |        | Max. Load          |        | Max. Load           |        | Max. Load    |        |                    |     |  |
|           |      |         |          |           |           |                             |            |               | Load Wheel                |        | Steering Wheel |        | Load Wheel         |        | Steering Wheel      |        |              |        |                    |     |  |
|           |      |         |          | Rec. inch | Alt. inch | ± 2 % inch                  | ± 2 % inch |               | Load Index                | (KGS.) | Load Index     | (KGS.) | Load Index         | (KGS.) | Load Index          | (KGS.) | Load Index   | (KGS.) | PSI                | Bar |  |
| 5.00-8    | 8    | TT      | JS2      | 3.0D      | 3.25 I    | 135                         | 467        | A5            | 115                       | 1250   | 106            | 950    | 106                | 950    | 95                  | 700    | 122.51       | 1530   | 3370               | 8   |  |
| 5.00-8    | 10   | TT      | JS2      | 3.0D      | 3.25 I    | 135                         | 467        | A5            | 120                       | 1435   | 111            | 1090   | 111                | 1090   | 100                 | 805    | 127          | 1755   | 145                | 10  |  |
| 18x7-8    | 12   | TT      | V3-02-05 | 4.33 R    | 5.00F     | 173                         | 472        | A5            | 126                       | 1685   | 116            | 1280   | 116                | 1280   | 106                 | 945    | 133          | 2061   | 150                | 10  |  |
| 18x7-8    | 16   | TT      | V3-02-05 | 4.33 R    | 5.00F     | 173                         | 472        | A5            | 135                       | 2170   | 121            | 1650   | 121                | 1650   | 115                 | 1215   | 141.69       | 2657   | 145                | 10  |  |
| 18x7-8    | 14   | TT      | V3-02-05 | 4.33 R    | 5.00F     | 173                         | 472        | A5            | 130                       | 1905   | 125            | 1450   | 125                | 1450   | 110                 | 1070   | 137.2        | 2335   | 130                | 9   |  |
| 6.00-9    | 10   | TT      | JS2      | 4.00E     |           | 168                         | 536        | A5            | 127                       | 1735   | 117            | 1320   | 117                | 1320   | 107                 | 975    | 133.93       | 2125   | 123                | 8   |  |
| 6.00-9    | 12   | TT      | JS2      | 4.00E     |           | 168                         | 536        | A5            | 130                       | 1905   | 121            | 1450   | 121                | 1450   | 110                 | 1070   | 137          | 2335   | 130                | 9   |  |
| 6.50-10   | 10   | TT      | JS2      | 5.00F     | 5.50F     | 183                         | 592        | A5            | 131                       | 1970   | 122            | 1500   | 122                | 1500   | 111                 | 1105   | 138          | 2415   | 112                | 8   |  |
| 6.50-10   | 12   | TT      | JS2      | 5.00F     | 5.50F     | 183                         | 592        | A5            | 134                       | 2150   | 125            | 1635   | 125                | 1635   | 114                 | 1205   | 141          | 2632   | 145                | 10  |  |
| 6.50-10   | 14   | TT      | JS2      | 5.00F     | 5.50F     | 183                         | 592        | A5            | 138                       | 2365   | 128            | 1800   | 128                | 1800   | 118                 | 1325   | 145          | 2898   | 145                | 10  |  |
| 23X9-10   | 20   | TT      | TR177A   | 6.5F      |           | 236                         | 579        | A5            | 151                       | 3485   | 142            | 2650   | 142                | 2650   | 131                 | 1955   | 158          | 4267   | 145                | 10  |  |
| 7.00-12   | 12   | TT      | TR75A    | 5.00S     |           | 196                         | 681        | A5            | 142                       | 2710   | 133            | 2060   | 133                | 2060   | 122                 | 1520   | 149          | 3317   | 123                | 9   |  |
| 7.00-12   | 12HD | TT      | TR75A    | 5.00S     |           | 196                         | 681        | A5            | 142                       | 2715   | 133            | 2065   | 133                | 2065   | 122                 | 1520   | 149          | 3325   | 130                | 9   |  |
| 7.00-12   | 14HD | TT      | TR75A    | 5.00S     |           | 196                         | 681        | A5            | 143                       | 2790   | 134            | 2120   | 134                | 2120   | 123                 | 1560   | 150          | 3413   | 130                | 9   |  |
| 7.00-12   | 14   | TT      | TR75A    | 5.00S     |           | 196                         | 681        | A5            | 143                       | 2790   | 134            | 2120   | 134                | 2120   | 123                 | 1560   | 150          | 3413   | 130                | 9   |  |
| 7.00-15   | 14   | TT      |          | 5.5       | 5.50BD    | 197                         | 762        | A5            | 159                       | 4405   | 150            | 3350   | 150                | 3350   | 139                 | 2470   | 166          | 5394   | 131                | 9   |  |
| 8.15-15   | 14   | TT      | TR75A    | 7.0       | 7.0BD     | 218                         | 706        | A5            | 154                       | 3815   | 145            | 2900   | 145                | 2900   | 134                 | 2135   | 161          | 4669   | 130                | 9   |  |
| 8.15-15   | 16   | TT      | TR75A    | 7.0       | 7.0BD     | 218                         | 706        | A5            | 157                       | 4140   | 148            | 3150   | 148                | 3150   | 137                 | 2320   | 164          | 5072   | 120                | 8   |  |
| 8.25-15   | 14   | TT      | TR177A   | 6.5       | 7.0       | 246                         | 841        | A5            | 158                       | 4275   | 149            | 3250   | 149                | 3250   | 138                 | 2395   | 165          | 5233   | 116                | 8   |  |
| 8.25-15   | 16   | TT      | TR177A   | 6.5       | 7.0       | 246                         | 841        | A5            | 161                       | 4670   | 152            | 3550   | 152                | 3550   | 141                 | 2615   | 168          | 5716   | 134                | 9   |  |
| 250-15    | 16   | TT      | TR 77 A  | 7.5       |           | 231                         | 744        | A5            | 159                       | 4405   | 150            | 3350   | 150                | 3350   | 139                 | 2470   | 166          | 5394   | 120                | 8   |  |
| 250-15    | 20   | TT      | TR 77 A  | 7.5       |           | 231                         | 744        | A5            | 165                       | 5260   | 156            | 4000   | 156                | 4000   | 145                 | 2950   | 172          | 6440   | 152                | 11  |  |
| 300-15    | 18   | TT      | TR 77 A  | 8.0       |           | 277                         | 851        | A5            | 170                       | 6080   | 161            | 4625   | 161                | 4625   | 150                 | 3410   | 177          | 7446   | 109                | 8   |  |
| 300-15    | 20   | TT      | TR 77 A  | 8.0       |           | 277                         | 851        | A5            | 172                       | 6410   | 163            | 4875   | 163                | 4875   | 152                 | 3595   | 179          | 7849   | 138                | 10  |  |
| 10.00-20  | 16   | TT      |          | 7.5       | 8.0       | 285                         | 1080       | A5            | 173                       | 6575   | 164            | 5000   | 164                | 5000   | 153                 | 3685   | 180          | 8050   | 131                | 9   |  |
| 10.00-20  | 18   | TT      |          | 7.5       | 8.0       | 285                         | 1080       | A5            | 175                       | 6970   | 166            | 5300   | 166                | 5300   | 155                 | 3905   | 182          | 8533   | 145                | 10  |  |



## Make the Switch to Sustainable Performance

### LIMITED WARRANTY

All tires manufactured by Global Rubber Industries (Pvt) Ltd are covered by limited warranty, which includes cover against material, workmanship and other manufacturing defects subject to the usage of the tires under specified conditions. If any tire covered by this warranty is deemed unserviceable due to aforementioned defects, we will provide an allowance to purchase a new tire at the current price as a percentage of the worn off tread of the original tire at the time of making the claim.

The cost of transportation, service and paid sales tax will be borne by the owner of the claimed tire. The limited warranty is exclusively applicable to the tire owner who is using the product. No other warranty of liability, expressed or implied, is applicable to the limited warranty or to our products.