

VELTOUR®

VELTOUR® QINGDAO PEYOTA TYRE CO., LTD

✉ info@peyota.com

🌐 [Http:www.peyota.com](http://www.peyota.com)

☎ 13220895663

VELTOUR®



QINGDAO PEYOTA TYRE CO., LTD
TRUCK TYRES

ALL POSITION

Recommend
Available
Disable 



OT625

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
12.00R24	20	TT	160/157	15.5	K	1226	315	8.50

DRIVE

Recommend
Available
Disable  



OT618

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
13R22.5	18	TL	156/153	21.5	K	1124	326	9.75
315/80R22.5	20	TL	156/152	20	L	1076	315	9.00

DRIVE

Recommend
Available
Disable  



OT629

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
12.00R24	20	TT	160/157	21.0	K	1226	315	8.50

DRIVE

Recommend
Available
Disable  




OT656

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
7.50R16LT	14	TT	122/118	17.0	L	805	215	6.00G
8.25R16LT	16	TT	128/124	17.0	L	855	235	6.50H
9.00R20	16	TT	144/142	22.5	K	1019	259	7.00
10.00R20	18	TT	149/146	24.5	L	1054	278	7.50
11.00R20	18	TT	152/149	24.5	L	1085	293	8.00
12.00R20	20	TT	154/151	25.0	K	1125	315	8.50

DRIVE


Recommend Available Disable



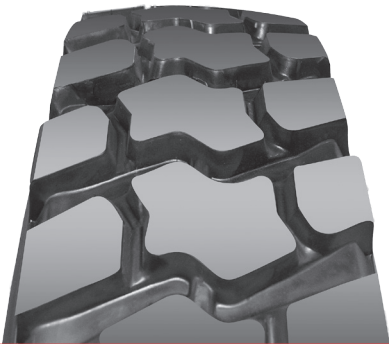

OT608

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
10.00R20	18	TT	149/146	20.0	L	1054	278	7.50
11.00R20	18	TT	152/149	20.5	L	1085	293	8.00
12.00R20	20	TT	154/151	23.5	K	1125	315	8.50
13R22.5	18	TL	156/150	21.5	K	1124	320	9.75

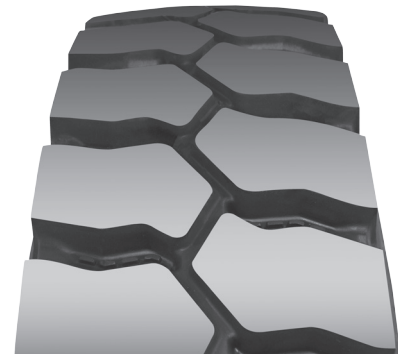

DRIVE

Recommend Available Disable



OT609

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
9.00R20	16	TT	144/142	22.0	K	1019	259	7.00
10.00R20	18	TT	149/146	22.5	L	1054	278	7.50
11.00R20	18	TT	152/149	22.5	L	1085	293	8.00
12.00R20	20	TT	154/151	23.0	K	1125	315	8.50

ALL POSITION

Recommend Available Disable





OT601

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
7.50R16	14	TT	122/118	12.0	L	805	215	6.00G
8.25R16	16	TT	128/124	14.0	L	855	235	6.50H
9.00R20	16	TT	144/142	15.0	K	1019	259	7.00
10.00R20	18	TT	149/146	17.0	L	1054	278	7.50
11.00R20	18	TT	152/149	16.5	L	1085	293	8.00
12.00R20	20	TT	156/153	17.0	K	1125	315	8.50
12.00R24	20	TT	160/157	15.5	K	1226	315	8.50
11R22.5	16	TT	146/143	15.0	M	1054	279	8.25
12R22.5	18	TT	152/148	16.5	M	1084	300	9.00
13R22.5	18	TT	156/150	21.5	K	1124	320	9.75
295/80R22.5	18	TT	152/148	14.5	M	1004	298	9.00
315/80R22.5	20	TT	156/150	19	L	1076	312	9.00



DRIVE

Recommend Available Disable



OT611

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
11R22.5	16	TT	146/143	21.0	M	1054	279	8.25

STEER / TRAILER

Recommend
Available
Disable



OT623

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
385/65R22.5	20	TL	160	16.0	K	1072	389	11.75

STEER / TRAILER

Recommend
Available
Disable



OT663

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
11R22.5	16	TL	146/143	14.5	M	1054	279	8.25

STEER / TRAILER

Recommend
Available
Disable



OT664

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
12R22.5	18	TL	152/149	14.5	M	1084	300	9.00
295/80R22.5	18	TL	152/149	14.5	M	1044	298	9.00
315/80R22.5	20	TL	156/153	14.5	M	1076	312	9.00

STEER / TRAILER

Recommend
Available
Disable



OT626

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
385/65R22.5	20	TL	160	16.0	K	1072	389	11.75

DRIVE

Recommend

Available

Disable





OT602

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
7.50R16LT	14	TT	122/118	14.5	K	805	215	6.00G
8.25R16LT	16	TT	128/124	16.5	K	855	235	6.50H
9.00R20	16	TT	144/142	16.5	K	1019	259	7.00
10.00R20	18	TT	149/146	18.0	J	1054	278	7.50
11.00R20	18	TT	152/149	19.0	L	1085	293	8.00
12.00R20	20	TT	154/151	21.0	L	1125	315	8.50

DRIVE

Recommend

Available

Disable





OT607

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
11R22.5	16	TT	146/143	21.0	M	1054	279	8.25
13R22.5	18	TL	156/150	21.5	K	1124	320	9.75
295/80R22.5	18	TL	152/148	21.5	M	1044	298	9.00
315/80R22.5	20	TL	156/150	21.5	M	1076	312	9.00

DRIVE

Recommend

Available

Disable





OT619

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
315/80R22.5	18	TL	156/153	23.0	L	1082	312	9.00
12R22.5	18	TL	152/149	19.5	M	1084	300	9.00

STEER/TRAILER

Recommend

Available

Disable





OT616

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
12R22.5	18	TT	152/148	14.0	M	1084	300	9.00
315/80R22.5	20	TL	156/152	14.5	L	1076	315	9.00

DRIVE

Recommend
Available
Disable



VE852

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
9.00R20	16	TT	144/142	22.0	K	1019	259	7.00
10.00R20	18	TT	149/146	22.5	L	1054	278	7.50
11.00R20	18	TT	152/149	22.5	L	1085	293	8.00
12.00R20	20	TT	154/151	23.0	K	1125	315	8.50

DRIVE

Recommend
Available
Disable



VE919

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
11R22.5	16	TT	156/150	21.0	M	1054	279	8.25
12R22.5	18	TT	156/150	22.0	M	1084	300	9.00
295/80R22.5	18	TT	156/150	22.5	M	1044	298	9.00
315/80R22.5	20	TT	156/150	22.5	M	1076	312	9.00

ALL POSITION

Recommend
Available
Disable



VE903

Size	P.R.	Style	Load Index	Tread Depth	Speed Rating	Diameter	Section Width	Stan-dard Rim
				mm		mm.	mm.	
9.00R20	16	TT	144/142	14.5	K	1019	259	7.00
10.00R20	18	TT	149/146	16.0	L	1054	278	7.50
11.00R20	18	TT	152/149	16.5	L	1085	293	8.00
12.00R20	20	TT	156/153	17.0	K	1125	315	8.50
12.00R20	20	TT	160/157	15.5	K	1226	315	8.50

