



HANMIX

PCR

The Perfect Fit For Your Car

Product parameter
manual

Tel: +86 532 80920608
Email: info@hanmix.net
Web: www.hanmix.net





WHY HANMIX?

HANMIX is an international brand with 40 years' experience in Tyre and Tyre Accessories business. HANMIX is not only a brand name, but a way for a better life. You can find security, safety and high quality life in the HANMIX World.



HANMIX THE QUALITY

HANMIX is committed to conducting comprehensive assessments of product quality, price, ability to supply our clients locally and internationally. All HANMIX products comply with international quality standards and are respected throughout the world.

-----WWW.HANMIX.NET

Quality Control:

HANMIX provides quality and quantity inspections, and offers a warranty for products purchased.



Inspected each tyre from production to the warehouse to the markets.
Inspected each tyre by serial number, tread depth and weight.
Inspected each tyre by international laboratory standards.

HANMIX PASSENGER CAR TIRE

THE PERFECT FIT FOR YOUR CAR

ECO SERIES	ECO 01	HP	P.03
------------	--------	----	------

WINTER TIRE	SNOW FORCE	SNOW	P.04
-------------	------------	------	------

GRANDRANK SERIES	GRANDRANK HX01	HP	P.06
	GRANDRANK HX02	HP	P.07
	GRANDRANK HX03	UHP	P.08
	GRANDRANK HX21	SUV	P.09
	GRANDRANK HX22	SUV	P.10

CLASSIC SERIES	CLASSIC CL01	HP	P.15
	CLASSIC CL02	LTR	P.17
	CLASSIC CL03	LTR	P.19
	CLASSIC CL04	LTR	P.20
	CLASSIC CL05	LTR	P.21
	CLASSIC CL06	LTR	P.22
	CLASSIC CL07	SUV	P.23
	CLASSIC CL08	UHP	P.24
	CLASSIC CL09	SUV	P.26

CLASSIC SERIES	CLASSIC CL10	SUV	P.27
	CLASSIC CL11	HP	P.28
	CLASSIC CL12	HP	P.29
	CLASSIC CL13	UHP	P.31
	CLASSIC CL14	SUV<R	P.32
	CLASSIC CL15	LTR	P.34
	CLASSIC CL16	LTR	P.35
	CLASSIC CL17	LTR	P.36

MIX SERIES	MIX-TOUR	HP	P.39
	MIX-COMFORT	HP	P.41
	MIX-SEASON	SUV	P.43
	MIX-GRIP	UHP	P.45
	MIX-UHP	UHP	P.49
	MIX-UHP II	UHP	P.53
	MIX-100	LTR	P.55
	MIX-200	LTR	P.56
	MIX-230	LTR	P.56



HANMIX PASSENGER CAR TIRE

THE PERFECT FIT FOR YOUR CAR

ECO SERIES



ECO 01

WINTER TIRE



SNOW FORCE

GRANDRANK SERIES



GRANDRANK HX01



GRANDRANK HX02



GRANDRANK HX03



GRANDRANK HX21



GRANDRANK HX22



HANMIX

WWW.HANMIX.NET



ECO 01

HP TIRE

CHARACTERS

Widened shoulder tread design increases contacting area, providing better driving stability and reliability.

Product features:

Continuous straight center rib design provides optimized ground contact area, guarantees better driving safety.

Excellent grip and handling performance on wet land.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
175/70R12 WSW	80T	5J	511	177	450	250
185/60R13 WSW	80H	5½J	552	189	450	250
175/70R13	82T	5J	576	177	475	250
175/65R14	82H	5	584	177	475	250
175/70R14	84H	5J	602	177	500	250
175/70R14	84T	5	602	177	500	250
185/70R14	88T	5.5	616	189	560	250
195/70R14	91H	6	630	201	615	250
185/65R15	88H	5.5	621	189	560	250
195/65R15	91V	6J	635	201	615	250
195/65R15	91V	6	635	201	615	280
205/65R15	94V	6	647	209	670	280
215/65R15	98H	6½J	686	221	750	250
205/70R15	96T	6	669	209	710	250
225/70R15 WSW	100H	6½J	697	228	800	250
205/55R16	91V	6½J	632	214	615	250
205/55R16	91V	6.5	632	214	615	280
215/60R16	95H	6.5	664	221	690	250
215/60R16	95V	6½J	664	221	690	250
205/65R16	95H	6J	672	209	690	250
215/55R17	98W XL	7J	668	226	750	290



SNOW FORCE

WINTER TIRE



CHARACTERS

Product features:

Assisted groove design strengthens grip, drainage and braking performance. Center consecutive tread pattern design, ensure the stability of straight driving.

Lateral three-dimensional steel disc improves tread elasticity, enhances grip and safe handling performance on ice and snow road.

V-shape groove design improves excellent handling, dry/wet grip, drainage and snow performance.

The three-dimensional steel disc design in the shoulder improves friction between tread and ice road, meanwhile reduces noise. Thus better comfort and safety performance are provided.

Size	Load Index	Speed	SW (mm)	OD (mm)
175/70R13	82	T	177	576
175/65R14	82	H	177	584
175/70R14	84	T	177	602
185/60R14	82	H	189	578
185/65R14	86	H	189	596
185/60R15	88XL	T	189	603
185/65R15	92XL	T	189	621
195/55R15	89XL	H	201	595
195/60R15	88	H	201	615
195/65R15	91	H	201	635
205/65R15	94	H	209	647
215/75R15	100	T	216	703

Size	Load Index	Speed	SW (mm)	OD (mm)
195/55R16	91XL	H	201	620
205/55R16	94XL	H	214	632
205/60R16	96XL	H	209	652
215/55R16	97XL	V	226	642
215/60R16	99XL	H	221	664
215/65R16	102XL	H	221	686
215/70R16	100	T	221	708
235/60R16	104XL	H	240	688
235/70R16	109XL	T	240	736
205/50R17	93XL	V	214	638
215/50R17	95XL	V	226	648
225/50R17	98XL	V	233	658

SNOW FORCE

Size	Load Index	Speed	SW (mm)	OD (mm)
215/55R17	98XL	V	226	668
215/60R17	100XL	H	221	690
225/45R17	94XL	V	225	634
225/55R17	101XL	V	233	680
225/60R17	99	H	228	702
225/65R17	102	H	228	724
235/45R17	97XL	V	236	644
235/55R17	103XL	V	245	690
235/65R17	108XL	H	240	738
265/65R17	112	H	272	776
215/55R18	95	V	226	693
225/40R18	92XL	V	230	637
225/45R18	95XL	V	225	659
225/50R18	99XL	V	233	683
225/55R18	98	V	233	705
225/60R18	104XL	H	228	727
255/40R18	99XL	V	260	661
235/45R18	98XL	V	236	669
235/50R18	101XL	V	245	693
235/55R18	104XL	V	245	715
235/60R18	107XL	H	240	739

Size	Load Index	Speed	SW (mm)	OD (mm)
245/40R18	97XL	V	248	653
245/45R18	100XL	V	243	677
245/50R18	104XL	V	253	703
225/55R18	109XL	V	265	737
265/60R18	110	H	272	775
265/70R18	116	T	272	829
285/60R18	116	H	292	799
225/45R19	96XL	V	225	685
235/35R19	91XL	V	241	647
235/55R19	101	V	245	741
245/45R19	102XL	V	243	703
245/50R19	105XL	V	253	729
245/55R19	103	V	253	753
255/35R19	96XL	V	260	661
255/50R19	107XL	V	265	739
255/55R19	111XL	V	265	763
275/40R19	105XL	V	278	703
245/45R20	103XL	V	243	728
255/40R20	101XL	V	260	712
255/45R20	105XL	V	255	738
275/45R20	110XL	V	273	756

RUN FLAT

No.	Size	LI/SS	No.	Size	LI/SS
1	225/40ZRF18	92V	9	255/55ZRF18	109V
2	225/45ZRF18	95V XL	10	225/45ZRF19	96V XL
3	235/50ZRF18	101V	11	235/55ZRF19	105V XL
4	235/55ZRF18	104V	12	245/45ZRF19	98V
5	245/40ZRF18	97V XL	13	245/50ZRF19	101V
6	245/45ZRF18	100V	14	255/50ZRF19	107V XL
7	245/50ZRF18	100V	15	275/40ZRF19	101V
8	255/40ZRF18	95V			




GRANDRANK HX01

HP TIRE



CHARACTERS

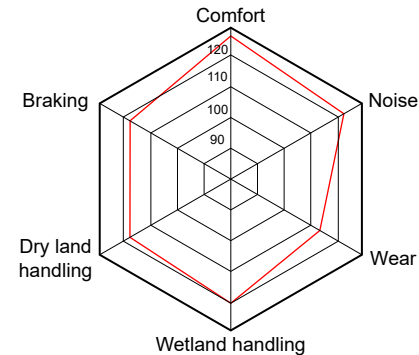

Product features:

Criss-cross grooves design enhance water evacuation, effectively prevent tire lateral slip on wet road.

Central rib combined with horizontal grooves provides nice stability, excellent acceleration and brake performance at high speed.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
215/65R16	98H	6½J	686	221	750	250
215/70R16	100H	6½J	708	221	800	250




GRANDRANK HX02

HP TIRE



CHARACTERS

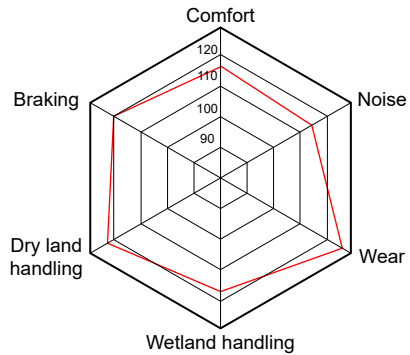

Product features:

Four wide grooves design provide effective drainage and sufficient wet safety performance.

Design of central rib with sipes promotes the rigidity, help to balance high-speed performance and grip performance and grip performance on wet land.

The compact shoulder design provide excellent handling performance with low noise.

Multiple blade groove pattern provide excellent grip and handling performance on wet land.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
225/65R17	106H	6½J	724	228	950	290
235/55R17	103V	7½J	690	245	875	290
245/65R17	111H	7J	750	248	1090	290
235/55R18	104V	7½J	715	245	900	290
265/65R18	114H	8J	801	272	1180	250




GRANDRANK HX03

UHP TIRE



CHARACTERS

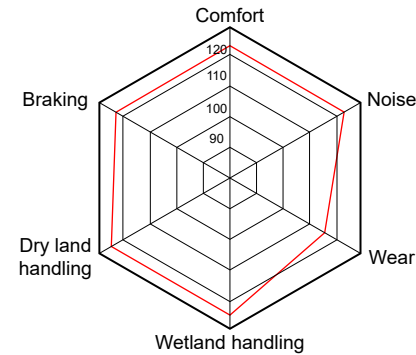

Product features:

Smooth asymmetric pattern, ensuring better controlling performance of outside while enhancing drainage of inside.

Four wide deep grooves keep excellent wetting performance and handling stability.

Outside shoulder reinforcement improving handling performance at curve, effectively preventing abnormal wear.

Bended steel groove, effectively reducing the noise while enlarging ground contact area.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
225/60R17	103V	6½J	702	228	875	290
245/45ZR20	103W	8J	728	243	875	290




GRANDRANK HX21

ALL SEASON SUV TIRE



CHARACTERS

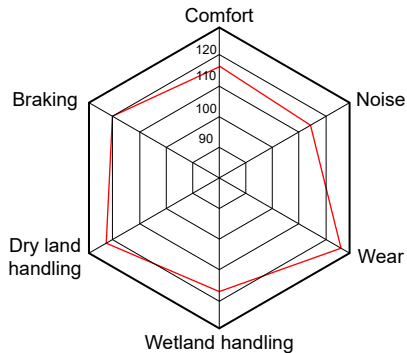

Product features:

Four wide grooves design provide effective drainage and sufficient wet safety performance.

The compact shoulder design provide excellent handling performance with low noise.

Design of central rib with sipes promotes the rigidity, help to balance high-speed performance and grip performance on wet land.

Multiple blade groove pattern provide excellent grip and handling performance on wet land.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
265/70R17	115T	8J	804	272	1215	300
265/60R18	110H	8J	775	272	1060	300
285/50R20	116V XL	9J	794	297	1250	340




GRANDRANK HX22

ALL TERRAIN SUV TIRE



CHARACTERS

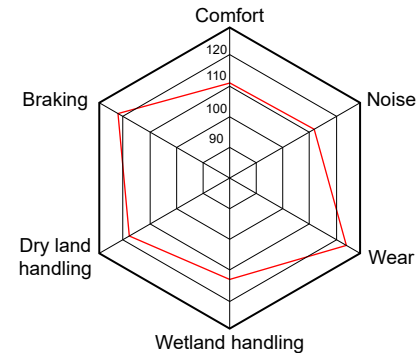

Product features:

Prevent stone nipped, enhance the ability to get rid of the stone.

Solid staggered central rib design ensures straight-line driving stability and safety.

Enhance the block rigidity, endurance, weight-carrying ability and steering qualities during driving.

Promote the grip performance on wet and dry land, enhance the tractive performance.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
265/70R16	112T	8J	778	272	1120	300
275/70R16	114T	8J	792	279	1180	300
265/65R17	112T	8J	776	272	1120	300
285/65R17	116H	8½J	802	292	1250	300
285/60R18	120H XL	8½J	799	292	1400	340

HANMIX PASSENGER CAR TIRE

THE PERFECT FIT FOR YOUR CAR

CLASSIC SERIES



CLASSIC CL01



CLASSIC CL02



CLASSIC CL03



CLASSIC CL04



CLASSIC CL05



CLASSIC CL06



CLASSIC CL07



CLASSIC CL08



CLASSIC CL09



CLASSIC CL10



HANMIX

WWW.HANMIX.NET

HANMIX PASSENGER CAR TIRE

THE PERFECT FIT FOR YOUR CAR

CLASSIC SERIES



CLASSIC CL11



CLASSIC CL12



CLASSIC CL13



CLASSIC CL14



CLASSIC CL15



CLASSIC CL16



CLASSIC CL17



HANMIX

WWW.HANMIX.NET



CLASSIC CL01

HP TIRE

CHARACTERS

Applicable Models



Product features:

Energy-saving and comfortable driving.
Excellent the hydroplaning and wet performance.
Good handling and comfort performance.
Low noise and high tread wear.



Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
155/65R13	73T	4.50B	532	157	365	300
165/65R13	77T	5.00B	544	170	412	300
★ 175/70R13	82T	5.00B	576	177	475	300
★ 185/70R13	86T	5.50B	590	189	530	300
175/65R14	82H	5J	584	177	475	300
★ 175/70R14	84T	5J	602	177	500	300
★ 185/60R14	82H	5½J	578	189	475	300
185/65R14	86H	5½J	596	189	530	300
★ 185/70R14	88T	5½J	616	189	560	300
195/60R14	86H	6J	590	201	530	300
★ 195/70R14	91T	6J	630	201	615	300
175/50R15	75H	5½J	557	182	387	300
185/55R15	82H	6J	585	194	475	300
★ 185/65R15	88H	5½J	621	189	560	300
195/55R15	85V/H	6J	595	201	515	300
★ 195/65R15	91H	6J	635	201	615	300
★ 205/65R15	94H	6J	647	209	670	300
★ 205/60R16	92V	6J	652	209	630	300
★ 215/60R16	95V/H	6½J	664	221	690	300



CLASSIC CL02

LTR TIRE



CHARACTERS

Applicable Models



Enhanced grip on off-road surface.
Excellent water dispersion and hydroplaning resistance.
Improved heat dissipation and grip performance.
Quiet driving performance at high speed.

Product features:



Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
155R12LT 6PR	83/81N	4.50B	553	157	487/462	350
155R12C 6PR	83/81N	4.50B	553	157	487/462	350
155R12LT 8PR	88/86N	4.50B	553	157	560/530	450
★ 155R12C 8PR	88/86N	4.50B	553	157	560/530	450
155R13LT 8PR	90/88N	4.50B	578	160	600/560	450
155R13C 8PR	90/88N	4.50B	578	160	600/560	450
165R13LT 8PR	94/93Q	4.50B	594	165	670/650	450
165R13C 8PR	94/93Q	4.50B	594	165	670/650	450
165R14C 8PR	97/95Q	4½J	620	165	730/690	450
165R14LT 8PR	97/95Q	4½J	620	165	730/690	450
175R13LT 8PR	97/95Q	5.00B	610	177	730/690	450
★ 175R13C 8PR	97/95Q	5.00B	610	177	730/690	450
175R14C 8PR	99/98Q	5J	636	177	775/750	450
175R14LT 8PR	99/98Q	5J	636	177	775/750	450
185R14LT 8PR	102/100Q	5½J	652	189	850/800	450
★ 185R14C 8PR	102/100Q	5½J	652	189	850/800	450
195R14LT 8PR	105/103Q	5½J	668	196	925/875	450
★ 195R14C 8PR	106/104Q	5½J	668	196	950/900	450
205R14LT 8PR	107/105R	6J	684	208	975/925	450
205R14C 8PR	109/107R	6J	684	208	1030/975	450
215R14LT 8PR	110/108R	6J	700	218	1060/1000	450
215R14C 8PR	112/110R	6J	700	218	1120/1060	450
215/75R14LT 8PR	104/101Q	6J	678	216	900/825	450
215/75R14C 8PR	112/110Q	6J	678	216	1120/1060	475
185R15LT 8PR	103/102S	5½J	677	189	875/850	450
185R15C 8PR	103/102S	5½J	677	189	875/850	450
195R15LT 8PR	106/104Q	5½J	693	196	950/900	450
★ 195R15C 8PR	106/104Q	5½J	693	196	950/900	450
195/70R15LT 8PR	99/96R	6J	655	201	775/710	450
★ 195/70R15C 8PR	104/102R	6J	655	201	900/850	450
205/70R15C 8PR	106/104R	6J	669	209	950/900	450
215/70R15C	109/107R	6½J	683	221	1030/975	450
225/70R15LT 8PR	106/103R	6½J	697	228	950/875	450
225/70R15C 8PR	112/110R	6½J	697	228	1120/1060	450
215/75R16C 8PR	113/111R	6J	728	216	1150/1090	475
225/65R16C 8PR	112/110R	6½J	698	228	1120/1060	475
235/65R16C 8PR	115/113R	7J	712	240	1215/1150	475



CLASSIC CL03

LTR TIRE

CHARACTERS

Applicable Models



Product features:

Improved grip and traction, sufficiently reduces braking distance under dry or wet.

Good ability to break water surface tension and reduces sliding on wet.

Great resistance to impact and load capability.

Low noise during driving.

Size	L/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
★ 205R16C 8PR	110/108R	6J	736	208	1060/1000	450
205R16LT 8PR	110/108R	6J	736	208	1060/1000	450
255/70R15C 6PR	112/110S	7½J	739	260	1120/1060	375
255/70R15LT 6PR	112/110S	7½J	739	260	1120/1060	375
★ 255/70R15C 8PR	113/110S	7½J	739	260	1150/1060	450
★ 265/70R16	112T	8J	778	272	1120	300
★ 275/70R16	114T	8J	792	279	1180	300
★ 265/65R17	112S	8J	776	272	1120	300
275/65R17	115T	8J	790	279	1215	300
★ 265/70R17	115T	8J	804	272	1215	300
265/60R18	110H	8J	775	272	1060	300
★ 285/60R18	116T	8½J	799	292	1250	300



CLASSIC CL04

LTR TIRE

CHARACTERS

Applicable Models



Product features:

Good straight line stability and steering performance.

Great loading capability.

Good drainage and safty performance on wet road.

More quite driving experience.

Size	L/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
7.50R16LT 8PR	114/112S	6.00G	805	215	1180/1120	475
★ 7.50R16LT 10PR	116/111S	6.00G	805	215	1250/1090	560
★ 225/95R16C	118/116Q	6J	834	223	1320	475



CLASSIC CL05

LTR TIRE

CHARACTERS

Applicable
Models



Product features:

Unique tread compound that offers superior cut and chip resistance.
Long life and exceptional irregular wear resistance.
Good load-bearing capacity.

Size	L/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
7.50R16C 8PR	114/112S	6.00G	805	215	1180	475



CLASSIC CL06

LTR TIRE

CHARACTERS

Applicable
Models



Product features:

Excellent high speed road durability and stability.
Straight rib pattern ensures firm grip on soft sand.

Size	L/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
225/95R16C 10PR	122/118Q	6J	834	223	1500	550
★ 225/95R16C 8PR	118/116Q	6J	834	223	1320	475



CLASSIC CL07

SUV TIRE

CHARACTERS

Applicable Models



Product features:

Comfort, quiet and durability performance.
Excellent the hydroplaning and wet performance.
Good steering and stability at high speed.
Excellent ride and low noise performance.
Stiff tread and uniform wear.

Size	L/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
★ 265/65R18	114H	8J	801	272	1180	300
★ 285/50R20	116V XL	9J	794	297	1250	340



CLASSIC CL08

UHP TIRE



CHARACTERS

Applicable Models



Product features:

Excellent grip ensures the stability of straight and curved in wet terrain.
Strong block effectively enhances side cornering traction.
Rapid drainage performance in wet terrain.
Optimized pattern design reduce tire noise and improves vehicle safety.



Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
205/50R15	86V	6½J	587	214	530	300
205/55R15	88V	6½J	607	214	560	300
225/60R15	96V	6½J	651	228	710	300
195/55R16	91V XL	6J	620	201	615	340
195/60R16	89H	6J	640	201	580	300
★ 205/55R16	91V	6½J	632	214	615	300
205/60R16	92V	6J	652	209	630	300
★ 205/65R16	95H	6J	672	209	690	300
215/55ZR16	93W	7J	642	226	650	340
215/60R16	95V	6½J	664	221	690	300
★ 215/65R16	98H	6½J	686	221	750	300
225/60R16	98H	6½J	676	228	750	300
★ 235/60R16	100H	7J	688	240	800	300
205/40ZR17	84W XL	7½J	596	212	500	340
205/45ZR17	88W XL	7J	616	206	560	340
215/45ZR17	91W XL	7J	626	213	615	340
215/50ZR17	95W XL	7J	648	226	690	340
★ 215/55ZR17	98W XL	7J	668	226	750	340
225/45ZR17	94W XL	7½J	634	225	670	340
★ 225/50ZR17	98W XL	7J	658	233	750	340
★ 225/55R17	97V	7J	680	233	730	300
225/45ZR18	95W XL	7½J	659	225	690	340
★ 245/45ZR18	100W XL	8J	677	243	800	340



CLASSIC CL09

SUV TIRE

CHARACTERS

Applicable Models



Good straight, curved high-speed stability and wetland drainage performance.

Product features:

Optimized pattern design enhances the lateral grip and improves vehicle safety.

Low driving noise ensure a quieter driving environment.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
215/70R16	100H	6½J	708	221	800	300
235/70R16	106H	7J	736	240	950	300
275/70R16	114H/T	8J	792	279	1180	300
★ 215/60R17	96H	6½J	690	221	710	300
★ 225/60R17	99H	6½J	702	228	775	300
★ 225/65R17	102H	6½J	724	228	850	300
★ 235/65R17	104H	7J	738	240	900	300
265/65R17	112H	8J	776	272	1120	300
235/60R18	107V XL	7J	739	240	975	340



CLASSIC CL10

SUV TIRE

CHARACTERS

Applicable Models



Product features:

Good straight, curved high-speed stability and wetland drainage performance.

Optimized pattern design enhances the lateral grip and improves vehicle safety.

Low driving noise ensure a quieter driving environment.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
225/70R16	103H	6½J	722	228	875	300
★ 245/70R16	107H	7J	750	248	975	300
265/70R16	112H/T	8J	778	272	1120	300
245/65R17	107H	7J	750	248	975	300
265/70R17	115H/T	8J	804	272	1215	300
★ 235/55R18	104V XL	7½J	715	245	900	340
265/60R18	110H	8J	775	272	1060	300
225/55R18	98V	7J	705	233	750	300
225/60R18	100V	6½J	727	228	800	300
★ 245/60R18	105H	7J	751	248	925	300



CLASSIC CL11

HP TIRE

CHARACTERS

Applicable Models



Product features:

Good quietness brings stable and comfortable driving experience.

Excellent handling performance can respond sensitively to various corners.

Deep grooves and outstanding tread compound for endurance and long-lasting use.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
135/70R12	65Q	4.00B	495	138	290	250
145/70R12	69T	4.50B	509	150	325	250
145/80R12	74T	4.00B	537	145	375	300
175/70R12	80T	5.00B	551	177	450	300
★ 165/70R13	79T	5.00B	562	170	437	300
175/70R13	82T	5.00B	576	177	475	300
185/70R13	86T	5.50B	590	189	530	300
★ 185/65R14	86T	5½J	596	189	530	300
185/70R14	88T	5½J	616	189	560	300
205/70R14	95T	6J	644	209	690	300



CLASSIC CL12

HP TIRE

CHARACTERS

Applicable
Models





Product features:

Good steering performance and ride comfort.

Excellent hydroplaning and wet performance.

Good stability on dry ground, great response and sensitivity of high speed.



Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
155/70R12	73T	4.50B	523	157	365	250
165/70R12	77T	5.00B	537	170	412	250
135/80R13	60L	4.00B	546	138	250	240
135/80R13	74N XL	4.00B	546	138	375	340
145/60R13	66N	4.50B	504	150	300	300
145/80R13	75T	4.00B	562	145	387	300
145/80R13	79N XL	4.00B	562	145	437	340
155/65R13	73T	4.50B	532	157	365	250
155/70R13	75T	4.50B	548	157	387	250
155/80R13	79T	4.50B	578	157	437	240
165/55R13	70N	5.00B	512	170	335	300
165/65R13	77T	5.00B	544	170	412	250
165/70R13	79T	5.00B	562	170	437	250
165/70R13LT 6PR	88/86S	5.00B	562	170	560/530	375
165/70R13C 6PR	88/86S	5.00B	562	170	560/530	375
165/80R13	83T	4.50B	594	165	487	240
175/70R13	82T	5.00B	576	177	475	250
185/70R13	86T	5.00B	590	189	530	250
155/50R14	67T	5J	512	162	307	300
165/60R14	75H	5J	554	170	387	300
165/65R14	79H	5J	570	170	437	300
165/70R14	81T	5J	588	170	462	250
165/80R14	85T	4½J	620	165	515	300
175/65R14	82H	5J	584	177	475	250
175/70R14	84T	5J	602	177	500	250
175/70R14LT 6PR	95/93Q	5J	602	177	690/650	375
175/70R14C 6PR	95/93Q	5J	602	177	690/650	375
185/60R14	82H	5½J	578	189	475	250
185/65R14	86H	5½J	596	189	530	250
185/70R14	88T	5½J	616	189	560	250
195/60R14	86H	6J	590	201	530	250
195/70R14	91T	6J	630	201	615	250
205/60R14	88H	6J	602	209	560	300
185/60R15	84H	5½J	603	189	500	300
185/65R15	88H	5½J	621	189	560	300
195/50R15	82H/V	6J	577	201	475	300
195/55R15	85H/V	6J	595	201	515	300
★ 195/60R15	88H	6J	615	201	560	300
195/65R15	91H	6J	635	201	615	250
205/60R15	91H/V	6J	627	209	615	300
205/65R15	94H	6J	647	209	670	250
215/65R15	96H	6½J	661	221	710	300



CLASSIC CL13

UHP TIRE

CHARACTERS

Applicable Models



Product features:

Excellent high speed handling.

Excellent hydroplaning performance.

Fuel economy, great wet grip and braking performance.

Excellent ride and low noise driving experience.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
205/45R16	87V XL	7J	590	206	545	340
205/50ZR17	93W XL	6½J	638	214	650	340
205/55ZR17	95W XL	6½J	658	214	690	340
235/55ZR17	103W XL	7½J	690	245	875	340
215/55R18	95V	7J	693	226	690	300
235/45ZR18	94W	8J	669	236	670	300
★ 235/45ZR18	98W XL	8J	669	236	750	340
235/50ZR18	101W XL	7½J	693	245	825	340
★ 235/55R19	101W	7½J	741	245	825	300



CLASSIC CL14

SUV & LTR TIRE

CHARACTERS

Applicable Models



Product features:

Upgraded material offers good handling and ride comfort.

Two steel belts and plies enhance carcass strength.

Splice-free belt hoops ensure tire strength and driving safety.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
175/80R14	88T	5J	636	177	560	300
LT215/75R14 6PR	98/95S	6J	678	216	750/690	350

Size	L/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
205/60R15	91H	6J	627	209	615	300
205/65R15	94H	6J	647	209	670	300
205/70R15	96T	6J	669	209	710	300
225/70R15	100T	6½J	697	228	800	300
225/70R15LT	107/103S	6½J	697	228	975/875	450
31X10.50R15LT	109S	8½J	775	268	1030	350
31X10.50R15LT	114/111R	8½J	775	268	1180/1090	550
205/60R16	92H	6J	652	209	630	300
215/65R16	98T	6½J	686	221	750	300
235/60R16	100T	7J	688	240	800	300
235/70R16	106T	7J	736	240	950	300
245/70R16	107T	7J	750	248	975	300
255/70R16	111T	7½J	764	260	1090	300
265/70R16	112T	8J	778	272	1120	300
LT215/85R16	115/112R	6J	772	216	1215/1120	550
LT225/75R16	115/112R	6J	744	223	1215/1120	550
LT235/85R16	120/116R	6½J	806	235	1380/1260	550
LT245/70R16	120/116R	7J	750	248	1380/1260	550
LT245/75R16	120/116R	7J	774	248	1380/1260	550
LT265/70R16	121/118R	8J	778	272	1450/1320	550
LT265/70R16	123/120R	8J	778	272	1550/1400	550
LT265/75R16	123/120R	7½J	804	267	1550/1400	550
225/65R17	102T	6½J	724	228	850	300
235/60R17	102T	7J	714	240	850	300
235/65R17	104T	7J	738	240	900	300
265/65R17	112T	8J	776	272	1120	300
265/70R17	115T	8J	804	272	1215	300
LT265/65R17	120/117R	8J	776	272	1400/1285	550



CLASSIC CL15

LTR TIRE

CHARACTERS

Applicable Models



4 Main grooves & sipes ensure optimal grip on wet roads.

Good performance on rain, snow, mud, and non-paved roads.

Low rolling resistance compound offers excellent fuel economy.

Low noise and more driving comfort.

Product features:

Size	L/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
185/75R16C	104/102R	5J	684	184	900/850	475



CLASSIC CL16

LTR TIRE

CHARACTERS

Applicable Models



Good high speed performance on complicated road surface.

Product features:

Wavy groove design grips onto various road surfaces effectively.

Randomized groove distribution reduces noise.

Multiple tread block sizes improve traction and comfort.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
235/75R15C 6PR	104/101S	6½J	733	235	900/825	350
235/75R15LT 6PR	104/101S	6½J	733	235	900/825	350
235/75R15C 10PR	116/113S	6½J	733	235	1250/1150	550
235/75R15LT 10PR	116/113S	6½J	733	235	1250/1150	550



CLASSIC CL17

LTR TIRE

CHARACTERS

Applicable Models



Special tread compound tailored for MT application improves outstanding and tread wear.

Product features:

Reinforced shoulder blocks and 3D sidewall improve pass-ability in harsh road.

Variable pitch design with large blocks improve grip and durability.

Size	LI/SS	Std. Rim	Overall Diameter (mm)	Section Width (mm)	Max Load (kg)	Inflated Pressure (kPa)
LT235/75R15	104/101Q	6½J	733	235	900/825	350
31X10.50R15LT	109Q	8½J	775	268	1030	350
LT235/85R16	120/116Q	6½J	806	235	1380/1260	550
LT245/75R16	120/116Q	7J	774	248	1380/1260	550
LT255/70R16	120/117Q	7½J	764	260	1400/1285	550
LT265/70R16	110/107Q	8J	778	272	1060/975	350
LT265/70R16	117/114Q	8J	778	272	1285/1180	450
LT265/75R16	123/120Q	7½J	804	267	1550/1400	550
LT265/65R17	120/117Q	8J	776	272	1400/1285	550
LT265/70R17	121/118Q	8J	804	272	1450/1320	550

HANMIX PASSENGER CAR TIRE

THE PERFECT FIT FOR YOUR CAR

MIX SERIES



MIX-TOUR



MIX-COMFORT



MIX-SEASON



MIX-GRIP



MIX-UHP



MIX-UHP II



MIX-100



MIX-200



MIX-230



HANMIX

WWW.HANMIX.NET



MIX-TOUR

HIGH PERFORMANCE TIRE



CHARACTERS



Widened shoulder tread design increases contacting area, providing better driving stability and reliability.

Continuous straight center rib design provides optimized ground contacting area, guarantees better driving safety.

4 wide longitudinal grooves design greatly improves water drainage and driving stability on slippery roads.

Lateral "S" shaped groove ensures better wet grip.



Optimized variable pitch sequence design disperses road noise and reduces vibration, driving comfort is highly improved.

Symmetrical pattern design and small notched design on the tread increases the friction between the tire and the ground, driving comfort is significantly improved.

MIX-TOUR

Rim	Size	LI/SS	Tread Depth (mm)	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Standard Pressure (kPa/psi)
13	175/70R13	82T	7.8	5.00B	177	576	300/44
	175/70R13	82H	7.8	5.00B	177	576	300/44
	175/65R14	82T	8.0	5J	177	584	300/44
	175/65R14	82H	8.0	5J	177	584	300/44
	175/70R14	84T	8.2	5J	177	602	300/44
	175/70R14	84H	8.2	5J	177	602	300/44
14	175/70R14	88T XL	8.2	5J	177	602	340/50
	185/60R14	82T	8.4	5 1/2J	189	578	300/44
	185/60R14	82H	8.4	5 1/2J	189	578	300/44
	185/65R14	86T	8.0	5 1/2J	189	596	300/44
	185/65R14	86H	8.0	5 1/2J	189	596	300/44
	185/70R14	88T	8.0	5 1/2J	189	616	300/44
	185/70R14	88H	8.0	5 1/2J	189	616	300/44
	195/60R14	86H	8.4	6J	201	590	300/44
	195/70R14	91T	8.0	6J	201	630	300/44
	195/70R14	91H	8.0	6J	201	630	300/44
	205/60R14	88H	7.9	6J	209	602	300/44
	185/55R15	82V	8.0	6J	194	585	300/44
	185/60R15	88H XL	8.0	5 1/2J	189	603	340/50
	185/65R15	88H	8.0	5 1/2J	189	621	300/44
15	185/65R15	92T XL	8.0	5 1/2J	189	621	340/50
	195/50R15	82V	8.0	6J	201	577	300/44
	195/55R15	85V	8.0	6J	201	595	300/44
	195/60R15	88H	8.4	6J	201	615	300/44
	195/60R15	88V	8.4	6J	201	615	300/44
	195/65R15	91H	8.0	6J	201	635	300/44
	195/65R15	91V	8.0	6J	201	635	300/44
	205/60R15	91V	8.2	6J	209	627	300/44
	205/65R15	94V	8.5	6J	209	647	300/44
	205/70R15	96T	8.2	6J	209	669	300/44
	205/70R15	96H	8.2	6J	209	669	300/44
	215/65R15	100H XL	8.2	6 1/2J	221	661	340/50
	215/70R15	98T	8.2	6 1/2J	221	683	300/44
	215/70R15	98H	8.2	6 1/2J	221	683	300/44
	235/75R15	105T	8.2	6 1/2J	235	733	300/44
	235/75R15	105S	8.2	6 1/2J	235	733	300/44
	195/60R16	89H	8.4	6J	201	640	300/44
16	205/55R16	91V	8.0	6 1/2J	214	632	300/44
	205/55R16	94W XL	8.0	6 1/2J	214	632	340/50
	205/60R16	92H	8.2	6J	209	652	300/44
	205/60R16	92V	8.2	6J	209	652	300/44
	205/60R16	96V XL	8.2	6J	209	652	340/50
	215/55R16	93V	8.2	7J	226	642	300/44
	215/60R16	95H	8.2	6 1/2J	221	664	300/44
	215/60R16	95V	8.2	6 1/2J	221	664	300/44
	215/60R16	99V XL	8.2	6 1/2J	221	664	340/50
	215/65R16	98T	8.5	6 1/2J	221	686	300/44
	215/65R16	98H	8.5	6 1/2J	221	686	300/44
	225/60R16	98H	8.5	6 1/2J	228	676	300/44
	235/60R16	100H	8.5	7J	240	688	300/44
	235/60R16	100V	8.5	7J	240	688	300/44
	235/60R16	104H XL	8.5	7J	240	688	340/50
	235/65R16	103H	8.2	7J	240	712	300/44
17	225/60R17	99T	8.2	6 1/2J	228	702	300/44
	225/60R17	99H	8.2	6 1/2J	228	702	300/44



MIX-COMFORT

HIGH PERFORMANCE TIRE



CHARACTERS




Excellent Grip Performance:
Asymmetrical pattern design ensures the grip of the tire when turning and improves the handling performance.

Optimizing the tread width of the driving surface and the high proportion of the upper and lower cambered surface improves the wet grip performance.

Low Noise and More Comfortable:
Dual pitch design with optimal pitch order can effectively reduce the noise peak.

The staggered steel sheet on tread center and semi-enclosed shoulder design reduce the tire noise.



MIX-COMFORT

Rim	Size	LI/SS	Tread Depth (mm)	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Standard Pressure (kPa/psi)
13	155/65R13	73T	7.0	4.50B	157	532	300/44
	155/70R13	75T	7.0	4.50B	157	548	300/44
	165/65R13	77T	7.0	5.00B	170	544	300/44
	165/70R13	79T	7.0	5.00B	170	562	300/44
	165/70R13	83T XL	7.0	5.00B	170	562	340/50
	175/60R13	77T	7.0	5.00B	177	540	300/44
	185/70R13	86T	7.0	5.00B	189	590	300/44
14	155/65R14	75H	7.0	4 1/2J	157	558	300/44
	155/65R14	75T	7.0	4 1/2J	157	558	300/44
	165/60R14	75H	7.0	5J	170	554	300/44
	165/60R14	75T	7.0	5J	170	554	300/44
	165/65R14	79T	7.0	5J	170	570	300/44
	165/65R14	83T XL	7.0	5J	170	570	340/50
	165/70R14	81H	7.0	5J	170	588	300/44
	165/70R14	81T	7.0	5J	170	588	300/44
	175/65R14	82H	7.0	5J	177	584	300/44
	175/65R14	82T	7.0	5J	177	584	300/44
	185/60R14	82H	7.0	5 1/2J	189	578	300/44
	185/60R14	82T	7.0	5 1/2J	189	578	300/44
	185/65R14	86H	7.0	5 1/2J	189	596	300/44
	185/65R14	86T	7.0	5 1/2J	189	596	300/44
	185/70R14	88H	7.0	5 1/2J	189	616	300/44
	185/70R14	88T	7.0	5 1/2J	189	616	300/44
	205/70R14	95H	7.5	6J	209	644	300/44
	205/70R14	95T	7.5	6J	209	644	300/44
15	175/65R15	84H	7.5	5J	177	609	300/44
	175/65R15	84T	7.5	5J	177	609	300/44
	185/65R15	88H	7.2	5 1/2J	189	621	300/44
	185/65R15	88T	7.2	5 1/2J	189	621	300/44
	195/60R15	88H	7.5	6J	201	615	300/44
	195/60R15	88T	7.5	6J	201	615	300/44
	195/65R15	91H	7.2	6J	201	635	300/44
	195/65R15	91V	7.2	6J	201	635	300/44
	205/65R15	94V	7.5	6J	209	647	300/44
	205/65R15	94H	7.5	6J	209	647	300/44
16	205/55R16	91V	7.2	6 1/2J	214	632	300/44
	205/55R16	94V XL	7.2	6 1/2J	214	632	340/50
	215/60R16	99V XL	7.5	6 1/2J	221	664	340/50
	215/60R16	99H XL	7.5	6 1/2J	221	664	340/50





MIX-SEASON

ON-ROAD SUV TIRE



CHARACTERS



4 longitudinal grooves design guarantees the safe maneuverability on the both dry and wet road.

Superior tread design provides excellent maneuverability and grip performance under all weather conditions.

Noise is dispersed by increased numbers of pitches and the optimized angle design.



Lateral pattern grooves on shoulder part ensures the best drainage performance.

MIX-SEASON

Rim	Size	LI/SS	Tread Depth (mm)	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Standard Pressure (kPa/psi)
15	265/70R15	112H	8.5	8J	272	753	300/44
16	215/65R16	98H	8.5	6 1/2J	221	686	300/44
	215/65R16	102 XL	8.5	6 1/2J	221	686	340/50
	215/70R16	100H	8.5	6 1/2J	221	708	300/44
	215/70R16	104H XL	8.5	6 1/2J	221	708	340/50
	225/70R16	103H	8.7	6 1/2J	228	722	300/44
	235/60R16	104V XL	8.5	7J	240	688	340/50
	235/70R16	106H	8.5	7J	240	736	300/44
	245/70R16	107H	8.5	7J	248	750	300/44
	245/70R16	107T	8.5	7J	248	750	300/44
	255/70R16	111T	8.5	7 1/2J	260	764	300/44
17	265/70R16	112T	8.5	8J	272	778	300/44
	215/60R17	96H	8.5	6 1/2J	221	690	300/44
	225/65R17	102H	8.5	6 1/2J	228	724	300/44
	235/65R17	108H XL	8.5	7J	240	738	340/50
	245/65R17	107H	8.8	7J	248	750	300/44
	245/70R17	110H	8.5	7J	248	776	300/44
	255/60R17	110H XL	8.5	7 1/2J	260	738	340/50
	255/65R17	114H XL	8.5	7 1/2J	260	764	340/50
	265/65R17	112H	8.5	8J	272	776	300/44
	265/65R17	116H XL	8.5	8J	272	776	340/50
18	275/65R17	119H XL	8.7	8J	279	790	340/50
	225/60R18	100H	8.2	6 1/2J	228	727	300/44
	235/50R18	101W XL	8.5	6 1/2J	245	693	340/50
	235/60R18	103H	8.5	7J	240	739	300/44
20	275/60R20	119H XL	8.5	8J	279	838	340/50





MIX-GRIP

ULTRA HIGH PERFORMANCE TIRE



CHARACTERS



Pore-free sidewall design without bumps for nice appearance.


Four longitudinal groove and the inside open shoulder groove design, provide the excellent handling and drainage performance; and the braking distance of 100km is reduced more than 7% on wetland.

Close lateral shoulder groove can reduce air flow noise and improve the stability of outer wheels turning.



AFB silencing block design in the groove can break the natural frequency of air flow and reduce the noise.

The unique design of "water absorber" increases the absorption capacity of water on the ground and improves the driving stability of vehicles in straight lines and curves on wet slippery road.



MIX-GRIP

Rim	Tire Size	Load Index	Speed Grade	Load Range	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Std. Rim	Standard Pressure (kPa)
26	295/30R26	107	Y	XL	301	838	8.0	10.5J	290
24	295/35R24	110	Y	XL	301	816	8.0	10.5J	290
	295/30R24	104	Y	XL	301	788	8.0	10.5J	290
	255/30R24	97	W	XL	260	764	8.0	9.0J	290
22	285/45R22	114	Y	XL	285	815	8.0	9.5J	290
	285/40R22	110	Y	XL	290	787	8.0	10.0J	290
	285/35R22	106	Y	XL	290	759	8.0	10.0J	290
	265/40R22	106	W	XL	271	771	8.0	9.5J	290
	265/35R22	102	W	XL	271	745	8.0	9.5J	290
	245/30R22	92	W	XL	248	707	8.0	8.5J	290
	235/30R22	90	W	XL	241	701	8.0	8.5J	290
21	325/30R21	108	Y	XL	331	729	8.0	11.5J	290
	285/35R21	105	Y	XL	290	733	8.0	10.0J	290
	275/45R21	110	W	XL	273	781	8.0	9.0J	290
	265/40R21	105	W	XL	271	745	8.0	9.5J	290
	245/35R21	96	Y	XL	248	705	8.0	8.5J	290
20	315/35R20	110	Y	XL	320	728	8.0	11.0J	290
	285/50R20	116	W	XL	297	794	8.0	9.0J	290
	285/35R20	104	W	XL	290	708	8.0	10.0J	290
	285/30R20	99	W	XL	290	680	8.0	10.0J	290
	275/55R20	117	W/V	XL	284	810	8.0	8.5J	290
	275/45R20	106	W	SL	273	756	8.0	9.0J	250
	275/40R20	105	W	XL	278	703	8.0	9.5J	290
	275/35R20	102	W	XL	278	700	8.0	9.5J	290
	275/30R20	97	W	XL	278	674	8.0	9.5J	290
	265/50R20	111	W/V	XL	277	774	8.0	8.5J	290
	265/45R20	108	W	XL	266	746	8.0	9.0J	290
	265/35R20	99	W	XL	271	694	8.0	9.5J	290
	255/50R20	109	W/V	XL	265	764	8.0	8.0J	290
	255/45R20	105	W	XL	255	738	8.0	8.5J	290
	255/40R20	101	W	XL	260	712	8.0	9.0J	290
	255/35R20	97	W	XL	260	686	8.0	9.0J	290
	245/50R20	105	W/V	XL	253	754	8.0	7.5J	290
	245/45R20	103	W	XL	243	728	8.0	8.0J	290
	245/40R20	99	W	XL	248	704	8.0	8.5J	290
	245/35R20	95	W	XL	248	680	8.0	8.5J	290
	245/30R20	90	W	XL	248	656	8.0	8.5J	290
	235/35R20	92	W	XL	241	672	8.0	8.5J	290
	235/30R20	88	W	XL	241	650	8.0	8.5J	290
	225/35R20	90	W	XL	230	666	8.0	8.0J	290
	225/30R20	85	W	XL	230	644	8.0	8.0J	290
19	285/45R19	111	Y	XL	285	739	8.0	9.5J	290
	285/40R19	107	W	XL	290	711	8.0	10.0J	290
	285/35R19	103	W	XL	290	683	8.0	10.0J	290
	275/55R19	111	W	SL	284	785	8.0	8.5J	250
	275/45R19	108	W	XL	273	731	8.0	9.0J	290

MIX-GRIP

Rim	Tire Size	Load Index	Speed Grade	Load Range	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Std. Rim	Standard Pressure (kPa)
19	275/40R19	105	W	XL	278	703	8.0	9.5J	290
	275/35R19	100	W	XL	278	675	8.0	9.5J	290
	265/50R19	110	W/V	XL	277	749	8.0	8.5J	290
	265/35R19	98	W	XL	271	669	8.0	9.5J	290
	265/30R19	93	W	XL	271	643	8.0	9.5J	290
	255/55R19	111	W/V	XL	265	763	8.0	8.0J	290
	255/50R19	107	W	XL	265	739	8.0	8.0J	290
	255/45R19	104	W	XL	255	713	8.0	8.5J	290
	255/40R19	100	W	XL	260	687	8.0	9.0J	290
	255/35R19	96	W	XL	260	661	8.0	9.0J	290
	255/30R19	91	Y	XL	260	637	8.0	9.0J	290
	245/55R19	103	V	SL	253	753	8.0	7.5J	250
	245/45R19	102	W	XL	243	703	8.0	8.0J	290
	245/40R19	98	W	XL	248	679	8.0	8.5J	290
	245/35R19	93	W	XL	248	655	8.0	8.5J	290
	235/55R19	105	W	XL	245	741	8.0	7.5J	290
	235/50R19	103	W	XL	245	719	8.0	7.5J	290
	235/40R19	96	W	XL	241	671	8.0	8.5J	290
	235/35R19	91	W	XL	241	647	8.0	8.5J	290
	225/45R19	96	W	XL	225	685	8.0	7.5J	290
	225/40R19	93	W	XL	230	663	8.0	8.0J	290
	225/35R19	88	W	XL	230	641	8.0	8.0J	290
	215/35R19	85	Y	XL	218	633	8.0	7.5J	290
18	275/40R18	103	W	XL	278	677	8.0	9.5J	290
	265/40R18	101	W	XL	271	669	8.0	9.5J	290
	265/35R18	97	W	XL	271	643	8.0	9.5J	290
	255/55R18	105	V	SL	265	737	8.0	8.0J	250
	255/45R18	103	W	XL	255	687	8.0	8.5J	290
	255/40R18	99	W	XL	260	661	8.0	9.0J	290
	255/35R18	94	W	XL	260	635	8.0	9.0J	290
	245/45R18	100	W	XL	243	677	8.0	8.0J	290
	245/40R18	97	W	XL	248	653	8.0	8.5J	290
	235/55R18	104	W/V	XL	245	715	8.0	7.5J	290
	235/50R18	101	W	XL	245	693	8.0	7.5J	290
	235/45R18	98	W	XL	236	669	8.0	8.0J	290
	235/40R18	95	W	XL	241	645	8.0	8.5J	290
	225/55R18	102	W/V	XL	233	705	8.0	7.0J	290
	225/50R18	99	W/V	XL	233	683	8.0	7.0J	290
	225/45R18	95	W	XL	225	659	8.0	7.5J	290
	225/40R18	92	W	XL	230	637	8.0	8.0J	290
	215/45R18	93	W	XL	213	651	8.0	7.0J	290
	215/40R18	89	W	XL	218	629	8.0	7.5J	290
	215/35R18	84	W	XL	218	607	8.0	7.5J	290
17	245/45R17	99	W	XL	243	652	8.0	8.0J	290
	245/40R17	95	W	XL	248	628	8.0	8.5J	290
	235/55R17	103	W/V	XL	245	690	8.0	7.5J	290

MIX-GRIP

Rim	Tire Size	Load Index	Speed Grade	Load Range	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Std. Rim	Standard Pressure (kPa)
17	235/50R17	100	W/V	XL	245	668	8.0	7.5J	290
	235/45R17	97	W	XL	236	644	8.0	8.0J	290
	225/55R17	97	W	SL	233	680	8.0	7.0J	250
	225/50R17	98	W	XL	233	658	8.0	7.0J	290
	225/45R17	94	W	XL	225	634	8.0	7.5J	290
	215/55R17	94	V	SL	226	668	8.0	7.0J	250
	215/50R17	95	W	XL	226	648	8.0	7.0J	290
	215/45R17	91	W	XL	213	626	8.0	7.0J	290
	215/40R17	87	W	XL	218	604	8.0	7.5J	290
	205/55R17	95	W/V	XL	214	658	8.0	6.5J	290
	205/50R17	89	V	SL	214	638	8.0	6.5J	250
	205/45R17	88	W	XL	206	616	8.0	7.0J	290
	205/40R17	84	W	XL	212	596	8.0	7.5J	290
	225/55R16	99	W/V	XL	233	654	8.0	7.0J	290
16	225/50R16	96	W/V	XL	233	632	8.0	7.0J	290
	215/55R16	97	V	XL	226	642	8.0	7.0J	290
	205/55R16	91	V	SL	214	632	8.0	6.5J	250
	205/45R16	87	W	XL	206	590	8.0	7.0J	290





MIX-UHP

ULTRA HIGH PERFORMANCE TIRE



CHARACTERS



Big pattern design:
Greatly improving cornering stability at high speed.

Straight lined central rib design:
Maneuverability is highly improved.

Four main rib design:
Better avoiding slippery.

Asymmetric tread design:
Offers better sporting performance.



Best footprint shape simulated by computer offers excellent braking performance.



- 1 Pitched pattern design reduces driving noise.
- 2 Special compound improves driving and gripping performance while maintaining excellent heat-resistant and wear-resistant ability.
- 3 Rim protection bar to protect the rim from any external damage.
- 4 All-new jointless protection layer improves the durability and braking performance, offers even landing and safe driving.
- 5 High strength steel belt reduces rolling resistance. To be more fuel saving and environmental while maintaining the driving safety.

MIX-UHP

Rim	Size	LI/SS	Tread Depth (mm)	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Standard Pressure (kPa/psi)
15	195/50R15	82H	8.0	6J	201	577	300/44
	195/45R16	80V	8.0	6 1/2J	195	582	300/44
	195/45R16	84V XL	8.0	6 1/2J	195	582	340/50
	195/50R16	84V	8.0	6J	201	602	300/44
	195/50R16	88V XL	8.0	6J	201	602	340/50
	195/55R16	87V	8.0	6J	201	620	300/44
	195/55R16	91V XL	8.0	6J	201	620	340/50
	205/50ZR16	87W	8.2	6 1/2J	214	612	300/44
	205/50ZR16	91W XL	8.2	6 1/2J	214	612	340/50
	205/55R16	91V	8.4	6 1/2J	214	632	300/44
	205/55ZR16	94W XL	8.4	6 1/2J	214	632	340/50
	215/55ZR16	93W	8.2	7J	226	642	300/44
	215/55ZR16	97W XL	8.2	7J	226	642	340/50
	225/50ZR16	92W	8.4	7J	233	632	300/44
16	225/50ZR16	96W XL	8.4	7J	233	632	340/50
	225/55ZR16	95W	8.2	7J	233	654	300/44
	225/55ZR16	99W XL	8.2	7J	233	654	340/50
	205/40ZR17	80W	8.2	7 1/2J	212	596	300/44
	205/40ZR17	80Y	8.2	7 1/2J	212	596	300/44
	205/40ZR17	84W XL	8.2	7 1/2J	212	596	340/50
	205/40ZR17	84Y XL	8.2	7 1/2J	212	596	340/50
	205/45ZR17	84W	8.0	7J	206	616	300/44
	205/45ZR17	84Y	8.0	7J	206	616	300/44
	205/45ZR17	88W XL	8.0	7J	206	616	340/50
	205/45ZR17	88Y XL	8.0	7J	206	616	340/50
	205/50ZR17	89W	8.7	6 1/2J	214	638	300/44
	205/50ZR17	93W XL	8.7	6 1/2J	214	638	340/50
	205/50ZR17	93Y XL	8.7	6 1/2J	214	638	340/50
	215/40ZR17	87W XL	8.0	7 1/2J	218	604	340/50
	215/40ZR17	87Y XL	8.0	7 1/2J	218	604	340/50
	215/45ZR17	87W	8.0	7J	213	626	300/44
	215/45ZR17	91W XL	8.0	7J	213	626	340/50
	215/45ZR17	91Y XL	8.0	7J	213	626	340/50
	215/50ZR17	95W XL	8.0	7J	226	648	340/50
	215/50ZR17	95Y XL	8.0	7J	226	648	340/50
	215/55ZR17	94W	8.2	7J	226	668	300/44
	215/55ZR17	98W XL	8.2	7J	226	668	340/50
	215/55ZR17	98Y XL	8.2	7J	226	668	340/50
	225/45ZR17	91W	8.2	7 1/2J	225	634	300/44
	225/45ZR17	94W XL	8.2	7 1/2J	225	634	340/50
	225/45ZR17	94Y XL	8.2	7 1/2J	225	634	340/50
	225/50ZR17	94W	8.7	7J	233	658	300/44
	225/50ZR17	98W XL	8.7	7J	233	658	340/50
	225/55ZR17	97W	8.4	7J	233	680	300/44
	225/55ZR17	101W XL	8.4	7J	233	680	340/50

MIX-UHP

Rim	Size	LI/SS	Tread Depth (mm)	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Standard Pressure (kPa/psi)
17	225/55ZR17	101Y XL	8.4	7J	233	680	340/50
	235/45ZR17	94W	8.2	8J	236	644	300/44
	235/45ZR17	97Y XL	8.2	8J	236	644	340/50
	235/55ZR17	103W XL	8.0	7 1/2J	245	690	340/50
	235/55ZR17	103Y XL	8.0	7 1/2J	245	690	340/50
	245/40ZR17	95W XL	8.0	8 1/2J	248	628	340/50
	245/45ZR17	95W	8.2	8J	243	652	300/44
	245/45ZR17	99W XL	8.2	8J	243	652	340/50
	245/45ZR17	99Y XL	8.2	8J	243	652	340/50
18	215/35ZR18	84W XL	8.0	7 1/2J	218	607	340/50
	215/35ZR18	84Y XL	8.0	7 1/2J	218	607	340/50
	215/40ZR18	85W	8.0	7 1/2J	218	629	300/44
	215/40ZR18	89W XL	8.0	7 1/2J	218	629	340/50
	215/40ZR18	89Y XL	8.0	7 1/2J	218	629	340/50
	215/55ZR18	95W	8.2	7J	226	693	300/44
	225/40ZR18	88W	8.2	8J	230	637	300/44
	225/40ZR18	92W XL	8.2	8J	230	637	340/50
	225/40ZR18	92Y XL	8.2	8J	230	637	340/50
	225/45ZR18	91W	8.2	7 1/2J	225	659	300/44
	225/45ZR18	95W XL	8.2	7 1/2J	225	659	340/50
	225/45ZR18	95Y XL	8.2	7 1/2J	225	659	340/50
	235/40ZR18	95W XL	8.2	8 1/2J	241	645	340/50
	235/45ZR18	94W	8.2	8J	236	669	300/44
	235/45ZR18	98W XL	8.2	8J	236	669	340/50
	235/45ZR18	98Y XL	8.2	8J	236	669	340/50
	235/55ZR18	104W XL	8.0	7 1/2J	245	715	340/50
	245/40ZR18	97W XL	8.0	8 1/2J	248	653	340/50
	245/40ZR18	97Y XL	8.0	8 1/2J	248	653	340/50
	245/45ZR18	96W	8.2	8J	243	677	300/44
	245/45ZR18	100W XL	8.2	8J	243	677	340/50
	245/45ZR18	100Y XL	8.2	8J	243	677	340/50
	255/35ZR18	94W XL	8.0	9J	260	635	340/50
	255/45ZR18	99W	8.0	8 1/2J	255	687	300/44
	255/45ZR18	103W XL	8.0	8 1/2J	255	687	340/50
	255/55R18	105V	8.0	8J	265	737	300/44
	255/55R18	109V XL	8.0	8J	265	737	340/50
19	225/40ZR19	93Y XL	8.0	8J	230	663	340/50
	225/45ZR19	96Y XL	8.0	7 1/2J	225	685	340/50
	235/35ZR19	91W XL	8.2	8 1/2J	241	647	340/50
	235/40ZR19	92W	8.0	8 1/2J	241	671	300/44
	235/40ZR19	96W XL	8.0	8 1/2J	241	671	340/50
	235/50ZR19	103W XL	8.0	7 1/2J	245	719	340/50
	235/55ZR19	105W XL	8.0	7 1/2J	245	741	340/50
	245/35ZR19	89W	8.2	8 1/2J	248	655	300/44
	245/35ZR19	93W XL	8.2	8 1/2J	248	655	340/50
	245/40ZR19	98W XL	8.0	8 1/2J	248	679	340/50

MIX-UHP

Rim	Size	LI/SS	Tread Depth (mm)	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Standard Pressure (kPa/psi)
19	245/45ZR19	102W XL	8.2	8J	243	703	340/50
	245/55ZR19	103W	8.0	7 1/2J	253	753	300/44
	255/35ZR19	92W	8.0	9J	260	661	300/44
	255/35ZR19	96W XL	8.0	9J	260	661	340/50
	255/40ZR19	100Y XL	8.0	9J	260	687	340/50
	255/45ZR19	104W XL	8.0	8 1/2J	255	713	340/50
	255/50R19	103V	8.0	8J	265	739	300/44
	255/50R19	107V XL	8.0	8J	265	739	340/50
	255/55ZR19	107W	8.0	8J	265	763	300/44
	255/55ZR19	111W XL	8.0	8J	265	763	340/50
20	255/55ZR19	111Y XL	8.0	8J	265	763	340/50
	265/35ZR19	98Y XL	8.0	9 1/2J	271	669	340/50
	265/50ZR19	106W	8.2	8 1/2J	277	749	300/44
	265/50ZR19	110W XL	8.2	8 1/2J	277	749	340/50
	265/50ZR19	110Y XL	8.2	8 1/2J	277	749	340/50
	275/40ZR19	101W	8.2	9 1/2J	278	703	300/44
	275/40ZR19	105W XL	8.2	9 1/2J	278	703	340/50
	275/40ZR19	105Y XL	8.2	9 1/2J	278	703	340/50
	275/45ZR19	104W	8.0	9J	273	731	300/44
	275/45ZR19	108W XL	8.0	9J	273	731	340/50
	275/45ZR19	108Y XL	8.0	9J	273	731	340/50
	285/45R19	111V XL	8.0	9 1/2J	285	739	340/50
	225/30ZR20	85W XL	7.8	8J	230	644	340/50
	225/35ZR20	90W XL	8.2	8J	230	666	340/50
	235/55ZR20	105W XL	8.0	7 1/2J	245	766	340/50
	245/35ZR20	95W XL	8.0	8 1/2J	248	680	340/50
	255/35ZR20	93W	8.2	9J	260	686	300/44
	255/35ZR20	97W XL	8.2	9J	260	686	340/50
	255/50R20	104 V	8.0	8J	265	764	300/44
	265/50R20	111V XL	8.0	8 1/2J	277	774	340/50
	275/40ZR20	106W XL	8.2	9 1/2J	278	728	340/50
	275/40ZR20	106Y XL	8.2	9 1/2J	278	728	340/50
	275/45ZR20	106W	8.5	9J	273	756	300/44
	275/45ZR20	110W XL	8.5	9J	273	756	340/50
	275/45ZR20	110Y XL	8.5	9J	273	756	340/50
	275/55R20	113V	8.0	8 1/2J	284	810	300/44
	315/35ZR20	106W	8.8	11J	320	728	300/44
	315/35ZR20	110W XL	8.8	11J	320	728	340/50
	315/35ZR20	110Y XL	8.8	11J	320	728	340/50
21	265/40ZR21	105Y XL	8.0	9 1/2J	271	745	340/50
	275/45R21	110W XL	8.0	9J	273	781	340/50
22	245/30ZR22	92W XL	8.0	8 1/2J	248	707	340/50
	265/35ZR22	102W XL	8.0	9 1/2J	271	745	340/50
	285/45ZR22	114W XL	8.0	9 1/2J	285	815	340/50
	285/45ZR22	114Y XL	8.0	9 1/2J	285	815	340/50
24	255/30ZR24	97W XL	8.0	9J	260	764	340/50



MIX-UHP II

ULTRA HIGH PERFORMANCE TIRE



CHARACTERS



Shoulder Design
Variable pitch sequence design and continuous shoulder tread pattern blocks disperses road noise greatly.



Wide tread design
Provides the best ground contact area and improves the maneuverability of high-speed at corner, guarantees the stability during running.



Pattern Design
Asymmetric thread design provides excellent grip force in the crooked roads and good water drainage performance.



Four Wide Groove
Increases drainage performance and effectively avoids slippery.



- 1 Special rubber compound improves heat resistance, good abrasion resistance, driving performance and grip.
- 2 RIM protection, protect wheels from accidental damage.
- 3 Layer of protection uses new materials, as well as the seamless technology, improve braking and durability, tread the ground more evenly and improving handling safety.
- 4 High tensile steel belt, lower rolling resistance, increased handling safety and more fuel and protect the environment.

MIX-UHP II

Rim	Size	LI/SS	Tread Depth (mm)	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Standard Pressure (kPa/psi)
16	195/55ZR16	87W	8.2	6J	201	620	300/44
	205/55ZR16	91W	8.2	6 1/2J	214	632	300/44
	205/60R16	92V	8.0	6J	209	652	300/44
17	205/45ZR17	88W XL	8.2	7 1/2J	206	616	340/50
	205/50ZR17	93Y XL	8.2	6 1/2J	214	638	340/50
	225/45ZR17	94Y XL	8.2	7 1/2J	225	634	340/50
	225/50ZR17	98Y XL	8.2	7 1/2J	233	658	340/50
	225/55ZR17	97Y	8.2	7 1/2J	233	680	300/44
18	225/40ZR18	92Y XL	8.2	8J	230	637	340/50
	225/45ZR18	95Y XL	8.2	7 1/2J	225	659	340/50
	245/40ZR18	97Y XL	8.2	8 1/2J	248	653	340/50
	245/45ZR18	100Y XL	8.2	8J	243	677	340/50
	245/50ZR18	100Y	8.0	7 1/2J	253	703	300/44
	255/35ZR18	94Y XL	8.0	9J	260	635	340/50
	255/40ZR18	95Y	8.0	9J	260	661	300/44
	275/40ZR18	99Y	8.2	9 1/2J	278	677	300/44
	275/40ZR18	103Y XL	8.2	9 1/2J	278	677	340/50
	315/30ZR18	98Y	8.0	11J	320	647	300/44
19	245/45ZR19	102Y XL	8.2	8J	243	703	340/50
	255/35ZR19	96Y XL	8.0	9J	260	661	340/50
	275/40ZR19	105Y XL	8.2	9 1/2J	278	703	340/50
20	265/30ZR20	94Y XL	7.8	9 1/2J	271	668	340/50
	275/30ZR20	97Y XL	8.0	9 1/2J	278	674	340/50
	285/30ZR20	99Y XL	7.8	10J	290	680	340/50
	295/30ZR20	101Y XL	8.0	10 1/2J	301	686	340/50
22	265/40ZR22	106W XL	7.8	9 1/2J	271	771	340/50
	305/40ZR22	110W	8.2	11J	313	803	300/44
	305/40ZR22	114W XL	8.2	11J	313	803	340/50
26	305/30ZR26	109W XL	8.2	11J	313	844	340/50



LIGHT TRUCK RADIAL TIRE



MIX-200

LIGHT TRUCK RADIAL TIRE

SIZE	PR	STD RIM	LOAD INDEX/ SPEED RATING	MAX LOAD (kg/lbs)		INFLATED PRESSURE (kPa/psi)		TIRE DIMENSION (mm)	
				SINGLE	DUAL	SINGLE	DUAL	SW	OD
700R16C	12	5.50F	115/110 N	1150/2535	1120/2469	515/74	515/74	200	775
750R16C	14	6.00G	122/118 L	1405/3295	1315/2899	740/107	740/107	215	805

