



Product Catalog



*Your Source For World Class
Fire Protection Products*



Hand Held Fire Extinguishers

- ABC Dry Chemical Page 5
- Purple K Dry Chemical Page 6
- Standard Dry Chemical Page 7
- Carbon Dioxide Page 8
- Halotron Page 9
- Water & Water Mist Page 10
- High Flow Page 11
- Heavy Duty High Flow Page 12
- Wet Chemical - Class K Page 15
- Foam Fire Extinguisher Page 16

Industrial Dry Chemical Suppression System**Automatic Spot Protection Fire Extinguishers**

- Horizontal Mini-Guards Page 13
- Vertical Mini-Guards Page 14

Wheeled Fire Extinguishers

- Wheeled Dry Chemical Page 18-20
- Wheeled Halotron Page 21
- Wheeled Carbon Dioxide Page 22

Offshore Extinguishers**Restaurant Fire Suppression Systems****Gas and Flame Detection****Foam Concentrates & Hardware****Mounting Hardware**

- Wall Hooks Page 31
- Marine/Vehicle Brackets Page 32

Recharge Agents



American Made Since 1968

For over four decades Buckeye Fire Equipment has been an international leader in the development and manufacture of reliable fire protection products.

A privately owned and operated company with its headquarters near Charlotte, NC, Buckeye Fire Equipment has earned an excellent reputation for quality, reliability and value within the commercial and industrial fire protection industry.

We offer a complete line of handheld and wheeled fire extinguishers, extinguishing agents, fire suppressing foam concentrates and hardware, pre-engineered kitchen fire suppression systems, and customizable gas detection systems.

To ensure our distributors and customers get the highest quality fire protection equipment, all of our products undergo rigorous testing, both in-house and by third party testing organizations such as Underwriters Laboratories, U.L. Canada, ASME and the U.S. Government.

We are committed to helpful and responsive customer service and knowledgeable and dependable technical support. This commitment has earned Buckeye Fire Equipment the coveted ISO 9001-2008 Quality Certification.

Contact us for more information about the wide selection of Buckeye Fire Equipment Company products and services. We have trained personnel who are ready to assist you with your fire protection needs.

Extinguisher Selection Guide

To provide the best protection of life and property from fire, it is critical that the proper extinguisher selection be made. The classification and rating of an extinguisher are vital pieces of information for making this selection.

The National Fire Protection Association (NFPA) has established the requirements for the **number, size, placement, inspection, maintenance, and testing** of portable fire extinguishers. These requirements are contained in NFPA 10, "Standard for Portable Fire Extinguishers".

Within this standard it is stated that the selection of fire extinguishers for a given situation is determined by the following:

- the character and size of the fires anticipated to be encountered.
- the construction and occupancy of the property to be protected.
- the ambient temperature of the area where the extinguisher will be located.
- other factors that may dictate the selection of a particular type of extinguisher.

Fire Classifications

Generally fire extinguishers are selected based on the hazard(s) they are intended to protect. Classifications have been established to categorize these hazards as follows:



Class A: Fires involving ordinary combustible materials such as wood, cloth, paper, rubber and many plastics.



Class B: Fires involving flammable liquids, combustible liquids, petroleum grease, tars, oils, oil based paints, solvents, lacquers, alcohols, and flammable gases.



Class C: Fires that involve energized electrical equipment.



Class D: Fires involving combustible metals such as magnesium, sodium, potassium and titanium.



Class K: Fires involving combustible cooking media such as vegetable oils, animal oils and fats.





Fire Ratings

Along with the classification, the numerical rating of an extinguisher is an important factor in the proper selection of an extinguisher. The rating is a measure of the extinguishing potential of the fire extinguisher and is developed on the basis of comparative fire tests.

Only **Class A** and **Class B** classifications carry numerical ratings. Basically the higher the number associated with the classification letter, the larger the fire the extinguisher has the potential to extinguish.

Class A fire tests involve two types of fire, a wood crib fire test and a wood panel fire test. For example to achieve a 3-A rating an extinguisher must successfully extinguish a burning wood crib measuring 29" x 29" x 27" and a wood panel measuring 12' x 12'.

Class B fire tests involve square pans containing flammable liquid.

For example to achieve a 40-B rating an extinguisher must successfully extinguish a burning pan measuring 100 sq. ft.

There are no numerical ratings associated with Class C, D or K.

For Class C, the electrical nonconducting characteristics of the agent are verified, not its extinguishing potential.

For Class D, only the amount of agent and application method needed to control a metal fire of a certain size and type is tested.

For Class K, the extinguisher must extinguish 80 lbs. of burning cooking oil in a commercial deep fat fryer and cause no splashing of flaming oil outside the fryer.

Placement/Accessibility Of Extinguisher

Fire Classification	Class A	Class B	Class C	Class D	Class K
Maximum Travel Distance To Fire Extinguisher	75 Feet Maximum area that one extinguisher can protect and meet the 75 ft. rule = 11,250 sq. ft..	50 Feet Maximum area that one extinguisher can protect and meet the 50 ft. rule = 5,000 sq. ft..	In accordance with the Class A or B hazard it is protecting	75 Feet	30 Feet Maximum area that one extinguisher can protect and meet the 30 ft. rule = 1,800 sq. ft.

Occupancy Hazards

The NFPA classifies occupancies as either Low, Moderate or High Hazard.

Low hazard occupancies are locations where the total amount of Class A combustible materials and Class B flammables, including furnishings, decorations, and contents, is of minor quantity. This can include some buildings or rooms occupied as offices, classrooms, churches, assembly halls, guest room areas of hotels/motels.

Moderate hazard occupancies are locations where the total amount of Class A combustibles and Class B flammables are present in greater amounts than expected under low hazard occupancies.

These occupancies could consist of dining areas, mercantile shops and allied storage, light manufacturing, research operations, auto showrooms, parking garages and workshops.

High hazard occupancies are locations where the total amount of Class A combustibles and Class B flammables present, in storage, production, use, finished product, or combination thereof, is over and above those expected in occupancies classed as moderate hazard.

These occupancies could consist of

woodworking; vehicle repair; aircraft and boat servicing; cooking areas; individual product display showrooms; product convention center displays; and storage and manufacturing processes such as painting, dipping, and coating, including flammable liquid handling.

Occupancies	Min. Rating	Unit of A
Low	2-A:5/10-B	3000
Moderate	2-A:10/20-B	1500
High	4-A:40/80-B	1000

Note: If the lower B rating is installed then the maximum travel distance to the extinguisher is reduced from 50 to 30 feet.

To determine the overall A rating necessary for protection of an occupancy, divide the total sq. ft. by the Unit of A in the above table. For example if a low occupancy building has a total sq. ft. of 30,000. Divide 30,000 by 3000 (Unit of A) = 10.

Therefore in this example the building would require a minimum of five 2-A rated extinguishers.



This ABC extinguisher is rated 3-A:40-B:C. The 3 and the 40 indicate the extinguishing potential for Class A and Class B fires respectively. The C indicates that the agent will not conduct electricity. This unit exceeds the minimum rating for Low and Moderate occupancy requirements.



Company Goal

Our goal is to provide our customers with quality fire extinguishers at a great value. In pursuit of this, we are proud to say that we manufacture all our products in the U.S.A. We mill and blend our own dry chemical agents, machine the component parts, assemble and then test our units to the highest quality standards.

Third Party Approvals For Peace Of Mind



Key Features Of Buckeye Fire Extinguishers

- Manufactured to meet UL/ULC's rigorous standards for commercial hazard protection and backed by our manufacturer's warranty.
- Dry Chemical and Halotron extinguisher cylinders are constructed out of deep drawn and ironed carbon steel. Carbon Dioxide cylinders are constructed out of 6061 TG aluminum.
- Rechargeable.
- Anodized aluminum or plated brass valve assemblies for superior strength and corrosion resistance.
- The extinguisher nameplate incorporates trilingual operating and maintenance instructions, English, Spanish and French.
- Color-coded gauges show operating status at-a-glance.
- Extinguishers have model and serial number bar coding for easy and accurate maintenance history.
- Metal pull pins, vehicle brackets and wall hooks for extended unit service life.
- Buckeye Fire Equipment products are environmentally friendly and can be included in projects aiming for LEED certification.





ABC Dry Chemical

ABC Dry Chemical is a multipurpose extinguishing agent that is suitable for use on Class A, Class B and Class C fires.

Typical Uses: For public areas such as offices, classrooms, churches, parking garages, and hotel/motel assembly halls and guest areas. For businesses such as retail stores, light manufacturing facilities, research facilities, auto dealerships, vehicle/ aircraft/marine service centers, and manufacturing processes such as painting, dipping, and coating.

Not recommended for use on sensitive electronic equipment or aircraft structure.

Third Party Approvals For Peace Of Mind



Model	2.5A-ABC	5HISA40-ABC 5HISB40-ABC*	5HISA40-ABC 5HISB40-ABC*	10HI SA80 ABC 10HI SB80 ABC*	10SHISA-ABC	20SHISA-ABC 20SHISB-ABC*	30SHISB-ABC*
Description	2.5 lb. ABC Vehicle Bracket	5 lb. ABC Wall Mount	5 lb. ABC Vehicle Bracket	10 lb. ABC Wall Mount	10 lb. Short ABC Wall Mount	20 lb. ABC Wall Mount	30 lb. ABC Wall Mount
Pt. # Alum. Valve	13315	10914	25614	11340	11310	12120	N/A
Pt. # Brass Valve	N/A	10915	25615	11341	N/A	12121	12905
Agent Capacity	2.5 lb. (1.13 kg)	5 lb. (2.27 kg)	5 lb. (2.27 kg)	10 lb. (4.54 kg)	10 lb. (4.54 kg)	20 lb. (9.07 kg)	30 lb. (13.6 kg)
UL/ULC Rating	1-A:10-B:C	3-A:40-B:C	3-A:40-B:C	4-A:80-B:C	4-A:60-B:C	10-A:120-B:C	10-A:160-B:C
Temperature Range	-65° to 120°F (-54° to 49°C)						
Discharge Time	9 sec	14 sec	14 sec	22 sec	18 sec	27 sec	32 sec
Discharge Range ft (m)	9-15 (2.7-4.6)	12-18 (3.7-5.5)	12-18 (3.7-5.5)	15-21 (4.6-6.4)	15-21 (4.6-6.4)	15-21 (4.6-6.4)	25-30 (7.6-9.1)
Operating Pressure	100 psi (689 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)
USCG Approval	Type B:C Size I	Type A Size II Type B:C Size I	Type A Size II Type B:C Size I	Type A Size II Type B:C Size II	Type A Size II Type B:C Size II	Type A Size II Type B:C Size III	Type A Size II Type B:C Size IV
Ship Weight**	5.5 lb. (2.5 kg)	10 lb. (4.5 kg)	10.25 lb. (4.7 kg)	18.25 lb. (8.3 kg)	18.75 lb. (8.6 kg)	33.5 lb. (15.2 kg)	52.25 lb. (23.7 kg)
Unit Height	14.75 in (37.5 cm)	16.375 in (41.6 cm)	16.375 in (41.6 cm)	21 in (53.3 cm)	16.75 in (42.5 cm)	21.25 in (53.8 cm)	27.375 in (69.4 cm)
Unit Width	4.875 in (12.4 cm)	7.25 in (18.4 cm)	7.25 in (18.4 cm)	7.75 in (19.7 cm)	8.25 in (21 cm)	8.75 in (22.2 cm)	8.75 in (22.2 cm)
Unit Diameter	3.375 in (8.6 cm)	4.25 in (10.8 cm)	4.25 in (10.8 cm)	5.125 in (13 cm)	6 in (15.2 cm)	7.5 in (19.1 cm)	7.5 in (19.1 cm)

* Denotes units with brass valves **Ship Weight is an approximate weight used for calculating shipping costs. Actual unit weight is printed on the product label.



Purple K Dry Chemical

Purple K Dry Chemical is a high performance extinguishing agent most effective for dealing with flammable liquid fires. Purple K is suitable for use on Class B and Class C fires.

Typical Uses: For flammable liquid hazards in public areas such as offices, classrooms, churches, parking garages, and hotel/ motel assembly halls and guest areas. For flammable liquid hazards in businesses such as retail stores, light manufacturing facilities, research facilities, auto dealerships, vehicle/aircraft/marine service centers, and manufacturing processes such as painting, dipping, and coating.

Not recommended for use on sensitive electronic equipment.



Third Party Approvals For Peace Of Mind



Model	2.5SA-PK	5HISA-PK	5HISA-PK	5 HI SAN-PK Fixed Nozzle	5 HI SAN-PK Fixed Nozzle	10HISA-PK 10HISB-PK*	20SHISA-PK 20SHISB-PK*	30SHISB-PK*
Description	2.5 lb. PK Vehicle Bracket	5 lb. PK Wall Mount	5 lb. PK Vehicle Bracket	5 lb. PK Wall Mount	5 lb. PK Vehicle Bracket	10 lb. PK Wall Mount	20 lb. PK Wall Mount	30 lb. PK Wall Mount
Pt. # Alum. Valve	13515	11214	25914	11214N	25914N	11740	12620	N/A
Pt. # Brass Valve	N/A	N/A	N/A	N/A	N/A	11741	12621	12805
Agent Capacity	2.5 lb. (1.13 kg)	5 lb. (2.27 kg)	5 lb. (2.27 kg)	5 lbs. (2.27 kg)	5 lbs. (2.27 kg)	10 lb. (4.54 kg)	20 lb. (9.07 kg)	30 lb. (13.6 kg)
UL/ULC Rating	10-B:C	20-B:C	20-B:C	10-B:C	10-B:C	80-B:C	120-B:C	160-B:C
Temperature Range	-65° to 120°F (-54° to 49°C)							
Discharge Time	9 sec	9 sec	9 sec	12 Seconds	12 Seconds	22 sec	27 sec	32 sec
Discharge Range ft (m)	9-15 (2.7-4.6)	12-18 (3.7-5.5)	12-18 (3.7-5.5)	12-18 (3.7-5.5)	12-18 (3.7-5.5)	15-21 (4.6-6.4)	15-21 (4.6-6.4)	25-30 (7.6-9.1)
Operating Pressure	100 psi (689 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)
USCG Approval	Type B:C Size I	Type B:C Size I	Type B:C Size I	Type B:C Size I	Type B:C Size I	Type B:C Size II	Type B:C Size III	Type B:C Size IV
Ship Weight**	5.5 lb. (2.5 kg)	10 lb. (4.5 kg)	10.25 lb. (4.7 kg)	9.5 lb. (4.3 kg)	9.75 lb. (4.4 kg)	18.25 lb. (8.3 kg)	33.5 lb. (15.2 kg)	52.25 lb. (23.7 kg)
Unit Height	14.75 in (37.5 cm)	16.375 in (41.6 cm)	16.375 in (41.6 cm)	16.375 in (41.6 cm)	16.375 in (41.6 cm)	21 in (53.3 cm)	21.25 in (53.8 cm)	27.375 in (69.4 cm)
Unit Width	4.875 in (12.4 cm)	7.25 in (18.4 cm)	7.25 in (18.4 cm)	6 in (15.24 cm)	6 in (15.24 cm)	7.75 in (19.7 cm)	8.75 in (22.2 cm)	8.75 in (22.2 cm)
Unit Diameter	3.375 in (8.6 cm)	4.25 in (10.8 cm)	4.25 in (10.8 cm)	4.25 in (10.8 cm)	4.25 in (10.8 cm)	5.125 in (13 cm)	7.5 in (19.1 cm)	7.5 in (19.1 cm)

* Denotes units with brass valves **Ship Weight is an approximate weight used for calculating shipping costs. Actual unit weight is printed on the product label.



Standard Dry Chemical

Standard (BC) Dry Chemical is a sodium bicarbonate based extinguishing agent that is suitable for use on Class B and Class C fires.

Typical Uses: For flammable liquid hazards in public areas such as offices, classrooms, churches, parking garages, and hotel/motel assembly halls and guest areas. For flammable liquid hazards in businesses such as retail stores, light manufacturing facilities, research facilities, auto dealerships, vehicle/aircraft/marine service centers, and manufacturing processes such as painting, dipping, and coating.

Not recommended for use on sensitive electronic equipment.

Third Party Approvals For Peace Of Mind



Model	2.5SA-STD	5.5HISA40-STD	5.5HISA40-STD	10HISA-STD	20SHISA-STD
Description	2.5 lb. STD Vehicle Bracket	5 lb. STD Wall Mount	5 lb. STD Vehicle Bracket	10 lb. STD Wall Mount	20 lb. STD Wall Mount
Pt. # Alum. Valve	13415	11014	13514	11840	12220
Agent Capacity	2.5 lb. (1.13 kg)	5.5 lb. (2.5 kg)	5.5 lb. (2.5 kg)	10 lb. (4.54 kg)	20 lb. (9.07 kg)
UL/ULC Rating	10-B:C	40-B:C	40-B:C	40-B:C	120-B:C
Temperature Range	-65° to 120°F (-54° to 49°C)				
Discharge Time	9 sec	14 sec	14 sec	14 sec	28 sec
Discharge Range ft (m)	9-15 (2.7-4.6)	12-18 (3.7-5.5)	12-18 (3.7-5.5)	15-21 (4.6-6.4)	15-21 (4.6-6.4)
Operating Pressure	100 psi (689 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)
USCG Approval	Type B:C Size I	Type B:C Size I	Type B:C Size I	Type B:C Size II	Type B:C Size III
Ship Weight*	5.5 lb. (2.5 kg)	10.5 lb. (4.8 kg)	10.75 lb. (4.9 kg)	18.25 lb. (8.3 kg)	33.5 lb. (15.2 kg)
Unit Height	14.75 in (37.5 cm)	16.375 in (41.6 cm)	16.375 in (41.6 cm)	21 in (53.3 cm)	21.25 in (53.8 cm)
Unit Width	4.875 in (12.4 cm)	7.25 in (18.4 cm)	7.25 in (18.4 cm)	7.75 in (19.7 cm)	8.75 in (22.2 cm)
Unit Diameter	3.375 in (8.6 cm)	4.25 in (10.8 cm)	4.25 in (10.8 cm)	5.125 in (13 cm)	7.5 in (19.1 cm)

*Ship Weight is an approximate weight used for calculating shipping costs. Actual unit weight is printed on the product label.



Carbon Dioxide

Carbon Dioxide is the trusted non-conductive clean agent and is most effective for dealing with electronic equipment fires. CO₂ is suitable for use on Class B and Class C fires.

Typical Uses: For protecting sensitive electronic equipment in offices, classrooms, churches, parking garages, and hotel/motel assembly halls and guest areas. For protecting sensitive electronic equipment in businesses such as retail stores, light manufacturing facilities, research facilities, auto dealerships, vehicle/aircraft/marine service centers, and manufacturing processes such as painting, dipping, and coating.

Recommended for use on sensitive electronic equipment.

Third Party Approvals For Peace Of Mind



Model	451	456	461	466
Description	5 lb. Carbon Dioxide	10 lb. Carbon Dioxide	15 lb. Carbon Dioxide	20 lb. Carbon Dioxide
Pt. #	45100	45600	46100	46600
Agent Capacity	5 lb. (2.27 kg)	10 lb. (4.54 kg)	15 lb. (6.8 kg)	20 lb. (9.07 kg)
UL/ULC Rating	5-B:C	10-B:C	10-B:C	10-B:C
Temperature Range	-22° to 120°F (-30° to 49°C)			
Discharge Time	9 sec	9 sec	15 sec	20 sec
Discharge Range ft (m)	4-8 (1.2-2.4)	4-8 (1.2-2.4)	4-8 (1.2-2.4)	4-8 (1.2-2.4)
USCG Approval	Type B:C Size I	Type B:C Size I	Type B:C Size II	Type B:C Size II
Ship Weight*	13.75 lb. (6.3 kg)	27.75 lb. (12.6 kg)	37.75 lb. (17.1 kg)	49 lb. (22.2 kg)
Unit Height	17.375 in (44.1 cm)	19.75 in (50.2 cm)	26.375 in (67 cm)	26.875 in (68.2 cm)
Unit Width	8.25 in (21 cm)	12 in (30.5 cm)	12 in (30.5 cm)	13 in (33 cm)
Unit Diameter	5.25 in (13.3 cm)	6.89 in (17.5 cm)	6.89 in (17.5 cm)	8 in (20.3 cm)

*Ship Weight is an approximate weight used for calculating shipping costs. Actual unit weight is printed on the product label.

See **Page 22** for Wheeled Carbon Dioxide Extinguishers.



Halotron

Halotron is a clean, non conductive gaseous agent that is an excellent replacement for Halon 1211 extinguishers. Halotron is suitable for use on Class A, Class B and Class C fires.

Typical Uses: For protecting sensitive electronic equipment in offices, classrooms, churches, parking garages, and hotel/motel assembly halls and guest areas. For protecting sensitive electronic equipment in businesses such as retail stores, light manufacturing facilities, research facilities, auto dealerships, vehicle/aircraft/marine service centers, and manufacturing processes such as painting, dipping, and coating.

Recommended for use on sensitive electronic equipment.

Third Party Approvals For Peace Of Mind



Model	2.5 FSA	2.5 FSA	2.5 HSA	2.5 HSA	5 FSA	5 FSA	5 HSA	5 HSA	11 SA 11 SB*	15 SA 15 SB*
Description	2.5 lb. Nozzle Wall Mount	2.5 lb. Nozzle Vehicle Brkt	2.5 lb. Hose Wall Mount	2.5 lb. Hose Vehicle Brkt	5 lb. Nozzle Wall Mount	5 lb. Nozzle Vehicle Brkt	5.5 lb. Hose Wall Mount	5.5 lb. Hose Vehicle Brkt	11 lb. Hose Wall Mount	15.5 lb. Hose Wall Mount
Pt. # Alum. Value	70258	70251	70259	70256	70510	70550	75550	75555	71100	71550
Pt. # Brass Value	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	71101	71551
Agent Capacity	2.5 lb. (1.13 kg)	2.5 lb. (1.13 kg)	2.5 lb. (1.13 kg)	2.5 lb. (1.13 kg)	5 lb. (2.27 kg)	5 lb. (2.27 kg)	5.5 lb. (2.49 kg)	5.5 lb. (2.49 kg)	11 lb. (5 kg)	15.5 lb. (7.03 kg)
UL/ULC Rating	2-B:C	2-B:C	2-B:C	2-B:C	5-B:C	5-B:C	5-B:C	5-B:C	1-A:10-B:C	2-A:10-B:C
Temperature Range	-40° to 120°F (-40° to 49°C)									
Discharge Time	9 sec	9 sec	9 sec	9 sec	9 sec	9 sec	9 sec	9 sec	9 sec	13 sec
Discharge Range ft (m)	6-10 (1.8-3)	6-10 (1.8-3)	6-10 (1.8-3)	6-10 (1.8-3)	9-15 (2.7-4.5)	9-15 (2.7-4.5)	9-15 (2.7-4.5)	9-15 (2.7-4.5)	9-15 (2.7-4.5)	12-18 (3.7-5.5)
Operating Pressure	100 psi (689 kPa)	100 psi (689 kPa)	100 psi (689 kPa)	100 psi (689 kPa)	100 psi (689 kPa)	100 psi (689 kPa)	100 psi (689 kPa)	100 psi (689 kPa)	100 psi (689 kPa)	125 psi (862 kPa)
USCG Approval	N/A	N/A	N/A	N/A	N/A	Type B:C Size I	N/A	Type B:C Size I	Type B:C Size I	Type B:C Size II
Ship Weight**	5.25 lb. (2.4 kg)	5.5 lb. (2.49 kg)	5.5 lb. (2.49 kg)	5.75 lb. (2.6 kg)	9.25 lb. (4.2 kg)	9.5 lb. (4.3 kg)	10.0 lb. (4.5 kg)	10.25 lb. (4.7 kg)	21.25 lb. (9.6 kg)	25.75 lb. (11.75 kg)
Unit Height	13.375 in (34 cm)	13.375 in (34 cm)	13.375 in (34 cm)	13.375 in (34 cm)	16.375 in (41.6 cm)	16.375 in (41.6 cm)	16.375 in (41.6 cm)	16.375 in (41.6 cm)	17.5 in (44.5 cm)	17.5 in (44.5 cm)
Unit Width	5.625 in (14.3 cm)	5.625 in (14.3 cm)	6.75 in (17.1 cm)	6.75 in (17.1 cm)	6.5 in (16.5 cm)	7.25 in (18.5 cm)	6.5 in (16.5 cm)	7.25 in (18.5 cm)	8.625 in (21.9 cm)	8.625 in (21.9 cm)
Unit Diameter	3.375 in (8.6 cm)	3.375 in (8.6 cm)	3.375 in (8.6 cm)	4.25 in (10.8 cm)	4.25 in (10.8 cm)	4.25 in (10.8 cm)	4.25 in (10.8 cm)	4.25 in (10.8 cm)	7 in (17.8 cm)	7 in (17.8 cm)

* Denotes units with brass valves **Ship Weight is an approximate weight used for calculating shipping costs. Actual unit weight is printed on the product label.



Water And Water Mist

Our Water and Water Mist units provide effective and economical protection for common combustible fires.

Both the Water and Water Mist extinguishers have Schrader Valves incorporated into the Valve Assemblies for easy recharge.

The Water Mist extinguisher is non-magnetic and third party tested to be safe to use in proximity to MRI equipment rated to three tesla. It uses deionized water and incorporates a unique spray nozzle that makes it safe to use on energized electrical equipment (rated for both Class A and Class C fires). The Water Mist is considered to be the #1 choice for use in hospitals and libraries.

The Water extinguisher uses ordinary water as its extinguishing agent and can be pressurized with regular air making recharging the extinguisher simple and economical. It is shipped empty for filling and pressurizing on site.

Typical Uses: For common combustible fires in offices, classrooms, churches, parking garages, and hotel/motel assembly halls and guest areas. For common combustible fires in businesses such as retail stores, light manufacturing facilities, research facilities, auto dealerships, vehicle/ aircraft/marine service centers, and manufacturing processes such as painting, dipping, and coating.

Model	500	WM250
Description	Stored Pressure Water	Stored Pressure Water Spray
Part #	50000	51000
Cylinder/Valve Material	Stainless Steel/Plated Brass	Stainless Steel/Plated Brass
Agent Capacity	2.5 gallons (9.6 liters)	2.5 gallons (9.6 liters)
UL/ULC Rating	2-A	2-A:C
Temperature Range	40° to 120°F (4.4° to 49°C)	40° to 120°F (4.4° to 49°C)
Discharge Time	50 sec	73 sec
Discharge Range	45 to 55 ft. (13.7 to 16.8m)	5 to 10 ft. (1.5 to 3m)
Operating Pressure	100 psi (689 kPa)	100 psi (689 kPa)
Mounting Type	Wall	Wall
USCG Approval	Type A Size II	N/A
Ship Weight*	Empty: 8.3 lb. (3.7 kg)	Full: 30.25 lb. (13.7 kg)
Unit Height	24.5 in (62.2 cm)	28 in (78.1 cm)
Unit Width (Incl. Hose)	9 in (22.9 cm)	14 in (35.6 cm)
Unit Diameter	7 in (17.8 cm)	7 in (17.8 cm)

* Ship Weight is an approximate weight used for calculating shipping costs. Actual unit weight is printed on the product label.

Third Party Approvals For Peace Of Mind





High Flow

Buckeye’s High Flow product line of fire extinguishers sets the standard for quality and reliability in the high flow extinguisher category. Designed to deliver outstanding performance, Buckeye High Flow extinguishers are specifically suited to meet the demands of industrial applications where NFPA 10 requires the installation of high flow extinguishers; installations where hazards such as pressurized flammable liquids, pressurized gas, or three dimensional fires exist.

Key Features

- Exceeds UL and NFPA requirement for 1 lb. per second discharge rate
- UL and ULC Listed
- Rugged steel cylinders, plated brass valves, and baked-on polyester epoxy top coat
- Meets DOT and TC requirements
- US Coast Guard Approved with listed marine bracket
- Trilingual labels-English, Spanish, and French
- Widest selection of agents and sizes in the industry
- Operating temperature is -65°F to 120°F
- Operating pressure 195 psi



Model	10 HF ABC	10 HF PK	10 HF STD	13 HF ABC	13 HF PK	13 HF STD	20 HF ABC	20 HF PK	20 HF STD	30 HF ABC	30 HF PK	30 HF STD
Pt. #	11350	11650	11850	11150	11250	11450	12350	12650	12850	13350	13650	13850
Agent Capacity	10 Lbs. (4.54 kg)	10 Lbs. (4.54 kg)	10 Lbs. (4.54 kg)	13.2 lbs. (6 kg)	13.2 lbs. (6 kg)	13.2 lbs. (6 kg)	20 lbs. (9.07 kg)	20 lbs. (9.07 kg)	20 lbs. (9.07 kg)	30 lbs. (13.6 kg)	30 lbs. (13.6 kg)	30 lbs. (13.6 kg)
UL/ULC Rating	1-A:20-B:C	20-B:C	10-B:C	1-A:20-B:C	20-B:C	10-B:C	4-A:60-B:C	60-B:C	60-B:C	4-A:80-B:C	80-B:C	60-B:C
Discharge Rate (lb/sec)	1.11	1.03	1.17	1.26	1.11	1.25	1.17	1.57	1.34	1.43	1.56	1.75
Discharge Time (Secs)	10 sec	10	9	11	12	10	18	13	14	22	21	17
Discharge Range ft (m)	30-40 ft (9.14-12.19m)	30-40 ft (9.14-12.19m)	30-40 ft (9.14-12.19m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)
USCG Approval	Type A Size II Type B:C Size II	Type B:C Size II	Type B:C Size II	Type A Size II Type B:C Size II	Type B:C Size II	Type B:C Size II	Type A Size II Type B:C Size III	Type B:C Size III	Type B:C Size III	Type A Size II Type B:C Size IV	Type B:C Size IV	Type B:C Size IV
Ship Weight*	19	19	19	25	25	25	35	35	35	48.5	48.5	48.5
Unit Height (in.)	16.75	16.75	16.75	17.5	17.5	17.5	21.25	21.25	21.25	27.5	27.5	27.5
Unit Width (in.)	8.25	8.25	8.25	8.25	8.25	8.25	8.75	8.75	8.75	8.75	8.75	8.75
Unit Diameter (in.)	6	6	6	7	7	7	7.5	7.5	7.5	7.5	7.5	7.5

*Ship Weight is an approximate weight used for calculating shipping costs. Actual unit weight is printed on the product label.



Heavy Duty High Flow



Buckeye's Heavy Duty High Flow product line of fire extinguishers go where other fire extinguishers fear to tread. Designed for installations in harsh, unforgiving environments, the Buckeye Heavy Duty High Flow extinguishers not only meet the demands where NFPA 10 requires the installation of high flow extinguishers, installations where hazards such as pressurized flammable liquids, pressurized gas, or three dimensional fires exist, but they are also equipped with additional features that make them less susceptible to damage and wear that would take other extinguishers out of service.

Key Features

- Exceeds UL and NFPA requirement for 1 lb. per second discharge rate
- Rugged steel cylinders and nickel-plated brass valves
- Galvanizing compound coating with a baked-on polyester epoxy finish coat provides unmatched corrosion protection - passes 3000 hr salt spray test
- Stainless Steel operating handles and Pull Pin
- Plated brass gauge guard and protective vinyl foot ring
- UL and ULC Listed
- Meets DOT and TC requirements
- US Coast Guard Approved with listed marine bracket
- Trilingual labels-English, Spanish, and French
- Widest selection of agents and sizes in the industry
- Operating temperature is -65°F to 120°F
- Operating pressure 195 psi

Third Party Approvals For Peace Of Mind



Model	10 HDHF ABC	10 HDHF PK	10 HDHF STD	13 HDHF ABC	13 HDHF PK	13 HDHF STD	20 HDHF ABC	20 HDHF PK	20 HDHF STD	30 HDHF ABC	30 HDHF PK	30 HDHF STD
Pt. #	11351	11651	11851	11151	11251	11451	12351	12651	12851	13351	13651	13851
Agent Capacity	10 Lbs. (4.54 kg)	10 Lbs. (4.54 kg)	10 Lbs. (4.54 kg)	13.2 lbs. (6 kg)	13.2 lbs. (6 kg)	13.2 lbs. (6 kg)	20 lbs. (9.07 kg)	20 lbs. (9.07 kg)	20 lbs. (9.07 kg)	30 lbs. (13.6 kg)	30 lbs. (13.6 kg)	30 lbs. (13.6 kg)
UL/ULC Rating	1-A:20-B:C	20-B:C	10-B:C	1-A:20-B:C	20-B:C	10-B:C	4-A:60-B:C	60-B:C	60-B:C	4-A:80-B:C	80-B:C	60-B:C
Discharge Rate (lb/sec)	1.11	1.03	1.17	1.26	1.11	1.25	1.17	1.57	1.34	1.43	1.56	1.75
Discharge Time (Secs)	10	10	9	11	12	10	18	13	14	22	21	17
Discharge Range ft (m)	30-40 ft (9.14-12.19m)	30-40 ft (9.14-12.19m)	30-40 ft (9.14-12.19m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)	40-50 ft (12.19-15.24m)
USCG Approval	Type A Size II Type B:C Size II	Type B:C Size II	Type B:C Size II	Type A Size II Type B:C Size II	Type B:C Size II	Type B:C Size II	Type A Size II Type B:C Size III	Type B:C Size III	Type B:C Size III	Type A Size II Type B:C Size IV	Type B:C Size IV	Type B:C Size IV
Shipping Wt. (lbs.)	19.5	19.5	19.5	26	26	26	35.5	35.5	35.5	49.5	49.5	49.5
Unit Height (in.)	17	17	17	17.75	17.75	17.75	21.5	21.5	21.5	27.5	27.5	27.5
Unit Width (in.)	8.25	8.25	8.25	8.25	8.25	8.25	8.75	8.75	8.75	8.75	8.75	8.75
Unit Diameter (in.)	6.5	6.5	6.5	7.5	7.5	7.5	8	8	8	8	8	8

* Denotes units with brass valves **Ship Weight is an approximate weight used for calculating shipping costs. Actual unit weight is printed on the product label.



Automatic Spot Protection

Horizontal Mini-Guards

Designed for single unit installations, the Buckeye Fire Equipment Mini-Guard automatic spot protection extinguishers provide supplementary fire protection suitable for some local and total flood applications. These units are not intended as a substitute for automatic sprinkler systems, fixed pre-engineered or engineered extinguishing systems and are not intended to be multiple mounted. These units are classified as disposable and are therefore not subject to the 6-year internal examination and 12-year hydrostatic test required by NFPA 10.



The Mini-Guard automatic spot protection extinguishers are designed, constructed, and tested to the same engineering standards as our portable fire extinguishers. Available in horizontal or vertical configurations, the units can be charged with multipurpose (ABC) dry chemical or Halotron agents and are fitted with a detection sprinkler head that is rated at 165° F.

Typical Uses: The dedicated protection of specialized equipment used in business or manufacturing processes or for specific fire risk areas such as flammable liquid storage rooms (dry chemical) and small electronic data storage rooms (Halotron).

Note: Requires a bracket for mounting (sold separately, see page 32).

Model		MULTIPURPOSE (ABC) DRY CHEMICAL				HALOTRON	
Agent Type	ABC Dry Chemical	ABC Dry Chemical	ABC Dry Chemical	ABC Dry Chemical	ABC Dry Chemical	Halotron I	Halotron I
Part #	80251	80521	81021	82021		87105	87205
Agent Capacity	2.5 lb. (1.13 kg)	5 lb. (2.3 kg)	10 lb. (4.5 kg)	20 lb. (9.1 kg)		18 lb. (8.2 kg)	25 lb. (11.3 kg)
Ship Weight*	4 lb. (1.8 kg)	11 lb. (5 kg)	19 lb. (8.6 kg)	36 lb. (16.3 kg)		29 lb. (13.2 kg)	42 lb. (19 kg)
Operating Pressure	100 psi (689 kPa)	100 psi (689 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)		100 psi (689 kPa)	100 psi (689 kPa)
Unit Length	14.25 in (36.2 cm)	17.25 in (43.8 cm)	20.875 in (53 cm)	21.875 in (55.6 cm)		17.875 in (45.4 cm)	21.875 in (55.6 cm)
Unit Diameter	3.375 in (8.6 cm)	4.25 in (10.8 cm)	5.125 in (13 cm)	7.5 in (19.1 cm)		7 in (17.8 cm)	7.5 in (19.1 cm)
Max Total Flood Volume	120 cu. ft.	180 cu. ft.	1300 cu. ft.	2184 cu. ft.		500 cu. ft.	700 cu. ft.
Max Total Flood Height Above Hazard	7.5 ft.	7.5 ft.	13 ft.	14 ft.		8 ft.	10 ft.
Local Application Coverage Areas	4 ft. x 4 ft.	4 ft. x 6 ft.	10 ft. x 10 ft.	12 ft. x 13 ft.		4 ft. x 4 ft.	6 ft. x 6 ft.
Mounting Bracket	700287	700270	700226	700229		700228	700229

Maximum Local Application - Height Above Hazard = 4 Feet for all Models

*Ship Weight is an approximate weight used for calculating shipping costs. Actual unit weight is printed on the product label.



Automatic Spot Protection

Vertical Mini-Guards

Designed for single unit installations, the Buckeye Fire Equipment Mini-Guard automatic spot protection extinguishers provide supplementary fire protection suitable for some local and total flood applications. These units are not intended as a substitute for automatic sprinkler systems, fixed pre-engineered or engineered extinguishing systems and are not intended to be multiple mounted. These units are classified as disposable and are therefore not subject to the 6-year internal examination and 12-year hydrostatic test required by NFPA 10.

The Mini-Guard automatic spot protection extinguishers are designed, constructed, and tested to the same engineering standards as our portable fire extinguishers. Available in horizontal or vertical configurations, the units can be charged with multipurpose (ABC) dry chemical or Halotron agents and are fitted with a detection sprinkler head that is rated at 165° F.

Typical Uses: The dedicated protection of specialized equipment used in business or manufacturing processes or for specific fire risk areas such as flammable liquid storage rooms (dry chemical) and small electronic data storage rooms (Halotron).

Note: The vertical Mini-Guard comes with a welded-on mounting plate and predrilled attachment holes.



Model	MULTIPURPOSE (ABC) DRY CHEMICAL				HALOTRON	
Agent Type	ABC Dry Chemical	ABC Dry Chemical	ABC Dry Chemical	ABC Dry Chemical	Halotron I	Halotron I
Part #	80250	80501	81001	82001	87100	87200
Agent Capacity	2.5 lb. (1.13 kg)	5 lb. (2.3 kg)	10 lb. (4.5 kg)	20 lb. (9.1 kg)	18 lb. (8.2 kg)	25 lb. (11.3 kg)
Ship Weight*	4 lb. (1.8 kg)	11 lb. (5 kg)	19 lb. (8.6 kg)	36 lb. (16.3 kg)	29 lb. (13.2 kg)	42 lb. (19 kg)
Operating Pressure	100 psi (689 kPa)	100 psi (689 kPa)	195 psi (1344 kPa)	195 psi (1344 kPa)	100 psi (689 kPa)	100 psi (689 kPa)
Unit Length	15.25 in (38.7 cm)	17.25 in (43.8 cm)	17.625 in (44.8 cm)	21.875 in (55.6 cm)	17.875 in (45.4 cm)	21.875 in (55.6 cm)
Unit Diameter	3.375 in (8.6 cm)	4.25 in (10.8 cm)	6 in (15.2 cm)	7.5 in (19.1 cm)	7 in (17.8 cm)	7.5 in (19.1 cm)
Max Total Flood Volume	120 cu. ft.	180 cu. ft.	1300 cu. ft.	2184 cu. ft.	500 cu. ft.	700 cu. ft.
Max Total Flood Height Above Hazard	7.5 ft.	7.5 ft.	13 ft.	14 ft.	8 ft.	10 ft.
Local Application Coverage Areas	4 ft. x 4 ft.	4 ft. x 6 ft.	10 ft. x 10 ft.	12 ft. x 13 ft.	4 ft. x 4 ft.	6 ft. x 6 ft.

Maximum Local Application - Height Above Hazard = 4 Feet for all Models

* Ship Weight is an approximate weight used for calculating shipping costs. Actual unit weight is printed on the product label.



Wet Chemical - Class K

Our Wet Chemical extinguishers contain a blend of Potassium Acetate and Potassium Citrate that is extremely effective in suppressing high temperature fires involving cooking oils and grease.

The units incorporate a spray nozzle that ensures the agent is applied gently to the burning oil thus preventing splashing. It's unique cooling properties deliver exceptional heat absorption ensuring the fire remains out.

Wet Chemical is suitable for use on Class A and K fires.

Typical Uses: For protecting cooking oil and grease fires in commercial kitchens. This extinguisher is designed to complement existing pre-engineered hood systems.



Model	WC-6L	WC-2.5
Description	6 Liter Wet Chemical	2.5 Gallon Wet Chemical
Part #	50006	50025
Cylinder/Valve Material	Stainless Steel/Plated Brass	Stainless Steel/Plated Brass
UL/ULC Rating	1-A:K	1-A:K
Temperature Range	40° to 120° (4.4° to 49°C)	40° to 120° (4.4° to 49°C)
Discharge Time	54 secs.	74 secs.
Mounting Type	Wall	Wall
Operating Pressure	100 psi (690 kPa)	100 psi (690 kPa)
Ship Weight*	22.75 lb. (10.3 kg)	30 lb. (13.6 kg)
Unit Height	19.25 in (48.9 cm)	24.5 in (62.2 cm)
Unit Width (incl. hose)	9 in (22.9 cm)	9 in (22.9 cm)
Cylinder Diameter	7 in (17.8 cm)	7 in (17.8 cm)

* Ship Weight is an approximate weight used for calculating shipping costs. Actual unit weight is printed on the product label.



Used in conjunction with Kitchen Mister Fire Suppression System. Page 25 – 27.

Third Party Approvals For Peace Of Mind





Model	FFE-6L	FFE-2.5
Part #	56000	52500
Agent Capacity	6 Liters (1.6 gallons)	2.5 gallon (9.6 liters)
UL Rating	2-A:10-B	3-A:20-B
Discharge Time	37 seconds	70 seconds
Discharge Range	10 – 15 ft. (3.05 – 4.57 m)	10 – 15 ft. (3.05 – 4.57 m)
Operating Temperature Range	35° F (1.7° C) to 120° F (49° C)	35° F (1.7° C) to 120° F (49° C)
Operating Pressure	100 psi (689 kPa)	100 psi (689 kPa)
Included Mounting Hardware	Wall Mounting	Wall Mounting
Ship Wt. (ships uncharged) *	9 lbs. (4.08 kg)	11 lbs. (4.99 kg)
Height	19.25 in. (48.9 cm)	25 in. (63 cm)
Width (including hose)	9 in (22.9 cm)	9 in (22.9 cm)
Cylinder Diameter	7 inches (17.8 cm)	7 inches (17.8 cm)
Construction.	Stainless steel cylinder with plated brass valve Stainless steel cylinder with plated brass valve	

*Ship Weight is an approximate weight used for calculating shipping costs. Actual unit weight is printed on the product label.

Foam Agent

The newest addition to the Buckeye Fire Equipment product line of portable fire extinguishers, the Foam Fire Extinguisher. Using a 3% AFFF foam agent, this extinguisher is UL rated for Class A and Class B fire hazards. The unique air-aspirating nozzle creates a foam spray that provides the cooling and soaking characteristics of the agent and limits the scattering of burning material. Primarily designed for combating Class B fires fueled by hydrocarbon flammable liquids such as gasoline, kerosene, and diesel, the agent creates a foam seal on the surface of the burning fuel, smothering the fire and preventing re-ignition. With its excellent wetting properties, the extinguisher is also very effective on common combustible (Class A) fires. An ideal choice for facilities storing flammable liquids and for emergency response vehicles.

Manufactured and UL/ULC Listed to ANSI/UL 8 and ANSI/UL 711 and CAN/ULC-S554 and CAN/ULC-S508 Standards.

The Discharge Valve Assembly has a Schrader Valve incorporated into it for easy recharging in the field.

The unit ships empty and unpressurized with a separate container of the AFFF foam concentrate included for on-site charging of the extinguisher.


Third Party Approvals For Peace Of Mind





The Buckeye Industrial Dry Chemical Fire Suppression System

Buckeye Fire Equipment Co. is proud to announce the latest addition to its World Class product line of fire suppression equipment, the Buckeye Industrial Dry Chemical Fire Suppression System.

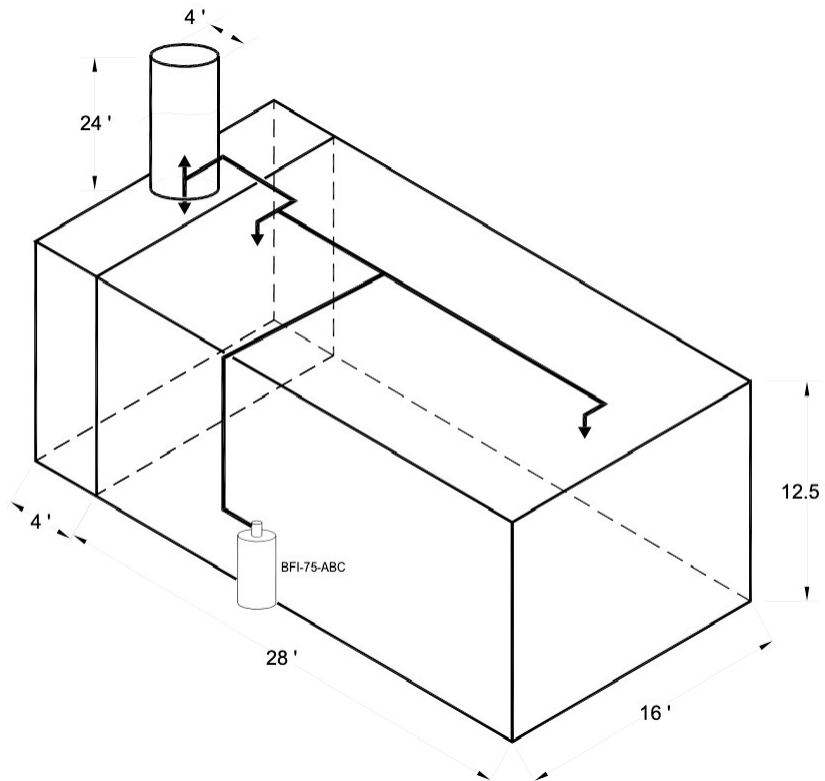

KEY FEATURES

- UL Listed to UL/ULCEX-15403 for:
Local Application • Total Flooding • Open Face Paint Spray Booths • Vehicle Paint Spray Booths
- Agent cylinders are available in seven sizes for custom fit to every application.
- The PAC-200 Pneumatic Actuation Cylinder can accommodate up to a 20-agent cylinder system configuration.
- Fully electric or mechanical actuation/detection, including pneumatic time delay.
- In-Line duct and plenum nozzle piping with flexible nozzle placement zones for easy installation and reduced installation costs.
- Buckeye Shielded Cable is approved for use with all system inputs and outputs outside the hazard area.
- Full paint booth coverage (28' x 16' x 12.5') with a single cylinder (BFI-75-ABC). See above diagram.
- Full truck paint booth coverage (28' x 16' x 20') with a single cylinder (BFI-100-ABC)
- Uses Buckeye ABC dry chemical as the extinguishing agent. Available in 50 lb. containers for system recharge.

Agent cylinders available in the following sizes:

BFI-17-ABC, BFI-25-ABC, BFI-35-ABC, BFI-50-ABC, BFI-50HF-ABC, BFI-75-ABC, BFI-100-ABC



Wheeled Dry Chemical

With our comprehensive line, Buckeye Wheeled Dry Chemical fire extinguishers have your large-scale fire protection needs covered. Available in three size capacities with three choices of extinguishing agent and three different operational design configurations, the best match for your hazard protection needs can be accurately selected, maximizing the fire safety of your operation.

Designed for one man operation these units are easily transportable through doorways and over rough terrain. Tow Loops can be added to your selection if you need easy vehicle transport capability.

All models are rechargeable and meet relevant UL, ULC, TC & DOT requirements. Selected models have US Coast Guard Approval.

Stationary models are also available.

Typical Uses: Offshore rigs, ship docks, refineries, chemical plants, aircraft ramps, remote construction sites, large laboratories, processing plants, storage and loading areas. Not for use on sensitive electronic equipment.

Dry chemical wheeled units are available for Class A, Class B and Class C fires.

Third Party Approvals For Peace Of Mind





Wheeled Dry Chemical - Product Specification

SP = Stored Pressure RG = Regulated Pressure PT = Pressure Transfer

MODEL	TYPE	PART NUMBER	AGENT CAPACITY	UL/ULC RATING	DISCHARGE TIME	DISCHARGE RANGE	UNIT WEIGHT*
A-50-SP	ABC Dry Chemical	30010	50 lb. (22.7 kg)	10-A:160-B:C	36 sec	25-35 ft. (7.6-10.7 m)	154 lb. (70 kg)
A-150-SP	ABC Dry Chemical	30110	125 lb. (56.7 kg)	30-A:240-B:C	47 sec	30-40 ft. (9.1-12.2 m)	300 lb. (136 kg)
A-150-RG	ABC Dry Chemical	31120	125 lb. (56.7 kg)	30-A:240-B:C	44 sec	30-40 ft. (9.1-12.2 m)	387 lb. (176 kg)
A-150-RG	ABC Dry Chemical	31140	125 lb. (56.7 kg)	30-A:240-B:C	44 sec	30-40 ft. (9.1-12.2 m)	422 lb. (191 kg)
A-150-RG	ABC Dry Chemical	31150	125 lb. (56.7 kg)	30-A:240-B:C	44 sec	30-40 ft. (9.1-12.2 m)	434 lb. (197 kg)
A-150-PT	ABC Dry Chemical	31110	125 lb. (56.7 kg)	30-A:240-B:C	43 sec	30-40 ft. (9.1-12.2 m)	325 lb. (147 kg)
A-350-RG	ABC Dry Chemical	32120	300 lb. (136 kg)	30-A:320-B:C	52 sec	30-40 ft. (9.1-12.2 m)	780 lb. (354 kg)
A-350-RG	ABC Dry Chemical	32140	300 lb. (136 kg)	30-A:320-B:C	52 sec	30-40 ft. (9.1-12.2 m)	806 lb. (366 kg)
A-350-PT	ABC Dry Chemical	32110	300 lb. (136 kg)	30-A:320-B:C	53 sec	30-40 ft. (9.1-12.2 m)	657 lb. (298 kg)
A-350-PT	ABC Dry Chemical	32130	300 lb. (136 kg)	30-A:320-B:C	53 sec	30-40 ft. (9.1-12.2 m)	683 lb. (310 kg)
S-150-RG	Standard Dry Chemical	31220	150 lb. (68 kg)	240-B:C	48 sec	30-40 ft. (9.1-12.2 m)	412 lb. (187 kg)
S-150-RG	Standard Dry Chemical	31240	150 lb. (68 kg)	240-B:C	48 sec	30-40 ft. (9.1-12.2 m)	447 lb. (203 kg)
S-150-RG	Standard Dry Chemical	31250	150 lb. (68 kg)	240-B:C	48 sec	30-40 ft. (9.1-12.2 m)	459 lb. (208 kg)
S-150-PT	Standard Dry Chemical	31210	150 lb. (68 kg)	240-B:C	43 sec	30-40 ft. (9.1-12.2 m)	350 lb. (159 kg)
S-350-RG	Standard Dry Chemical	32220	350 lb. (159 kg)	320-B:C	59 sec	30-40 ft. (9.1-12.2 m)	830 lb. (376 kg)
S-350-RG	Standard Dry Chemical	32240	350 lb. (159 kg)	320-B:C	59 sec	30-40 ft. (9.1-12.2 m)	856 lb. (388 kg)
S-350-PT	Standard Dry Chemical	32210	350 lb. (159 kg)	320-B:C	50 sec	30-40 ft. (9.1-12.2 m)	707 lb. (321 kg)
S-350-PT	Standard Dry Chemical	32230	350 lb. (159 kg)	320-B:C	50 sec	30-40 ft. (9.1-12.2 m)	733 lb. (333 kg)
K-50-SP	Purple K Dry Chemical	30030	50 lb. (22.7 kg)	160-B:C	36 sec	25-35 ft. (7.6-10.7 m)	154 lb. (70 kg)
K-150-SP	Purple K Dry Chemical	30310	125 lb. (56.7 kg)	320-B:C	54 sec	30-40 ft. (9.1-12.2 m)	300 lb. (136 kg)
K-150-RG	Purple K Dry Chemical	31320	125 lb. (56.7 kg)	320-B:C	55 sec	30-40 ft. (9.1-12.2 m)	387 lb. (176 kg)
K-150-RG	Purple K Dry Chemical	31340	125 lb. (56.7 kg)	320-B:C	55 sec	30-40 ft. (9.1-12.2 m)	422 lb. (191 kg)
K-150-RG	Purple K Dry Chemical	31350	125 lb. (56.7 kg)	320-B:C	55 sec	30-40 ft. (9.1-12.2 m)	434 lb. (197 kg)
K-150-PT	Purple K Dry Chemical	31310	125 lb. (56.7 kg)	320-B:C	54 sec	30-40 ft. (9.1-12.2 m)	325 lb. (147 kg)
K-350-RG	Purple K Dry Chemical	32320	300 lb. (136 kg)	320-B:C	57 sec	30-40 ft. (9.1-12.2 m)	780 lb. (354 kg)
K-350-RG	Purple K Dry Chemical	32340	300 lb. (136 kg)	320-B:C	57 sec	30-40 ft. (9.1-12.2 m)	806 lb. (366 kg)
K-350-PT	Purple K Dry Chemical	32310	300 lb. (136 kg)	320-B:C	62 sec	30-40 ft. (9.1-12.2 m)	657 lb. (298 kg)
K-350-PT	Purple K Dry Chemical	32330	300 lb. (136 kg)	320-B:C	62 sec	30-40 ft. (9.1-12.2 m)	683 lb. (310 kg)

US Coast Guard Approved Models - Part numbers 30010, 30110, 30030, 30310 & 31210

Tow Loops can be added to all models for vehicle transportability.

* For information purposes. Unit weight ranges are printed on the product label.



Wheeled Dry Chemical - Product Specification

UNIT HEIGHT	UNIT WIDTH	UNIT DEPTH	HOSE LENGTH & DIAMETER	WHEEL TYPE	WHEEL DIAMETER
47 inches (119 cm)	24 inches (61 cm)	26.5 inches (67 cm)	25 ft. x .50 in. (7.6 m x 1.3 cm)	Rubber	12.3 in. x 3.5 in. (31.3 cm x 8.9 cm)
51 inches (128 cm)	26 inches (66 cm)	38 inches (96.5 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Rubber	16 in. x 4 in. (40.6 cm x 10.2 cm)
50 inches (127 cm)	24 inches (61 cm)	42 inches (105 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Rubber	16 in. x 4 in. (40.6 cm x 10.2 cm)
55 inches (139 cm)	32 inches (81.3 cm)	46 inches (117 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Steel	36 in. x 2.5 in. (91.4 cm x 6.4 cm)
55 inches (139 cm)	32 inches (81.3 cm)	46 inches (117 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Steel with rubber tread	36 in. x 2.5 in. (91.4 cm x 6.4 cm)
50 inches (127 cm)	24 inches (61 cm)	42 inches (105 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Rubber	16 in. x 4 in. (40.6 cm x 10.2 cm)
58 inches (147 cm)	36 inches (91.4 cm)	48 inches (122 cm)	50 ft. x 1 in. (15.2 m x 2.5 cm)	Steel	36 in. x 6 in. (91.4 cm x 15.2 cm)
58 inches (147 cm)	36 inches (91.4 cm)	48 inches (122 cm)	50 ft. x 1 in. (15.2 m x 2.5 cm)	Steel with rubber tread	36 in. x 6 in. (91.4 cm x 15.2 cm)
58 inches (147 cm)	36 inches (91.4 cm)	48 inches (122 cm)	50 ft. x 1 in. (15.2 m x 2.5 cm)	Steel	36 in. x 6 in. (91.4 cm x 15.2 cm)
58 inches (147 cm)	36 inches (91.4 cm)	48 inches (122 cm)	50 ft. x 1 in. (15.2 m x 2.5 cm)	Steel with rubber tread	36 in. x 6 in. (91.4 cm x 15.2 cm)
50 inches (127 cm)	24 inches (61 cm)	42 inches (105 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Rubber	16 in. x 4 in. (40.6 cm x 10.2 cm)
55 inches (139 cm)	32 inches (81.3 cm)	46 inches (117 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Steel	36 in. x 2.5 in. (91.4 cm x 6.4 cm)
55 inches (139 cm)	32 inches (81.3 cm)	46 inches (117 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Steel with rubber tread	36 in. x 2.5 in. (91.4 cm x 6.4 cm)
50 inches (127 cm)	24 inches (61 cm)	42 inches (105 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Rubber	16 in. x 4 in. (40.6 cm x 10.2 cm)
58 inches (147 cm)	36 inches (91.4 cm)	48 inches (122 cm)	50 ft. x 1 in. (15.2 m x 2.5 cm)	Steel	36 in. x 6 in. (91.4 cm x 15.2 cm)
58 inches (147 cm)	36 inches (91.4 cm)	48 inches (122 cm)	50 ft. x 1 in. (15.2 m x 2.5 cm)	Steel with rubber tread	36 in. x 6 in. (91.4 cm x 15.2 cm)
58 inches (147 cm)	36 inches (91.4 cm)	48 inches (122 cm)	50 ft. x 1 in. (15.2 m x 2.5 cm)	Steel	36 in. x 6 in. (91.4 cm x 15.2 cm)
58 inches (147 cm)	36 inches (91.4 cm)	48 inches (122 cm)	50 ft. x 1 in. (15.2 m x 2.5 cm)	Steel with rubber tread	36 in. x 6 in. (91.4 cm x 15.2 cm)
47 inches (119 cm)	24 inches (61 cm)	26.5 inches (67 cm)	25 ft. x .50 in. (7.6 m x 1.3 cm)	Rubber	12.3 in. x 3.5 in. (31.3 cm x 8.9 cm)
51 inches (128 cm)	26 inches (66 cm)	38 inches (96.5 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Rubber	16 in. x 4 in. (40.6 cm x 10.2 cm)
50 inches (127 cm)	24 inches (61 cm)	42 inches (105 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Rubber	16 in. x 4 in. (40.6 cm x 10.2 cm)
55 inches (139 cm)	32 inches (81.3 cm)	46 inches (117 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Steel	36 in. x 2.5 in. (91.4 cm x 6.4 cm)
55 inches (139 cm)	32 inches (81.3 cm)	46 inches (117 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Steel with rubber tread	36 in. x 2.5 in. (91.4 cm x 6.4 cm)
50 inches (127 cm)	24 inches (61 cm)	42 inches (105 cm)	50 ft. x .75 in. (15.2 m x 1.9 cm)	Rubber	16 in. x 4 in. (40.6 cm x 10.2 cm)
58 inches (147 cm)	36 inches (91.4 cm)	48 inches (122 cm)	50 ft. x 1 in. (15.2 m x 2.5 cm)	Steel	36 in. x 6 in. (91.4 cm x 15.2 cm)
58 inches (147 cm)	36 inches (91.4 cm)	48 inches (122 cm)	50 ft. x 1 in. (15.2 m x 2.5 cm)	Steel with rubber tread	36 in. x 6 in. (91.4 cm x 15.2 cm)
58 inches (147 cm)	36 inches (91.4 cm)	48 inches (122 cm)	50 ft. x 1 in. (15.2 m x 2.5 cm)	Steel	36 in. x 6 in. (91.4 cm x 15.2 cm)
58 inches (147 cm)	36 inches (91.4 cm)	48 inches (122 cm)	50 ft. x 1 in. (15.2 m x 2.5 cm)	Steel with rubber tread	36 in. x 6 in. (91.4 cm x 15.2 cm)

Operating Temperature Range for all wheeled dry chemical extinguishers is -65° to 120°F (-54° to 49°C).

Operating Pressure for all wheeled dry chemical extinguishers is 240 psi (1655 kPa)

Dealing with harsh or corrosive environments? See Pages 23 & 24 for our Offshore models.



Wheeled Halotron

Our Wheeled Halotron units are designed to deliver exceptional performance whatever the environment. DOT/TC approved cylinders, rugged frames and semi-pneumatic tires are key features of these UL/ULC approved extinguishers. Tow Loops can be added upon request.

Halotron is a residue-free, non-conductive agent that is suitable for use on Class A, Class B and Class C fires.

Typical Uses: For protecting sensitive electronic equipment in research facilities, vehicle/aircraft/marine service centers, and flight lines.



Third Party Approvals For Peace Of Mind



Model	W-65	W-150
Description	65 lb. Stored Pressure	150 lb. Stored Pressure
Part #	76500	71500
Agent Capacity	65 lb. (29.5 kg)	150 lb. (68 kg)
UL/ULC Rating	4A:60B:C	10A:120B:C
Discharge Time	20 sec	30 sec
Operating Temperature Range	-40° to 120°F (-40° to 49°C)	-40° to 120°F (-40° to 49°C)
Operating Pressure	150 psi (1035 kPa)	150 psi (1035 kPa)
Range	15-25 ft. (4.6-7.6 m)	23-36 ft. (7-10.7 m)
Unit Weight*	252 lb. (114 kg)	396 lb. (180 kg)
Unit Height x Width x Depth	50" x 24" x 41.5" (127 x 61 x 105 cm)	62" x 24" x 41.5" (157.5 x 61 x 105 cm)
Hose Diameter & Length	.75 in x 25 ft. (1.9 cm x 7.6 m)	.75" x 50 ft. (1.9 cm x 15.2 m)

* For information purposes. Unit weight ranges are printed on the product label.





Wheeled Carbon Dioxide

Our Wheeled Carbon Dioxide extinguishers are designed for one-man operation and are constructed with spun steel cylinders and plated brass valve assemblies. DOT/TC approved cylinders, rugged frames and solid rubber tires are key features of these UL/ULC approved units.

Carbon Dioxide is a residue-free agent and is suitable for use on Class B and Class C fires.


Typical Uses: For protecting sensitive electronic equipment in refineries, shipboard, laboratories, construction sites, chemical plants and manufacturing facilities.

Third Party Approvals For Peace Of Mind



Model	C-50-SE	C-100-SE
Description	50 lb. CO2	100 lb. CO2
Part #	35050	35100
Agent Capacity	50 lb. (22.68 kg)	100 lb. (45.36 kg)
UL Rating	20-B:C	20-B:C
USCG Approval	Type B:C Size IV	Type B:C Size V
Operating Temperature Range	-22° to 120°F (-30° to 49°C)	-22° to 120°F (-30° to 49°C)
Discharge Time	40 sec	80 sec
Range	15 ft. (4.6 m)	15 ft. (4.6 m)
Unit Weight	286 lb. (130 kg)	416 lb. (189 kg)
Unit Height x Width x Depth	60" x 31" x 21" (152.4 x 76.2 x 53.3 cm)	65" x 30" x 21" (165.1 x 76.2 x 53.3 cm)
Hose Diameter & Length	.50 in x 15 ft. (1.27 cm x 4.6 m)	.50 in x 40 ft. (1.27 cm x 12.2 m)

* For information purposes. Unit weight ranges are printed on the product label.

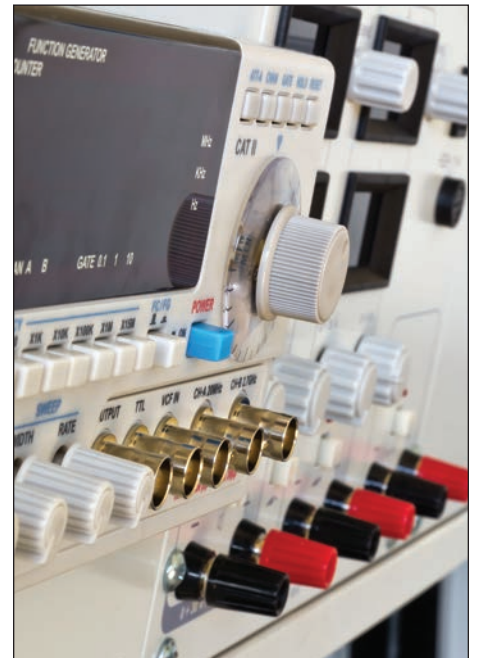



Made for the harshest of environments, the Offshore product line of extinguishers comes with features specifically designed to keep them on watch and in shipshape operating condition.

Offshore extinguishers... the perfect storm of performance, durability, and value.

Key Features:

- Rugged steel cylinders/frames, stainless steel operating levers, and plated brass valves.
- The agent cylinders and the wheeled model frames have a galvanizing compound undercoat, baked-on enamel top coat, and protective clear coat finish to prevent corrosion and fading from exposure to sun & sea – passes 3000 hour salt spray test.
- All nameplate labels have UV resistant lamination to prevent sun damage.
- Plated brass guard around the pressure gauge and a vinyl ring on the cylinder bottom of the hand portable extinguishers prevent the kind of damage that would deep-six any other fire extinguisher.
- Meets DOT and Transport Canada requirements.
- UL and ULC Listed with the same high fire ratings of Buckeye's standard models.
- All hand portable extinguishers are USCG Approved with noted marine bracket.
- Trilingual nameplate labels – English, Spanish, and French

The Offshore Line

Announcing the latest addition to a stellar line of fire extinguishers.





Offshore Wheeled Fire Extinguisher Specifications

Model	Part No.	Agent Type	Agent Capacity	UL/ULC Rating	Discharge Time	Discharge Range	Unit Wt. (lbs.)*	Hose Length	Wheel Type Dia./Width	Wheel Dims.
OS A-50-SP	30360	ABC	50 lbs.	10A:160B:C	36 sec.	25-35 ft.	154	25 ft.	Rubber	12.3 x 3.5 ins.
OS A-150-SP	31360	ABC	125 lbs.	30A:240B:C	47 sec.	30-40 ft.	300	50 ft.	Rubber	16 x 4 ins.
OS A-150-PT	31490	ABC	125 lbs.	30A:240B:C	43 sec.	30-40 ft.	325	50 ft.	Rubber	16 x 4 ins.
OS A-150-RG	31460	ABC	125 lbs.	30A:240B:C	44 sec.	30-40 ft.	387	50 ft.	Rubber	16 x 4 ins.
OS A-150-RG	31470	ABC	125 lbs.	30A:240B:C	44 sec.	30-40 ft.	422	50 ft.	Steel	36 x 2.5 ins.
OS A-150-RG	31480	ABC	125 lbs.	30A:240B:C	44 sec.	30-40 ft.	434	50 ft.	Steel Wheel Rubber Tread	36 x 2.5 ins.
OS A-350-PT	32180	ABC	300 lbs.	30A:320B:C	53 sec.	30-40 ft.	657	50 ft.	Steel	36 x 6 ins.
OS A-350-PT	32190	ABC	300 lbs.	30A:320B:C	53 sec.	30-40 ft.	683	50 ft.	Steel Wheel Rubber Tread	36 x 6 ins.
OS A-350-RG	32160	ABC	300 lbs.	30A:320B:C	52 sec.	30-40 ft.	780	50 ft.	Steel	36 x 6 ins.
OS A-350-RG	32170	ABC	300 lbs.	30A:320B:C	52 sec.	30-40 ft.	806	50 ft.	Steel Wheel Rubber Tread	36 x 6 ins.
OS K-50-SP	30760	PK	50 lbs.	160B:C	36 sec.	25-35 ft.	154	25 ft.	Rubber	12.3 x 3.5 ins.
OS K-150-SP	31760	PK	125 lbs.	320B:C	54 sec.	30-40 ft.	300	50 ft.	Rubber	16 x 4 ins.
OS K-150-PT	31590	PK	125 lbs.	320B:C	54 sec.	30-40 ft.	325	50 ft.	Rubber	16 x 4 ins.
OS K-150-RG	31560	PK	125 lbs.	320B:C	55 sec.	30-40 ft.	387	50 ft.	Rubber	16 x 4 ins.
OS K-150-RG	31570	PK	125 lbs.	320B:C	55 sec.	30-40 ft.	422	50 ft.	Steel	36 x 2.5 ins.
OS K-150-RG	31580	PK	125 lbs.	320B:C	55 sec.	30-40 ft.	434	50 ft.	Steel Wheel Rubber Tread	36 x 2.5 ins.
OS K-350-PT	32380	PK	300 lbs.	320B:C	62 sec.	30-40 ft.	657	50 ft.	Steel	36 x 6 ins.
OS K-350-PT	32390	PK	300 lbs.	320B:C	62 sec.	30-40 ft.	683	50 ft.	Steel Wheel Rubber Tread	36 x 6 ins.
OS K-350-RG	32360	PK	300 lbs.	320B:C	57 sec.	30-40 ft.	780	50 ft.	Steel	36 x 6 ins.
OS K-350-RG	32370	PK	300 lbs.	320B:C	57 sec.	30-40 ft.	806	50 ft.	Steel Wheel Rubber Tread	36 x 6 ins.
OS W-65	76501	Halotron	65 lbs.	4A:60B:C	20 sec.	15-25 ft.	252	25 ft.	Rubber	16 x 4 ins.
OS W-150	71501	Halotron	150 lbs.	10A:120B:C	30 sec.	23-36 ft.	396	50 ft.	Rubber	16 x 4 ins.

USCG APPROVED MODELS – 30360, 31360, 30760, and 31760

SP = Stored Pressure

PT = Pressure Transfer

RG = Regulated Pressure

Operating Temperature

Dry Chemical Models: -65°F to 120°F

Halotron Models: -40°F to 120°F

Operating Pressure

Hand Portable: 195 psi

Dry Chemical Wheeled: 240 psi

Halotron Wheeled: 150 psi

Offshore Hand Portable Fire Extinguisher Specifications

Model	Part No.	Agent Type	Agent Capacity	UL/ULC Rating	Discharge Time	Discharge Range	Shipping Wt. (lbs.)*
OS 5 ABC	10960	ABC	5 lbs.	3A:40B:C	14 sec.	12-18 ft.	10 lbs.
OS 10 ABC	11360	ABC	10 lbs.	4A:80B:C	22 sec.	15-21 ft.	18.25 lbs.
OS 20 ABC	12360	ABC	20 lbs.	10A:120B:C	27 sec.	15-21 ft.	33.5 lbs.
OS 30 ABC	13360	ABC	30 lbs.	10A:160B:C	32 sec.	25-30 ft.	52.25 lbs.
OS 5 PK	11260	PK	5 lbs.	20B:C	9 sec.	12-18 ft.	10 lbs.
OS 10 PK	11760	PK	10 lbs.	80B:C	22 sec.	15-21 ft.	18.25 lbs.
OS 20 PK	12760	PK	20 lbs.	120B:C	27 sec.	15-21 ft.	33.5 lbs.
OS 30 PK	13760	PK	30 lbs.	160B:C	32 sec.	25-30 ft.	52.25 lbs.

All models are USCG Approved for marine vessel use when used in conjunction with the bracket specified on the label. See page 32 for brackets.

* For information purposes. Unit weight ranges are printed on the product label.



Kitchen Mister - Restaurant Fire Suppression System

Tested & Listed To UL-300

Open flames, red-hot cooking surfaces, and a heavily grease-laden environment combine to make the modern commercial kitchen a potentially dangerous fire hazard. Kitchen fires spread quickly and have proven to be very difficult to extinguish, making them the leading cause of structural fire damage in the United States.

Protecting the modern commercial kitchen from the ever-present danger of cooking oil and grease fires is the reason we developed The Buckeye Kitchen Mister™ System. Utilizing state of the art misting technology, the Kitchen Mister System has proven to be the most effective fixed kitchen fire extinguishing system ever developed, extinguishing potentially deadly kitchen fires fast, before they can spread

That's why the Kitchen Mister System is quickly becoming the preferred choice of fire protection professionals throughout the world.

So before fire strikes...**Don't Take Chances -Demand The Best!**

See our companion product (Wet Chemical Class K Portable) used in conjunction with our *Kitchen Mister* System. Page 15.



System Cylinders

The models BFR-5, BFR-10, BFR-15 and BFR-20 cylinders are designated by flow point capacity (so the BFR-5 supports five (5) flow points) instead of the amount of agent they hold. Recharge is available in 5 and 10 flow point containers so there's never a chance of error.



BFR-5



BFR-10



BFR-15



BFR-20



Buckeye Shielded Cable

The Kitchen Mister Shielded Cable Interface is used to connect Buckeye Shielded Cable to any standard 1/2 inch conduit connection device. The use of Buckeye Shielded Cable instead of conduit and corner pulleys for connecting the gas valve, remote pull station, and fusible link line to the Systems Releasing Module reduces installation time by up to 50%.

Listings And Approvals


- Listed by Underwriters Laboratories, Inc. (Standard UL-300)
- Listed by Underwriters Laboratories of Canada, Inc.
- Approved by the New York City Fire Department COA #5550
- Complies with NFPA-96 and NFPA-17A Standards
- CE Listed

Third Party Approvals For Peace Of Mind





Kitchen Mister - Protect with the best & install for less.

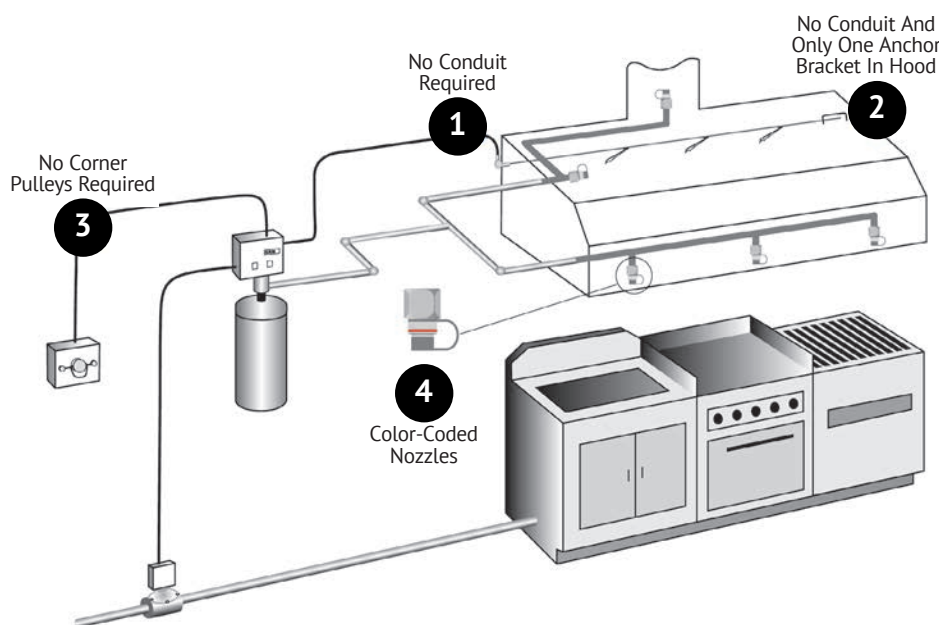

Simplicity Of Design

The constant changes and complicated requirements of most restaurant systems have made design and installation errors a concern of fire protection professionals globally.

The uncomplicated design of the *Kitchen Mister™* System all but eliminates design and installation errors by combining common sense features and the elimination of confusing design requirements.

Faster Installations

By eliminating the labor-intensive task of installing conduit, corner pulleys, and detector brackets, the *Kitchen Mister* System dramatically reduces installation time.

The *Kitchen Mister* System is approved for use with Buckeye Shielded Cable instead of traditional conduit and corner pulleys for all system inputs and outputs. This, combined with the elimination of conduit and fusible link brackets in the plenum area, makes installing the *Kitchen Mister* System quick and easy.

Discharge Nozzles

All five (5) *Kitchen Mister* nozzles come equipped with a color identification band, red, blue, green, white or yellow. This allows for easy identification of the nozzle even when it's installed in difficult locations such as a duct or plenum area. The nozzle is also stamped with its model number.

1 No Conduit Required

By using Buckeye Shielded Cable no conduit is required for system inputs/outputs. Buckeye Shielded Cable is Listed for the gas valve, detection line, and pull station.

2 No Conduit & Only One Anchor Bracket In Hood

The *Kitchen Mister* System eliminates the need for conduit in the plenum and requires only one anchor bracket in the exhaust hood.

3 No Corner Pulleys Required

Buckeye Shielded Cable eliminates the need for corner pulleys, making installation easy and fast.

4 Color-Coded Nozzles

All *Kitchen Mister* nozzles have a unique color band for easy identification.

Dealer Friendly Features

- Uncomplicated system design eliminates design and installation errors.
- Installation time significantly reduced.
- Innovative design eliminates conduit and corner pulleys.
- Advanced detection system installs quickly and easily.
- Color-coded nozzles for easy identification.
- Flexible piping requirements allow for unlimited system configurations.
- Best coverage in the industry.
- Online & face to face training.



NOW AVAILABLE - DesignPro By Buckeye

Buckeye Fire Equipment is pleased to announce the availability of **DesignPro**, a design and drawing tool for the Kitchen Mister™ restaurant cooking area fire suppression system.

DesignPro is a user-friendly software program with a comprehensive set of templates and symbols used to create scaled drawings of your kitchen system layout. With this easy-to-use program you can create simple one page 8.5" x 11" drawings for local approvals or detailed A&E multiple page specifications.

Whatever the need, DesignPro can support your drawing requirements.


- User-friendly default drawings
- Power Point tutorial to get you started
- Uses Delta Cad software
- No annual fees
- Create drawing templates complete with pipe and fitting requirements, title block, and NFPA requirements
- Must be Buckeye Kitchen Mister™ certified in order to access the software

See **Pages 25 & 26** for more information on the Buckeye Kitchen Mister™ Restaurant Fire Suppression System.



Sample of a Permit Application Drawing created by DesignPro

BUCKEYE FIRE EQUIPMENT KITCHEN MISTER FIRE SUPPRESSION SYSTEM U.L. 300

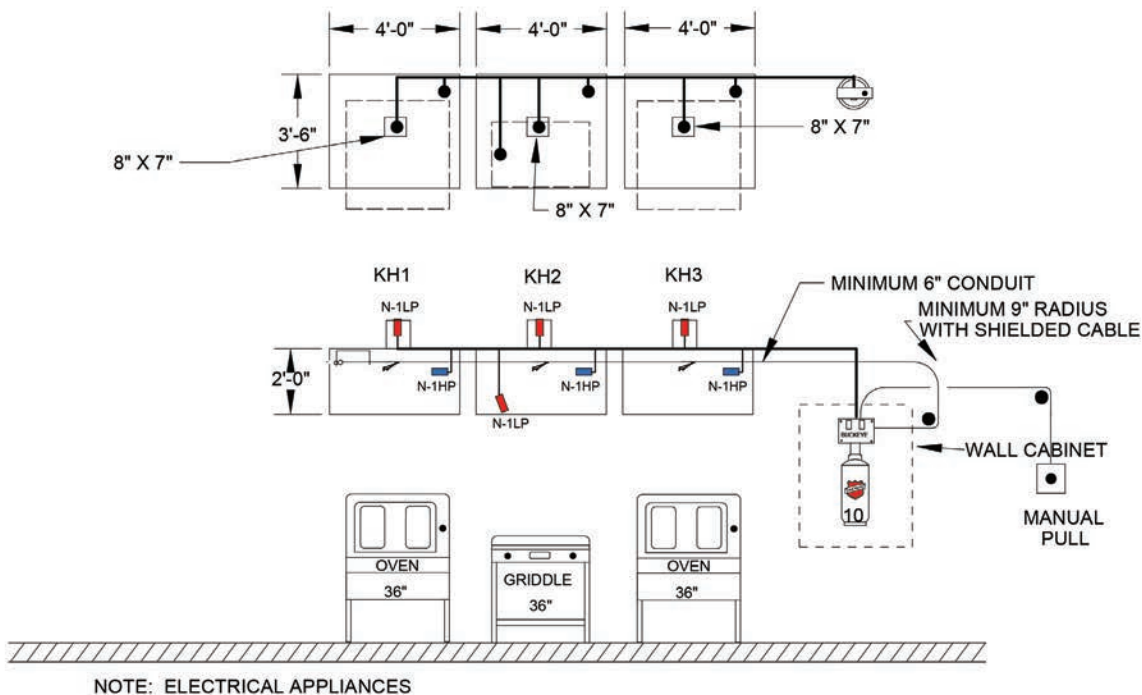

K CLASS EXTINGUISHER REQUIRED

PERMIT APPLICATION DRAWING

DISTRIBUTOR USE

YOUR COMPANY
YOUR STREET
YOUR CITY / STATE

BUCKEYE FIRE EQUIPMENT CO.

DRAWN JMS 10-31-15

HOUSTON STATION RESTAURANT
NASHVILLE, TN

SCALE 1/4"=1'

REV 1 -

SHEET 1 OF 2



Gas and Flame Detection

You Have a New Partner in Detection Systems

Buckeye Fire Equipment Company, a world leader in the fire protection industry, has assembled over 50 years of experience in gas and flame detection, system applications, sales, and service to create the Buckeye Detection Systems Division. Our mission is to provide a state of the art product line that meets our customer's need for a reliable, low maintenance, cost effective, and versatile gas and flame detection system that can seamlessly complement your current fire and/or gas detection equipment.

Our systems are designed to meet the specifications of the end user while maintaining ease of operation. Whether it's a traditional wired system, a versatile wireless system, or a combination of both, Buckeye Detection Systems can offer you the perfect solution for all your hazard detection concerns.

Buckeye Detection Systems is committed to continuing the Buckeye tradition of reliable products, responsive customer service, and knowledgeable technical support that has come to be expected by our customers.

For more information on how Buckeye Detection Systems can help safeguard you, your people, and your business from the real dangers of gas and flames, please contact us.



Maximum Protection for Every Application



Foam Concentrates And Equipment

Buckeye Fire Equipment manufactures a complete line of foam agents and hardware that when used in conjunction with one another make an unbeatable fire-fighting combination.

The selection includes bladder tanks, balanced pressure pump skid paks, eductors, monitors, foam chambers, foam makers, high expansion foam generators, foam carts and handline nozzles.

Many of the components can be customized to provide optimal protection for your unique situation. All foam system components are precision made from rugged materials to provide years of dependable service.

Buckeye's Foam Team Delivers

- The widest selection of Earth-Friendly fire fighting foam concentrates in the industry. Foam concentrates that independent tests have proven to be superior in quality and performance*.
- A wide selection of foam proportioning hardware and agents designed to maximize performance.
- Knowledgeable, professional in-house foam system design expertise to assist with your fire suppression equipment choice.

** Independent tests conducted by Chevron Petroleum and Dow Chemical. Report available on request.*



Foam Monitors



Foam Bladder Tanks



Hi-Ex Generators



Foam Concentrate Proportioners



Diesel Pump Skids



Foam Concentrates

Protecting the Environment

In addition to delivering superior fire suppression and reliability, Buckeye foam concentrates are all manufactured without EPA reportable components, thus reducing environmental impact. In fact, the environmentally friendly Buckeye Platinum Plus C-6 foam concentrates have been specifically formulated using the new short chain C-6 fluorochemicals. These advanced C-6 formulations do not contain PFOS and will not breakdown to yield PFOA in accordance with the goals of the US EPA 2010/15 PFOA Stewardship Program.

By using only Earth-Friendly components you are relieved of the major problems and burdensome paperwork that can result from the discharge of other foam concentrates. This environmental commitment in no way dilutes the fire-fighting effectiveness of Buckeye foam concentrates.



Every foam concentrate Buckeye manufactures is subjected to rigorous quality control standards and comprehensive testing to ensure complete reliability and maximum fire-fighting performance.

Foam Concentrate	Model Designation	Part # 5 Gallon	Part # 55 Gallon	Part # 275 Gallon	Listing / Approvals]
Platinum Plus C-6 1% AFFF	BFC-1.6	56325	56330	56335	UL
Platinum Plus C-6 3% AFFF	BFC-3.6	56340	56345	56350	UL
Platinum Plus C-6 6% AFFF	BFC-6.6	56130	56135	56140	UL
Platinum Plus C-6 1% x 3% AR-AFFF	BFC-13.6	56310	56315	56320	UL
Platinum Plus C-6 3% X 3% AR-AFFF	BFC-33.6	56355	56360	56365	UL
Platinum Plus C-6 3% X 6% AR-AFFF	BFC-36.6	56385	56370	56375	UL
Platinum Plus C-6 3% Low Temp AFFF	BFC-3.6LT	56115	56120	56125	UL
Platinum Plus C-6 3% AFFF Mil Spec	BFC-3.6MS	56285	56290	56295	UL
Platinum Plus C-6 6% AFFF Mil Spec	BFC-6.6MS	56625	56630	56635	Buckeye Quality Assurance
Platinum Class A	BFC-CA.1	50190	50195	50200	Buckeye Quality Assurance
2.2% High Expansion	BFC-2.2	50235	50240	50245	Buckeye Quality Assurance
Training Foam	BFC-TF	50415	50420	50525	Buckeye Quality Assurance



Wall Hooks



Pt. # 700202



Pt. # 700203



Pt. # 700204



Pt. # 700247



Pt. # 700249



Pt. # 900935
Pt. # 900937

Part Number	Suitable for Typical Extinguisher Sizes	Reference Diameter
700202	2.5 lb., 5 lb. & 5.5 lb. Dry Chemical and Halotron	3.25 - 4.25 inches
700203	10 lb. Tall Dry Chemical and 5 lb. CO2	4.75 - 5.5 inches
700204	10 lb. Short Dry Chemical	5.0 - 6.5 inches
700247	20 lb. & 30 lb. Dry Chemical, 10 lb. & 15 lb. CO2, 11 lb. & 15 lb. Halotron	6.75 - 7.5 inches
700249	20 lb. CO2	7.5 - 8.0 inchesF
900935	Foam, Wet Chemical & Water	7.0 inches
900937*	Water Mist	7.0 inches

*Stainless Steel

Wall Hooks have been plated to pass the UL 240 hour Salt Spray Corrosion Resistance test.



Pt. # 700287



Pt. # 700270



Pt. # 700260



Pt. # 700430



Pt. # 700224

Pt. # 700226

Pt. # 700228

Pt. # 700229

Pt. # 700230

Marine/Vehicle Brackets

Buckeye Fire Equipment manufactures strong and durable mounting hardware for all our portable fire extinguishers.

Retention straps on the brackets are made of stainless steel or coated with a baked-on epoxy polyester powder paint, the steel bodies of the brackets are coated with a baked-on epoxy polyester powder paint, and the latches and adjustment bolts are plated ...all to provide the units with corrosion resistance meeting the UL 240 hour salt spray test requirements.

Part Number	Model	Suitable for Typical Extinguisher Sizes	Reference Diameter
700287 700287DS	A-2 A2 Double Strap	2.5 lb. Dry Chemical, Halotron & MiniGuard (horizontal) 2.5 lb. Dry Chemical, Halotron & MiniGuard (horizontal)	3.375 inches 3.375 inches
700270 700270TS 700270DS	A-6 A6 Top Strap A6 Double Strap	5 lb. & 5.5 lb. Dry Chemical, Halotron & MiniGuard (horizontal) 5 lb. & 5.5 lb. Dry Chemical, Halotron & MiniGuard (horizontal) 5 lb. & 5.5 lb. Dry Chemical, Halotron & MiniGuard (horizontal)	4.25 inches 4.25 inches 4.25 inches
700260	B-6	5 lb. & 5.5 lb. Dry Chemical and Halotron	4.25 inches
700430	B-12	10 lb. Tall Dry Chemical	5.125 inches
700224	5DC	5 lb. & 5.5 lb. Dry Chemical, Halotron & MiniGuard (horizontal)	4.25 inches
700226	809	10 lb. Tall Dry Chemical, MiniGuard (horizontal) and 5 lb. CO2	5.0 - 5.25 inches
700228	810	10 lb. & 15 lb. CO2. 11 lb. & 15 lb. Halotron. 2.5 gal Water, Water Mist, Wet Chemical (6 liter and 2.5 gallon), Foam (6 liter and 2.5 gallon) 18 lb. MiniGuard (horizontal), 13 lb. High Flow	6.5 - 7.25 inches
700229	811	20 lb. & 30 lb. Dry Chemical, 20 lb. CO2 20 lb. & 25 lb. MiniGuard (horizontal), 20 lb. & 30 lb. High Flow	7.0 - 8.0 inches
700230	812	10 lb. Short Dry Chemical, 10 lb. High Flow	6.0 - 6.25 inches



Dry Chemical



Purple K
Pt. # 61200 (54 lbs.)



ABC
Pt. # 61000 (54 lbs.)



Standard (BC)
Pt. # 61400 (54 lbs.)

Portable Extinguisher Recharge Agents

Buckeye Fire Equipment carries a full line of extinguishing agent recharge products. Maintain the UL Listing and ensure optimal performance of your Buckeye Fire Equipment products by recharging with our high quality agents, agents made to the same standards and tested to the same requirements as the originals. Shipping weights are shown in parentheses and are an approximate weight used for estimating shipping costs.

See Page 30 for Foam System Recharge Agents.

Wet Chemical Class K



6 Liter Container
Pt. # 600872 (9 lbs.)

Water Mist



2.5 Gallon Container
Pt. # 600910 (23 lbs.)

Halotron I



40 lb. - Pt. # 64040 (63 lbs.)
150 lb. - Pt. # 64150 (220 lbs.)
200 lb. - Pt. # 64200 (270 lbs.)



2.5 Gallon Container
Pt. # 600871 (23 lbs.)

Note: Weights shown in parentheses are the approximate shipping weights.



As Buckeye Fire Equipment Company continues beyond 50 years of operation, we would like to express our deep appreciation to our wonderful and loyal customers. Buckeye has received support from companies like yours for over fifty years and for that we are grateful. Your continued loyalty to Buckeye products is something we do not take for granted and something we will constantly strive to deserve. The entire Buckeye family assures you that we will remain customer focused, quality focused, and always motivated to provide you with the best customer experience in the fire protection industry.

Thank you and we look forward to the next fifty years of being your source for world class fire protection equipment.



Warehouse Distribution Centers

Buckeye Fire Equipment Company

PO Box 428 • 110 Kings Road • Kings Mountain • North Carolina 28086

Tel: 704.739.7415 • Fax: 704.739.7418 • Email: bfec@buckeyefire.com

www.buckeyefire.com

For more information please contact: