



GAS APPLIANCES

PROFESSIONAL MANUFACTURER

2023 FW



CONTENTS

Mini stove	01-08	Infrared stove	18-19	Deluxe aluminium stove	30-31	Accessories	38-40
Commercial stove	09	Magnetic stove	20-22	Foldable stove	32-33		
Single burner stove	10-14	BBQ stove & Hot Pot	23-24	Gas torch	34		
Double burner stove	15-16	Camping Kit	25-27	Butane gas cartridge	35-36		
Dual-fuel stove	17	FSD stove	28-29	Camping gas cartridge	37		

SUPER MINI STOVE



Unique appearance design

"Super Mini" design, portable and compact, has the advantages in both of good-looking and excellent performance.

Magnetic locking system

Easy to make the gas cartridge connect with the valve in safe. It is virtually impossible to load the gas cartridge incorrectly.

MINI B NEW

Input Rating:	1.5kW (110g/h)
Product Size:	227(L)×164(W)×125(H)mm
Product Weight:	0.82kg
Packing Information:	8pcs/ctn

Container Loading quantity:

20FT	3,040PCS
40FT GP	6,480PCS
40FT HQ	7,520PCS

Espresso



*Have a Nice
Camping Life*




Short flame length and optimal combustion with a durable porous burner port.



Magnetic locking system
Easy to make the gas cartridge connect with the valve in safe.



Foldable grate designed to support various dimensions of cookware.
(Suitable for pan or pot, the diameter of which is the same as 10cm)



Push and turn dual motion control knob.(Child Lock)



Cute and Mini body to maximize table space utilization and make elegant table setting.



Stepped design to minimize heat transfer and heat load to the gas cartridge.





MINI STOVE


NEW

Economic inner flame burner

Inner flame burner makes the combustion homogeneous, improves the heat efficiency and reduces the energy consumption.

Magnetic locking system

Easy to make the gas cartridge connect with the valve in safe. It is virtually impossible to load the gas cartridge incorrectly.

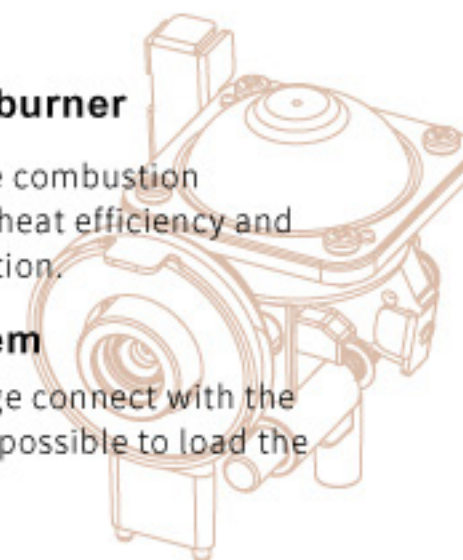

Latte



Choco



Tangerine



Blueberry

MINI A



Input Rating:	2.1kW (150g/h)
Product Size:	265(L)×204(W)×122(H)mm
Product Weight:	1.14kg
Packing Information:	8pcs/ctn

Container Loading quantity:	
20FT	2,560PCS
40FT GP	5,632PCS
40FT HQ	6,336PCS





Economic inner flame burner
processed by precision die-casting



Magnetic locking system



Stainless steel heat shield



Heightened pan supports



Stainless steel heat shield



Push & turn dual motion
control knob (child lock)



Solid rubber foot



MINI STOVE

DOUBLE FLAME
MINI STOVE

2 IN 1 BURNER



MS-8000S

Input Rating:	2.1kW (150g/h)
Product Size:	245(L)×203(W)×100(H)mm
Product Weight:	1.00kg
Packing Information:	10pcs/ctn

Container Loading quantity:

20FT	3,360PCS
40FT GP	7,730PCS
40FT HQ	8,230PCS

MS-8000AS

Input Rating:	2.1kW (150g/h)
Product Size:	245(L)×203(W)×100(H)mm
Product Weight:	1.00kg
Packing Information:	10pcs/ctn

Container Loading quantity:

20FT	3,360PCS
40FT GP	7,730PCS
40FT HQ	8,230PCS



MS-8000R

Input Rating:	2.1kW (150g/h)
Product Size:	245(L)×203(W)×100(H)mm
Product Weight:	1.00kg
Packing Information:	10pcs/ctn

Container Loading quantity:

20FT	3,360PCS
40FT GP	7,730PCS
40FT HQ	8,230PCS



COMMERCIAL GAS COOKING STOVE

Portable butane cook stove for Restaurant Use - Certified to U.S. Standards



Safety locking system
on cartridge cover



MS-77

Input Rating:	12,000 Btu/Hr
Product Size:	330(L)×389(W)×91(H)mm
Product Weight:	1.60kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	1,944PCS
40FT GP	3,888PCS
40FT HQ	4,536PCS



MS-3800SP

Input Rating:	10,000 Btu/Hr
Product Size:	329(L)×277(W)×101(H)mm
Product Weight:	1.55kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,394PCS
40FT GP	4,980PCS
40FT HQ	5,700PCS



MS-3800

Input Rating:	10,000 Btu/Hr
Product Size:	329(L)×277(W)×101(H)mm
Product Weight:	1.50kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,394PCS
40FT GP	4,980PCS
40FT HQ	5,700PCS



MS-2900HC

Input Rating:	15,000 Btu/Hr
Product Size:	372(L)×286(W)×125(H)mm
Product Weight:	1.85kg
Packing Information:	4pcs/ctn

Container Loading quantity:

20FT	1,676PCS
40FT GP	3,468PCS
40FT HQ	3,468PCS

SINGLE BURNER STOVE



MS-2500

Input Rating:	2.2kW (160g/h)
Product Size:	343(L)×280(W)×113(H)mm
Product Weight:	1.50kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,568PCS
40FT GP	5,292PCS
40FT HQ	6,036PCS

BSF

Input Rating:	2.2kW (160g/h)
Product Size:	343(L)×280(W)×113(H)mm
Product Weight:	1.50kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,568PCS
40FT GP	5,292PCS
40FT HQ	6,036PCS



MS-2500BS-1

Input Rating:	2.2kW (160g/h)
Product Size:	343(L)×280(W)×118(H)mm
Product Weight:	1.65kg
Packing Information:	4pcs/ctn

Container Loading quantity:

20FT	1,848PCS
40FT GP	3,864PCS
40FT HQ	3,864PCS

SINGLE BURNER STOVE

MS-2900HC

Input Rating:	12,000Btu/hr (265g/h)
Product Size:	372(L)×286(W)×125(H)mm
Product Weight:	1.85kg
Packing Information:	4pcs/ctn

Container Loading quantity:

20FT	1,676PCS
40FT GP	3,468PCS
40FT HQ	3,468PCS



MS-2800 A

Input Rating:	2.2kW (160g/h)
Product Size:	372(L)×286(W)×125(H)mm
Product Weight:	1.80kg
Packing Information:	4pcs/ctn

Container Loading quantity:

20FT	1,676PCS
40FT GP	3,468PCS
40FT HQ	3,468PCS



MS-2800 BS

Input Rating:	2.2kW (160g/h)
Product Size:	372(L)×286(W)×125(H)mm
Product Weight:	1.80kg
Packing Information:	4pcs/ctn

Container Loading quantity:

20FT	1,676PCS
40FT GP	3,468PCS
40FT HQ	3,468PCS

MS-3500

Input Rating:	2.75kW (200g/h)
Product Size:	326(L)×277(W)×91(H)mm
Product Weight:	1.50kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,700PCS
40FT GP	5,544PCS
40FT HQ	6,372PCS



MS-3500S

Input Rating:	2.75kW (200g/h)
Product Size:	326(L)×277(W)×91(H)mm
Product Weight:	1.60kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,700PCS
40FT GP	5,544PCS
40FT HQ	6,372PCS

MS-3900DFW

Input Rating:	4.2kW (305g/h)
Product Size:	329(L)×277(W)×114(H)mm
Product Weight:	1.60kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,082PCS
40FT GP	4,494PCS
40FT HQ	5,154PCS



SINGLE BURNER STOVE



MS-3800

Input Rating:	2.75kW (200g/h)
Product Size:	329(L)×277(W)×101(H)mm
Product Weight:	1.50kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,394PCS
40FT GP	4,980PCS
40FT HQ	5,700PCS

MS-3800SP

Input Rating:	2.75kW (200g/h)
Product Size:	329(L)×277(W)×101(H)mm
Product Weight:	1.55kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,394PCS
40FT GP	4,980PCS
40FT HQ	5,700PCS



MS-3800DFS

Input Rating:	3.1kW (225g/h)
Product Size:	329(L)×277(W)×101(H)mm
Product Weight:	1.70kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,394PCS
40FT GP	4,980PCS
40FT HQ	5,700PCS



MS-7000S

Input Rating:	1.8kW (130g/h)
Product Size:	303(L)×249(W)×95(H)mm
Product Weight:	1.25kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	3,108PCS
40FT GP	6,420PCS
40FT HQ	7,416PCS



MS-2900HCBW

NEW

Input Rating:	4.5kW (330g/h)
Product Size:	372(L)×285(W)×132(H)mm
Product Weight:	2.10kg
Packing Information:	4pcs/ctn

Container Loading quantity:

20FT	1,524PCS
40FT GP	3,164PCS
40FT HQ	4,800PCS



SINGLE BURNER STOVE

COMPACT DESIGN

MS-7000

Input Rating:	1.8kW (130g/h)
Product Size:	303(L)×249(W)×95(H)mm
Product Weight:	1.25kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	3,108PCS
40FT GP	6,420PCS
40FT HQ	7,416PCS



MS-7000DFS

Input Rating:	2.2kW (160g/h)
Product Size:	303(L)×249(W)×95(H)mm
Product Weight:	1.28kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	3,108PCS
40FT GP	6,420PCS
40FT HQ	7,416PCS



DOUBLE BURNER STOVE

NEW



CE UK CA

* OPTIONAL PART
WIDE COOKING PLATE
3-Layered non-stick
coated griddle with
grease collection reservoir.



MSD-5800BS	
Input Rating:	2.2kWx2 (160g/hx2)
Product Size:	679(L)x286(W)x125(H)mm
Product Weight:	3.20kg
Packing Information:	3pcs/ctn
Container Loading quantity:	
20FT	756PCS
40FT GP	1,584PCS
40FT HQ	1,848PCS



DOUBLE BURNER STOVE



MSD-5800S	
Input Rating:	2.2kWx2 (160g/hx2)
Product Size:	679(L)x286(W)x125(H)mm
Product Weight:	3.30kg
Packing Information:	3pcs/ctn
Container Loading quantity:	
20FT	756PCS
40FT GP	1,584PCS
40FT HQ	1,848PCS

CARRY CASE



DUAL-FUEL STOVE



MS-2500LPG

Input Rating:	
Gas cartridge -	2.3kW (165g/h)
28mbar gas cylinder -	2.0kW (145g/h)
Product Size:	343(L)×280(W)×113(H)mm
Product Weight:	1.45kg
Packing Information:	6pcs/ctn

Container Loading quantity:	
20FT	2,568PCS
40FT GP	5,292PCS
40FT HQ	6,036PCS

MS-3800LPG

Input Rating:	
Gas cartridge -	2.3kW (165g/h)
28mbar gas cylinder -	2.0kW (145g/h)
Product Size:	329(L)×277(W)×101(H)mm
Product Weight:	1.60kg
Packing Information:	6pcs/ctn


Container Loading quantity:	
20FT	2,394PCS
40FT GP	4,980PCS
40FT HQ	5,700PCS

DUAL POWER
SOURCE



Built-in valve / regulator

Inlet port

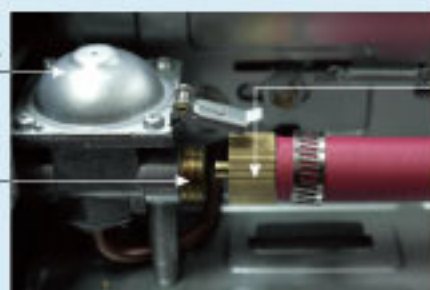

Adaptor (Connections)



- Operates with butane gas cartridge or LP gas cylinder (not included)
- Ultra-quiet operation
- Propane hose & regulator not included

INFRARED STOVE



MS-8000ASC

Input Rating:	1.65kW (120g/h)
Product Size:	245(L)×203(W)×100(H)mm
Product Weight:	1.05kg
Packing Information:	10pcs/ctn

Container Loading quantity:	
20FT	3,360PCS
40FT GP	7,730PCS
40FT HQ	8,230PCS

MS-2500BS-1C

Input Rating:	1.65kW (120g/h)
Product Size:	343(L)×280(W)×118(H)mm
Product Weight:	1.80kg
Packing Information:	4pcs/ctn

Container Loading quantity:	
20FT	1,848PCS
40FT GP	3,864PCS
40FT HQ	3,864PCS



UK
CA

MS-2500C

Input Rating:	1.65kW (120g/h)
Product Size:	343(L)×280(W)×118(H)mm
Product Weight:	1.55kg
Packing Information:	6pcs/ctn

Container Loading quantity:	
20FT	2,010PCS
40FT GP	4,032PCS
40FT HQ	4,596PCS

CERAMIC SURFACE COMBUSTION

Stable Flame - shorter and closer to ceramic cellular burner head.
Infrared prevents flare-up and spillover.

FAR INFRARED RADIATION

Infrared eliminates hot spots.
Healthy heat.

PILOT IGNITION



•

INFRARED STOVE

MS-3500CS

Input Rating:	1.65kW (120g/h)
Product Size:	336(L)×277(W)×91(H)mm
Product Weight:	1.60kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,700PCS
40FT GP	5,544PCS
40FT HQ	6,372PCS



MS-N3600CR

Input Rating:	1.65kW (120g/h)
Product Size:	325(L)×277(W)×93(H)mm
Product Weight:	1.55kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,370PCS
40FT GP	5,004PCS
40FT HQ	5,770PCS



MAGNETIC STOVE



MS-N6000RP

Input Rating:	2.2kW (160g/h)
Product Size:	301(L)×241(W)×95(H)mm
Product Weight:	1.23kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	3,000PCS
40FT GP	6,114PCS
40FT HQ	7,104PCS



MAGNETIC LOCKING SYSTEM



MAGNETIC STOVE

MS-N3600AS

Input Rating:	2.75kW (200g/h)
Product Size:	325(L)×277(W)×93(H)mm
Product Weight:	1.44kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,370PCS
40FT GP	5,004PCS
40FT HQ	5,770PCS



MS-N3600S

Input Rating:	2.75kW (200g/h)
Product Size:	325(L)×277(W)×93(H)mm
Product Weight:	1.47kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,370PCS
40FT GP	5,004PCS
40FT HQ	5,770PCS



MS-N3600R

Input Rating:	2.75kW (200g/h)
Product Size:	325(L)×277(W)×93(H)mm
Product Weight:	1.40kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,370PCS
40FT GP	5,004PCS
40FT HQ	5,770PCS

MAGNETIC STOVE

MS-N6000AS

Input Rating:	2.2kW (160g/h)
Product Size:	301(L)×241(W)×95(H)mm
Product Weight:	1.23kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	3,000PCS
40FT GP	6,114PCS
40FT HQ	7,104PCS



MS-N6000S

Input Rating:	2.2kW (160g/h)
Product Size:	301(L)×241(W)×95(H)mm
Product Weight:	1.26kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	3,000PCS
40FT GP	6,114PCS
40FT HQ	7,104PCS



MS-N6000R

Input Rating:	2.2kW (160g/h)
Product Size:	301(L)×241(W)×95(H)mm
Product Weight:	1.27kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	3,000PCS
40FT GP	6,114PCS
40FT HQ	7,104PCS

MS-N3900HCB NEW

Input Rating:	4.2kW (305g/h)
Product Size:	329(L)×277(W)×109(H)mm
Product Weight:	1.84kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,082PCS
40FT GP	4,494PCS
40FT HQ	5,154PCS



BBQ STOVE



MS-8 mini BBQ

Input Rating:	2.2kW (160g/h)
Product Size:	426(L)×291(W)×118(H)mm
Product Weight:	4.00kg
Packing Information:	2pcs/ctn

Container Loading quantity:

20FT	1,366PCS
40FT GP	2,828PCS
40FT HQ	3,316PCS

MS-8 mini BBQ OS

Input Rating:	2.2kW (160g/h)
Product Size:	426(L)×291(W)×118(H)mm
Product Weight:	4.00kg
Packing Information:	2pcs/ctn

Container Loading quantity:

20FT	1,366PCS
40FT GP	2,828PCS
40FT HQ	3,316PCS



MS-8

Input Rating:	2.2kW (160g/h)
Product Size:	460(L)×335(W)×168(H)mm
Product Weight:	4.60kg
Packing Information:	3pcs/ctn
Pot size:	374(L)×301(W)×48(H)mm

Container Loading quantity:

20FT	1,008PCS
40FT GP	2,088PCS
40FT HQ	2,088PCS



MS-8 mini

Input Rating:	2.2kW (160g/h)
Product Size:	414(L)×291(W)×132(H)mm
Product Weight:	4.00kg
Packing Information:	3pcs/ctn
Pot size:	332(L)×268(W)×68(H)mm

Container Loading quantity:

20FT	1,170PCS
40FT GP	2,430PCS
40FT HQ	2,835PCS



③ Removal drip pan tray



① STAINLESS STEEL WIDE BURNER

70 burner holes can ensure high heat efficiency and flame stability.

② Stainless steel heat reflection plate



④ "PUSH & TURN" dual motion safety control knob

CAMPING KIT

NEW



Lid with folding handle

323 x 259 x 65 mm

Pancake grill pan

281 x 208 x 33 mm

Tokoyaki grill pan

260 x 210 x 38 mm

Steamer

295 x 230 x 6.5 mm

Cooking pot

332 x 268 x 68 mm



- 1 Kitchen tongs
- 2 Clip for steamer plate
- 3 Multi-functional scissors
- 4 Sticks for Balls
- 5 Brush
- 6 Cutting Board
- 7 Organizer Bag



FUN COOK KIT

Input Rating: 2.2kW (160g/h)
 Product Size: 430(L)×300(W)×230(H)mm
 Product Weight: 7.55kg
 Packing Information: 1pcs/ctn

Container Loading quantity:
 20FT 462PCS
 40FT GP 986PCS
 40FT HQ 1,127PCS

CAMPING KIT



MS-8000PLUS

- 1 Full transparent plastic case
- 2 3-layered non-stick grill pan
- 3 Multi-functional scissors
- 4 Kitchen tongs
- 5 Mini stove MS-8000



MS-88 KIT

- 1 Bag
- 2 Stainless steel lid
- 3 3-layered non-stick pot
- 4 BBQ stove
- 5 Kitchen tongs
- 6 Multi-functional scissors



MS-8 mini BBQ OS KIT

- 1 Bag
- 2 Stainless steel lid
- 3 3-layered non-stick pot
- 4 BBQ stove

CAMPING KIT



MSD-5800S COMBO

- ① Tempered glass lid
- ② 3-layered non-stick grill pan
- ③ Non-stick grill plate
- ④ Spatula
- ⑤ Multi-functional scissors
- ⑥ Kitchen tongs
- ⑦ Ladle
- ⑧ COMBO stove



MEGA KIT

- ① Tempered glass lid
- ② 3-layered non-stick grill pan
- ③ Non-stick grill plate
- ④ Spatula
- ⑤ Multi-functional scissors
- ⑥ Kitchen tongs
- ⑦ Ladle
- ⑧ Gas cartridge sold separately
- ⑨ Portable gas stove MS-2900 or MS-2800

FSD STOVE

NEW



THERMOCOUPLE



MPU (MAGNETIC POWER UNIT)



MULTIPLE SAFETY DEVICE

2-stage Dual Overpressure Protection device fitted with Flame Supervision Device (FSD).

What is Flame Supervision Device?

When the burner flames go out for whatever reason, Flame Supervision Device (FSD) shuts off the fuel supply to a gas burner to prevent accumulations of gas which lead to an explosion or a fire.



MSD-5800 BS FSD

Input Rating:	2.2kWx2 (160g/hx2)
Product Size:	679(L)x286(W)x125(H)mm
Product Weight:	3.47kg
Packing Information:	3pcs/ctn


Container Loading quantity:

20FT	756PCS
40FT GP	1,584PCS
40FT HQ	1,848PCS

How to ignite

Push down (1) cartridge lever

Hold down (2) the red lever and push & turn the (3) control knob

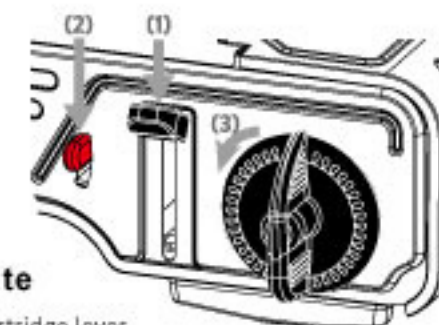

FSD STOVE



MS-2500BS-1FSD

Input Rating:	2.2kW (160g/h)
Product Size:	343(L)×280(W)×118(H)mm
Product Weight:	1.77kg
Packing Information:	4pcs/ctn

Container Loading quantity:

20FT	1,848PCS
40FT GP	3,864PCS
40FT HQ	3,864PCS

MS-3800S FSD

Input Rating:	2.75kW (200g/h)
Product Size:	329(L)×277(W)×101(H)mm
Product Weight:	1.75kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	2,394PCS
40FT GP	4,980PCS
40FT HQ	5,700PCS



MS-2800 BS FSD

Input Rating:	2.2kW (160g/h)
Product Size:	372(L)×286(W)×125(H)mm
Product Weight:	1.88kg
Packing Information:	4pcs/ctn

Container Loading quantity:

20FT	1,676PCS
40FT GP	3,468PCS
40FT HQ	3,468PCS

DELUXE ALUMINUM STOVE

EXTREMELY HIGH HEAT 11,500BTU/Hr

* PUSH & TURN * dual motion safety control knob
with auto cartridge ejection safety device



MS-7S

Input Rating:	3.5kW (253g/h)
Product Size:	330(L)×389(W)×91(H)mm
Product Weight:	1.45kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	1,944PCS
40FT GP	3,888PCS
40FT HQ	4,884PCS

MS-77

Input Rating:	3.5kW (253g/h)
Product Size:	330(L)×389(W)×91(H)mm
Product Weight:	1.60kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	1,944PCS
40FT GP	3,888PCS
40FT HQ	4,884PCS



MS-7

Input Rating:	3.5kW (253g/h)
Product Size:	330(L)×389(W)×91(H)mm
Product Weight:	1.40kg
Packing Information:	6pcs/ctn

Container Loading quantity:

20FT	1,944PCS
40FT GP	3,888PCS
40FT HQ	4,884PCS



DELUXE ALUMINUM STOVE



MS-N7

Input Rating:	3.5kW (253g/h)
Product Size:	330(L)×389(W)×91(H)mm
Product Weight:	1.30kg
Packing Information:	6pcs/ctn

Container Loading quantity:	
20FT	1,944PCS
40FT GP	3,888PCS
40FT HQ	4,884PCS


MS-808

Input Rating:	2.1kW (150g/h)
Product Size:	245(L)×204(W)×100(H)mm
Product Weight:	1.00kg
Packing Information:	10pcs/ctn

Container Loading quantity:	
20FT	3,200PCS
40FT GP	7,040PCS
40FT HQ	7,920PCS



* OPTIONAL PART

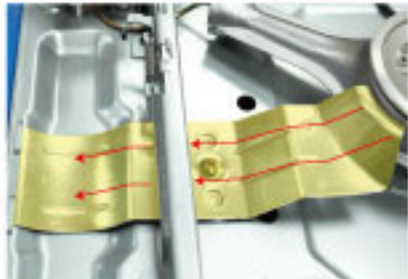

BUILT-IN HEAT TRANSFER PLATE

When you use portable gas appliance, the butane cartridge is getting cold usually because of the heat of vaporization, and the output is decreasing. Heat transfer plate helps to maintain consistent heating power and eliminates left-over butane fuel in cartridge.

AVAILABLE COLOR

Gold

Silver

Red

Blue

FOLDABLE STOVE

MS-100

Input Rating:	2.2kW (160g/h)
Product Size:	319(L)×128(W)×113(H)mm
Product Weight:	1.80kg
Packing Information:	6pcs/ctn

Container Loading quantity:	
20FT	4,122PCS
40FT GP	8,700PCS
40FT HQ	10,200PCS



FOLDABLE STOVE



MS-200DF

Input Rating:	2.4kW (175g/h)
Product Size:	305(L)×226(W)×120(H)mm
Product Weight:	2.20kg
Packing Information:	5pcs/ctn

Container Loading quantity:

20FT	2,360PCS
40FT GP	4,920PCS
40FT HQ	5,535PCS



This appliance can be used with MSF-2, MSF-3 or MSF-7 cartridge.



This appliance has short supports, which shall only be used with the MAX MSF-3 butane-propane mixture cartridge.



GAS TORCH



■ Anti Flare Function ■

The phenomenon of flaring may occur because of the spout of liquid gas during the warm up period or if the gas torch is moved.

- Automatic piezo ignition
- One touch gas connection
- Focused high fire power more than 1300°C
- Adjustable fire power range
- Flame-retardant housing



MS-T3

Input Rating:	1.2kW (85g/h)
Product Size:	178(L)×70(W)×50(H)mm
Product Weight:	0.15kg
Packing Information:	10pcs/ctn

MS-T5

Input Rating:	1.3kW (95g/h)
Product Size:	179(L)×70(W)×50(H)mm
Product Weight:	0.14kg
Packing Information:	10pcs/ctn



BUTANE GAS CARTRIDGE



■ Butane Gas Cartridge



MSF-1A, MSF-1 CRV

Fuel Capacity		220g, 227g
Capacity		420ml
Packing	Inner Packing	4pcs / Shrink Film (4x1)
	Outer Box	28pcs (4x7) 485x280x210mm

Item	Packing Information		No. of units per container type					
	Outer Box		20FT		40FT		40FT HC	
	L x W x H	CBM	Unit	Box	Unit	Box	Unit	Box
Butane Gas	485x280x210mm	0.028	28,224	1,008	57,400	2,050	65,184	2,328

BUTANE GAS CARTRIDGE

■ Max CRV Butane Gas Cartridge



CRV with Triple Seaming

- Benefit of Triple Seaming
Triple Seaming technology can prevent rupture and explosion by holding the top and body plate together until the CRV system activates and all residual gas are continuously discharged with 12 release vents.




Normal
Butane Gas Cartridge



Max CRV
Butane Cartridge

Dot-Shaped
Explosion - ProofVent



Explosion-Proof CRV System (Invention Patent No.10-0572517)



- What is CRV? (Countersink Release Vent)
When excessive pressure is supplied into the butane gas cartridge, CRV system releases gas from dot-shaped explosion proof vents in the countersink at the top of the can.
- The world wide use in over 65 countries of the world.
- Max CRV does not leave the butane residual even in wintertime.
You can save energy cost since Max CRV compounded with the high quality liquied gas, helps a complete combustion in stove and keeps a steady strong heat power until the cartridge is completely empty.
- Max CRV Butane Gas Cartridge, Your only choice for high product quality, user safety and energy saving.

Explosion-proof, CRV system is very popular with all over the world as well as domestic market.

- UL Listed in U.S.A and Canada.
- CE approved.

CAMPING GAS CARTRIDGE



■ Camping Gas Cartridge

	MSF-2 MSF-4(EU)	MSF-3 MSF-8(EU)	MSF-7 MSF-9(EU)	No. of units per container type					
	100g (110g)	230g	450g	Model	20FT		40FT		40FT HC
Fuel Capacity	321ml	505ml	990ml		Unit	Box	Unit	Box	Unit
Capacity	24pcs (3x4x2)	24pcs (3x4x2)	12pcs (3x4)	MSF-2 / MSF-4(EU)	31,992	1,333	63,984	2,666	84,552
Packing	450x340x135mm	450x340x170mm	450x340x170mm	MSF-3 / MSF-8(EU)	25,824	1,076	51,672	2,153	56,880
Features	Compatible with screw connector type camping devices			MSF-7 / MSF-9(EU)	12,912	1,076	25,824	2,153	28,440



ACCESSORIES

Hot Pot G-13


Dimension: 308 x 258 x 150 mm
Volume: 3.5L
Product weight: 1.65kg
Individual packing: Color box
Packing information: 8pcs/ctn



Bayonet type locking system to fix POT on pan supports.

PFOA - free 3 LAYERED NON-STICK POT AND GRILL PLATE

Made of aluminum alloy die castings




MG-8000

Dimension: 240 x 213 x 64 mm
Product weight: 1.05kg
Individual packing: Color box
Packing information: 10pcs/ctn

MG-2900

Dimension: 274 x 246 x 73 mm
Product weight: 1.45kg
Individual packing: Color box
Packing information: 10pcs/ctn

AVAILABLE COLOR



ACCESSORIES

MS G-102

Dimension: 320 x 320 mm
Volume:
Product weight: 1.18kg
Individual packing: Color box
Packing information: 10pcs/ctn

Stew&Grill Multi Use
4Layered Non-Stick Coating



PFOA - free 3 LAYERED NON-STICK POT AND GRILL PLATE

Made of aluminum alloy die castings

MG-22

Dimension: 240 x 213 x 92 mm
Product weight: 1.05kg
Individual packing: Color box
Packing information: 10pcs/ctn



ACCESSORIES

MG-2800

Dimension: 255 x 224 x 22 mm
Product weight: 0.50kg
Individual packing: Color box
Packing information: 10pcs/ctn



WINDSHIELD

Dimension: 840 x 240 mm
Product weight: 0.25kg
Individual packing: Nylon bag
Packing information: 50pcs/ctn



CUTLERY KIT

Dimension: 221 x 101 x 30 mm
Product weight: 0.36kg
Packing information: 50sets/ctn



1 Multi-functional scissors 2 Kitchen tongs 3 Fork 4 Spoon 5 Brush





MINI B
P.01-04

NEW



MINI A
P.05-07

NEW

Single Burner Stove



MS-2500
P.11



BSF
P.11



MS-2500BS-1
P.011



MS-2500BS-1 FSD
P.29



MS-3500
P.12



MS-3500S
P.12



MS-3800
P.13



MS-3800SP
P.13



MS-2800 A
P.10



MS-200DF
P.33



MS-2800 BS
P.10



MS-2800 BS FSD
P.29



MS-2900HC
P.10



MS-3800DFS
P.13



MS-2900HCBW
P.14 **NEW**



MS-3800S FSD
P.29



MS-3900DFW
P.12



MS-7000
P.14



MS-7000S
P.14



MS-7000DFS
P.14



MS-8000AS
P.08



MS-8000S
P.08



MS-8000R
P.08



MS-808
P.31



MS-75
P.30



MS-77
P.30



MS-7
P.30

Double Burner Stove



MSD-5800S
P.16



MSD-5800BS
P.15 **NEW**



MSD-5800BS FSD
P.28 **NEW**

Commercial gas cooking Stove



MS-77
P.09 **NEW**



MS-3800
P.09 **NEW**



MS-3800SP
P.09 **NEW**



MS-2900HC
P.09 **NEW**

Ceramic Burner Stove



MS-8000ASC
P.18



MS-2500BS-1C
P.18



MS-2500C
P.18



MS-3500CS
P.19



MS-N3600CR
P.19 **NEW**

BBQ & Hot pot Stove



MS-8 mini BBQ
P.23



MS-88
P.23



MS-8
P.24



MS-8 mini
P.24

Magnetic Stove



MS-N3600AS
P.21



MS-N3600S
P.21



MS-N3600R
P.21



MS-N7
P.31



MS-N6000AS
P.22



MS-N6000S
P.22



MS-N6000R
P.22



MS-100
P.32



MS-N6000AS
P.20 **NEW**



MS-N6000S
P.20 **NEW**



MS-N6000R
P.20 **NEW**



MS-N3900HCB
P.22 **NEW**



-  HOMEPAGE
<http://www.maxsun-china.com>
-  FACEBOOK
<http://www.maxsunchina>
-  TWITTER
http://www.maxsun_china
-  INSTAGRAM
<http://www.maxsunchina>

ISO 9001:2015 ISO 14001:2015





MAXSUN(DALIAN)CO.,LTD.

No.125,Bayiroad,Jinzhou district,Dalian,116100,China

Tel. +86 411 87858555~7 Fax. +86 411 8785 8558

Email:sales@maxsun-china.com

www.maxsun-china.com

Copyright©2023 Maxsun(Dalian)Co., Ltd. All Right Reserved.