



LUXOR[®]

GENERAL CATALOGUE
HEATING LINE

2022.1



RADIATOR VALVES

1.2 / THERMOTEKNA


THERMOTEKNA

THERMOSTATIC VALVE


BODIES WITH PRE-



* UNI EN 215
Approved



PATENTED



**REVERSE
FLOW**

The screw of ThermoTekna valves allows to preset the flow thanks to a shaped acetal ring. The thermostatic screw enables to replace one of the o-rings on the control stem without draining the system. The valves - where clearly indicated - are approved according to UNI EN 215.

The valves are nickel plated. Valves and lockshields must be opened with a differential pressure lower than 1 bar.

The tightness of Tekna lockshields is ensured by an o-ring on the obturator and, if necessary, by a further o-ring between the body and the plug. When in closed position, the tightness is granted by an o-ring and a conical metal collar. The lockshields are nickel plated. The flow can be adjusted by limiting the lift of the obturator.

TECHNICAL DATA



DN

10
15
20



Max temperature

120 °C



Max pressure

10 bar



Max differential pressure
(thermostatic valves)

0,6 bar



Max differential pressure

1 bar



Materials

CW617N
UNI EN
12165:2016



Knob

white ABS
RAL 9016



Stem

AISI 316



Testing

100%

SYSTEM CONNECTIONS



Iron pipe

G 3/8
G 1/2
G 3/4




Copper pipe

W 24x19 - TR 91
G 3/4 EK - TR 91/A



Plastic pipe

W 24x19 - TP 95
G 3/4 EK - TP 98



Multilayer pipe

W 24x19 - TP 97
G 3/4 EK - TP 99

RADIATOR CONNECTION



**conical milled
thread**

G 3/8
G 1/2
G 3/4



**cylindrical thread
with soft sealing**

G 3/8
G 1/2
G 3/4

All valves and lockshields are 100% checked with an electronically controlled pneumatic test.

The characteristics of the fluid in the system must be compliant with the UNI 8065: 2019 directive.


FLOW ADJUSTMENT AND REVERSE FLOW

To adjust the maximum flow rate, proceed as follows:

- align the reference mark on the stainless steel stem with one of the positions marked on the valve.

Luxor thermostatic valves are now EN 215 approved in reverse flow mode as well.


This characteristic allows for installation on the inlet as well as on the outlet of the radiator up to a 0,6 bar differential pressure.

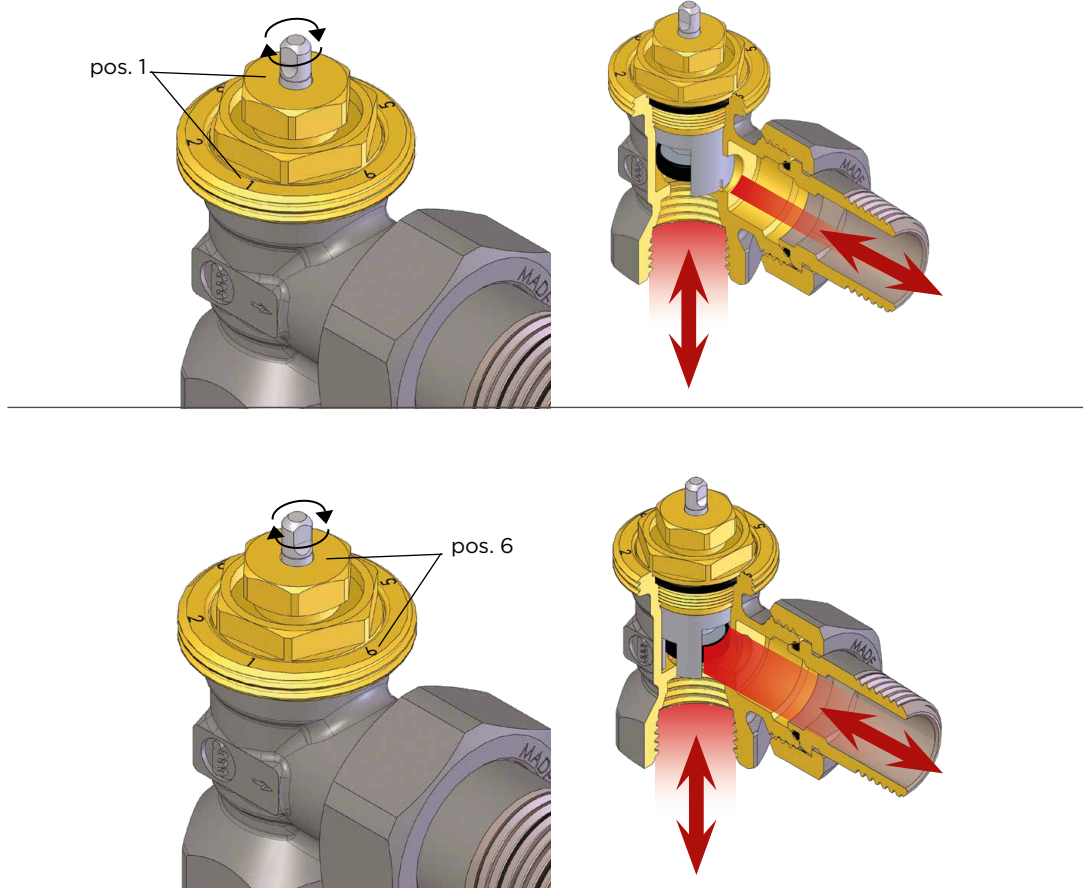

TIGHTNESS ON THE STEM

The tightening system can be easily replaced without draining the system:

- unscrew the hexagonal collar with a 13 mm wrench key;
- remove the o-ring "art. 582 - code 3424602", clean the stainless steel stem, insert a new o-ring "art. 582";
- assemble the collar screwing tight.

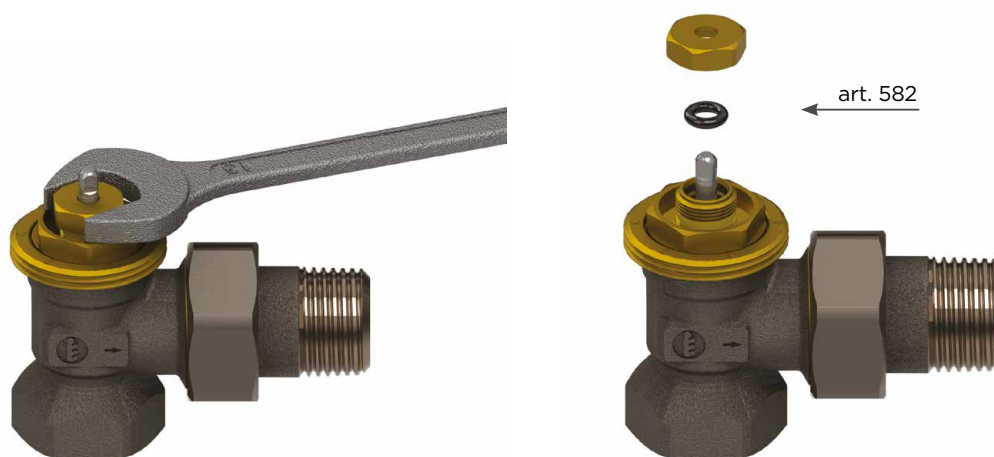

THERMOSTATIC KIT: CONNECTION FOR IRON PIPE



 * UNI EN 215
Approved

KT 202

Complete thermostatic kit for radiator connection. Equipped with RS 202 + DS 22 + TT 3000. Connection for iron pipe.

CODE	SIZE						
12821700	DN 10 3/8	-	-	-	436	1	32
12822100*	DN 15 1/2	TR 92	-	TP 90	521	1	32
12822700	DN 20 3/4	-	-	-	671	1	32

**KT 201**

Complete thermostatic kit for radiator connection. Equipped with RD 201 + DD 21 + TT 3000. Connection for iron pipe.

CODE	SIZE						
12901700	DN 10 3/8	-	-	-	473	1	32
12902100	DN 15 1/2	TR 92	-	TP 90	514	1	32
12902700	DN 20 3/4	-	-	-	685	1	32



 * UNI EN 215
Approved

KT 206

Complete thermostatic kit for radiator connection. Equipped with RS 206 + DS 26 + TT 3000. Connection for iron pipe.

CODE	SIZE						
12822117	DN 10 3/8	-	-	-	426	1	32
12822103*	DN 15 1/2	TR 92	-	TP 90	501	1	32
12822703	DN 20 3/4	-	-	-	636	1	32

**KT 205**

Complete thermostatic kit for radiator connection. Equipped with RD 205 + DD 25 + TT 3000. Connection for iron pipe.

CODE	SIZE						
12942117	DN 10 3/8	-	-	-	471	1	32
12942103	DN 15 1/2	TR 92	-	TP 90	536	1	32
12942703	DN 20 3/4	-	-	-	706	1	32

THERMOSTATIC KIT: CONNECTION FOR COPPER AND PLASTIC PIPE W24X19



* UNI EN 215
Approved

KT 212

Complete thermostatic kit for radiator connection. Equipped with RS 212 + DS 32 + TT 3000. Connection for copper and plastic pipe.

CODE	SIZE						
12841700*	DN 10 3/8	TR 91	TP 95	TP 97	424	1	32
12842100*	DN 15 1/2	TR 91	TP 95	TP 97	477	1	32

**KT 211**

Complete thermostatic kit for radiator connection. Equipped with RD 211 + DD 31 + TT 3000. Connection for copper and plastic pipe.

CODE	SIZE						
12861700	DN 10 3/8	TR 91	TP 95	TP 97	445	1	32
12862100	DN 15 1/2	TR 91	TP 95	TP 97	492	1	32



* UNI EN 215
Approved

KT 209

Complete thermostatic kit for radiator connection. Equipped with RS 209 + DS 39 + TT 3000. Connection for copper and plastic pipe.

CODE	SIZE						
12842117*	DN 10 3/8	TR 91	TP 95	TP 97	441	1	32
12842103*	DN 15 1/2	TR 91	TP 95	TP 97	484	1	32

**KT 208**

Complete thermostatic kit for radiator connection. Equipped with RD 208 + DD 38 + TT 3000. Connection for copper and plastic pipe.

CODE	SIZE						
12962117	DN 10 3/8	TR 91	TP 95	TP 97	348	1	32
12962103	DN 15 1/2	TR 91	TP 95	TP 97	381	1	32



Fittings for copper pipe



Fittings for plastic pipe



Fittings for multilayer pipe



Fittings: chapter 7



Accessories: chapter 1.A

THERMOSTATIC KIT: CONNECTION FOR COPPER AND PLASTIC PIPE G3/4 EUROKONUS



 * UNI EN 215
Approved

KT 212/A

Complete thermostatic kit for radiator connection. Equipped with RS 212/A + DS 32/A + TT 3000.
Eurokonus connection.

CODE	SIZE						
12842718*	DN 10 3/8	TR 91/A	TP 98	TP 99	406	1	32
12842721*	DN 15 1/2	TR 91/A	TP 98	TP 99	483	1	32



KT 211/A

Complete thermostatic kit for radiator connection. Equipped with RD 211/A + DD 31/A + TT 3000.
Eurokonus connection.

CODE	SIZE						
12862719	DN 10 3/8	TR 91/A	TP 98	TP 99	440	1	32
12862722	DN 15 1/2	TR 91/A	TP 98	TP 99	484	1	32



 * UNI EN 215
Approved

KT 209/A

Complete thermostatic kit for radiator connection. Equipped with RS 209/A + DS 39/A + TT 3000.
Eurokonus connection.

CODE	SIZE						
12842717*	DN 10 3/8	TR 91/A	TP 98	TP 99	447	1	32
12842703*	DN 15 1/2	TR 91/A	TP 98	TP 99	484	1	32




KT 208/A

Complete thermostatic kit for radiator connection. Equipped with RD 208/A + DD 38/A + TT 3000.
Eurokonus connection.

CODE	SIZE						
12962717	DN 10 3/8	TR 91/A	TP 98	TP 99	340	1	32
12962703	DN 15 1/2	TR 91/A	TP 98	TP 99	380	1	32



CONNECTION FOR IRON PIPE

**RS 202**

Angle radiator valve, thermostatically or electronically controlled with protection cap. Connection for iron pipe.




Fittings



** Only for the sizes indicated

CODE	SIZE	A	B	C	D	E	F	G	H	L			
12021700	DN 10 3/8	58	50	20	37	G 3/8	-	R 3/8	-	-	156	10	80
12022100*	DN 15 1/2**	60	53	23	37	G 1/2	-	R 1/2	-	-	198	10	80
12022700	DN 20 3/4	60	62	27	37	G 3/4	-	R 3/4	-	-	264	8	64

**RD 201**


Straight radiator valve, thermostatically or electronically controlled with protection cap. Connection for iron pipe.

Fittings



** Only for the sizes indicated

CODE	SIZE	A	B	C	D	E	F	G	H	L			
12221700	DN 10 3/8	76	51	46	37	G 3/8	-	R 3/8	-	-	177	10	80
12222100	DN 15 1/2**	83	55	46	37	G 1/2	-	R 1/2	-	-	216	10	80
12222700	DN 20 3/4	97	65	47	37	G 3/4	-	R 3/4	-	-	301	8	64

**RS 206**

Angle radiator valve, thermostatically or electronically controlled with protection cap. Connection for iron pipe.




Fittings



** Only for the sizes indicated

CODE	SIZE	A	B	C	D	E	F	G	H	L			
12022117	DN 10 3/8	58	47	20	37	G 3/8	-	-	G 3/8	37	164	10	80
12022103*	DN 15 1/2**	61	49	23	37	G 1/2	-	-	G 1/2	39	202	10	80
12022703	DN 20 3/4	60	60	27	37	G 3/4	-	-	G 3/4	48	267	8	64

**RD 205**

Straight radiator valve, thermostatically or electronically controlled with protection cap. Connection for iron pipe.

Fittings



** Only for the sizes indicated

CODE	SIZE	A	B	C	D	E	F	G	H	L			
12222117	DN 10 3/8	73	48	46	37	G 3/8	-	-	G 3/8	38	185	10	80
12222103	DN 15 1/2**	78	51	46	37	G 1/2	-	-	G 1/2	40	220	10	80
12222703	DN 20 3/4	95	63	47	37	G 3/4	-	-	G 3/4	51	305	8	64



Fittings for copper pipe



Fittings for plastic pipe



Fittings for multilayer pipe




Fittings: chapter 7



Accessories: chapter 1.A



RADIATOR VALVES / THERMOTEKNA



RS 2502

Angle radiator valve, thermostatically or electronically controlled, with manual control knob. Connection for iron pipe.




Fittings



** Only for the sizes indicated

CODE	SIZE	A	B	C	D	E	F	G	H	L			
12621700	DN 10 3/8	75	50	20	37	G 3/8	-	R 3/8	-	-	165	10	80
12622100*	DN 15 1/2**	78	53	23	37	G 1/2	-	R 1/2	-	-	201	10	80
12622700	DN 20 3/4	78	62	27	37	G 3/4	-	R 3/4	-	-	277	8	64



RD 2501


Straight radiator valve, thermostatically or electronically controlled, with manual control knob. Connection for iron pipe.

Fittings



** Only for the sizes indicated

CODE	SIZE	A	B	C	D	E	F	G	H	L			
12421700	DN 10 3/8	76	51	64	37	G 3/8	-	R 3/8	-	-	184	10	80
12422100	DN 15 1/2**	83	55	64	37	G 1/2	-	R 1/2	-	-	220	10	80
12422700	DN 20 3/4	97	65	65	37	G 3/4	-	R 3/4	-	-	309	8	64



RS 2506

Angle radiator valve, thermostatically or electronically controlled, with manual control knob. Connection for iron pipe.


Fittings



** Only for the sizes indicated



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12622117	DN 10 3/8	75	47	20	37	G 3/8	-	-	G 3/8	37	192	10	80
12622103*	DN 15 1/2**	78	49	23	37	G 1/2	-	-	G 1/2	39	224	10	80
12622703	DN 20 3/4	78	60	27	37	G 3/4	-	-	G 3/4	48	275	8	64



RD 2505


Straight radiator valve, thermostatically or electronically controlled, with manual control knob. Connection for iron pipe.

Fittings



** Only for the sizes indicated

CODE	SIZE	A	B	C	D	E	F	G	H	L			
12422117	DN 10 3/8	73	48	64	37	G 3/8	-	-	G 3/8	38	173	10	80
12422103	DN 15 1/2**	78	51	64	37	G 1/2	-	-	G 1/2	40	205	10	80
12422703	DN 20 3/4	95	63	65	37	G 3/4	-	-	G 3/4	51	290	8	64



M 332

Reverse angle radiator valve, thermostatically or electronically controlled, with manual control knob. Connection for iron pipe.

Fittings



** Only for the sizes indicated

CODE	SIZE	A	B	C	D	E	F	G	H	L			
13222100	DN 15 1/2	116	52	40	35	G 1/2	-	R 1/2	-	-	228	10	80



Fittings for copper pipe



Fittings for plastic pipe




Fittings for multilayer pipe



Fittings: chapter 7



Accessories: chapter 1.A

**DS 22**


Angle regulating lockshield.
Connection for iron pipe.

Fittings



** Only for the sizes indicated

CODE	SIZE	A	B	C	D	E	F	G	H	L			
10061700	DN 10 3/8	53	50	20	30	G 3/8	-	R 3/8	-	-	132	10	80
10062100	DN 15 1/2**	57	54	23	30	G 1/2	-	R 1/2	-	-	170	10	80
10062700	DN 20 3/4	57	62	27	30	G 3/4	-	R 3/4	-	-	244	8	64

**DD 21**


Straight regulating lockshield.
Connection for iron pipe.

Fittings



** Only for the sizes indicated

CODE	SIZE	A	B	C	D	E	F	G	H	L			
10261700	DN 10 3/8	76	51	41	30	G 3/8	-	R 3/8	-	-	153	10	80
10262100	DN 15 1/2**	83	55	42	30	G 1/2	-	R 1/2	-	-	187	10	80
10262700	DN 20 3/4	97	65	43	30	G 3/4	-	R 3/4	-	-	273	8	64

**DS 26**


Angle regulating lockshield.
Connection for iron pipe.

Fittings



** Only for the sizes indicated

CODE	SIZE	A	B	C	D	E	F	G	H	L			
10062117	DN 10 3/8	53	47	20	30	G 3/8	-	-	G 3/8	37	138	10	80
10062103	DN 15 1/2**	57	50	23	30	G 1/2	-	-	G 1/2	39	174	10	80
10062703	DN 20 3/4	57	57	27	30	G 3/4	-	-	G 3/4	45	247	8	64

**DD 25**

Straight regulating lockshield.
Connection for iron pipe.

Fittings



** Only for the sizes indicated

CODE	SIZE	A	B	C	D	E	F	G	H	L			
10262117	DN 10 3/8	73	48	41	30	G 3/8	-	-	G 3/8	38	159	10	80
10262103	DN 15 1/2**	78	51	42	30	G 1/2	-	-	G 1/2	40	191	10	80
10262703	DN 20 3/4	95	63	43	30	G 3/4	-	-	G 3/4	51	276	8	64



Fittings for copper pipe



Fittings for plastic pipe



Fittings for multilayer pipe




Fittings: chapter 7



Accessories: chapter 1.A

CONNECTION FOR COPPER AND PLASTIC PIPE W24X19



RS 212


Angle radiator valve, thermostatically or electronically controlled, with protection cap.
Connection for copper and plastic pipe.



Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12121700*	DN 10 3/8	57	52	19	37	-	W24x19	R 3/8	-	-	158	10	80
12122100*	DN 15 1/2	59	54	22	37	-	W24x19	R 1/2	-	-	182	10	80




RD 211

Straight radiator valve, thermostatically or electronically controlled, with protection cap.
Connection for copper and plastic pipe.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12321700	DN 10 3/8	76	51	46	37	-	W24x19	R 3/8	-	-	179	10	80
12322100	DN 15 1/2	81	55	46	37	-	W24x19	R 1/2	-	-	203	10	80



RS 209


Angle radiator valve, thermostatically or electronically controlled, with protection cap.
Connection for copper and plastic pipe.



Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12122117*	DN 10 3/8	57	47	19	37	-	W24x19	-	G 3/8	37	164	10	80
12122103*	DN 15 1/2	60	49	22	37	-	W24x19	-	G 1/2	39	185	10	80



RD 208


Straight radiator valve, thermostatically or electronically controlled, with protection cap.
Connection for copper and plastic pipe.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12322117	DN 10 3/8	73	48	46	37	-	W24x19	-	G 3/8	38	186	10	80
12322103	DN 15 1/2	78	51	46	37	-	W24x19	-	G 1/2	40	203	10	80



**RS 2512**


Angle radiator valve, thermostatically or electronically controlled, with manual control knob. Connection for copper and plastic pipe.



Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12721700*	DN 10 3/8	74	52	19	37	-	W24x19	R 3/8	-	-	166	10	80
12722100*	DN 15 1/2	77	54	22	37	-	W24x19	R 1/2	-	-	192	10	80


**RD 2511**

Straight radiator valve, thermostatically or electronically controlled, with manual control knob. Connection for copper and plastic pipe.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12521700	DN 10 3/8	76	51	64	37	-	W24x19	R 3/8	-	-	185	10	80
12522100	DN 15 1/2	81	55	64	37	-	W24x19	R 1/2	-	-	207	10	80

**RS 2509**


Angle radiator valve, thermostatically or electronically controlled, with manual control knob. Connection for copper and plastic pipe.



Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12722117*	DN 10 3/8	74	47	19	37	-	W24x19	-	G 3/8	37	172	10	80
12722103*	DN 15 1/2	77	49	22	37	-	W24x19	-	G 1/2	39	193	10	80


**RD 2508**

Straight radiator valve, thermostatically or electronically controlled, with manual control knob. Connection for copper and plastic pipe.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12522117	DN 10 3/8	73	48	64	37	-	W24x19	-	G 3/8	38	194	10	80
12522103	DN 15 1/2	77	51	64	37	-	W24x19	-	G 1/2	40	211	10	80

**M 330**

Reverse angle radiator valve, thermostatically or electronically controlled, with manual control knob. Connection for copper and plastic pipe.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
13122100	DN 15 1/2	116	52	39	35	-	W24x19	R 1/2	-	-	215	10	80



Fittings for copper pipe



Fittings for plastic pipe




Fittings for multilayer pipe



Fittings: chapter 7




Accessories: chapter 1.A

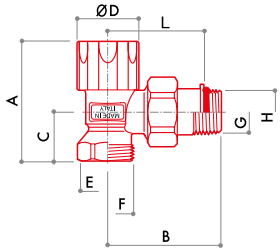

DS 32
Angle regulating lockshield.
Connection for copper and plastic
pipe.

Fittings
TR 91 TP 95 TP 97


CODE	SIZE	A	B	C	D	E	F	G	H	L			
10161700	DN 10 3/8	52	50	19	30	-	W24x19	R 3/8	-	-	130	10	80
10162100	DN 15 1/2	56	54	22	30	-	W24x19	R 1/2	-	-	159	10	80

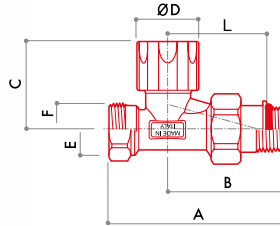

DD 31
Straight regulating lockshield.
Connection for copper and plastic
pipe.

Fittings
TR 91 TP 95 TP 97


CODE	SIZE	A	B	C	D	E	F	G	H	L			
10361700	DN 10 3/8	76	51	41	30	-	W24x19	R 3/8	-	-	155	10	80
10362100	DN 15 1/2	82	55	42	30	-	W24x19	R 1/2	-	-	178	10	80

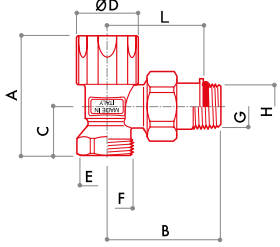

DS 39
Angle regulating lockshield.
Connection for copper and plastic
pipe.

Fittings
TR 91 TP 95 TP 97

CODE	SIZE	A	B	C	D	E	F	G	H	L			
10162117	DN 10 3/8	52	47	19	30	-	W24x19	-	G 3/8	37	141	10	80
10162103	DN 15 1/2	56	49	22	30	-	W24x19	-	G 1/2	39	163	10	80

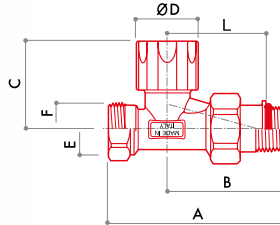


DD 38
Straight regulating lockshield.
Connection for copper and plastic
pipe.

Fittings
TR 91 TP 95 TP 97

CODE	SIZE	A	B	C	D	E	F	G	H	L			
10362117	DN 10 3/8	73	48	41	30	-	W24x19	-	G 3/8	38	162	10	80
10362103	DN 15 1/2	77	51	42	30	-	W24x19	-	G 1/2	40	178	10	80



CONNECTION FOR COPPER AND PLASTIC PIPE G3/4 EUROKONUS

**RS 212/A**


Angle radiator valve, thermostatically or electronically controlled, with protection cap. Eurokonus connection.



Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12122718*	DN 10 3/8	56	50	19	37	-	G 3/4 EK	R 3/8	-	-	157	10	80
12122721*	DN 15 1/2	59	54	22	37	-	G 3/4 EK	R 1/2	-	-	181	10	80


**RD 211/A**

Straight radiator valve, thermostatically or electronically controlled, with protection cap. Eurokonus connection.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12322719	DN 10 3/8	77	52	46	37	-	G 3/4 EK	R 3/8	-	-	170	10	80
12322722	DN 15 1/2	81	55	46	37	-	G 3/4 EK	R 1/2	-	-	199	10	80

**RS 209/A**


Angle radiator valve, thermostatically or electronically controlled, with protection cap. Eurokonus connection.



Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12122717*	DN 10 3/8	57	47	19	37	-	G 3/4 EK	-	G 3/8	37	163	10	80
12122703*	DN 15 1/2	60	49	22	37	-	G 3/4 EK	-	G 1/2	39	184	10	80

**RD 208/A**

Straight radiator valve, thermostatically or electronically controlled, with protection cap. Eurokonus connection.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12322717	DN 10 3/8	73	48	46	37	-	G 3/4 EK	-	G 3/8	38	182	10	80
12322703	DN 15 1/2	77	51	46	37	-	G 3/4 EK	-	G 1/2	40	199	10	80



Fittings for copper pipe



Fittings for plastic pipe




Fittings for multilayer pipe



Fittings: chapter 7



Accessories: chapter 1.A

**RS 2512/A**


Angle radiator valve, thermostatically or electronically controlled, with manual control knob. Eurokonus connection.



Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12722718*	DN 10 3/8	74	50	19	37	-	G 3/4 EK	R 3/8	-	-	163	10	80
12722721*	DN 15 1/2	77	54	22	37	-	G 3/4 EK	R 1/2	-	-	189	10	80


**RD 2511/A**

Straight radiator valve, thermostatically or electronically controlled, with manual control knob. Eurokonus connection.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12522719	DN 10 3/8	77	52	64	37	-	G 3/4 EK	R 3/8	-	-	196	10	80
12522722	DN 15 1/2	81	55	64	37	-	G 3/4 EK	R 1/2	-	-	207	10	80

**RS 2509/A**


Angle radiator valve, thermostatically or electronically controlled, with manual control knob. Eurokonus connection.



Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12722717*	DN 10 3/8	74	47	19	37	-	G 3/4 EK	-	G 3/8	37	171	10	80
12722703*	DN 15 1/2	77	49	22	37	-	G 3/4 EK	-	G 1/2	39	192	10	80


**RD 2508/A**

Straight radiator valve, thermostatically or electronically controlled, with manual control knob. Eurokonus connection.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
12522717	DN 10 3/8	73	48	64	37	-	G 3/4 EK	-	G 3/8	38	190	10	80
12522703	DN 15 1/2	77	51	64	37	-	G 3/4 EK	-	G 1/2	40	207	10	80

**M 330/A**


Reverse angle radiator valve, thermostatically or electronically controlled, with manual control knob. Eurokonus connection.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
13122721	DN 15 1/2	116	52	39	35	-	G 3/4 EK	R 1/2	-	-	217	10	80




**DS 32/A**

Angle regulating lockshield.
Connections eurokonus type.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
10162718	DN 10 3/8	52	50	19	30	-	G 3/4 EK	R 3/8	-	-	139	10	80
10162721	DN 15 1/2	56	54	22	30	-	G 3/4 EK	R 1/2	-	-	162	10	80


**DD 31/A**

Straight regulating lockshield.
Connections eurokonus type.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
10362719	DN 10 3/8	76	51	41	30	-	G 3/4 EK	R 3/8	-	-	164	10	80
10362722	DN 15 1/2	82	55	42	30	-	G 3/4 EK	R 1/2	-	-	174	10	80


**DS 39/A**

Angle regulating lockshield.
Connections eurokonus type.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
10162717	DN 10 3/8	52	47	19	30	-	G 3/4 EK	-	G 3/8	37	144	10	80
10162703	DN 15 1/2	56	49	22	30	-	G 3/4 EK	-	G 1/2	39	166	10	80

**DD 38/A**

Straight regulating lockshield.
Connections eurokonus type.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
10362717	DN 10 3/8	73	48	41	30	-	G 3/4 EK	-	G 3/8	38	165	10	80
10362703	DN 15 1/2	77	51	42	30	-	G 3/4 EK	-	G 1/2	40	178	10	80



Fittings for copper pipe



Fittings for plastic pipe




Fittings for multilayer pipe



Fittings: chapter 7



Accessories: chapter 1.A


**MD 321/A**

Coaxial right radiator valve, thermostatically or electronically controlled, with protection cap. Eurokonus connection.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
13272722	DN 15 1/2	49	56	27	37	-	G 3/4 EK	R 1/2	-	-	287	10	80


**MS 331/A**

Coaxial left regulating lockshield. Eurokonus connections.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
13252722	DN 15 1/2	42	56	27	30	-	G 3/4 EK	R 1/2	-	-	258	10	80


**MS 321/A**

Left coaxial radiator valve, thermostatically or electronically controlled, with protection cap. Eurokonus connection.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
13292722	DN 15 1/2	49	56	27	37	-	G 3/4 EK	R 1/2	-	-	287	10	80

**MD 331/A**

Coaxial right regulating lockshield. Eurokonus connections.

Fittings



CODE	SIZE	A	B	C	D	E	F	G	H	L			
13232722	DN 15 1/2	42	56	27	30	-	G 3/4 EK	R 1/2	-	-	258	10	80




TT 3000

THERMOSTATIC HEAD



* UNI EN 215
Approved

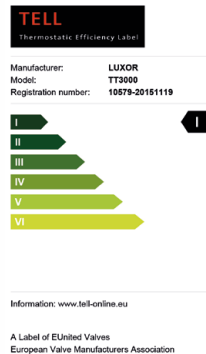

TECHNICAL DATA



Max temperature
120 °C



Max pressure
10 bar



Max differential
pressure
0,6 bar

**Min. adjustment temperature
(anti-freeze pos.)**

Ts min 6 °C

**Max regulation temperature
(max position)**

Ts max 30 °C (5)

Energy saving conditions
20 °C

Thermostatic element inalterability range

-15 °C ÷ 60 °C

Storage temperature

-20 °C ÷ + 50 °C

Hysteresis

C 0,4 k

Differential pressure influence

D 0,5 k

Water temperature influence

W 0,25 k

Response time

Z 22 min.

Control Accuracy

CA 0,2 K.

VALVE CONNECTION



Available with
chrome finish
(chapter Series 50th)



CHROME



WHITE-CHROME

CONSTRUCTIVE FEATURES

Thermostatic heads consist of a sensor filled with a highly expandable element. This element, which may be incorporated in the adjustment knob or in the remote sensor, expands or contracts in proportion to room temperature changes, reacting even to the smallest variation. When the surrounding




temperature increases, the element expands and acts on the obturator with an axial thrust movement, thus controlling the valve action. The flow of the heating medium can be adjusted by opening and closing the valve.

TECHNICAL FEATURES IN COMBINATION WITH THERMOSTATIC HEAD TT 3000

POS	ITEM	Kv Δt 1 °C	Kv ΔT 1 °C	qmN (Kg/h)	qm max (Kg/h)	a
1	RS 202 DN 15 - RS 206 DN 15	0.07	0.07	23±65%	32	0.42
2	RS212 DN10 - RS212 DN15 RS209 DN10 - RS209 DN15	0.20	0.25	80±40%	100	0.36
3	RS212/A DN15 - RS209/A DN15	0.24	0.36	113±30%	155	0.46
4	RS2502 DN15 - RS2506 DN15 RS2512 DN10 - RS2512 DN15	0.24	0.37	116±20%	180	0.57
5	RS2509 DN10 - RS2509 DN15	0.24	0.40	128±20%	250	0.74
6	RS2512/A DN15 - RS2509/A DN15	0.32	0.52	165±10%	440	0.84

RANGE OF ADJUSTMENT

Thermostatic valves allow to make each room independent with a specific set temperature, thus enhancing comfort and actual energy saving, as prescribed by national and international regulations. Thermostatic heads can also maintain an anti-freeze temperature (position “❄”), which is very useful in order to prevent frost damage when rooms are not being used. During summer it is instead recommended to set the heads to the maximum opening (position “5”).

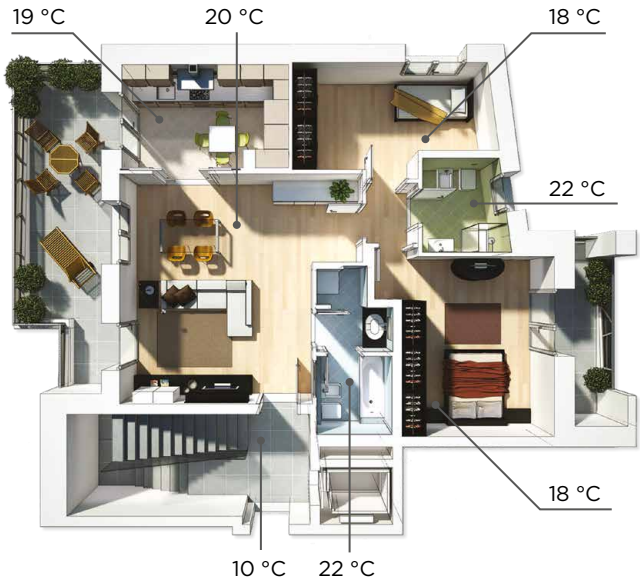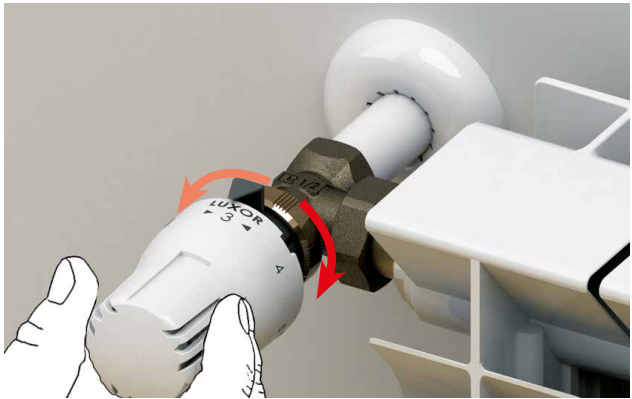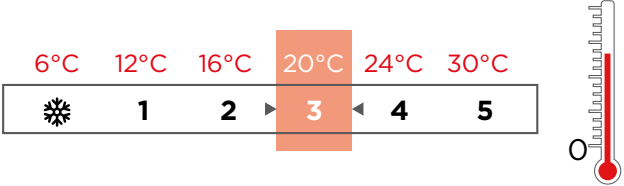

INSTRUCTIONS FOR USE

Before installing the thermostatic head, set the adjustment knob to “5”, so as to facilitate the following installation steps. Unscrew the RAL 9016 white ABS protection cap mounted on ThermoTekna thermostic valves. Tighten the brass collar of the thermostatic head to the valve body, then set the knob to the desired position.






LIMITING AND LOCKING TEMPERATURE



The head's temperature range can be limited or locked by using the provided fork pin. To lock the temperature to “3”, turn the knob so that the indicator corresponds to the required position. The temperature can be locked by inserting the fork pin across the

spline placed diametrically opposite to the index (fig. 1). Insert the fork pin to the left of the spline to limit the temperature to values between “3” and “5” (fig. 2), to the right to set a temperature range between “3” and “❄” (fig. 3).

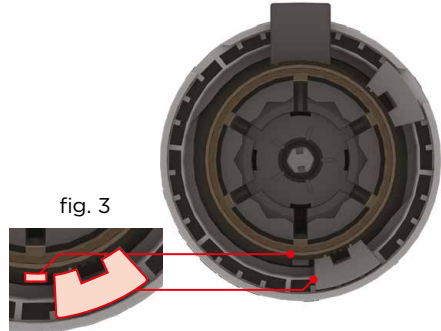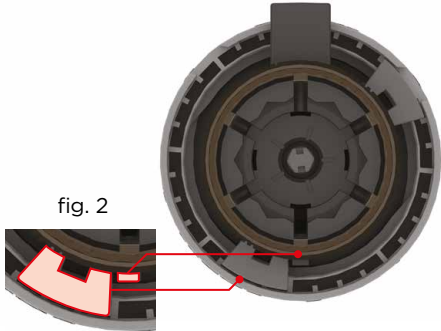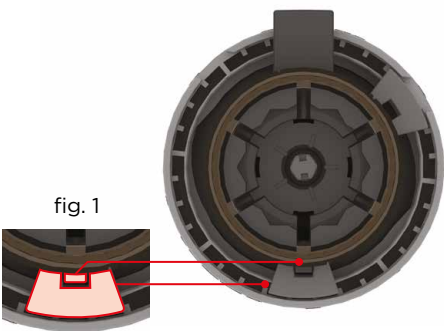

INSTALLATION WARNINGS



TT3000 thermostatic heads can be applied to all heating bodies unless in presence of barriers such as shelves, curtains or furniture, which may accumulate heat and therefore alter the measurement of room temperature. In this case, it is recommended to use **TT3002** thermostatic heads with remote sensor.

In systems where all heating bodies are controlled by thermostatic heads, it is advisable to install a bypass valve in order to avoid noise due to the excessive pressure difference which might arise inside thermostatic valves.

Thermostatic heads must be installed away from the heat streams surrounding the heating body (fig. 1) and direct sunlight (fig. 2).

Do not install thermostatic heads under shelves (fig. 3), in a recess (fig. 4), within the heat stream (fig. 5) or behind curtains (fig. 6).

These kinds of installation are not proper, as they may cause the head to measure temperature values which do not coincide with the actual room temperature.



fig. 1



fig. 2




fig. 3



fig. 4



fig. 5



fig. 6



fig. 7




fig. 8

Should the heating body be installed as in fig. 1, a number of issues may arise. The door could not be opened completely and, unless provided with a doorstop, it could hit and damage the head.

In cases like this, it is advisable to use a reverse radiator valve as shown in fig. 2.

THERMOSTATIC HEADS

**TT 3000**


Thermostatic head with integrated control and sensor.



CODE	SIZE	A	B	C	D	E	F	G	H	L			
69100000	M30x1,5	75	80	46,5	-	-	M30x1,5	-	-	-	110	1	100

CODE	SIZE	A	B	C	D	E	F	G	H	L			
69100000BRA*	M30x1,5	75	80	46,5	-	-	M30x1,5	-	-	-	110	1	100

*With Braille numbers

**TT 3002**


Thermostatic head with integrated control and remote sensor. Standard length of capillary 2 m.

CODE	SIZE	A	B	C	D	E	F	G	H	L			
69100020	M30x1,5	75	80	46,5	-	-	M30x1,5	-	35	96	156	1	32

**BT 242**

Tamper-and-theft-proof clip for TT 3000 and TT 3002.

CODE	SIZE			
69010402	-	14	5	160

**TT 2302**

In-wall thermostatic head with control and remote sensor. Standard length of capillary 2 m.

CODE	SIZE	A	B	C	D	E	F	G	H	L			
69011005	M30x1,5	63	68	45	67	75	M30x1,5	-	28	51	220	1	30




The certification of the valves according to UNI EN 215 applies to the coupling valve+thermostatic head Luxor TT 3000. **Technical information are available on our website: www.luxor.it**

VALVES FLOW RATE CHART

ANGLE VALVES


DN 10 - DN 15

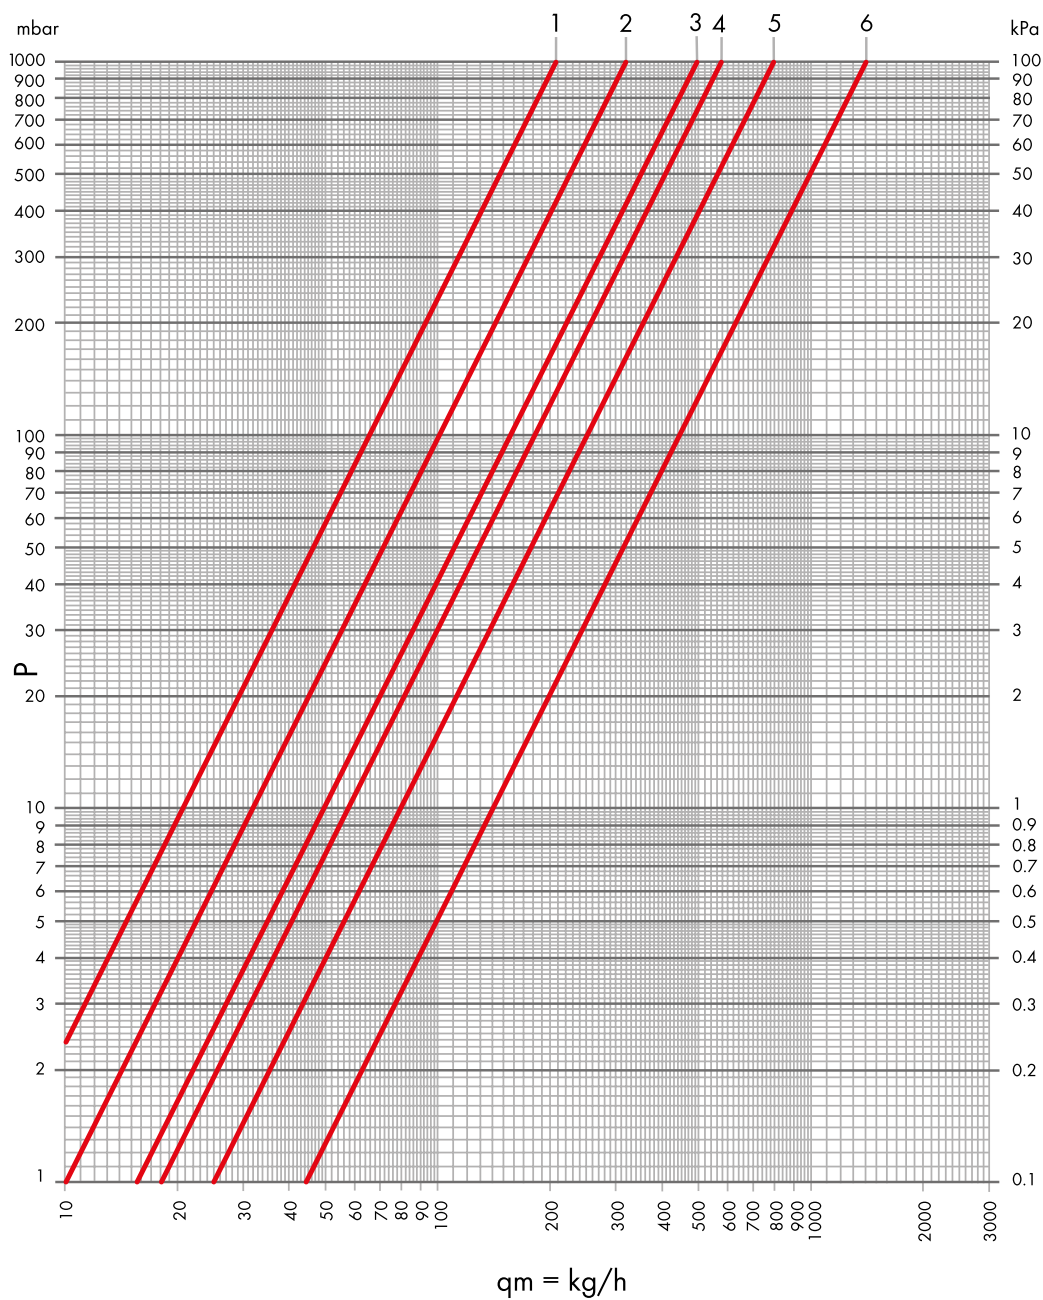

ITEM	Kv	Kv Δt 1 °C	Kv Δt 2 °C	POS
Angle DN 10 - DN 15	0.10	0.07	0.07	1
	0.32	0.20	0.25	2
	0.49	0.24	0.36	3
	0.57	0.24	0.37	4
	0.79	0.24	0.40	5
	1.39	0.32	0.55	6

VALVES FLOW RATE CHART

ANGLE VALVES
DN 20

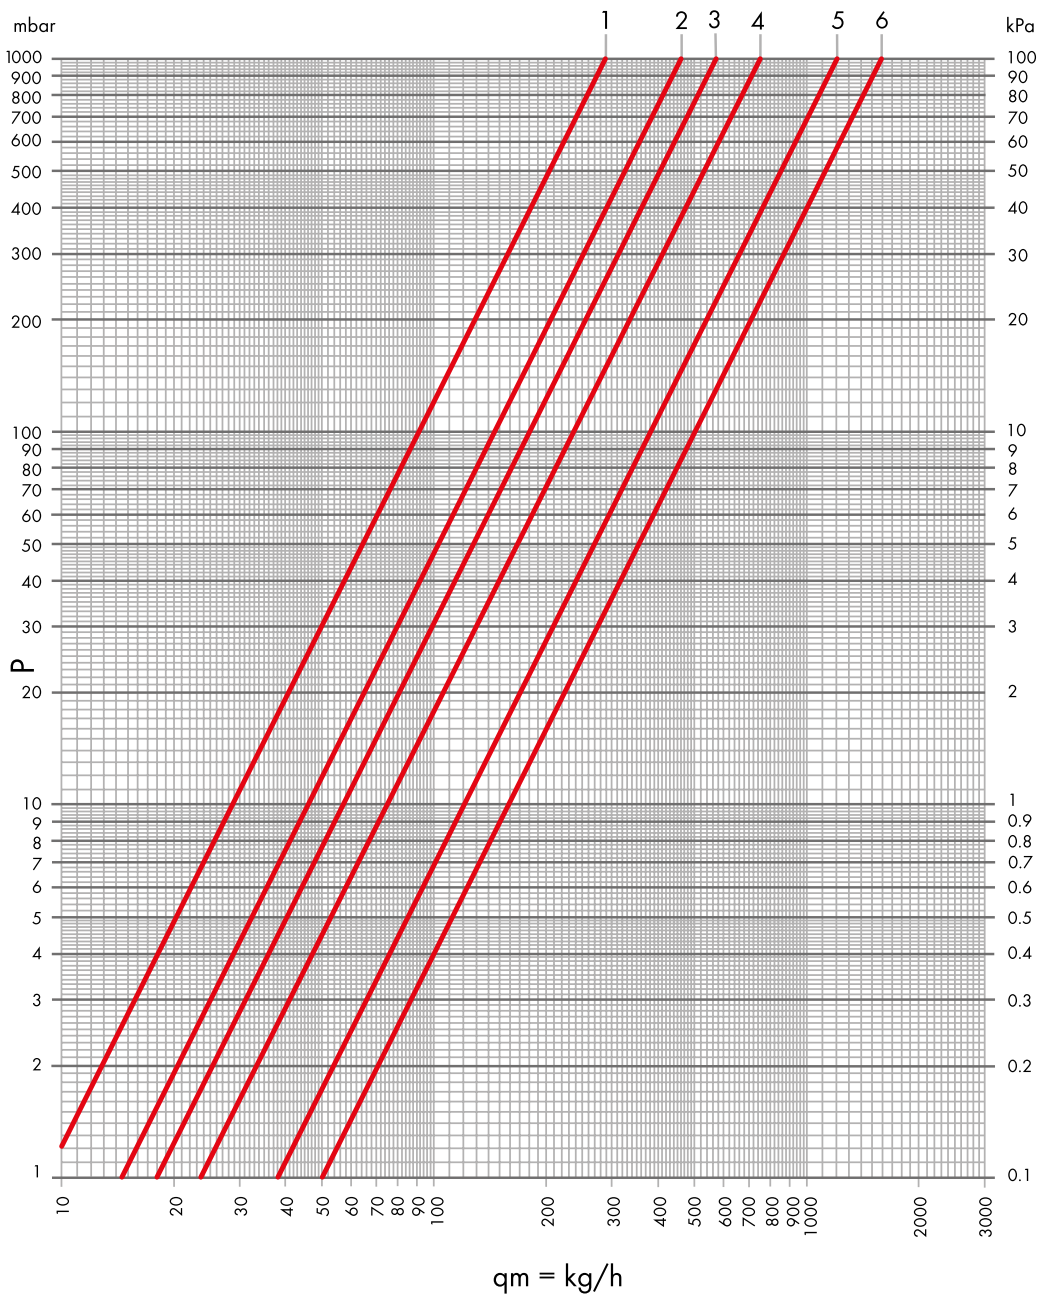


ITEM	Kv	Kv Δt 1 °C	Kv Δt 2 °C	POS
Angle DN 20	0.29	0.15	0.19	1
	0.49	0.20	0.25	2
	0.57	0.24	0.36	3
	0.75	0.26	0.41	4
	1.20	0.31	0.55	5
	1.58	0.32	0.56	6

VALVES FLOW RATE CHART

STRAIGHT VALVES

DN 10 - DN 15

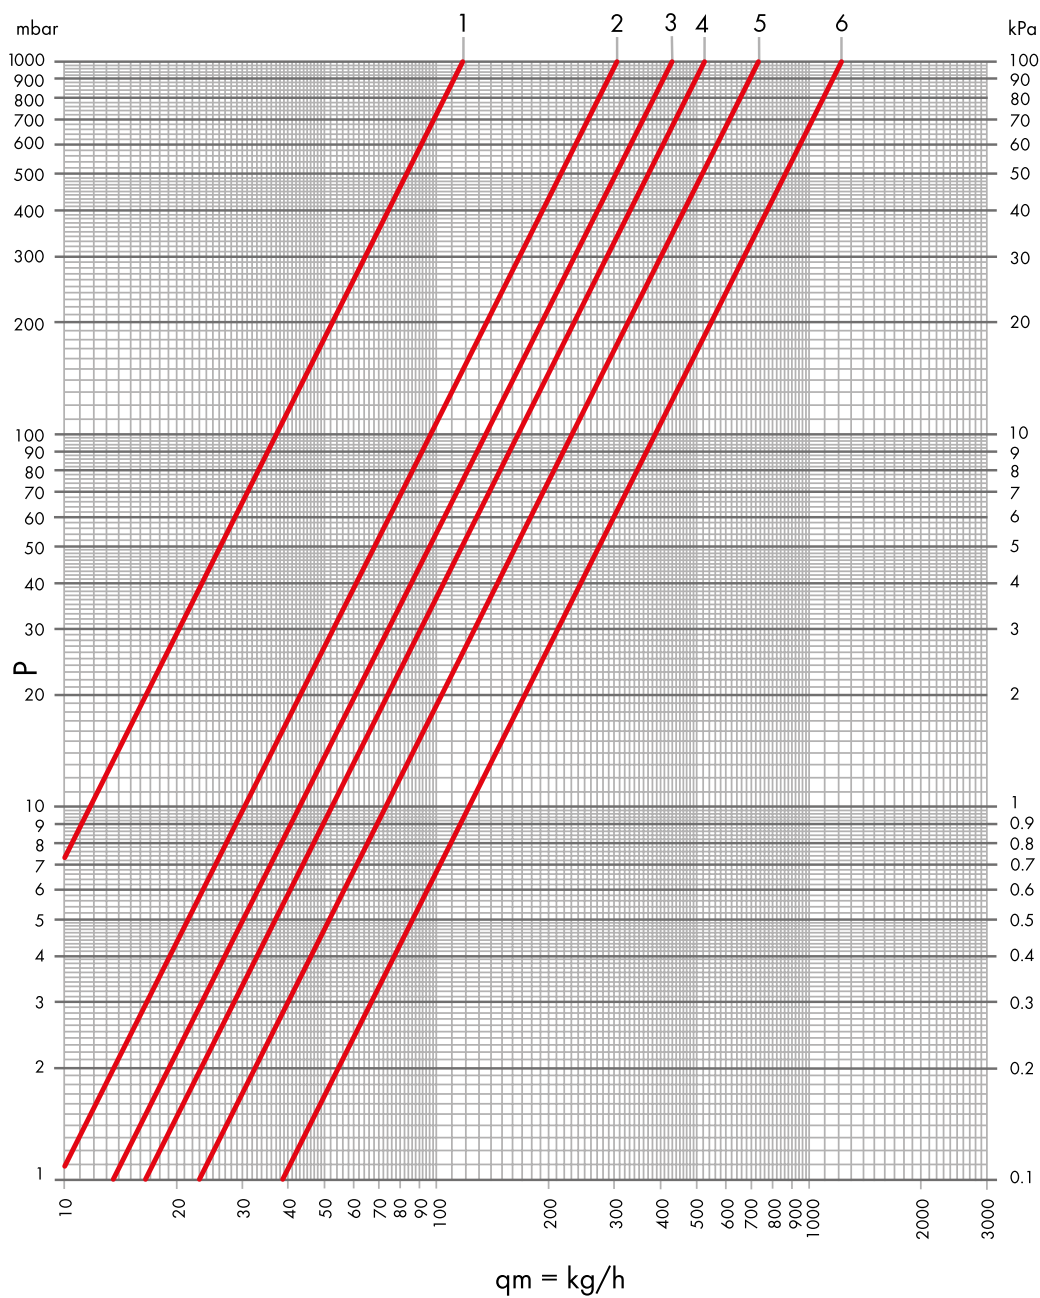


ITEM	Kv	Kv Δt 1 °C	Kv Δt 2 °C	POS
Straight DN 10 - DN 15	0.12	0.10	0.11	1
	0.30	0.20	0.25	2
	0.43	0.24	0.36	3
	0.52	0.24	0.37	4
	0.72	0.24	0.40	5
	1.21	0.29	0.49	6

VALVES FLOW RATE CHART

STRAIGHT VALVES

DN 20

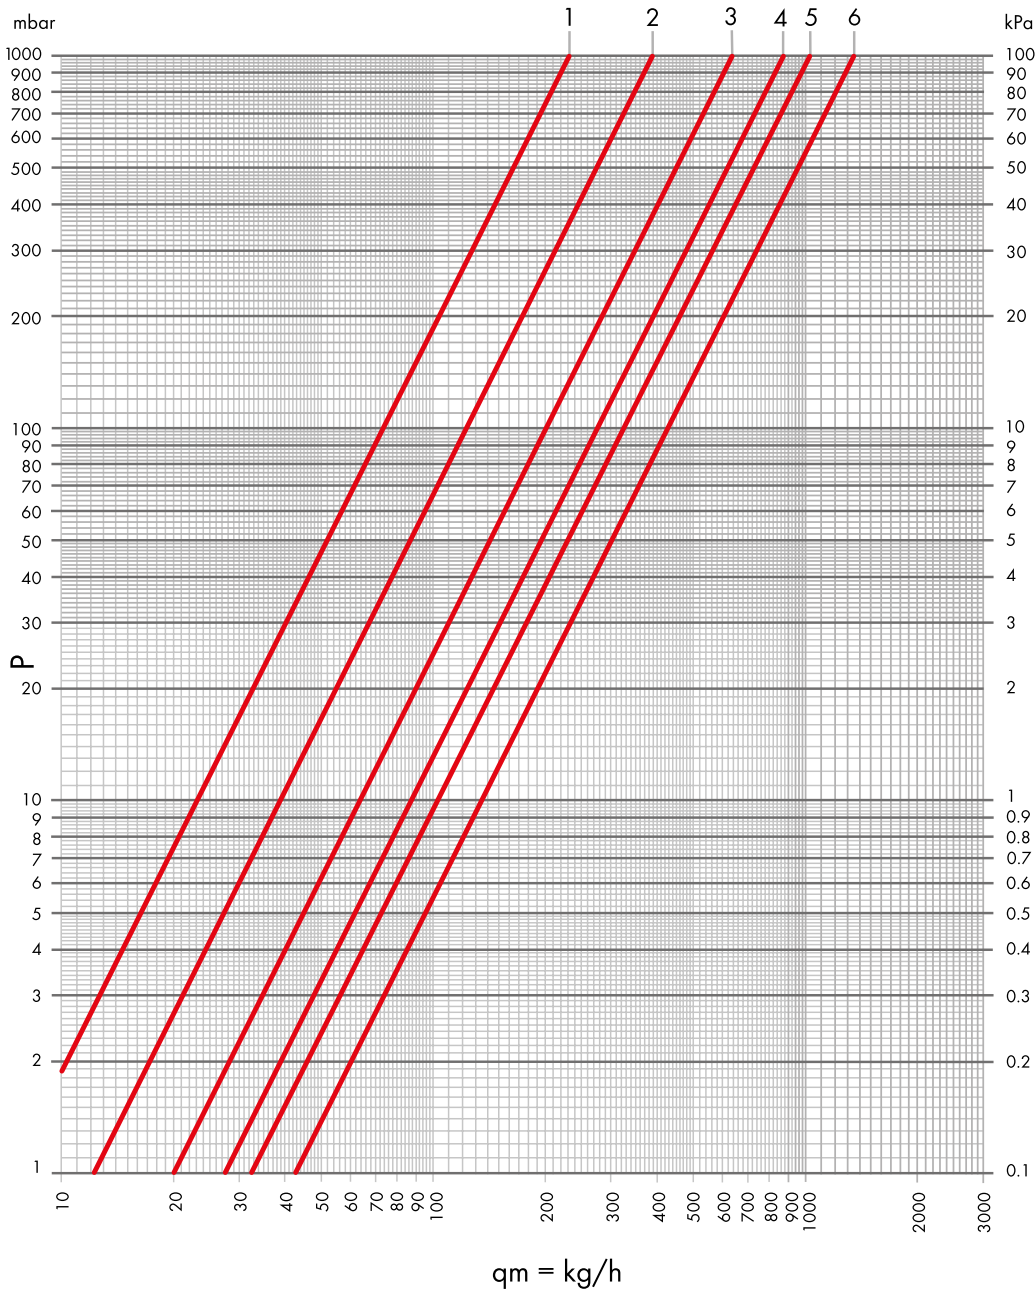


ITEM	Kv	Kv Δt 1 °C	Kv Δt 2 °C	POS
Straight DN 20	0.23	0.16	0.19	1
	0.39	0.22	0.25	2
	0.63	0.25	0.36	3
	0.87	0.29	0.41	4
	1.02	0.30	0.50	5
	1.34	0.31	0.52	6

LOCKSHIELD FLOW RATE CHART

ANGLE LOCKSHIELD


DN 10 3/8

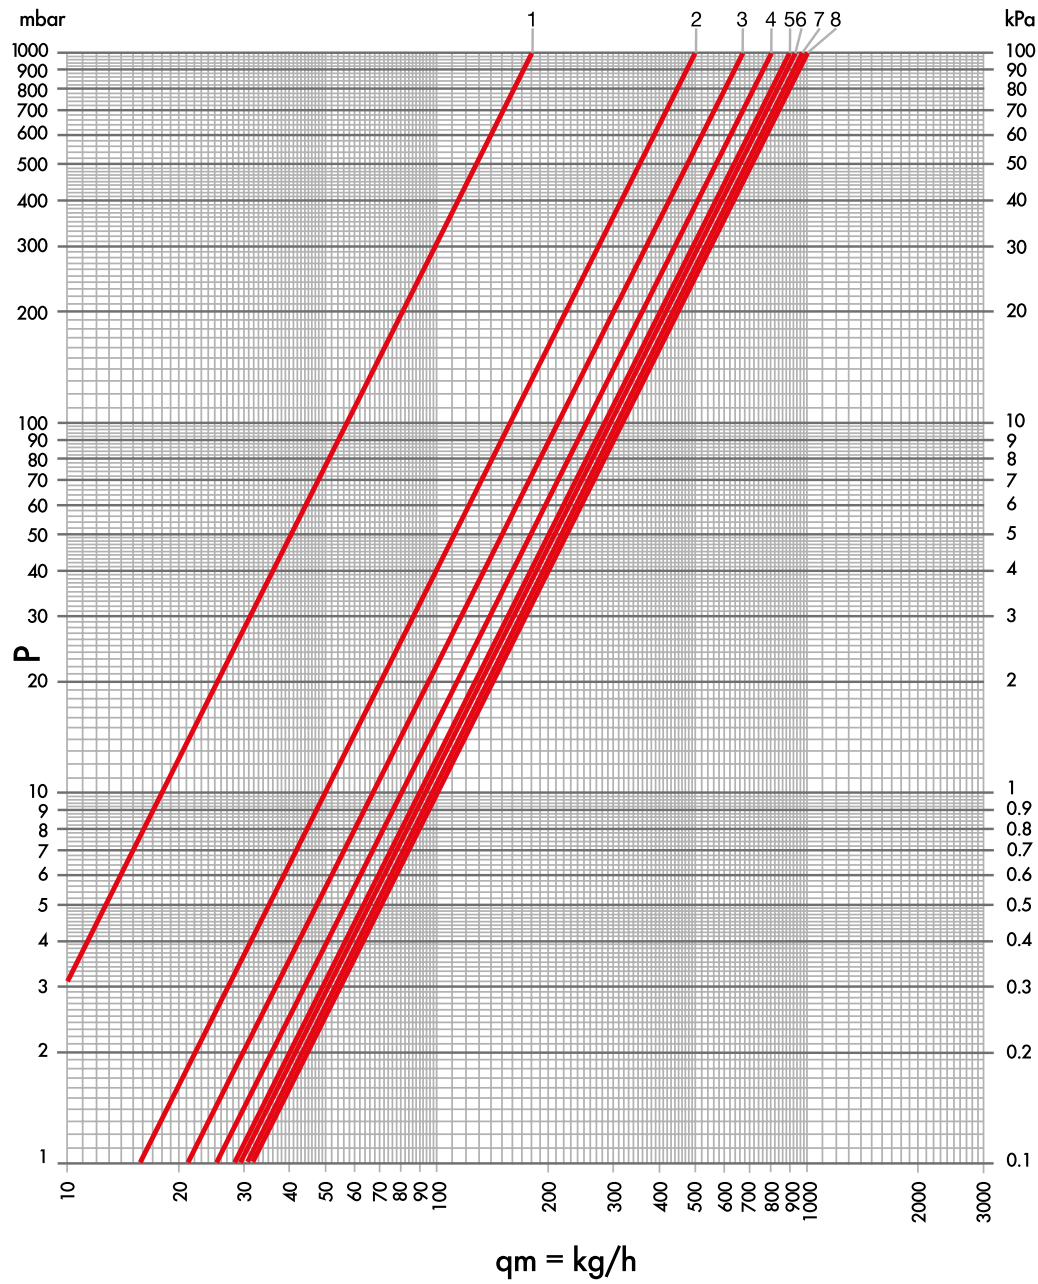

ITEM	TURNS N°	Kvs	POS
DS 22 DS 26 DS 32 DS 39 DS 32/A DS 39/A	1	0.18	1
	1+1/2	0.50	2
	2	0.67	3
	2+1/2	0.80	4
	3	0.90	5
	3+1/2	0.93	6
	4	0.97	7
	all open	1.00	8

LOCKSHIELD FLOW RATE CHART

ANGLE LOCKSHIELD
DN 15 1/2

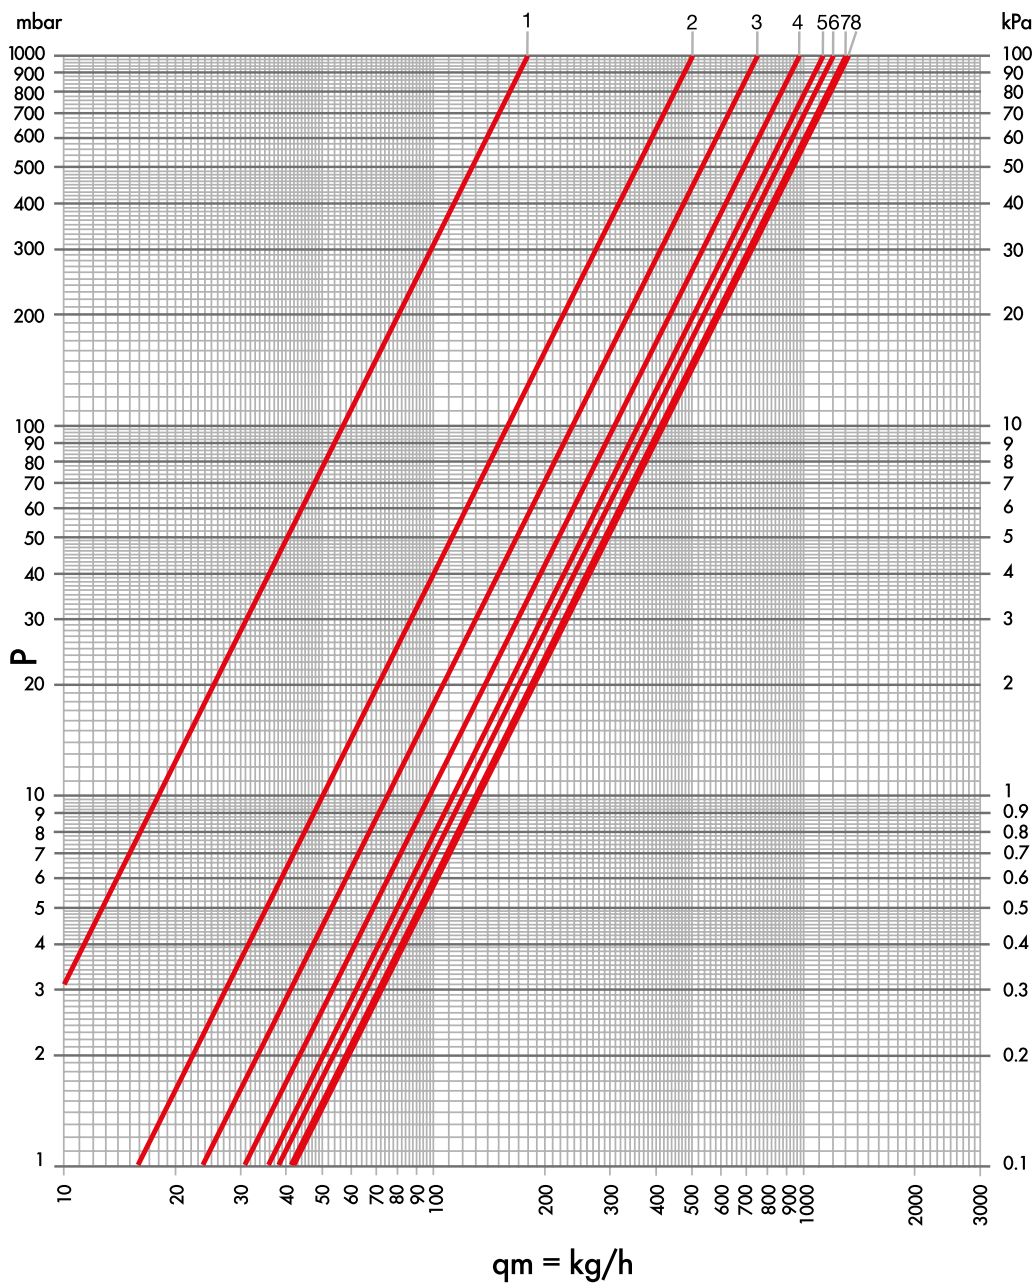


ITEM	TURNS N°	Kvs	POS
DS 22 DS 26 DS 32 DS 39 DS 32/A DS 39/A	1	0.18	1
	1+1/2	0.50	2
	2	0.75	3
	2+1/2	0.97	4
	3	1.12	5
	3+1/2	1.20	6
	4	1.30	7
	all open	1.31	8

LOCKSHIELD FLOW RATE CHART

ANGLE LOCKSHIELD

DN 20 3/4

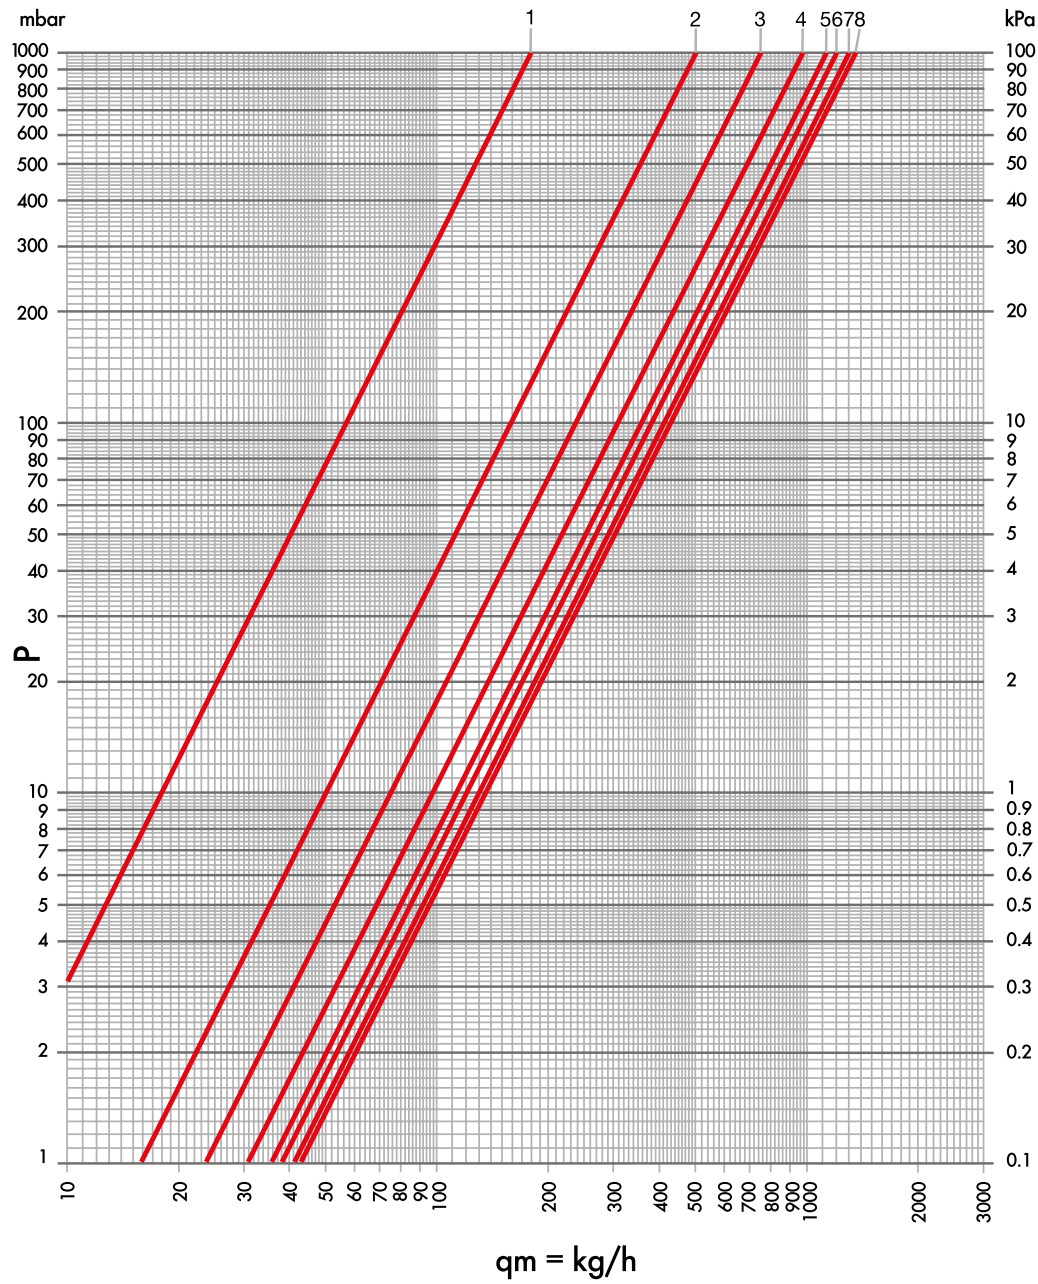


ITEM	TURNS N°	Kvs	POS
DS 22 DS 26 DS 32 DS 39 DS 32/A DS 39/A	1	0.18	1
	1+1/2	0.50	2
	2	0.75	3
	2+1/2	0.97	4
	3	1.12	5
	3+1/2	1.20	6
	4	1.30	7
	all open	1.34	8

LOCKSHIELD FLOW RATE CHART

STRAIGHT LOCKSHIELD

DN 10 3/8

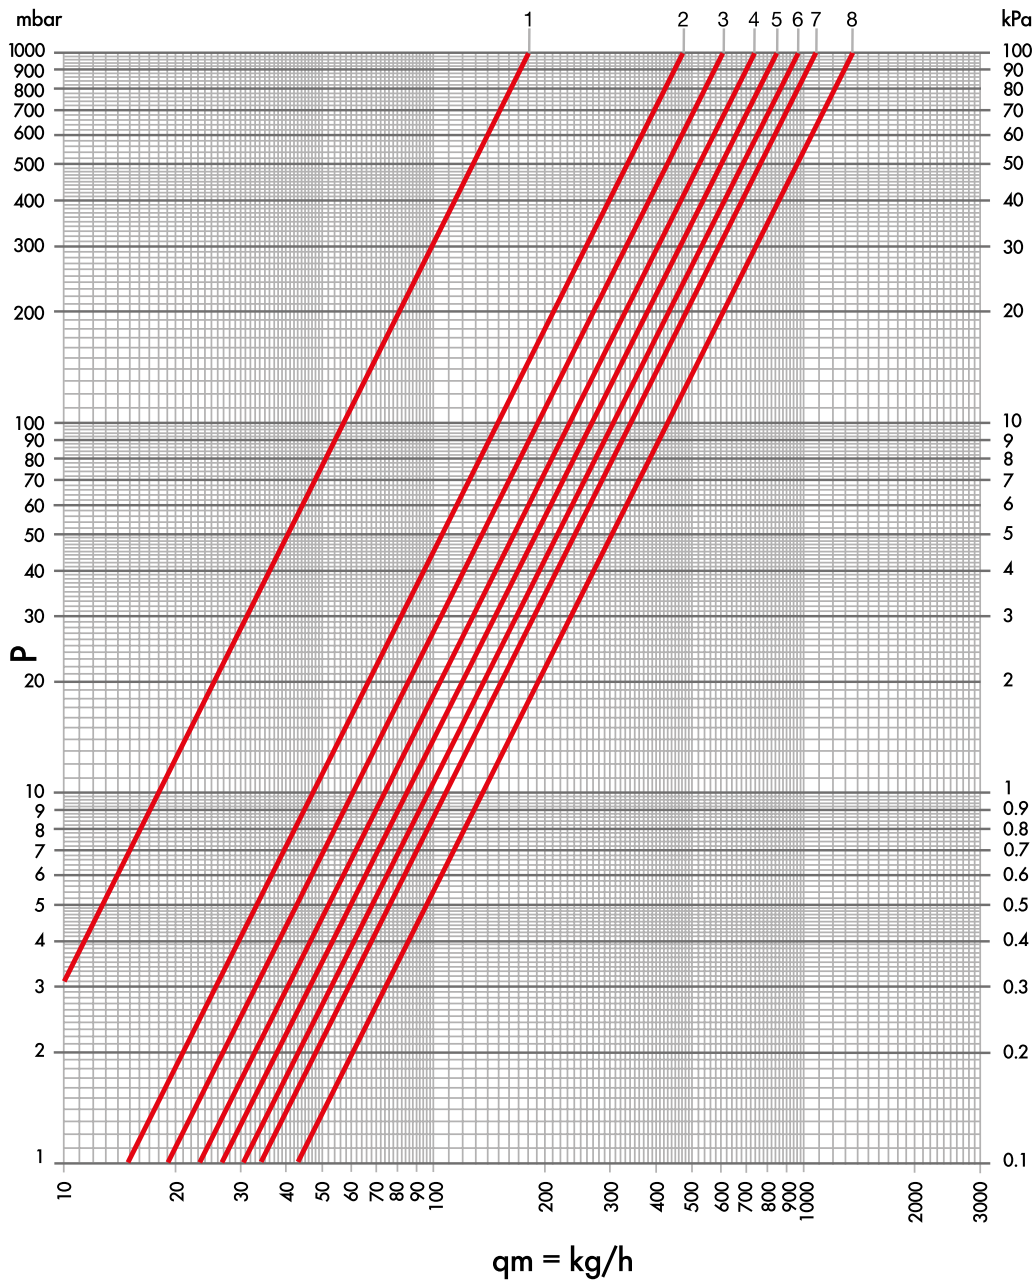


ITEM	TURNS N°	Kvs	POS
DD 21 DD 25 DD 31 DD 38 DD 31/A DD 38/A	1	0.18	1
	1+1/2	0.47	2
	2	0.60	3
	2+1/2	0.73	4
	3	0.84	5
	3+1/2	0.95	6
	4	1.07	7
	all open	1.34	8

LOCKSHIELD FLOW RATE CHART

STRAIGHT LOCKSHIELD

DN 15 1/2

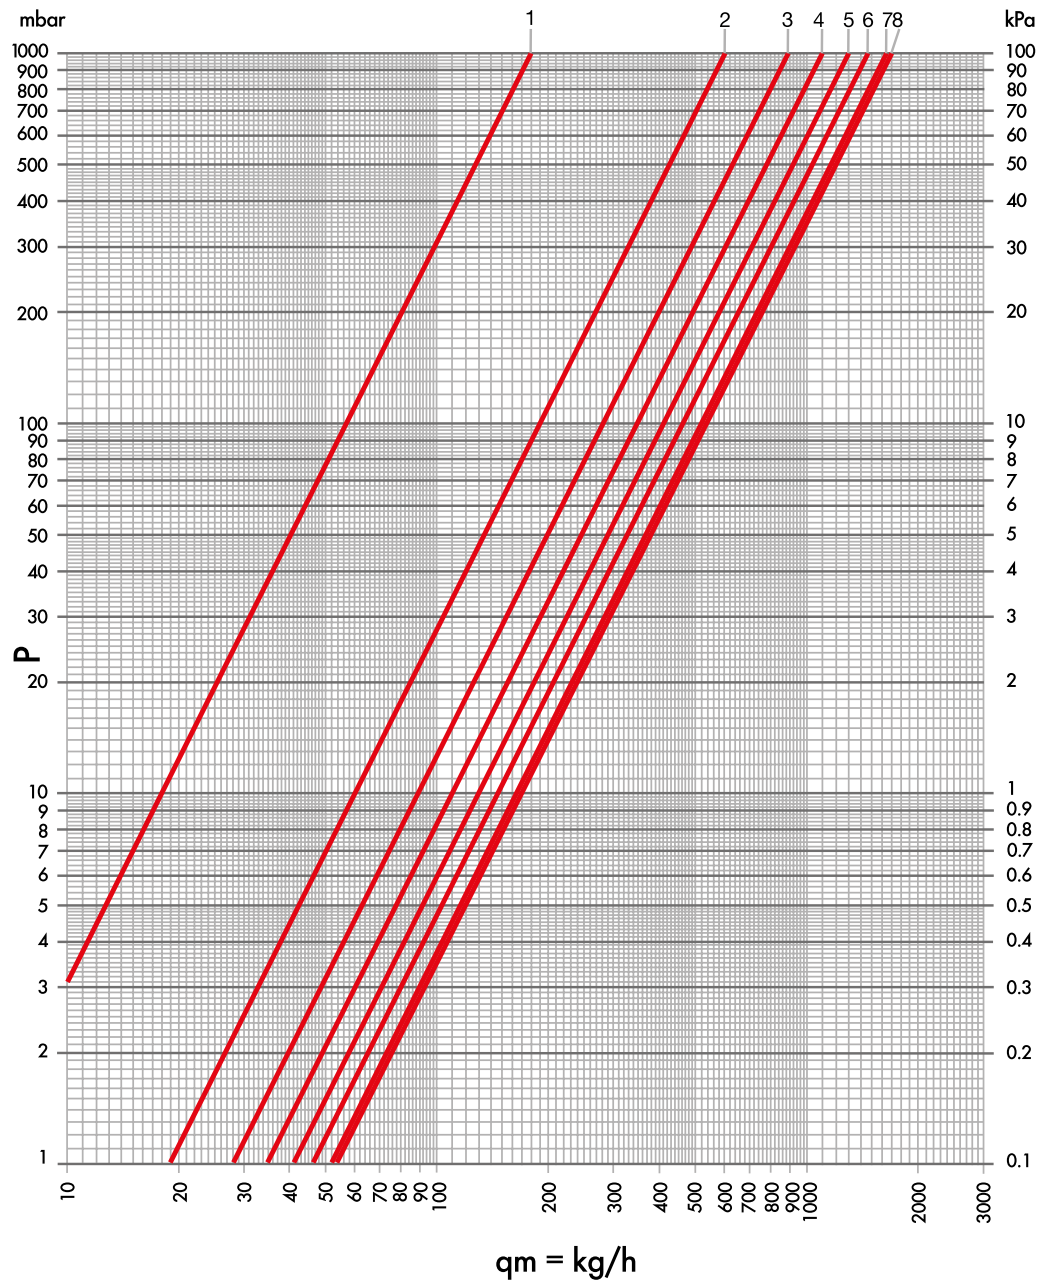


ITEM	TURNS N°	Kvs	POS
DD 21 DD 25 DD 31 DD 38 DD 31/A DD 38/A	1	0.18	1
	1+1/2	0.60	2
	2	0.89	3
	2+1/2	1.10	4
	3	1.30	5
	3+1/2	1.46	6
	4	1.63	7
	all open	1.70	8

LOCKSHIELD FLOW RATE CHART

STRAIGHT LOCKSHIELD

DN 20 3/4

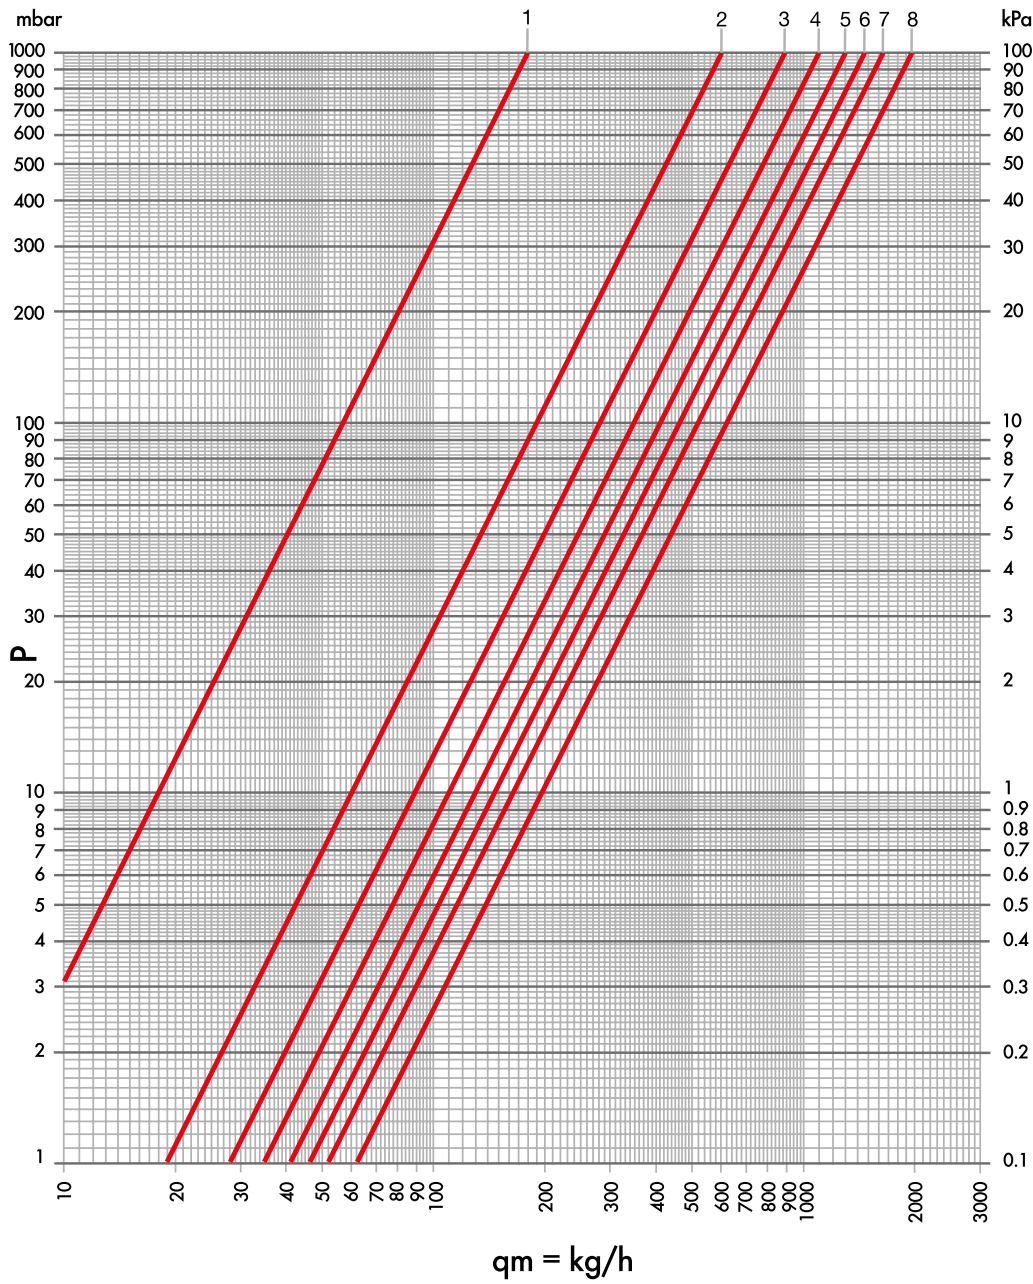

ITEM	TURNES N°	Kvs	POS
DD 21 DD 25 DD 31 DD 38 DD 31/A DD 38/A	1	0.18	1
	1+1/2	0.60	2
	2	0.89	3
	2+1/2	1.10	4
	3	1.30	5
	3+1/2	1.46	6
	4	1.63	7
	all open	1.96	8



A series of horizontal lines for writing, spanning the width of the page.

CONDITION OF SALE

ORDERS

Contracts entered by agents or representative are not definitive until they are regularly accepted by supplier. The orders sent either through our Agents or directly, are accepted under the "General Sales Conditions" described in the present Price List terms, and will agree, without reservation, to the terms below.

INCOTERMS

The consignments are always Ex works unless differently agreed in the sales contract.

PAYMENT TERMS

The payment terms are those specified in the offers and the order confirmation and are binding.

In case of delay of payment with respect to the agreed due terms, the commercial interest shall be calculated. The delayed payment of previous supplies will authorize us to cancel all orders in progress. Agents and representative are not entitled to collect credits, unless clearly authorised in writing by the supplier.

CLAIMS

Claims on quantities will be accepted within 8 days from the date of receipt of goods. The supplier will not be responsible for missing or damaged packages, unless in the despatch note it is clearly written "accepted with reservation".

COURT

For any controversies the place of jurisdiction shall be: the Court of Low of Brescia.

PRICES

Prices indicated are those clearly agreed in the contract sales confirmed by our order confirmation.

DELIVERY TERMS

The articles part of this catalogue will be consigned within a term of 90 days from order acceptance. Any date inferior to this term is not to be considered accepted unless confirmed in order confirmation.

The delivery times are not binding for the supplier, who will not respond for any damages arising directly or indirectly from delivery delays, or from a total or partial interruption of the supply.

PACKAGING

The standard packaging is at suppliers charges.

The standard packaging does not include special out of size or particular. Where any special packaging is required this will be at customer's charges, unless previously agreed in writing in the contract sales.

RETURN OF GOODS

No goods will be accepted without our previous authorization.

MINIMUM ORDER VALUE

The supplier in addition to checking the feasibility will have the right to deliver orders with a minimum value of 500 Euro.

WARRANTY

The guarantee terms refer to article 3 and 5 of the 199/44/CE Directive. The guarantee is supported by an adequate insurance policy for the "Product Third Party Liability". The guarantee declines any responsibility whereas the installation and the test have not been correctly carried out. The wholesalers and the retailers are compelled to illustrate to their customers and installers all the useful care for a correct installation of our materials.

CATALOGUE VALIDITY

Illustrations, data and references published in this issue are not binding on the supplier who reserves the right to make reasonable changes, both technical and commercial, at his discretion at any time, still without lowering the design performance of the goods.



LUXOR SPA

LEGAL OFFICE: Via Zanardelli, 88 - 25013 Carpenedolo (BS) Italy

ADMINISTRATIVE OFFICE, FACTORY AND COMMERCIAL OFFICE:

Via Madonnina, 94 - 25018 Montichiari (BS) Italy

Tel. +39 030 9961161 - Fax +39 030 9961165 - info@luxor.it

www.luxor.it