

NETTUNO UNIVERSAL NETTUNO THREE-PHASE

PRESSURE SENSOR
INPUT (4÷20mA)

AUX INPUT 0÷10V

16X2 LCD DISPLAY

DIGITAL OUTPUTS (2X relay)

POWER SUPPLY

VENTILATION
SYSTEM

DIECASTING
HEATSINK

MOTOR OUTPUT

Rs 485

DIGITAL INPUTS (3X)



POWER SUPPLY
230V 50-60 Hz
400V 50-60 Hz



MAX RATED
CURRENT
1x230V - 10,5A max
3x230V - 9,7A max
(selectable)
3x400V - 13A



PROTECTION
DEGREE
IP 44



Pressure transducer 4÷20mA
with 2mts cable.



NETTUNO UNIVERSAL / NETTUNO THREE-PHASE



PRESSURIZATION



CAR WASH




WASHING



WATER SUPPLY



IRRIGATION

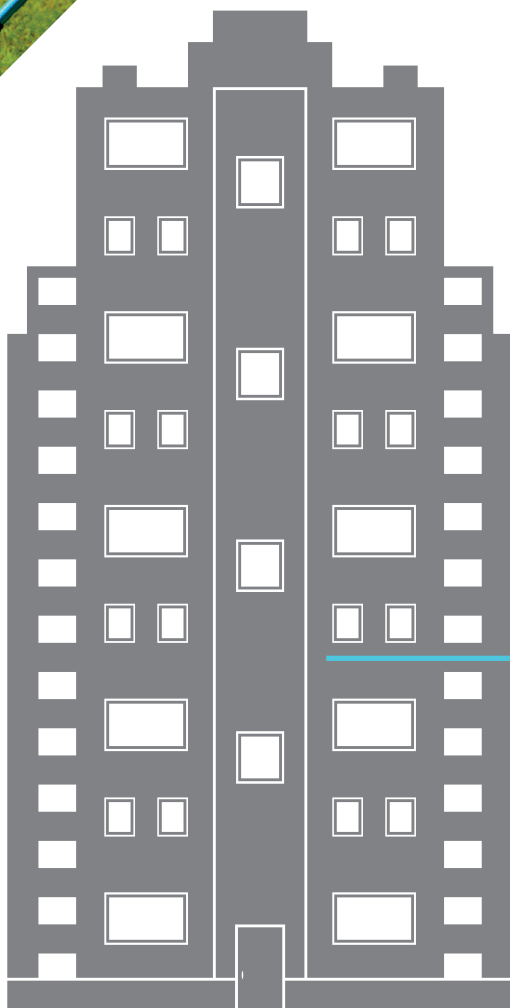

PUMP:

CENTRIFUGAL
SELF-PRIMING
SUBMERSIBLE

TANK

