


HHP – H2


Hand Held Clinching Unit

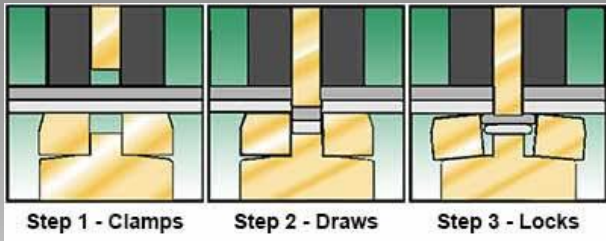

Clinching Unit HHP – H2 **Fast-Clever-Ergonomic**

Features & Specifications

- Full pneumatic – one air connection
- 35 kN pressure force
- Capable for Tog-L-Loc® round, Lance-N-Loc® rectangular and Oval-Loc® oval joint clinch tooling
- Two trigger – one hand operation:
 1. Closing and opening the upper jaw
 2. Power cycle to clinch
- Large opening width especially suitable for clinching HVAC products
- Safe repeatable power stroke
- Built in pivot mechanism - turnable to 360°
- Easy handling
- Weight – 6,5 kg / 14 pounds
- Optimal weight design

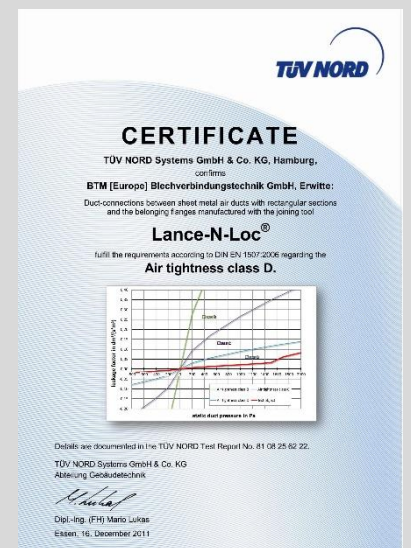

BTM [Europe] Blechverbindungstechnik GmbH



Nord: Handwerkerstraße 6, D-59597 Erwitte
Tel.: +49 (0) 2943-9790-0
www.btm-europe.de · info@btm-europe.de

Süd: Am Fuchsgraben 13, D-77880 Sasbach
Tel.: +49 (0) 7841-68136-0
www.btm-europe.de · info-sued@btm-europe.de

HHP – H2

Hand Held Clinching Unit

Tool holder exchangeable

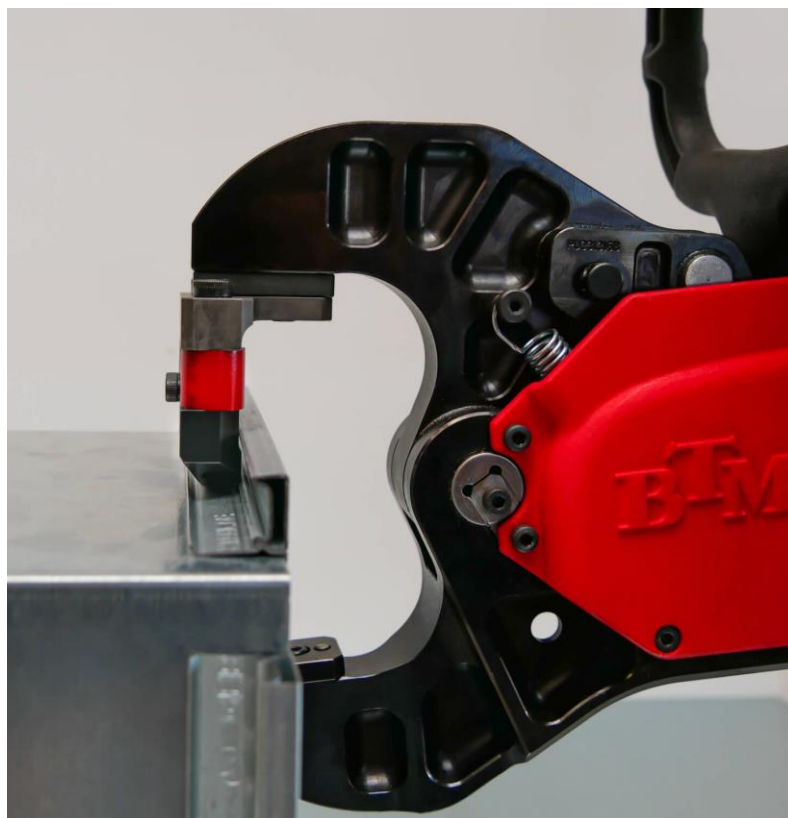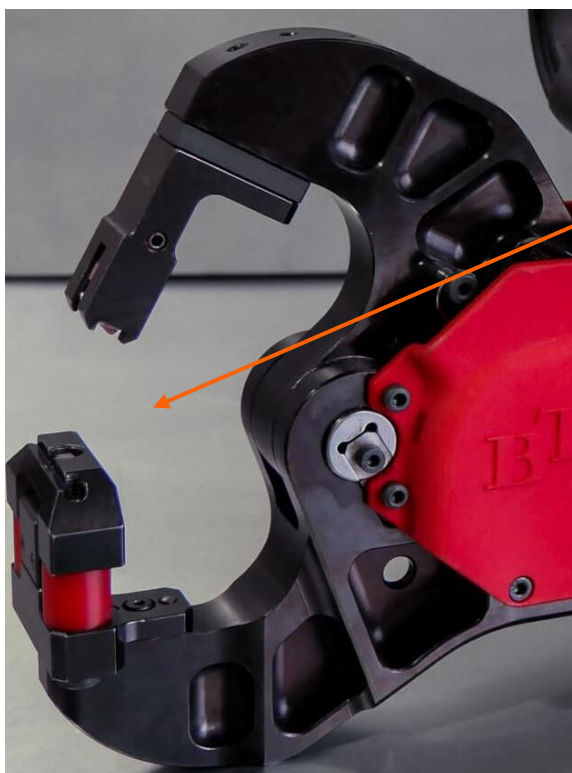

Clinching Unit HHP – H2
Fast-Clever-Ergonomic