




Radar Sensor & Accessories

Product information and application examples



Sample System configuration

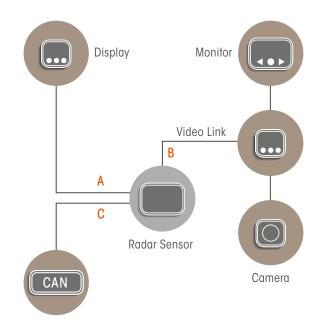



Radar sensors provide an additional monitoring option for a machine's environment.

Should an object or person enter the machine's path of travel, the operator is alerted by acoustic alarms and therefore able to react immediately. The alarm tone frequency as well as visual indicators let the operator know what the distance to the object is. If a camera system is used as well, the situation can easily be assessed by looking at the monitor.

The sensors supplied by our partner PRECO electronics have been successfully employed in construction and earth-moving equipment for many years and are capable of detecting relevant close-proximity and long-distance areas of the machine. Detection ranges of three, four and a half, six and ten meters are standard for the majority of the applications, however, ranges of up to 30 meters are also feasible.




| Radar Sensor and In-Cab Display | | |
|---------------------------------|-------------------------|--|
| Frequency range | 24 GHz | |
| Operating voltage | 9 - 33 V | |
| Measurements | 103 mm x 124 mm x 33 mm | |
| Temperature range | -40 °C to +85 °C | |
| Protection class | IP 69K | |
| Vibration resistance | 25 G | |



Video Link for display on the Monitor

| Operating Voltage | 9 - 33 V |
|----------------------|-------------------------|
| Measurements | 130 mm x 118 mm x 36 mm |
| Temperature range | -40 °C to +85 °C |
| Vibration resistance | 25 G |
| Warning | visual and acoustical |

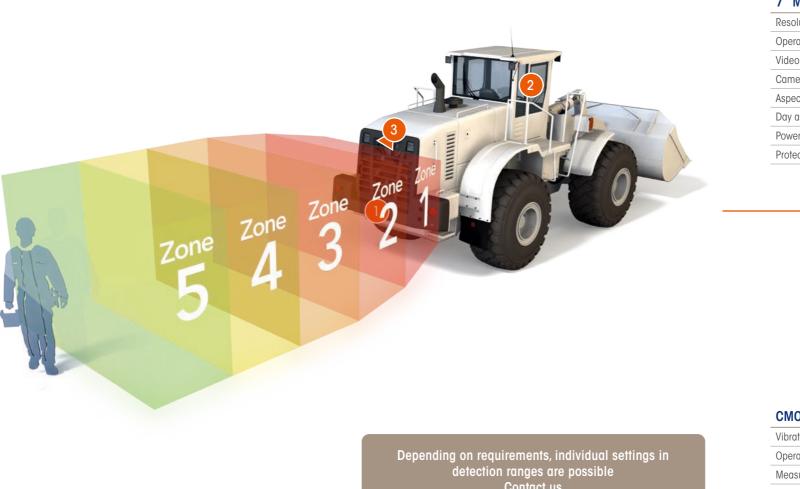

Contact us

Vibra Oper Meas Aper Videa Temp Prote



2

2

7" MEKRA LED Monitor

| Resolution | 800 x 480 Pixel |
|----------------------|------------------------------|
| Operating voltage | 9 - 36 V |
| Video format | PAL / NTSC (automatic) |
| Camera inputs | 4, Splitscreen possible |
| Aspect ratio | 7″/16:9 |
| Day and Night switch | automatically through sensor |
| Power drain | approx. 10 W |
| Protection class | IP 65 |
| | |



CMOS Camera

| ration resistance | 50 G |
|-------------------|----------------------------|
| erating Voltage | 10 - 36 V |
| asurements | 65 mm x 59 mm x 50 mm |
| erture angles | 28°/50°/70°/100°/120°/130° |
| eo format | PAL or NTSC |
| nperature range | -40 °C to +85 °C |
| tection class | IP 69К |
| | |



Our vision ... is safety!

Your contact person:



MEKRAtronics GmbH

Buchheimer Str. 4 91465 Ergersheim

info@mekratronics.de www.mekratronics.de