



| BRAKE FLUIDS                                      | 2        |
|---|----------|
| POWER STEERING-VIREX-ATF-LHM                      | 2-3-4    |
| COOLANTS / ANTIFREEZES                            | 4        |
| GLYCOGEL ORGANIC                                  | 5-6      |
| GLYCO-TRUCK PLUS ORGANIC                          | 6-7      |
| HEAT TRANSFER FLUIDS                              | 7        |
| ANTIFREEZE REFRIGERATION SYSTEM FOR FOOD INDUSTRY | 7        |
| CAR CARE PRODUCTS                                 | 8-9      |
| CLEANING PRODUCTS                                 | 9-10-11  |
| "RED LINE" CLEANING                               | 11       |
| PROFESSIONAL CLEANING                             | 12-13    |
| MOTOR OILS  | 13-14-15 |
| MOTOR OILS - HEAVY VEHICLE                        | 15-16    |
| GEAR OIL  | 17-18    |
| HYDRAULIC AND AGRICULTURAL OILS                   | 18-19-20 |
| GREASES   | 20       |
| ADDITIVES   | 21-22    |
| CARGO ADDITIVES                                   | 23       |
| IADA MOTORCYCLE 2T AND 4T                         | 24       |
| OUTBOARD OIL                                      | 24       |



#### DOT 3

BRAKE FLUID. BOILING POINT >235°C.

| SPECIFICATIONS    | PACK SIZE         | UN/BX |
|-------------------|-------------------|-------|
| SAE J-1703        | 500 ML. (Red)     | 20    |
| FMVSS N-116 DOT 3 | 500 ML (Blue)     | 20    |
| ISO 4925 Class 3  | 500 ML. (Natural) | 20    |



# ADVANCE DOT 4 ABS

BRAKE FLUID. BOILING POINT >260°C

| CERTIFIED BY INTA 5 L 4 10534 | SPECIFICATIONS                                       | PACK SIZE           | UN/BX | REF.                                      |
|-------------------------------|--|---------------------|-------|---|
|                               | CERTIFIED BY INTA<br>SAE J 1704<br>FMVSS № 116 DOT-4 | 5 L<br>10 L<br>25 L |       | 15034<br>10534<br>10434<br>10334<br>10134 |



### **FUTURE DOT 4 ESP**

BRAKE FLUID. BOILING POINT >265°C. WET BOILING POINT >170°C.

| SPECIFICATIONS  | PACK SIZE | UN/BX | REF.  |
|---|-----------|-------|-------|
| UNE 26-109-88 CERTIFIED BY INTA SAE J 1704 FMVSS № 116 DOT-4 ISO 4925 Class 6 Renault R 100278540 BMW QV 34001 VW/AUDI/Seat/Skoda TL-VW766Z Opel GMW 3356 (Draft 9) Smart | 500 ML.   | 20    | 15038 |
|   |           |       |       |



### **SINT-PLUS DOT 5.1**

BRAKE FLUID. BOILING POINT >265°C

| SPECIFICATIONS  | PACK SIZE | UN/BX | REF.  |
|---|-----------|-------|-------|
| UNE 26-409-92 subclass A<br>CERTIFIED BY INTA<br>SAE J 1704<br>FMVSS Nº 116 DOT-5.1<br>ISO 4925 | 500 ML.   | 20    | 15035 |

### • POWER STEERING-VIREX-ATF-LHM •



REF.

15031 15032 15033



### **VIREX**

HYDRAULIC FLUID ATF TYPE FOR POWER STEERING AND AUTOMATIC TRANSMISSIONS.

| SPECIFICATIONS             | PACK SIZE                                  | UN/BX   | REF.                                      |
|----------------------------|--|---------|---|
| GM DEXRON II<br>Allison C3 | 500 ML.<br>5L.<br>25 L.<br>50 L.<br>200 L. | 20<br>4 | 25015<br>20515<br>20315<br>20215<br>20115 |



#### **DEXRON II D**

HYDRAULIC FLUID ATF TYPE.
SPECIALLY INDICATED FOR AUTOMATIC
TRANSMISSIONS AND POWER STEERING.

| SPECIFICATIONS   | PACK SIZE   | UN/BX         | REF.   |
|--|---|---------------|--|
| GM DEXRON IID MB 236.6 - MB 236.7 FORD MERCON MAN 339 TYPE V-1, Z-1 VOLVO 97335 ZF TE-ML 03D, 04D, 11A, 14A, 17C Voith H55.6335xx Bosch Rexroth RD 90 220-1 / 08.6 | 500 ML.<br>1 L.<br>5 L.<br>25 L.<br>50 L.<br>200 L. | 20<br>20<br>4 | 25045<br>20745<br>20545<br>20345<br>20245<br>20145 |



### **DEXRON III**

HIGH QUALITY HYDRAULIC FLUID ATF TYPE WITH SYNTHETIC COMPONENTS FOR AUTOMATIC TRANSMISSIONS AND POWER STEERING OF NEW GENERATION VEHICLES.

| SPECIFICATIONS  | PACK SIZE                       | UN/BX   | REF.                             |
|---|---------------------------------|---------|----------------------------------|
| GM DEXRON IIIG / IID / IIE FORD MERCON<br>ALLISON C-4 TES-228, TES 389 MB 236.9 /<br>MB 236.5 ZF TE-ML 02F, 03D, 04D, 05L, 09,<br>11A, 17C, 21L Caterpillar TO-2<br>MAN 339 Type V1/Z1<br>Volvo STD 1273.40 / 1273.41 Voith 55.6336<br>XXX Ford SQM 9010B - Ford M2C 138CJ<br>Ford M2C 166H - Ford M2C 185A | 1 L.<br>5 L.<br>25 L.<br>200 L. | 20<br>4 | 20746<br>20546<br>20346<br>20147 |



### **DEXRON VI**

100% SYNTHETIC LUBRICANT FOR AUTOMATIC TRANSMISSIONS AND POWER STEERING OF VEHICLES REQUIRING QUALITY LEVEL GM DEXRON VI. COMPATIBLE WITH VEHICLES REQUIRING QUALITY LEVELS DEXRON II OR DEXRON III.

| SPECIFICATIONS                                | PACK SIZE             | UN/ DA  | KEF.                    |  |
|---|-----------------------|---------|-------------------------|--|
| MB 236.41<br>Voith 55.6336 XXX<br>ZF TE-ML 09 | 1 L.<br>5 L.<br>25 L. | 12<br>4 | 20703<br>20506<br>20303 |  |

SPECIFICATIONS

| Ī  |                               |
|----|-------------------------------|
| 7  | IADA                          |
| AT | Fasadir embicule<br>Sintifico |
| =  |                               |
| ₹  |                               |

### ATF MULTI-VEHICLE

100% SYNTHETIC HYDRAULIC FLUID FOR EUROPEAN, AMERICAN AND JAPANESE VEHICLES. MULTIFUNCTIONAL IN AUTOMATIC TRANSMISSIONS AND POWER STEERING.

|   | 1 L. | 12 | 20702          |
|---|------|----|----------------|
| Allison C4, TES-295 BMW LT71141, LA2634, ETL-7045, 8072B Caterpillar TO-2 - Chrysler +3, +4 Ford MERCON®V GM DEXRON III G, III H, II D, II E - HMC/KIA SPSP- III Honda Z1 - Jaguar Idemitsu K17 Jaso M315-2004 Land Rover Texaco N402 MB 236.1, 236.2, 236.3, 236. 5, 236.6, 236.7, 236. 9, 236.10, 236.11 MAN 339V1, 339Z2 Mazda ATF M-III, M5 - JWS 3309 Subaru ATF, plus ATF-HP Toyota T-III, T-IV - Voith H55.6336 ZF TE- ML 03D, 04D, 17C, 14A, 14B FORD XT-5-QM - FORD M Nissan Matic D, Matic J, Matic K | 5 L. | 4  | 20702<br>20509 |



### **ATF CVT**

100% SYNTHETIC FLUID FOR CONTINUOUSLY VARIABLE TRANSMISSION TYPE (CVT). TO BE USED IN LAST GENERATION CHAIN AND BELT CVT. AUDI (Multitronic) MERCEDES (Autotronic). **SPECIFICATIONS** 

| Nissan: NS-1 CVT - Nissan: NS-2 CVT Nissan: NS-3 CVT - Audi/VW TL52180 General Motors: DEX-CVT Daimler Chrysler MB 236.20 Dodge / Jeep NS-2 / Mopar CVTF+4 Ford CVT30 / Mercon C / Ford CVT23 DAIHATSU: AMIX CVTF-DC Honda HMMF - Hyundai Genuine CVTF Hyundai / Kia SP-III Mini Cooper EZL 799 Mitsubishi CVTF-J1 / SP-III Mitsubishi Dia Queen CVTF-J1 Mitsubishi Dia Queen CVTF-J4 Subaru: NS-2 / Lineartronic CVTF Suzuki: TC/ NS-2 / CVT Green 1 (except color) Toyota CVT TC | 1 L. | 12 | 20701 |
|--|------|----|-------|
|  | 5 L. | 4  | 20510 |

**PACK SIZE** 

UN/BX

REF.



#### **SERVO-TEX**

100% MULTIFUNCTIONAL FLUID FOR CENTRAL HYDRAULIC SYSTEMS AND POWER STEERING.

| SPECIFICATIONS  | PACK SIZE                | UN/BX    | REF.                    |
|---|--------------------------|----------|-------------------------|
| MB 345.0<br>MAN 3289<br>VW TL 521 46<br>FORD 12C 204A | 500 ML.<br>1 L.<br>25 L. | 20<br>20 | 25016<br>20716<br>20316 |



### **LHM PLUS**

MINERAL HYDRAULIC FLUID FOR BRAKES, SUSPENSIONS AND CENTRAL CIRCUITS IN CITROËN (PARTS PAINTED IN GREEN). BOILING POINT >250°C.

|                                   | SPECIFICATIONS                                     | PACK SIZE | UN/BX | REF.           |
|-----------------------------------|--|-----------|-------|----------------|
| AFNOR NFR 12-640M<br>PSA B 712710 | CERTIFIED BY INTA<br>ISO 7308<br>AFNOR NFR 12-640M |           |       | 15005<br>10505 |



### **HYDRA-FLUID (LDS)**

SYNTHETIC HYDRAULIC FLUID FOR CITROËN VEHICLES PROVIDED WITH HYDRACTIVE 3 SUSPENSION, AS CITROËN C5.

| SPECIFICATIONS | PACK SIZE | UN/BX | REF.  |
|----------------|-----------|-------|-------|
| PSA B 712710   | 1 L.      | 20    | 20700 |



#### ATF DCT

100% SYNTHETIC FLUID FOR VEHICLES WITH DUAL-CLUTCH TRANSMISSION (DCT), VAG GROUP (DSG OR S-TRONIC BOX), BMW (DKG BOX), FORD (POWER-SHIET)

| SPECIFICATIONS                  | PACK SIZE    | UN/BX   | REF.           |
|---------------------------------|--------------|---------|----------------|
| Ford WSS-M2C-936 A<br>MB 236,21 | 1 L.<br>5 L. | 12<br>4 | 20704<br>20504 |
|                                 |              |         |                |



### 7 SPEED ATF 236.14

FULLY SYNTHEIC FLUID SPECIALLY FORMULATED FOR MERCEDES WITH AUTOMATIC TRANSMISSION RWD 7 SPPED (NAG-2) AND ALL MODELS WHERE MB-APPROVAL 236.14 IS REQUIRED (COLOUR RED)

| SPECIFICATIONS  | PACK SIZE | UN/BX | REF.  |
|---|-----------|-------|-------|
| MB 236.14 NAG2<br>MB 236.12<br>SSANGYONG (MB-AUTOMATIC TRANSMISSIONS) | 1L.       | 20    | 20705 |



#### **ATF-WS**

LOW VISCOSITY LONGFLIFE PRODUCT. IT IS NOT COMPATIBLE WITH ANY OTHER TYPE OF AUTOMATIC TRANSMISSION FLUID. SPECIAL TOYOTA. Toyota T-WS - JWS 3324 Hyundai / Kia SP-IV Aisin Warner AW-1 Nissan Matic S Ford Mercon® LV, Mercon SP Honda ATF DW-1 ZF 8-Speed ATs (ZF Lifeguard Fluid 8) Hyundai NWS-9638

**SPECIFICATIONS** 

**SPECIFICATIONS** 

**SPECIFICATIONS** 

**SPECIFICATIONS** 

1 L.

**PACK SIZE** 

PACK SIZE

**PACK SIZE** 

PACK SIZE

20706

REF.

REF.

UN/BX



#### ATF-6HP

MAINLY TO USE WITH ZF 6-SPEED AUTOMATIC TRANSMISSIONS, INSTALLED IN BMW, JAGUAR AND LAND ROVER.

ATF M1375.4 ATF2 FORD Mercon SP XT-6-QSP (6R60, 6R75, 6R80) Jaguar C2C 8432 Land Rover TYK 500050 ZF S671 090 252/3/5

UN/BX 1 L. 20 20707

### • COOLANTS / ANTIFREEZERS •



UN/BX REF.

RFF

50522 50523

UN/BX

| ä |   |   |
|---|---|---|
|   |   | ١ |
|   |   | ١ |
|   | IADA<br>*********************************** |   |
|   |   |   |
|   | -z-c 5'                                     | ı |
|   | SLoc Jilli                                  | J |

C.C. 5%

COOLANT FLUID FOR RADIATORS WITH CLOSED CIRCUIT. DIRECT USE. FREEZING POINT: -2°C 3 1°C

| (PINK)<br>(GREEN) |
|-------------------|
|                   |



C.C. 10%

COOLANT FLUID FOR RADIATORS WITH CLOSED CIRCUIT. DIRECT USE. FREEZING POINT: -4°C 3 1°C

| UNE 26-361-88 | 1 L. (PINK)   | 20 | 50724 |
|---------------|---------------|----|-------|
|               | 1 L. (GREEN)  | 20 | 50725 |
|               | 1 L. (YELLOW) | 20 | 50520 |
|               | 5 L. (PINK)   | 4  | 50524 |
|               | 5 L. (GREEN)  | 4  | 50525 |
|               |               |    |       |



C.C. 20%

**COOLANT FLUID FOR RADIATORS** WITH CLOSED CIRCUIT. DIRECT USE. FREEZING POINT: -9°C 3 1°C

| SPECIFICATIONS | PACK SIZE  | UN/RX              | REF.  |
|----------------|--|--------------------|---|
| UNE 26-361-88  | 1 L. (PINK)<br>1 L. (GREEN)<br>5 L. (PINK)<br>5 L. (GREEN)<br>25 L. (GREEN)<br>200 L. (GREEN)<br>1000 L. (GREEN) | 20<br>20<br>4<br>4 | 50726<br>50727<br>50526<br>50527<br>50327<br>50127<br>50027 |
|                |  |                    |   |



C.C. 30%

COOLANT FLUID FOR RADIATORS WITH CLOSED CIRCUIT. DIRECT USE. FREEZING POINT: -18°C 3 1°C

| SPECIFICATIONS | PACK SIZE  | UN/RX              | REF.  |
|----------------|--|--------------------|---|
| UNE 26-361-88  | 1 L. (PINK) 1 L. (GREEN) 5 L. (PINK) 5 L. (GREEN) 25 L. (GREEN) 200 L. (GREEN) 1000 L. (GREEN) | 20<br>20<br>4<br>4 | 50728<br>50729<br>50528<br>50529<br>50329<br>50129<br>50029 |



#### CONCENTRATED **ANTIFREEZE**

CONCENTRATED ANTIFREEZE. TO BE DILUTED. REFER TO DILUTION TABLE FOR PROTECTION RANGE. COLOUR: YELLOW.

| SPECIFICATIONS | PACK SIZE | UN/BX | REF.  |
|----------------|-----------|-------|-------|
| UNE 26-361-88  | 1 L.      | 20    | 60720 |
|                | 5 L.      | 4     | 60520 |
|                | 10 L.     | 2     | 60420 |



### **OAT 30% ORGANIC**

**ENGINE COOLANT** ETYLENEGLYCOGL BASED SPECIALLY FORMULATED FOR LIGHT VEHICLES. OAT TECHNOLOGY. DIRECT USE. DO NOT DILUTE.

| SPECIFICATIONS | PACK SIZE | UN/BX | REF.  |
|----------------|-----------|-------|-------|
| UNE 26-361-88  | 5 L.      | 4     | 50555 |

| • GLYCO  | GE   |
|--|--|
| GIVE O GEL   | GL'<br>OR<br>NEW<br>REFR<br>LONG<br>FREE         |
| IADA<br>GLYGOGIA<br>DE RAUGETTA  | NEW REFF LONG                                    |
| IADA<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>GLYCOGI<br>G | GL'OR<br>NEW<br>REFF<br>LONG<br>FREE<br>OAT      |
| GLYCOGEL<br>DESCRIPTION OF THE PROPERTY OF THE PR  | GL'<br>HY<br>COOL<br>LENG<br>FOR<br>LOGY<br>AMIN |

# GLYCOGEL ORGANIC 20%

NEW GENERATION ORGANIC REFRIGERATION FLUID. LONG LIFE. FREEZING POINT: -9 3 1º C. OAT TECHNOLOGY. DIRECT USE.

| UNE 26-361-88 |
|---------------|
| UNE 20-301-88 |
| ASTM D3306-00 |
|               |
| SAF 11034-91  |

**SPECIFICATIONS** 

 PACK SIZE
 UN/BX
 REF.

 5 L. (BLUE)
 4
 50537

# **GLYCOGEL ORGANIC 30%**

NEW GENERATION ORGANIC REFRIGERATION FLUID. LONG LIFE. FREEZING POINT: -18 3 1º C. OAT TECHNOLOGY. DIRECT USE.

| SPECIFICATIONS                                  | PACK SIZE  | UN/BX        | REF.   |
|---|--|--------------|--|
| UNE 26-361-88<br>ASTM D3306-00<br>SAE J 1034-91 | 1 L. (YELLOW)<br>5 L.(BLUE)<br>5 L. (YELLOW)<br>25 L. (BLUE)<br>200 L. (BLUE)<br>200 L. (YELLOW) | 20<br>4<br>4 | 50741<br>50539<br>50541<br>50339<br>50139<br>50053 |

# GLYCOGEL ORGANIC 50%

NEW GENERATION ORGANIC REFRIGERATION FLUID. LONG LIFE. FREEZING POINT: -37 3 1º C. OAT TECHNOLOGY. DIRECT USE.

| SPECIFICATIONS  | PACK SIZE  | UN/BX                              | REF.   |
|---|--|------------------------------------|--|
| UNE 26-361-88 ASTM D 3306-00 ASTM D 4985-94 VW TL 774D (G12) PINK VW TL 774D (G12) (Except color) - Color yellow and blue. VW TL 774F (G12 PLUS) LILAC FORD WSS-M97B44D MB 325.0 FIAT 9.55523 SAE J 1034/91 GENERAL MOTORS 6277M PSA PEUGEOT-CITROËN B71-5110 RENAULT 41-01-001/Q type D NISSAN BS 6580 HONDA HES D2009-75 CUNA NC 956-16 (FIAT) BMW MB 325.3 | 1 L.(BLUE) 1 L. (YELLOW) 1 L. (PINK) 5 L. (BLUE) 5 L. (YELLOW) 5 L. (PINK) 5 L. (LILAC) 25 L.(BLUE) 25 L. (PINK) 200 L.(BLUE) 200 L.(YELLOW) 200 L. (PINK) 1000 L. (BLUE) 1000 L. (PINK) | 20<br>20<br>20<br>4<br>4<br>4<br>4 | 50731<br>50743<br>50742<br>50531<br>50530<br>50542<br>50533<br>50331<br>50333<br>50131<br>50030<br>50142<br>50031<br>50036<br>50037<br>50038 |
|   |  |                                    |  |

#### GLYCOGEL HYBRID 50%

COOLANT FLUID BASED ON ETI-LENGLYCOL. SPECIALLY FORMULATED FOR LIGHT ENGINES, HYBRID TECHNO-LOGY. DOES NOT CONTAIN NITRITES, AMINS NOR PHOSPHATE (NAP). IT CONTAINS BORATS AND SILICATES. MEETS STANDARDS VW: TL 774-C (GII) BLUE COLOR.

| SPECIFICATIONS   | PACK SIZE | UN/BX | REF.  |
|--|-----------|-------|-------|
| AUDI / SEAT / SKODA / VW LAMBORGINI:<br>TL 774-C (G-11)<br>MB/SMART 325.0<br>ROLLS-ROYCE (DESDE 1998) MINI<br>BMW N 600 69.0<br>OPEL B 040 0240 (VEHICLES UNTIL YEAR<br>2000)<br>VOLVO CAR (1286083 ISSUE 002) | 5 L.      | 4     | 50560 |



# **GLYCOGEL** SI-OATS 50%

COOLANT FLUID BASED ON ETI-LENGLYCOL. SPECIALLY FORMULATED FOR LIGHT ENGINES, COMBINED HYBRID TECHNOLOGY WITH ORGANIC ACIDS (OAT). DOES NOT CONTAIN NITRITES, AMINS NOR PHOSPHATE (NAP). NOR CONTAINS BORATS. IT CONTAINS SILICATES ADDITIVES THAT PROTECT FAST CURED ALUMINIUM. MEETS STANDARDS VW: TL-774-G (G12++). COMPATIBLE WITH G13 TECHNOLOGY PINK/VIOLET COLOR.

| SPECIFICATIONS  | PACK SIZE | UN/BX | REF.  |
|---|-----------|-------|-------|
| AUDI / SEAT / SKODA / VW LAMBORGINI:<br>TL 774-C (G-12++)<br>MB 325.5<br>MB 326.5<br>PORSCHE (SINCE 1997) 911, BOXSTER, | 5 L.      | 4     | 50561 |



### GLYCOGEL ECO 50%

COOLANT FLUID BASED ON ETILENGLYCOL. SPECIALLY FORMULATED FOR LIGHT ENGINES, COMBINED HYBRID TECHNOLOGY WITH ORGANIC ACIDS (OAT). DOES NOT CONTAIN NITRITES, AMINS NOR PHOSPHATE (NAP). NOR CONTAINS BORATS. IT CONTAINS SILICATES ADDITIVES THAT PROTECT FAST CURED ALUMINIUM. MEETS STANDARDS VW: TL-774-J (G13). PINK/VIOLET COLOR.

| SPECIFICATIONS   | PACK SIZE | UN/BX | REF.  |
|--|-----------|-------|-------|
| AUDI / SEAT / SKODA / VW<br>TL 774-J (G-13)<br>(SINCE 08/2011) | 5 L.      | 4     | 50562 |
|  |           |       |       |



# CONCENTRATED GLYCOGEL ORGANIC

NEW GENERATION ORGANIC REFRIGERATION FLUID. LONG LIFE. OAT TECHNOLOGY. TO BE DILUTED. REFER TO DILUTION TABLE FOR PROTECTION RANGE. COLOUR: BLUE.

| SPECIFICATIONS   | PACK SIZE                       | UN/BX | REF.                             |
|--|---------------------------------|-------|----------------------------------|
| UNE 26-361-88 ASTM D 3306-00 ASTM D 4985-94 VW TL 774D (G12) (except color) FORD WSS-M97B44D MB-325.3 FIAT 9.55523 SAE J 1034/91 GENERAL MOTORS 6277M PSA PEUGEOT-CITROËN B71-5110 RENAULT 41-01-001/Q type D NISSAN BS 6580 BMW HONDA HES D2009-75 CUNA NC 956-16 | 1 L.<br>5 L.<br>25 L.<br>200 L. | 20 4  | 60731<br>60531<br>60331<br>60131 |

### • GLYCO-TRUCK PLUS ORGANIC •





# **GLYCO-TRUCK PLUS ORGANIC 50%**

NEW GENERATION ORGANIC REFRIGERATION FLUID. LONG LIFE. OAT TECHNOLOGY. DIRECT USE. COLOUR: YELLOW.

| SPECIFICATIONS  | PACK SIZE                                   | UN/BX  | REF.                                      |
|---|---|--------|---|
| National and international specifications: AFNOR NFR 15-601, ASTM D3306 - D4985 , BS 6580, FW Heft R443 (Germany standard), ASO M325, JIS K2234 (Japanese standards), KSM 2142, (Korean standard), MIL Belgium BT-PS- 606A, MIL France DCSEA 615/C, MIL Italy 1415b, MIL Sweden FSD 8704, NATO S-759, Önorm V 5123, SAE J 1034, UNE 26- 361-88/1.   | 5 L.<br>10 L.<br>25 L.<br>200 L.<br>1000 L. | 4<br>2 | 50535<br>50432<br>50332<br>50132<br>50033 |
| Constructors specifications.  Heavy vehicles:  DAF 74002, Detroit Diesel, Deutz 0199- 99-1115, Deutz/MWM 0199-99-2091, Isuzu, Leyland trucks DW03245403, Man 324 type SNF, MB 325.3 - MB 326.3, MTU MTL 5048, Renault trucks 41-01-001/S type D, Scania TB 1451, Volvo VCS.  Constructors specifications. Heavy vehicles and public works: Caterpillar-Mak A4.05.09.01, Kobelco, Komat- su 07.892, Liebherr MD1-36-130. |   |        |   |



# CONCENTRATED GLYCO-TRUCK PLUS ORGANIC

NEW GENERATION ORGANIC REFRIGERATION FLUID. LONG LIFE. OAT TECHNOLOGY. TO BE DILUTED. REFER TO DILUTION TABLE FOR PROTECTION RANGE.

COLOUR: YELLOW.

| su 07.892, Liebherr MD1-36-130.  |                            |       |                         |
|--|----------------------------|-------|-------------------------|
| SPECIFICATIONS   | PACK SIZE                  | UN/BX | REF.                    |
| National and international specifications: AFNOR NFR 15-601, ASTM D3306 - D4985, BS 6580, FW Heft R443 (Germany standard), ASO M325, JIS K2234 (Japanese standards), KSM 2142, (Korean standard), MIL Belgium BT-PS-606A, MIL France DCSEA 615/C, MIL Italy 1415b, MIL Sweden FSD 8704, NATO S-759, Önorm V 5123, SAE J 1034, UNE 26-361-88/.  Constructors specifications. Heavy vehicle. DAF 74002, Detroit Diesel, Deutz 0199-99- 1115, Deutz/MWM 0199-99-2091, Isuzu, Leyland trucks DW03245403, Man 324 type SNF, MB 325.3 - MB 326.3, MTU MTL 5048, Renault trucks 41-01-001/S type D, Scania TB 1451, Volvo VCS.  Constuctors specifications. Heavy vehicles and public works: Caterpillar-Mak A4.05.09.01, Kobelco, Komatsu 07.892, Liebherr MD1-36-130. | 25 L.<br>200 L.<br>1000 L. |       | 60333<br>60121<br>60032 |



### GLYCO-TRUCK SPECIFIC CONCENTRATED

CONCENTRATE COOLANT BASED ON ETHYLENE GLYCOL. IT NEEDS TO DILUTE FOR ITS USE. RECOMMENDED 50% PRODUCT 50% WATER.
CONTAINS CORROSION ADDITIVES BASED ON ORGANIC ACID AND SILICATES (SI-OAT) FREE OF NITRITES, AMINO PHOSPHATES AND BORATES. THE DILUTION RANGE CAN GO FROM 33 TO 60%.

| AS 2108-2004, ASTM D 3306,                        |
|---|
| ASTM D 4985, ASTM D 6210,                         |
| <ul> <li>SAE J1034, ÖNORM V 5123, CUNA</li> </ul> |
| NC 956-16, JIS K 2234:2006, Cummins               |
| CES 14603.  |
| SANS 1251:2005, SH 0521-1999 and                  |
| BS 6580:2010                                      |
| MB 325.5 - 326.5                                  |
| MAN 324 Type Si-OAT.                              |

**SPECIFICATIONS** 



# **GLYCO-TRUCK SPECIFIC 50%**

DIRECT USE.
FOR VEHICLES THAT REQUIRE SI-OAT
TECHNOLOGY. FREE OF NITRITES,
AMINES AND PHOSPHATES WITH
ADDED SILICATES. SPECIALLY FOR
MAN VEHICLES REQUIRING TYPE MAN
324-F SI-OAT. INCLUDING THOSE MADE
FROM DECEMBER 2012. APPROVED
FOR ENGINES EURO 6
(COLOUR VIOLET).

| SPECIFICATIONS  | PACK SIZE                  | UN/BX | REF.                    |
|---|----------------------------|-------|-------------------------|
| AS 2108-2004, ASTM D 3306, ASTM D 4985,<br>ASTM D 6210,<br>SAE J1034, ÖNORM V 5123, CUNA NC 956-16, JIS<br>K 2234:2006,<br>SANS 1251:2005, SH 0521-1999 and BS<br>6580:2010<br>VW / Audi / Seat / Skoda TL 774-G (G12++)<br>Lamborghini / Bentley / Bugatti<br>Porsche from MY 1996<br>MB 326.5, MAN 324 Type Si-OAT<br>Cummins CES 14603 | 25 L.<br>200 L.<br>1000 L. |       | 50370<br>50170<br>50070 |

PACK SIZE

200 L

1000 L.

UN/BX

REF.

50385

50185 50085

### • HEAT TRANSFER FLUIDS •





#### **SOLAR-TECH 35%**

HEAT TRANSFER FLUID FOR SOLAR PANELS. DIRECT USE.

COLOUR: BLUE.

| Requirements DIN 4757 part 3 10 L. 2 50450 Requirements established by CTE 25 L. 50350 | SPECIFICATIONS | PACK SIZE | UN/BX | REF. |
|--|----------------|-----------|-------|------|
|  | ·              |           | 2     |      |



# CONCENTRATED SOLAR-TECH

HEAT TRANSFER FLUID FOR SOLAR PANELS. TO BE DILUTED. COLOUR: BLUE. REFER TO DILUTION TABLE FOR PROTECTION RANGE.

| SPECIFICATIONS   | PACK SIZE      | UN/BX | REF.           |
|--|----------------|-------|----------------|
| Requirements DIN 4757 part 3 Requirements established by CTE | 10 L.<br>25 L. | 2     | 60450<br>60350 |

### • Antifreeze refrigeration system for food industry •





#### **IADAFRIGO 35%**

HEAT TRANSFER FLUID FOR FOOD INDUSTRY. DIRECT USE.

COLOUR: BLUE.

| SPECIFICATIONS  | PACK SIZE      | UN/BX | REF.           |
|---|----------------|-------|----------------|
| MPG based product certified by FDA. Harmless to health. | 10 L.<br>25 L. | 2     | 50401<br>50301 |



# CONCENTRATED IADAFRIGO

HEAT TRANSFER FLUID FOR FOOD INDUSTRY. TO BE DILUTED. COLOUR: BLUE. REFER TO DILUTION TABLE FOR PROTECTION RANGE.

| MPG based product certified 10 L. 2 60401 by FDA. Harmless to health. 25 L. 60301 | SPECIFICATIONS | PACK SIZE | UN/BX | REF. |
|---|----------------|-----------|-------|------|
|   |                |           | 2     |      |

### • CAR CARE PRODUCTS •

|                | MULTIPURPOSE  | SPECIFICATIONS | PACK SIZE   | UN/BX               | REF.                                      |
|----------------|---|----------------|---|---------------------|---|
|                | UNLOCKING, ANTIOXYDANT,<br>LUBRICANT AND MOIST ABSORBER.                                    |                | SPRAY 270 ML.<br>SPRAY 520 ML.                                | 20<br>20            | 72231<br>75231                            |
|                | COLD START  | SPECIFICATIONS | PACK SIZE   | UN/BX               | REF.                                      |
|                | EASES START IN COLD CONDITIONS.<br>FOR DIESEL AND PETROL ENGINES.                           |                | SPRAY 270 ML.   | 20                  | 72232                                     |
|                | PENETRATING OIL   | SPECIFICATIONS | PACK SIZE   | UN/BX               | REF.                                      |
|                | TO FREE RUSTED MECHANICAL PARTS<br>(SUCH AS NUTS AND BOLTS)                                 |                | SPRAY 270 ML.<br>SPRAY 520 ML.<br>SPRAY 1 L.<br>5 L.<br>25 L. | 20<br>20<br>20<br>4 | 72230<br>75230<br>70530<br>70430<br>70330 |
|                | HERMETIC 90   | SPECIFICATIONS | PACK SIZE   | UN/BX               | REF.                                      |
| ADA            | ADHESIVE FORMULATED TO<br>JOIN GASKETS, CYLINDER HEADS,<br>SUMPS, ETC.                      |                | 125 ML.<br>250 ML.<br>(with applicator)                       | 20<br>20            | 79048<br>72548                            |
|                | DEONIZED WATER  | SPECIFICATIONS | PACK SIZE   | UN/BX               | REF.                                      |
| Again Destroit | NEUTRAL AND SALTS FREE DEONIZED WATER TO BE USED IN BATTERIES AND COOLANTS DILUTIONS.       |                | 1 L.<br>5 L.  | 20<br>4             | 70731<br>70531                            |
|                | IADA AUTO   | SPECIFICATIONS | PACK SIZE   | UN/BX               | REF.                                      |
| selina Auto    | SPECIAL ANTICORROSIVE PETROLEUM JELLY FOR TERMINAL BATTERY. COLOUR RED.                     |                | 125 ML.   | 20                  | 41037                                     |
|                | GRASDUR   | SPECIFICATIONS | PACK SIZE   | UN/BX               | REF.                                      |
| Grasdur        | NEUTRAL PETROLEUM JELLY<br>HIGH GREASINESS AND TEMPERATURE<br>RESISTANT.<br>COLOUR RED.     |                | 500 ML.   | 20                  | 45038                                     |
|                | TYRE REPAIR   | SPECIFICATIONS | PACK SIZE   | UN/BX               | REF.                                      |
| Anthon A       | LIQUID NATURAL RUBBER BASED PRODUCT FOR REPARING AND INFLATING TYRES WITHOUT REMOVING THEM. |                | SPRAY 405 ML.   | 20                  | 74045                                     |

|  | SILIKON 1  | SPECIFICATIONS | PACK SIZE | UN/BX | REF.  |
|--|--|----------------|-----------|-------|-------|
| The state of the s | SILICONE RUBBER JOINT CREATOR WITH WORKING TEMPERATURE RESISTANCE -70°C TO +210°C. MONOCOMPONENT, TREATED AT ROOM TEMPERATURE. COLOUR RED.   |                | 75 ML.    | 20    | 47547 |
|  |  |                |           |       |       |
|  | SILIKON 2  | SPECIFICATIONS | PACK SIZE | UN/BX | REF.  |
| Evens I I I  | SILICONE RUBBER JOINT CREATOR WITH WORKING TEMPERATURE RESISTANCE -50°C TO +150°C. MONOCOMPONENT, TREATED AT ROOM TEMPERATURE. COLOUR BLACK. |                | 75 ML.    | 20    | 47549 |

### • CLEANING PRODUCTS •

| <br>/ |  |
|-------|--|

|                    | WAY CHAMBOO   | CRECIFICATIONS | DACK CIZE   | LIN /DV                       | DEE                             |
|--------------------|---|----------------|---|-------------------------------|---------------------------------|
| IADA               | WAX SHAMPOO  CLEANS AND WAXES IN ONE SINGLE OPERATION. TO BE DILUTED.   | SPECIFICATIONS | PACK SIZE   | 20                            | REF.<br>80753                   |
| ADA                | WAX SHAMPOO<br>+ SPONGE   | SPECIFICATIONS | PACK SIZE<br>1 L.                                 | UN/BX                         | <b>REF.</b><br>80453            |
| IA DA<br>Ourpa ado | CAR SHAMPOO  MANUAL BODYWORK WASHING. TO BE DILUTED.  | SPECIFICATIONS | PACK SIZE<br>1 L.                                 | UN/BX<br>20                   | <b>REF.</b><br>80703            |
| A DA<br>Surpo ado  | CAR SHAMPOO<br>+ SPONGE   | SPECIFICATIONS | PACK SIZE   | UN/BX                         | REF.<br>80403                   |
|                    | ENGINE DEGREASER  DEGREASER SPECIALLY FORMULATED FOR CLEANING ENGINES AND PARTS. NEUTRAL PRODUCT SUITABLE TO CLEAN ANY METAL (INCLUDING ALUMINIUM). | SPECIFICATIONS | PACK SIZE SPRAY 520 ML.                           | UN/BX<br>20                   | <b>REF.</b><br>85232            |
|                    | DASHBOARD CLEANER  SILICONE BASED PRODUCT FOR CLEANING, RENOVATING AND PROTECTING VINYL, PLASTIC SYNTHETIC LEATHER AND SIMILAR MATERIALS SURFACES.  | SPECIFICATIONS | PACK SIZE  SPRAY 270 ML. SPRAY 520 ML. SPRAY 1 L. | UN/BX<br>20<br>20<br>20<br>20 | REF.<br>82254<br>86054<br>80554 |

|                              |   | CDECIFICATIONS | DACK CITE                                | LINI /DV | DEE                                       |
|------------------------------|---|----------------|--|----------|---|
|                              | ASHBOARD<br>LEANER<br>CLEANING CLOTH  | SPECIFICATIONS | SPRAY 520 ML.<br>SPRAY 1 L.              | 16<br>14 | REF.<br>86056<br>80556                    |
|                              | INDSCREEN   | SPECIFICATIONS | PACK SIZE                                | UN/BX    | REF.                                      |
| Limpia parabrias PRO WII MEI | LEANER  ODUCT FOR CLEANING VEHICLE'S NDSCREEN. DIUM-LOW PROTECTION AGAINST EEZING °C). DIRECT USE.  |                | 1L.<br>5L.<br>25 L.<br>200 L.<br>1000 L. | 20<br>4  | 80731<br>80531<br>80331<br>80130<br>80001 |
|                              | /INDSCREEN  | SPECIFICATIONS | PACK SIZE                                | UN/BX    | REF.                                      |
| PRO WII                      | LEANER -9°C  ODUCT FOR CLEANING VEHICLE'S  NDSCREEN.  DIUM PROTECTION AGAINST  EEZING  °C). DIRECT USE.   |                | 1L.<br>5 L.                              | 20<br>4  | 80732<br>80530                            |
|                              | INTER WINDSCREEN  | SPECIFICATIONS | PACK SIZE                                | UN/BX    | REF.                                      |
| PRO WII                      | LEANER  ODUCT FOR CLEANING VEHICLE'S NDSCREEN. 3H PROTECTION AGAINST FREEZING 0°C). DIRECT USE.   |                | 1 L.<br>5 L.                             | 20<br>4  | 80736<br>80537                            |
|                              | NTIMOSQUITOES   | SPECIFICATIONS | PACK SIZE                                | UN/BX    | REF.                                      |
| PRO WII                      | VINDSCREEN CLEANER  ODUCT FOR CLEANING VEHICLE'S NDSCREEN. WITH BIODEGRADABLE TERGENT. EASILY DISSOLVES RESTS INSECTS. DIRECT USE.                  |                | 5 L.                                     | 4        | 80540                                     |
|                              | AIN REPELLENT   | SPECIFICATIONS | PACK SIZE                                | UN/BX    | REF.                                      |
| FOI ISS                      | ATER-REPELLENT PRODUCT R WINDSHIELDS. EFFECT CAN BE BEST APPRECIA- D RUNNING AT 80 KM/H. PROTECTIN AINTS FREEZEING -10°. DIRECT USE.                |                | 5 L.                                     | 4        | 80541                                     |
|                              | ONCENTRATED   | SPECIFICATIONS | PACK SIZE                                | UN/BX    | REF.                                      |
| PRO WII                      | VINDSCREEN CLEANER  ODUCT FOR CLEANING VEHICLES NDSCREEN. TO BE DILUTED TO OBTAIN EEZING PROTECTION SOUGHT. REFER DILUTION TABLE FOR PROTECTIN NGE. |                | 250 ML.                                  | 20       | 82532                                     |
|                              | ONCENTRATED   | SPECIFICATIONS | PACK SIZE                                | UN/BX    | REF.                                      |
| COI<br>TIN<br>TO             | NTIMOSQUITOS /INDSCREEN CLEANER  NCENTRATED ADDITIVE FOR ELIMINA- IG INSECTS FROM THE WINDSCREEN. BE DILUTED IN WINDSCREEN                          |                | 250 ML.                                  | 20       | 82531                                     |
|                              | EANER OR DEONIZED WATER.  |                |  |          |   |
|                              | RAKES AND<br>LUTCHES CLEANER  | SPECIFICATIONS | PACK SIZE SPRAY 520                      | UN/BX    | REF.<br>85234                             |



### MULTIPURPOSE DEGREASER

CLEANING AND DEGREASING PRODUCT. BIODEGRADABLE LIQUID.

| SPECIFICATIONS | PACK SIZE                               | UN/BX        | REF.                    |
|----------------|---|--------------|-------------------------|
|                | 1 L.<br>5 L.<br>1 L. (EXHIBITOR<br>BOX) | 20<br>4<br>9 | 80754<br>80553<br>80054 |

### • "RED LINE" CLEANING •



85031

12



#### WHEEL CLEANER

PRODUCT FOR CLEANING ALL KIND OF WHEELS: STEEL, ALLOY CHROME OR PLASTIC. DO NOT USE IN LACQUERED WHIEE! & **SPECIFICATIONS** 

| PACK SIZE | UN/BX | REF. |
|-----------|-------|------|
|           |       |      |

500 ML



# ANTI FOG WINDOW CLEANER

PROVIDES PERFECT SHINE CRYSTALS WITHOUT TRACES, ENSURES PERFECT VISIBILITY THROUGH THE WINDSHIELD AND MIRRORS. DIRECT USE. DO NOT DILUTE. HIS EFFECT PREVENTS FOG MISTING. HIS RAINPROOF EFFECT PREVENTS WATER DROPLETS ADHERE TO THE GLASS. IT CAN ALSO BE USED IN MIRRORS AND GLASS HOME.

| SPECIFICATIONS | PACK SIZE | UN/BX | REF.  |
|----------------|-----------|-------|-------|
|                | 500 ML.   | 12    | 85032 |



# INSECT REMOVER EXTERIOR PLASTIC CLEANER

DESCALING PRODUCT OF GREAT POWER. REMOVES QUICKLY AND EASILY THE REMAINS OF INSECTS IN PLASTICS, PAINT AND CHROME. EXCELLENT ALSO TO PRE-TREATMENT BEFORE WASHING VEHICLE.

| SPECIFICATIONS | PACK SIZE | UN/BX | REF.  |
|----------------|-----------|-------|-------|
|                | 500 ML.   | 12    | 85036 |



# DASHBOARD CLEANER

SPECIAL FOR THE INTERIOR SURFACES OF THE VEHICLE. CLEANS AND RENEWS THE SURFACES. REPELS DUST AND LEAVES A CLEAN AND SCENTED SURFACE. SILICON FREE.

| 500 ML. 12 85037 | , |
|------------------|---|



# UPHOLSTERY CLEANER

SPECIAL FOR CLEANING UPHOLSTERY AND CARPETS, REMOVES EXCESS OIL, CHOCOLATE, GREASE, ETC.

| 5. 25 15.1.15115 | TATOM SIZE | 011/ DA |       |
|------------------|------------|---------|-------|
|                  | 500 ML.    | 12      | 85038 |

DACK SIZE

HN/RY

DEE



# LEATHER CLEANER CONDITIONER

CLEANS, CONDITIONS AND NOURISHES THE LEATHER ALL AT ONCE. THE FORMULA IS FAST DRYING AND CERTAINLY NOT FAT.

| SPECIFICATIONS | PACK SIZE | NN/RX | REF.  |
|----------------|-----------|-------|-------|
|                | 500 ML.   | 12    | 85039 |



# WINDSHIELD DE-ICER

SPECIALLY FORMULATED TO QUICKLY LIQUEFY AND REMOVE THE ICE AND FROST IN WINDSCREEN, WINDOWS, LIGHTS, LOCKS, WINDSCREEN WIPERS, ETC.

| SPECIFICATIONS | PACK SIZE | UN/BX | REF.  |
|----------------|-----------|-------|-------|
|                | 500 ML.   | 12    | 85042 |
|                |           |       |       |

**SPECIFICATIONS** 

### • PROFESSIONAL CLEANING •

| BIADA BURDOT TORK  | AUTO CARWASH<br>SHAMPOO.<br>EXTRA FOAM  SPECIALLY FORMULATED FOR<br>AUTOMATIC DRIVE-THOURGH CARWASH<br>AND CAR WASHING TUNNEL.   | SPECIFICATIONS | PACK SIZE<br>25 L.            | UN/BX            | REF.<br>80301                   |
|--|--|----------------|-------------------------------|------------------|---------------------------------|
| MANAGO AITO CO   | SHAMPOO AUTO  SPECIALLY FORMULATED FOR HIGH PRESSURE CAR WASHING WITH BODYWORK BRUSH IN COLD OR WARM WATER.  | SPECIFICATIONS | PACK SIZE<br>5 L.<br>25 L.    | UN/BX            | REF.<br>80503<br>80303          |
| SNAPO C  | WAX SHAMPOO SHAMPOO AND WAX IN A SINGLE PRODUCT.   | SPECIFICATIONS | PACK SIZE<br>25 L.            | UN/BX            | REF.<br>80353                   |
| BRILLON (2)  | BRILLCAR  WATER RESISTANT POLISHING PRODUCT FOR BODY WORKS. IT ACCELERATES DRYING.   | SPECIFICATIONS | PACK SIZE<br>25 L.            | UN/BX            | REF.<br>80332                   |
| DT-300 (C)   | DT-300  ALKALINE DETERGENT AND DEGREASER FOR CLEANING BODY WORKS AND HEAVY AND COMMERCIAL VEHICLE CABINS.  | SPECIFICATIONS | PACK SIZE<br>25 L.            | UN/BX            | REF.<br>80304                   |
| O I A DA minimum of the strong | ENGINE DEGREASER DS-600  ENGINE AND PARTS DEGREASER. VERY ENERGETIC. NOT SUITABLE FOR ALUMINIUM. WATER BASE.   | SPECIFICATIONS | <b>PACK SIZE</b> 25 L. 200 L. | UN/BX            | REF.<br>80371<br>80171          |
| ADA  | ENGINE DEGREASER DS-601 DIS  ENGINE AND PARTS EMULSIFIER NEUTRAL DEGREASER. DOES NOT ATTACK VARNISH NOR PAINT. SOLVENT BASE. SUITABLE DOR ALUMINIUM AND SOFT METAL. AVOID GASKETS. | SPECIFICATIONS | PACK SIZE  5 L. 25 L. 200 L.  | UN/BX            | REF.<br>80572<br>80372<br>80172 |
| O I A D.A. Indiana or Section 1 A D.A. Indiana or Section  | INSECT CLEANER  SOFTENS AND REMOVES RESTS OF INSECTS ON WINDSCREEN AND FRONTAL PARTS OF THE VEHICLE, GLASS, CHROME AND PLASTIC SURFACES.   | SPECIFICATIONS | PACK SIZE<br>5 L.<br>25 L.    | UN/BX            | REF.<br>80533<br>80337          |
| IADA.  | HAND PLUS ENERGETIC DEGREAER CREAM FOR HANDS WASHING.  | SPECIFICATIONS | PACK SIZE<br>800 gr.<br>4 KG. | UN/BX<br>20<br>4 | REF.<br>80751<br>80451          |

| IADA   | CONCENTRATED HAND WASHING GEL  LIQUID SOAP FOR HAND CLEANING AND DEGREASING. RESPECTS THE BALANCE OF THE SKIN.   | SPECIFICATIONS | PACK SIZE  1 L. 5 L.  | UN/BX<br>20<br>4 | REF.<br>80750<br>80550 |
|--|--|----------------|-----------------------|------------------|------------------------|
| O COSSACES   | ANTI FOG WINDOW CLEANER  PRODUCT SPECIALLY FORMULATED FOR CLEANING WINDSCREEN AND GLASS IN GENERAL.  | SPECIFICATIONS | PACK SIZE<br>25 L.    | UN/BX            | REE.<br>80334          |
| O ADA-mineral O Company of the Compa | DEGREASER DS-643 PZ  ALKALINE DEGREASER HIGHLY CONCENTRATED FOR CLEANING ENGINE PARTS. FOR WASHING PARTS MACHINES OR DIRECTLY ON THE SURFACE TO CLEAN. WATER BASE. IT CAN BE EMULSI- FIED WITH DIESEL OIL AND PETROLEUM. | SPECIFICATIONS | PACK SIZE<br>25 L.    | UN/BX            | REF.<br>80375          |
| JADA MARIA   | FLOOR CLEANER  CONCENTRATED PRODUCT FOR CLEANING AND DEGREASING ALL KIND OF FLOORS.  | SPECIFICATIONS | PACK SIZE<br>25 L.    | UN/BX            | REF.<br>80340          |
| JADA_missenses   | WHEEL CLEANER  PRODUCT FOR CLEANING ALL KIND OF WHEELS. VERY EFFECTIVE.  | SPECIFICATIONS | PACK SIZE  5 L. 25 L. | 4                | 80538<br>80302         |
| O ADA OSCIPLO  | DEGREASER HD-380 PLUS  POWERFUL DEGREASER CLEANER FOR VERTICAL CLEANING HEAVY VEHICLES AND PUBLIC WORKS EQUIPMENT WITHOUT RUBBING.   | SPECIFICATIONS | 25 L.                 | 4                | REF.<br>80373          |

### • MOTOR OILS •




OUR ENGINE OILS CATALOGUE

| OILS FOR   | PASSENGER CARS GEI   | ARBOXES - MTF  |  |         |   |
|--|--|--|--|---------|---|
|  | MTF SAE 75W80  | SPECIFICATIONS   | PACK SIZE                              | UN/BX   | REF.                                      |
| GEAR OIL TOTAL THE CONTROL TOTAL THE CONTROL TOTAL THE CONTROL THE | GL-4  SYNTHETIC MULTIGRADE OIL FOR MANUAL BOXES. SPECIALLY FORMULATED FOR PSA-CITRÖEN.   | API GL-4 + PSA B71 2315 PSA-CITRÖEN BMW, MINI, MB, FIAT, ALFA ROMEO, VOLVO, HONDA, NISSAN RENAULT, DACIA, SEAT, SKODA, VW.   | 1 L.<br>5 L.<br>20 L.<br>50 L.<br>205L | 20<br>4 | 30745<br>30545<br>30645<br>30245<br>30145 |
|  | MTF SAE 75W90  | SPECIFICATIONS   | PACK SIZE                              | UN/BX   | REF.                                      |
| GEAR OIL SYN FOR SPE   | GL-4  SYNTHETIC MULTIGRADE OIL FOR MANUAL BOXES.  SPECIALLY FORMULATED FOR JAPANESE AND COREAN CARS.   | GL-4<br>LANCIA, FORD, CHEVROLET, OPEL, SAAB<br>HYUNDAI, KIA, MAZDA, MITSUBISHI, NISSAN<br>SUZUKI, LAND ROVER, JAGUAR<br>TOYOTA, VW.  | 1 L.<br>5 L.<br>20 L.<br>205 L.        | 20<br>4 | 30746<br>30546<br>30646<br>30146          |
|  | MTF SAE 75W GL-4   | SPECIFICATIONS   | PACK SIZE                              | UN/BX   | REF.                                      |
| GEAR OIL WIT 78/01C-1  | 100% SYNTHETIC OIL FOR MANUALS GEARS, FORMULATED WITH VERY HIGH QUALITY OILS THAT ALLOW TO ACHIEVE THE MAXIMUM SAVINGS OF COM-BUS-TIBLE. IT ALLOWS AN OPTIMIZED COLD START AND PROVIDES STABLE VISCOSITY / TEMPERATURE BEHAVIOR.   | API: GL-4 BMW: MTF LT-2 - BMW: MTF LT-3 FORD: WSS- M2C200-D2 GM: MTF 0063 NISSAN: LV MTF-1 PSA: B71 9730 A8 VW: G 052 171 - VW: G 052 178 VW: G 052 512 - VW: G 052 726 VW: G 052 798              | 1 L.<br>5 L.                           | 20<br>4 | 30747<br>30547                            |
| OILS SPE   | CIAL FOR TRUCKS  |  |  |         |   |
|  | TDL SAE 75W90  | SPECIFICATIONS   | PACK SIZE                              | UN/BX   | REF.                                      |
| IADA   | GL-4/GL-5  | API GL-4/GL-5 API MT-1<br>SAE J2360, MIL-PRF-2105E   | 5 L.<br>20 L.                          |         | 30542<br>30642                            |
| GEAR OIL 7/10 TR CA-4-C3   | 100% SYNTHETIC OIL WITH TOTAL DRIVELINE TECHNOLOGY GL-4/GL-5. FUEL ECONOMY AND EXTENDED CHANGE (160,000 KM) RECOMMENDED FOR HEAVY VEHICLES WITH HEAVY LOADINGS.  | ArvinMeritor 076-N, RENAULT DAF, IVECO, MACK GO-J.MB 235,8, MAN 342 M-2 ZF TE-ML 058-07A-08-12B-21B EATON EUROPE Tranmissions MAN 341 Z-2, MAN 341 E-3 SCANIA STO 1:0 BOC ZF TE-ML 02B-16F-17B-19C | 205 L.                                 |         | 30142                                     |
|  | <b>MULTIAXLE 80W90</b>   | SPECIFICATIONS   | PACK SIZE                              | UN/BX   | REF.                                      |
| GEAR OIL WATER D. P. FERSON MATERIAL D. FERSON MATE | GL-5   | API GL-5<br>SAE J2360, MIL-PRF-2105D<br>VOLVO 97310<br>ZF TE-ML 07A-08-16B-16C-17B-19B-21A<br>VW TL 727, MB 235,0, MAN 342 M-1   | 5 L.<br>20 L.<br>50 L.<br>205 L.       | 4       | 30514<br>30614<br>30214<br>30114          |
|  | <b>MULTIAXLE 85W140</b>  | SPECIFICATIONS   | PACK SIZE                              | UN/BX   | REF.                                      |
| GEAR OIL   | GL-5   | API GL-5<br>MIL-L-2105D  | 5 L.<br>20 L.                          | 4       | 30521<br>30321                            |
| SWIM MUNICO  | LUBRICANT FOR GEARS, TRANSMISSIONS AND DIFFERENTIALS OF TRUCKS AND BUSES THAT WORK AT MODERATE LOADINGS.   |  | 205 L.                                 |         | 30121                                     |
|  | GEARBOX 75W80  | SPECIFICATIONS   | PACK SIZE                              | UN/BX   | REF.                                      |
| GEAR OIL   | GL-4   | GL-4<br>MIL-PRF-2105E  | 5 L.<br>20 L.                          | 4       | 30540<br>30640                            |
| STATE OF STA | HIGH PERFORMANCE 100% SYNTHE-<br>TIC LUBRICANT. EXTENDED CHANGE<br>(320,000 KM) AND FUEL ECONOMY. SUI-<br>TABLE FOR RETARDER SYNCRONIZED<br>BOXES (ZF) AND INTARDER (VOITH),<br>HEAVY VEHICLES AND BUSES WITH HIGH<br>PERFORMANCE. | VOLVO 97307, MAN 341 Z-3, Z-4<br>ZF TE-01L-02D-02L-08<br>EATO EUROPE 300,000 KM (3 years)<br>ZF TE-ML 16K RAIL APLICATION  | 205 L.                                 |         | 30140                                     |
| OILS FOR   | MIXED FLEETS   |  |  |         |   |
|  | TDL SAE 80W90  | SPECIFICATIONS   | PACK SIZE                              | UN/BX   | REF.                                      |
| IADA )   | GL-4/GL-5  | API GL-4/GL-5 API MT-1<br>SAE J2360, MIL-PRF-2105E, VOLVO 97310  | 5 L.<br>20 L.                          | 4       | 30544<br>30644                            |
| GEAR OIL  SONO TR. CLA-CLS  THE  | MINERAL LUBRICANT WITH TOTAL DRIVELINE TECHNOLOGY GL-4/GL-5, FOR BOTH SYNCRONIZED CHANGES AND BRIDGES.   | DAF, IVECO, MACK GO-J.MB 235,8, MAN 342 M-2<br>ZF TE-ML-05A-07A-OBA 12E-21A<br>MAN 3343 M, SCANIA STO 1:0 BOX.,<br>MAN 341 Type E2, Z2<br>ZF TE ML-2B-07-08-16B-16C-17B-19B                        | 205 L.                                 |         | 30144                                     |

|   | MULTIAXLE SAE  | SPECIFICATIONS   | PACK SIZE                | UN/BX                                     | REF.                    |
|---|--|--|--------------------------|---|-------------------------|
| 75W90 GL-5  LUBRICANT FOR GEARS FOR CARS, TRUCKS AND BUSES. EXTREME PREASSURE OIL FOR DIFFERENTIALS AND DRIVESHAFTS WITH SPECIFICATION GL-5.                          | API GL-5<br>ZF TE ML 05A, 07A, 12E, 17B, 19B<br>MIL-L-2105D  | 1 L.<br>5 L.<br>20 L.<br>50 L.<br>205 L.   | 20<br>4                  | 30722<br>30508<br>30322<br>30222<br>30108 |                         |
|   | MULTIAXLE 75W80  | SPECIFICATIONS   | PACK SIZE                | UN/BX                                     | REF.                    |
|   | GL-5   | API GL-5   | 5 L.                     | 4   | 30517                   |
| GEAR OIL  MULTIGRADE OIL FOR TRANSMISSIONS. FOR ALL KIND OF GEARS THAT WORK WITH HEAVY LOADS AND HIGH TEMPERATURES.   | FOR ALL KIND OF GEARS THAT WORK<br>WITH HEAVY LOADS AND HIGH | MIL-L-2105D  | 20 L.<br>50 L.<br>205 L. |   | 30617<br>30217<br>30117 |
|   | GEARBOX 80W90  | SPECIFICATIONS   | PACK SIZE                | UN/BX                                     | REF.                    |
| MINERAL OIL FOR MECHANICAL TRANMISSIONS WITH MODERATE PRESSURE. SUITABLE FOR SYNCRONIZED BOXES, TRANSFERENCE BOXES, MECHANICAL DIRECTION CONTROLS AND FINAL COMMANDS. | GL-4 MINERAL OIL FOR MECHANICAL TRANMISSIONS WITH MODERATE   | GL-4<br>MIL-PRF-2105E<br>MAN 341 Z-2, MAN 342 E-1<br>ZF TE-ML 2A, 8, 16A, 17A, 19A | 5 L.<br>20 L.<br>205 L.  | 4   | 30543<br>30643<br>30143 |
|   | MB 235.1   |  |                          |   |                         |
|   | <b>SAE 140 GL-5</b>  | SPECIFICATIONS   | PACK SIZE                | UN/BX                                     | REF.                    |
| MONOGRADE MINERAL GEAR OIL WITH EXTREME PRESSURE PROPERTIES.  | API GL-5   | 5 L.<br>20 L.<br>50 L.<br>205 L.   | 4                        | 30516<br>30616<br>30216<br>30116          |                         |
|   | SAE 80   | SPECIFICATIONS   | PACK SIZE                | UN/BX                                     | REF.                    |
| GEAR OIL  | MONOGRADE MINERAL GEAR OIL.                                  | API GL-4   | 5 L.                     | 4   | 30513<br>30613          |
| SESS CAMPORQ.4  |  | ZF TE ML 17A   | 20 L.                    |   | 30013                   |
| SEE CHINGS  | SAE 90   | SPECIFICATIONS   | PACK SIZE                |   | REF.                    |
| JEE GENTOGA   | SAE 90  MONOGRADE MINERAL GEAR OIL.                          |  |                          |   |                         |

### • HYDRAULIC AND AGRICULTURAL OILS •

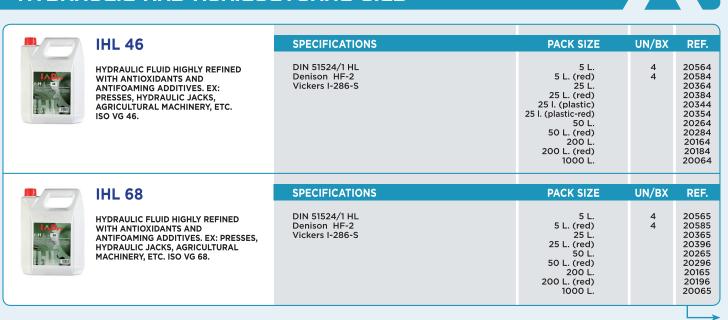

|                | IHM 32  | SPECIFICATIONS  | PACK SIZE   | UN/BX | REF.   |
|----------------|---|---|---|-------|--|
| DHM 2          | HYDRAULIC FLUID HIGH PRESSURE, TYPE HLP, HIGHLY REFINED WITH ANTIWEAR AND ANTIRUST ADDITIVES TO USE IN HYDARULIC STATIONS WORKING UNDER HIGH PRESSURE. ISO VG 32.   | DIN 51524/2 HLP ISO 13357 part 1y 2 CINCINNATI Machine P-68, P-69,P-70. GM LS 2 US Steel 136, 127 DENISON HF-0, HF-1, HF-2 EATON VICKERS I-286-S, M-2950-S AFNOR NFE 48603  | 5L.<br>25 L.<br>25 L.<br>25 L. (plastic)<br>50 L.<br>200 L.<br>1000 L.  | 4     | 20573<br>20373<br>20353<br>20273<br>20173<br>20073   |
|                | IHM 46  | SPECIFICATIONS  | PACK SIZE   | UN/BX | REF.   |
| Ish Maria      | HYDRAULIC FLUID HIGH PRESSURE, TYPE HLP, HIGHLY REFINED WITH ANTIWEAR AND ANTIRUST ADDITIVES TO USE IN HYDARULIC STATIONS WOR- KING UNDER HIGH PRESSURE. ISO VG 46.   | DIN 51524/2 HLP ISO 13357 part 1y 2 CINCINNATI Machine P-68, P-69,P-70. GM LS 2 US Steel 136, 127 DENISON HF-0, HF-1, HF-2 EATON VICKERS I-286-S, M-2950-S AFNOR NFE 48603  | 5 L. 5 L. (red) 25 L. (red) 25 L. (red) 25 L. (plastic) 25 L. (plastic-red) 50 L. 50 L. (red) 200 L. 200 L. (red) 1000 L. (red) | 4 4   | 20574<br>20594<br>20374<br>20394<br>20324<br>20355<br>20274<br>20294<br>20174<br>20194<br>20074<br>20094 |
|                | IHM 68  | SPECIFICATIONS  | PACK SIZE   | UN/BX | REF.   |
| HHM GS         | HYDRAULIC FLUID HIGH PRESSURE, TYPE HLP, HIGHLY REFINED WITH ANTIWEAR AND ANTIRUST ADDITIVES TO USE IN HYDARULIC STATIONS WORKING UNDER HIGH PRESSURE. ISO VG 68.   | DIN 51524/2 HLP ISO 13357 part 1y 2 CINCINNATI Machine P-68, P-69,P-70. GM LS 2 US Steel 136, 127 DENISON HF-0, HF-1, HF-2 EATON VICKERS I-286-S, M-2950-S AFNOR NFE 48603  | 5 L.<br>25 L.<br>25 L. (red)<br>25 L. (plastic)<br>50 L.<br>50 L. (red)<br>200 L.<br>200 L. (red)<br>1000 L.<br>1000 L.         | 4     | 20575<br>20375<br>20395<br>20356<br>20275<br>20293<br>20175<br>20185<br>20075<br>20095                   |
|                | IHV 46  | SPECIFICATIONS  | PACK SIZE   | UN/BX | REF.   |
| IH X-45        | HYDRAULIC FLUID HIGH PRESSURE, TYPE HLP, HIGHLY REFINED WITH ANTIWEAR, ANTIFOAM AND ANTIRUST ADDITIVES, WITH HIGH VISCOSITY INDEX. TOUSE IN HYDRAULIC CIRCUITS REQUIRING FLUIDS TYPE HVLP OR HV. ISO VG 46.               | DIN 51524/3 HVLP DENISON HF-O, HF-1, HF-2 EATON VICKERS I-286-S, M-2950-S CINCINNATI Machine P-68, P-69,P-70. ISO 13357 part 1y 2 GM LS 2 US Steel 136, 127 AFNOR 48603   | 5 L.<br>25 L.<br>50 L.<br>200 L.<br>1000 L.   | 4     | 20598<br>20398<br>20298<br>20198<br>20098  |
|                | IHV 68  | SPECIFICATIONS  | PACK SIZE   | UN/BX | REF.   |
| IADA<br>DHAVA  | HYDRAULIC FLUID HIGH PRESSURE,<br>TYPE HLP, HIGHLY REFINED WITH<br>ANTIWEAR AND ANTIRUST ADDITIVES<br>TO USE IN HYDARULIC STATIONS<br>WORKING UNDER HIGH PRESSURE.<br>ISO VG 68.  | DIN 51524/3 HVLP DENISON HF-O, HF-1, HF-2 EATON VICKERS I-286-S, M-2950-S CINCINNATI Machine P-68, P-69,P-70. ISO 13357 part 1y 2 GM LS 2 US Steel 136, 127 AFNOR 48603   | 5 L.<br>25 L.<br>50 L.<br>200 L.<br>1000 L.   | 4     | 20599<br>20399<br>20299<br>20199<br>20099  |
|                | IATRACK 20  | SPECIFICATIONS  | PACK SIZE   | UN/BX | REF.   |
| IATRACK-20     | (AGRICULTURAL)  HIGHLY REFINED LUBRICANT SPECIALLY FORMULATED FOR AGRICULTURAL MACHINERY, TO USE IN THE HYDRAULIC SYSTEM, POWER STEERING AND BRAKE DISKS SUBMERGED IN OIL BATH. VISCOSITY GRADE SAE 10W30. UTTO TYPE OIL. | Allison C-4 - API GL-4 - Carterpillar TO-2<br>CNH MAT 3525, 3526 Ford M2C134D, M2C86B/C<br>JCMAS HK P-041<br>J.I. Case / Case international MS-1204, 1206, 1207,<br>1209<br>John Deere J2OC Kubota UDT fluid<br>Massey Ferguson M1135/1143/1145 NH410B,<br>NH420A Oliver Type 55/5J/Q1802<br>Sauer Sunstrand/Danfoss: Hydrostatic trans Fluid<br>Vickers/Eaton: M2950S / I-280-S Volvo VB101<br>WhiteQ1705/1722/1766/176 6B/1802/1826 | 5 L.<br>50 L.<br>200 L.<br>1000 L.  | 4     | 92054<br>92052<br>92051<br>92050   |
|                | IADA STOU   | SPECIFICATIONS  | PACK SIZE   | UN/BX | REF.   |
| MALL treatment | MULTIFUNCIONAL  15 W 40 OIL FOR ALL KIND OF AGRICULTURAL ENGINES BOTH DIESEL AND GASOLINE. MULTIFUNCTIONAL LUBRICANT FOR ENGINES, POWER STEERING, BRAKE SYSTEMS, ETC. STOU TYPE OIL.                                      | Ford M2C 159B/C, 134D New Holland 82009201/2/3 John Deere J27, J20C Massey Ferguson CMS M 1139,1144,1145 1135,1143 API CG-4/SF ACEA E3 API GL-4 ZF TE ML 06A,B,C,07B Case New Holland MAT 3525, 3526  | 50 L.<br>200 L.   |       | 90200<br>90100   |



#### SAE 10W CAT TO-4

HIGH QUALITY AGRICULTURAL OIL. GRADE SAE 10W TO-4 FOR TRANSMISIONS AND DRIVE TRAIN, TO USE IN PUBLIC WORKS MACHINERY AND AGRUCULTURAL EQUIPMENTS.

| SPECIFICATIONS  | PACK SIZE               | UN/BX | REF.                    |
|---|-------------------------|-------|-------------------------|
| Caterpillar TO-4<br>Allison C-4<br>ZF TE-ML 03C<br>Komatsu Micro-Clutch<br>Eaton/Fuller<br>DANA | 5 L.<br>25 L.<br>200 L. | 4     | 30550<br>30350<br>30150 |

### • GREASES •



REF.

UN/BX



**GIL** 

LITHIUM GREASE SPECIALLY FORMULATED FOR HUBS AND BEARINGS. NLGI CONSISTENCY: 2, T<sup>2</sup> (W): -20/120°C. DROPPING POINT: 180°C min. BROWN COLOR. SUITABLE FOR ALL KIND OF AUTOMOTIVE GREASING. **SPECIFICATIONS** 

CDECIFIC ATIONS

|  | 450 CC (cart.)<br>1 KG.<br>5 KG.<br>18 KG<br>45 KG.<br>185 KG. | 30<br>20<br>4 | 40836<br>40736<br>40536<br>40336<br>40236<br>40136 |
|--|--|---------------|--|
|--|--|---------------|--|

**PACK SIZE** 



GIC

CALCIUM GREASE SPECIALLY FORMULATED FOR CHASSIS AND FRAMES OF CARS AND INDUSTRIAL VEHICLES. WATER REPELLENT. NLGI CONSISTENCY:2. Tº (W):-20/60°C. DROPPING POINT: 95°C. BROWN COLOR.

| SPECIFICATIONS | PACK SIZE                                    | ON/ DX  | KEF.                                      |
|----------------|--|---------|---|
|                | 1 KG.<br>5 KG.<br>18 KG<br>45 KG.<br>185 KG. | 20<br>4 | 40735<br>40535<br>40335<br>40235<br>40135 |



**KOTE** 

LITHIUM GREASE WITH MOLIBDENUM-BISULPHIDE ADDITIVE, SPECIALLY FORMULTAED FOR HIGH PERFORMANCE FRICTIONS. NLGI CONSISTENCY: 2, T<sup>2</sup>
(W):-20/120°C. DROPPING POINT: 180°C min. BALCK-GREY COLOR.

| SPECIFICATIONS | PACK SIZE   | UN/BX               | REF.  |
|----------------|---|---------------------|---|
|                | 450 CC (cart.)<br>500 GR.<br>1 KG.<br>5 KG.<br>18 KG<br>45 KG.<br>185 KG. | 30<br>20<br>20<br>4 | 40839<br>45039<br>40739<br>40539<br>40339<br>40239<br>40139 |



**GICE** 

LITHIUM GREASE SPECIALLY FORMULATED FOR CENTRALIZED
GREASING. SEMI FLUID GREASE. NLGI CONSISTENCY: 00, T<sup>2</sup> (W):-20/120°C. DROPPING POINT: 170°C min. BROWN COLOR.

| SPECIFICATIONS | PACK SIZE       | UN/BX | REF.           |
|----------------|-----------------|-------|----------------|
|                | 1 KG.<br>18 KG. | 20    | 40738<br>40338 |



**CALIAC BLUE MULTIFUNCTION GREASE** 

**LITHIUM - CALCIUM GREASE** SUITABLE FOR:
- PUBLIC WORKS MACHINERY, IN THE PRESENCE OF POWDER, WATER OR HIGH TEMPERATURES. - INDUSTRY: EQUIPMENT OPERATING UNDER HEAVY LOADS OR HIGH TEMPERATURES.
- TRANSPORTATION COMPANIES: GENERAL ENGRASE, JOINTS OR BEARINGS. T ° (W) = -20° C TO / 140° C. DROP POINT ° C> 180. COLOR BLUE.

| SPECIFICATIONS | PACK SIZE       | UN/BX   | REF.           |
|----------------|-----------------|---------|----------------|
|                | 400 CC<br>5 KG. | 24<br>4 | 40840<br>40540 |
|                |                 |         |                |



**TEFLON CHAIN GREASE** 

INSOLUBLE IN WATER.

WHITE GREASE WITH PTFE FOR CHAINS. EXCELLENT ADHERENCE AND LUBRICITY. Tº (W):-20/260°C.

| SPECIFICATIONS | PACK SIZE        | UN/BX | REF.  |
|----------------|------------------|-------|-------|
|                | SPRAY 520<br>ML. | 20    | 45238 |


| DIESEL   |   |                                |                                      |                   |   |
|--|---|--------------------------------|--------------------------------------|-------------------|---|
|  | FOR DIESEL  | SPECIFICATIONS                 | PACK SIZE                            | UN/BX             | REF.                                    |
| FOR  | MULTIFUNCTIONAL ADDITIVE FOR DIESEL IMPROVES CETANE INDEX (typical 2 points) REDUCING THE IGNITION DELAY. REDUCES EMISSIONS AND NOISE.  |                                | 300 ML.                              | 12                | 33003                                   |
|  | DIESEL INJECTOR   | SPECIFICATIONS                 | PACK SIZE                            | UN/BX             | REF.                                    |
| LIMPIA   | CLEANER   |                                | 300 ML.                              | 12                | 33006                                   |
| DIESEL   | ADDITIVE FOR CLEANING AND CARING THE INJECTORS IN DIESEL VEHICLES, WITH OR WITHOUT PARTICULATE FILTER. COMPATIBLE WITH ALL CONVENTIONAL DIESEL AND BIODIESEL FUELS.   |                                |                                      |                   |   |
|  | DIESEL  | SPECIFICATIONS                 | PACK SIZE                            | UN/BX             | REF.                                    |
| GASON  | ANTIFREEZE  |                                | 300 ML.                              | 12                | 33043                                   |
| Diskets<br>Antibuses   | ADDTIVE TO IMPROVE THE FLUIDITY OF DIESEL IN COLD. IT REDUCES THE FREEING DOWN TO -33°C.  |                                |                                      |                   |   |
|  | EMISSION-REDUCING   | SPECIFICATIONS                 | PACK SIZE                            | UN/BX             | REF.                                    |
| ADITIVO  | ADDITIVE  |                                | 300 ML.                              | 12                | 33007                                   |
| Direction and the second   | IT MINIMIZES EXHAUST EMISSINS FROM DIESEL VEHICLES EQUIPED WITH OR WITHOUT CATALYTIC CONVERTER/PARTICULATE FILTER.  |                                |                                      |                   |   |
| GASOLI   | ne  |                                |                                      |                   |   |
|  | <b>.</b> _  |                                |                                      |                   |   |
|  | FOR GAS   | SPECIFICATIONS                 | PACK SIZE                            | UN/BX             | REF.                                    |
| FOR  |   | SPECIFICATIONS                 | PACK SIZE<br>300 ML.                 | UN/BX             | REF.<br>33002                           |
| FOR  | FOR GAS  MULTIFUNCTIONAL ADDITIVE FOR GASOLINE. STABILIZES GASOLINE CONSUPMTION AND HELPS REFUCE GREENHOUSE GASES.  GASOLINE INJECTOR   | SPECIFICATIONS  SPECIFICATIONS |                                      |                   |   |
| FOR GAS  | FOR GAS  MULTIFUNCTIONAL ADDITIVE FOR GASOLINE. STABILIZES GASOLINE CONSUPMTION AND HELPS REFUCE GREENHOUSE GASES.  GASOLINE INJECTOR CLEANER   |                                | 300 ML.                              | 12                | 33002                                   |
| FOR GAS  | FOR GAS  MULTIFUNCTIONAL ADDITIVE FOR GASOLINE. STABILIZES GASOLINE CONSUPMTION AND HELPS REFUCE GREENHOUSE GASES.  GASOLINE INJECTOR   |                                | 300 ML. PACK SIZE                    | 12 UN/BX          | 33002<br>REF.                           |
| FOR GAS  LIMPIA  UMPIA  STOCKER  STOCKE | FOR GAS  MULTIFUNCTIONAL ADDITIVE FOR GASOLINE. STABILIZES GASOLINE CONSUPMTION AND HELPS REFUCE GREENHOUSE GASES.  GASOLINE INJECTOR CLEANING AND CARING THE INJECTORS IN GASOLINE VEHICLES. REMOVES SEDIMENTS AND KEEPS THE CARBURETOR AND ITS SYSTEM CLEAN.  EMISSION-REDUCING   |                                | 300 ML. PACK SIZE                    | 12 UN/BX          | 33002<br>REF.                           |
| FOR GAS  LIMPIA  SOCIOLIS  ADITIVO   | FOR GAS  MULTIFUNCTIONAL ADDITIVE FOR GASOLINE. STABILIZES GASOLINE CONSUPMTION AND HELPS REFUCE GREENHOUSE GASES.  GASOLINE INJECTOR CLEANING AND CARING THE INJECTORS IN GASOLINE VEHICLES. REMOVES SEDIMENTS AND KEEPS THE CARBURETOR AND ITS SYSTEM CLEAN.  EMISSION-REDUCING ADDITIVE DIESE  | SPECIFICATIONS                 | PACK SIZE 300 ML.                    | 12<br>UN/BX<br>24 | 33002<br>REF.<br>33004                  |
| FOR GAS  LIMITARY  LIMITARY  LIMITARY  ADDITIVO  APPRILATION  APPRILAT | FOR GAS  MULTIFUNCTIONAL ADDITIVE FOR GASOLINE. STABILIZES GASOLINE CONSUPMTION AND HELPS REFUCE GREENHOUSE GASES.  GASOLINE INJECTOR CLEANING AND CARING THE INJECTORS IN GASOLINE VEHICLES. REMOVES SEDIMENTS AND KEEPS THE CARBURETOR AND ITS SYSTEM CLEAN.  EMISSION-REDUCING   | SPECIFICATIONS                 | PACK SIZE 300 ML.  PACK SIZE         | UN/BX             | 33002<br>REF.<br>33004                  |
| FOR GAS  LIMPIA  RECORD  ADTIVO  ADTIVO  GOLD  GOLD  GOLD  GOLD  ADTIVO  GOLD  | FOR GAS  MULTIFUNCTIONAL ADDITIVE FOR GASOLINE. STABILIZES GASOLINE CONSUPMTION AND HELPS REFUCE GREENHOUSE GASES.  GASOLINE INJECTOR CLEANING AND CARING THE INJECTORS IN GASOLINE VEHICLES. REMOVES SEDIMENTS AND KEEPS THE CARBURETOR AND ITS SYSTEM CLEAN.  EMISSION-REDUCING ADDITIVE DIES IT MINIMIZES EXHAUST EMISSI NS FROM DIESEL VEHICLES EQUIPED WITH OR WITHOUT CATALYTIC CONVERTER/PARTICULATE FILTER. | SPECIFICATIONS                 | PACK SIZE 300 ML.  PACK SIZE         | UN/BX             | 33002<br>REF.<br>33004                  |
| FOR GAS  LIMPIA  RECORD A  LIMPIA  RECORD A  ADITIVO  ARTICLASIA  ADITIVO  ARTICLAS  ADITIVO  ADIT | FOR GAS  MULTIFUNCTIONAL ADDITIVE FOR GASOLINE. STABILIZES GASOLINE CONSUPMTION AND HELPS REFUCE GREENHOUSE GASES.  GASOLINE INJECTOR CLEANING AND CARING THE INJECTORS IN GASOLINE VEHICLES. REMOVES SEDIMENTS AND KEEPS THE CARBURETOR AND ITS SYSTEM CLEAN.  EMISSION-REDUCING ADDITIVE DIES IT MINIMIZES EXHAUST EMISSI NS FROM DIESEL VEHICLES EQUIPED WITH OR WITHOUT CATALYTIC CONVERTER/PARTICULATE FILTER. | SPECIFICATIONS                 | PACK SIZE 300 ML.  PACK SIZE         | UN/BX             | 33002<br>REF.<br>33004                  |
| FOR GAS  LIMPIA  RECORD A  LIMPIA  RECORD A  ADITIVO  ARTICLASIA  ADITIVO  ARTICLAS  ADITIVO  ADIT | FOR GAS  MULTIFUNCTIONAL ADDITIVE FOR GASOLINE. STABILIZES GASOLINE CONSUPMTION AND HELPS REFUCE GREENHOUSE GASES.  GASOLINE INJECTOR CLEANING AND CARING THE INJECTORS IN GASOLINE VEHICLES. REMOVES SEDIMENTS AND KEEPS THE CARBURETOR AND ITS SYSTEM CLEAN.  EMISSION-REDUCING ADDITIVE DIES IT MINIMIZES EXHAUST EMISSI NS FROM DIESEL VEHICLES EQUIPED WITH OR WITHOUT CATALYTIC CONVERTER/PARTICULATE FILTER. | SPECIFICATIONS  SPECIFICATIONS | PACK SIZE 300 ML.  PACK SIZE 300 ML. | UN/BX 24 UN/BX 24 | 33002<br>REF.<br>33004<br>REF.<br>33015 |

|  | <b>ENGINE CLEANER</b>  | SPECIFICATIONS | PACK SIZE     | UN/BX | REF.  |
|--|--|----------------|---------------|-------|-------|
| LIMPIA<br>BOTONES<br>THE CAMED   | ADDTIVE FOR CLEANING THE ENGINE<br>BEFORE OIL DRAINAGE.  |                | 300 ML.       | 12    | 33044 |
|  | OIL MOKE STOP  | SPECIFICATIONS | PACK SIZE     | UN/BX | REF.  |
| ACTION OF THE PARTY OF THE PART | ADDITIVE FOR ENGINE OIL SPECIALLY FORMULATED TO REMOVE SMOKE FROM ENGINES THAT BURN OIL. FOR ALL ENGINES GAOLINE, DIESEL AND GPL, WITH OR WITHOUT TURBO. |                | 400 ML.       | 12    | 34003 |
|  | OIL STOP LEAK  | SPECIFICATIONS | PACK SIZE     | UN/BX | REF.  |
| THE POLICE OF TH | ADDITIVE SPECIALLY DESIGNED TO STOP AND PREVENT OIL LEAKS WITHOUT DISASSEMBLY.   |                | 300 ML.       | 12    | 33014 |
| CARE   |  |                |               |       |       |
|  | REFRIGERATION  | SPECIFICATIONS | PACK SIZE     | UN/BX | REF.  |
| TAPAFUGAS  | SYSTEM LEAK SEALER   |                | 300 ML.       | 24    | 33010 |
| erridda.co   | IT REPAIRS LITTLE LEAKS<br>OF RADIATOR LIQUID.   |                |               |       |       |
|  | REFRIGERATION  | SPECIFICATIONS | PACK SIZE     | UN/BX | REF.  |
| Unit Day   | SYSTEM CLEANER  CLEANER OF DIRT AND OBSTRUCTIONS OF THE RADIATOR AND REFRIGERATION SYSTEM.   |                | 300 ML.       | 24    | 33009 |
|  | DPF CLEANER  | SPECIFICATIONS | PACK SIZE     | UN/BX | REF.  |
| DATABLENIO   | ADDITIVE   |                | 300 ML.       | 12    | 33011 |
| DRF  | PARTICULATE CLEANER FILTER (DPF) ADDITIVE SERVING AS A CATALYST IN THE REGENERATION OF DIESEL PARTICULATE FILTER.  |                |               |       |       |
|  | GEARBOX  | SPECIFICATIONS | PACK SIZE     | UN/BX | REF.  |
| LMPIADOR<br>CA LA  | CLEANER  |                | 300 ML.       | 12    | 33012 |
| arrowante  | ADDITIVE FOR CLEANING AUTOMATIC<br>TRANSMISSION. NOT COMPATIBLE<br>WITH CVT OR DCT. REMOVES SLUDGE,<br>GREASE DIRT AND DEPOSITS.                         |                |               |       |       |
|  | EGR SYSTEM   | SPECIFICATIONS | PACK SIZE     | UN/BX | REF.  |
| IADA<br>Moreon   | CLEANER  |                | SPRAY 200 ML. | 12    | 72234 |
| Umplator<br>ostema (F)   | PRODUCT FOR CLEANING THE CIRCULATION SYSTEM OF EXHAUST, INTAKE SYSTEM AND COMBUSTION OF DIESEL AND GASOLINE ENGINES.                                     |                |               |       |       |
|  |  |                |               |       |       |


### • CARGO ADDITIVES •

| IADA<br>I COLTA   | OIL TREATMENT HD (Compression Enhancer) OIL ADDITIVE FOR GASOLINE AND DIESEL ENGINES. WITH MOLIBDENE DISULPHIDE.   | SPECIFICATIONS | PACK SIZE<br>1 L.         | UN/BX      | REF.<br>30728          |
|---|--|----------------|---------------------------|------------|------------------------|
| IADA<br>181   | DIESEL TREATMENT  ADDITIVE FOR THE CLEANING, CARE AND PROTECTION OF THE DIESEL ENGINES SYSTEM.   | SPECIFICATIONS | PACK SIZE                 | UN/BX      | REF.<br>30727          |
| IADA<br>GASON   | DIESEL ANTIFREEZE  ADDITIVE TO IMPROVE THE FLUIDITY OF DIESEL IN COLD.   | SPECIFICATIONS | PACK SIZE                 | UN/BX      | REF.<br>30726          |
| IADA<br>PAR   | REFRIGERATION<br>SYSTEM CLEANER  CLEANER OF DIRT AND OBSTRUCTIONS OF THE RADIATOR AND REFRIGERATION SYSTEM.  | SPECIFICATIONS | PACK SIZE                 | UN/BX      | REF.<br>30735          |
| IADA<br>MARIE   | REFRIGERATION<br>SYSTEM LEAK SEALER<br>IT REPAIRS LITTLE LEAKS<br>OF RADIATOR LIQUID.  | SPECIFICATIONS | PACK SIZE                 | UN/BX      | REF.<br>30734          |
| IABA  | ANTIBAC  ADDITIVE ESPECIALLY DEVELOPED TO PREVENT, CLEAN AND LIMIT MICROBIAL GROWTH IN STORAGE TANKS AND COMBUSTIBLE DISTRIBUTION SYSTEMS FOR DIESEL ENGINES THAT WORK WITH OIL OR BIODIESEL. FOR ALL DIESEL ENGINES (INCLUDING THE COMMON RAIL) WITH OR WITHOUT TURBOC HARGERS. | SPECIFICATIONS | PACK SIZE                 | UN/BX      | REF.<br>30737          |
| IADA<br>MORE MANAGEMENT OF THE PARTY OF THE PAR | CONCENTRATED DIESEL ANTIFREEZE  ADDITIVE TO IMPROVE THE FLUIDITY OF DIESEL IN COLD.  | SPECIFICATIONS | PACK SIZE<br>1 L.<br>5 L. | UN/BX 12 4 | REF.<br>30729<br>30591 |

### • IADA MOTORCYCLE 2T AND 4T •

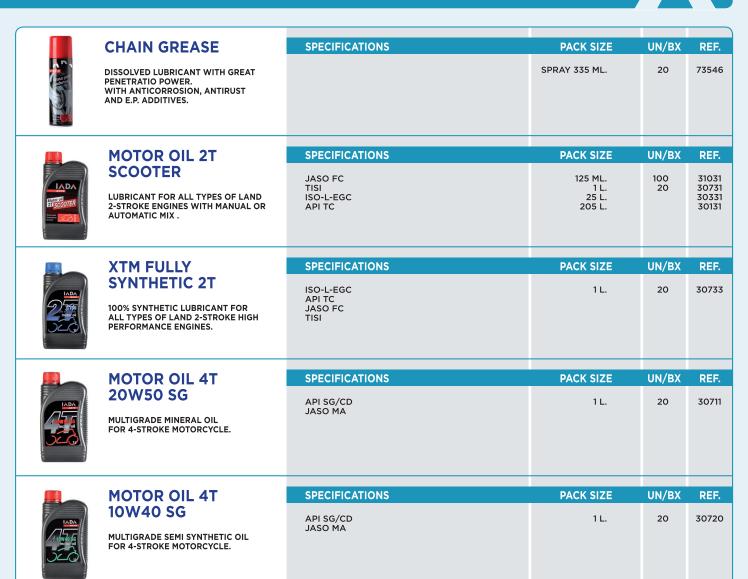

### • OUTBOARD OIL •





#### **OUTBOARD 2T**

OIL FOR 2.STROKE OURBOARD ENGINES.

| SPECIFICATIONS | PACK SIZE      | UN/BX    | REF.           |
|----------------|----------------|----------|----------------|
| NMMA TC-W3     | 1 L.<br>500 CC | 20<br>20 | 30732<br>35032 |
|                |                |          |                |
|                |                |          |                |



www.iada.es

