

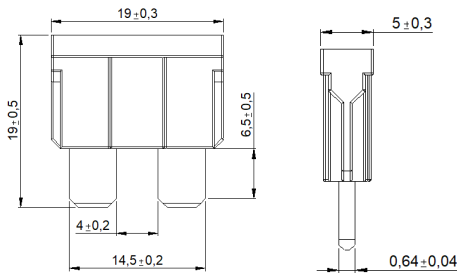
S2000 SERIES BLADE TYPE (PLUG-IN) FUSES

**Specifications:**

Current Rating:	5-30A
Voltage Rating :	32 VDC
Terminals:	One piece fuse element
Housing Material:	PC
Complies with:	DIN 72581-3, SAE J1284, ISO 8820-3

Description :

- Transparent PC body makes fuse elements visible.
- The heat-resistant body prevents flammability and fire during the melting.
- Colored body provides ampere coding in accordance with the norm.
- Air circulation on the body provides natural cooling.
- The contacts at the top point, while in the fuse body, provide external measurement and control.
- Closed top side of fuses prevents the hot molten metal from splashing on people and belongings during melting.
- One-piece special alloy fuse element ensures correct transmission and timely release.

**Dimensions :** Dimensions are in mm**Time-Current Characteristics:**

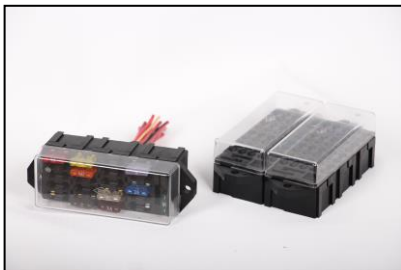
% of Rating	Opening Time Min. / Max. (s)
110	360.000 s / -
135	0,75 s / 1800 s
200	0,15 s / 5 s
350	0,04 s / 0,5 s
600	0,02 s / 0,1 s

Ordering Information :

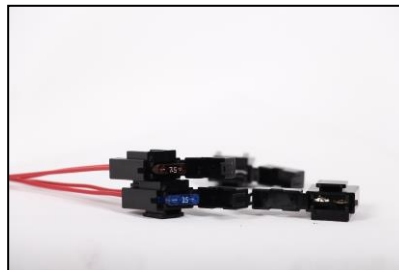
Part Number	Packing Size
S2xxx-DV50	50 pcs. in a Clear Vacuum Box
S2xxx-DK50	50 pcs. in a Carton Box
S2xxx-DC50	50 pcs. in a Clear Box
S2xxx-DT1000	1000 pcs. in a Plastic Bag

Ratings:

Part No	Body Color	Rated Current	Voltage Drop mV
S2005	Light Brown	5 Amp.	150
S2075	Brown	7,5 Amp.	140
S2010	Red	10 Amp.	125
S2015	Blue	15 Amp.	
S2020	Yellow	20 Amp.	
S2025	Natural (White)	25 Amp.	
S2030	Green	30 Amp.	120

Related Products :

20 pos. Fuse Holder
(Product code: FH1004)



Fuse Holder
(Product code: FH2001)



Fuse Puller
(Product code: FH6001)