


YOUR PARTNER
SINCE 1911

Tyrebox by **Guernet** compresseurs



www.**Guernet**.com

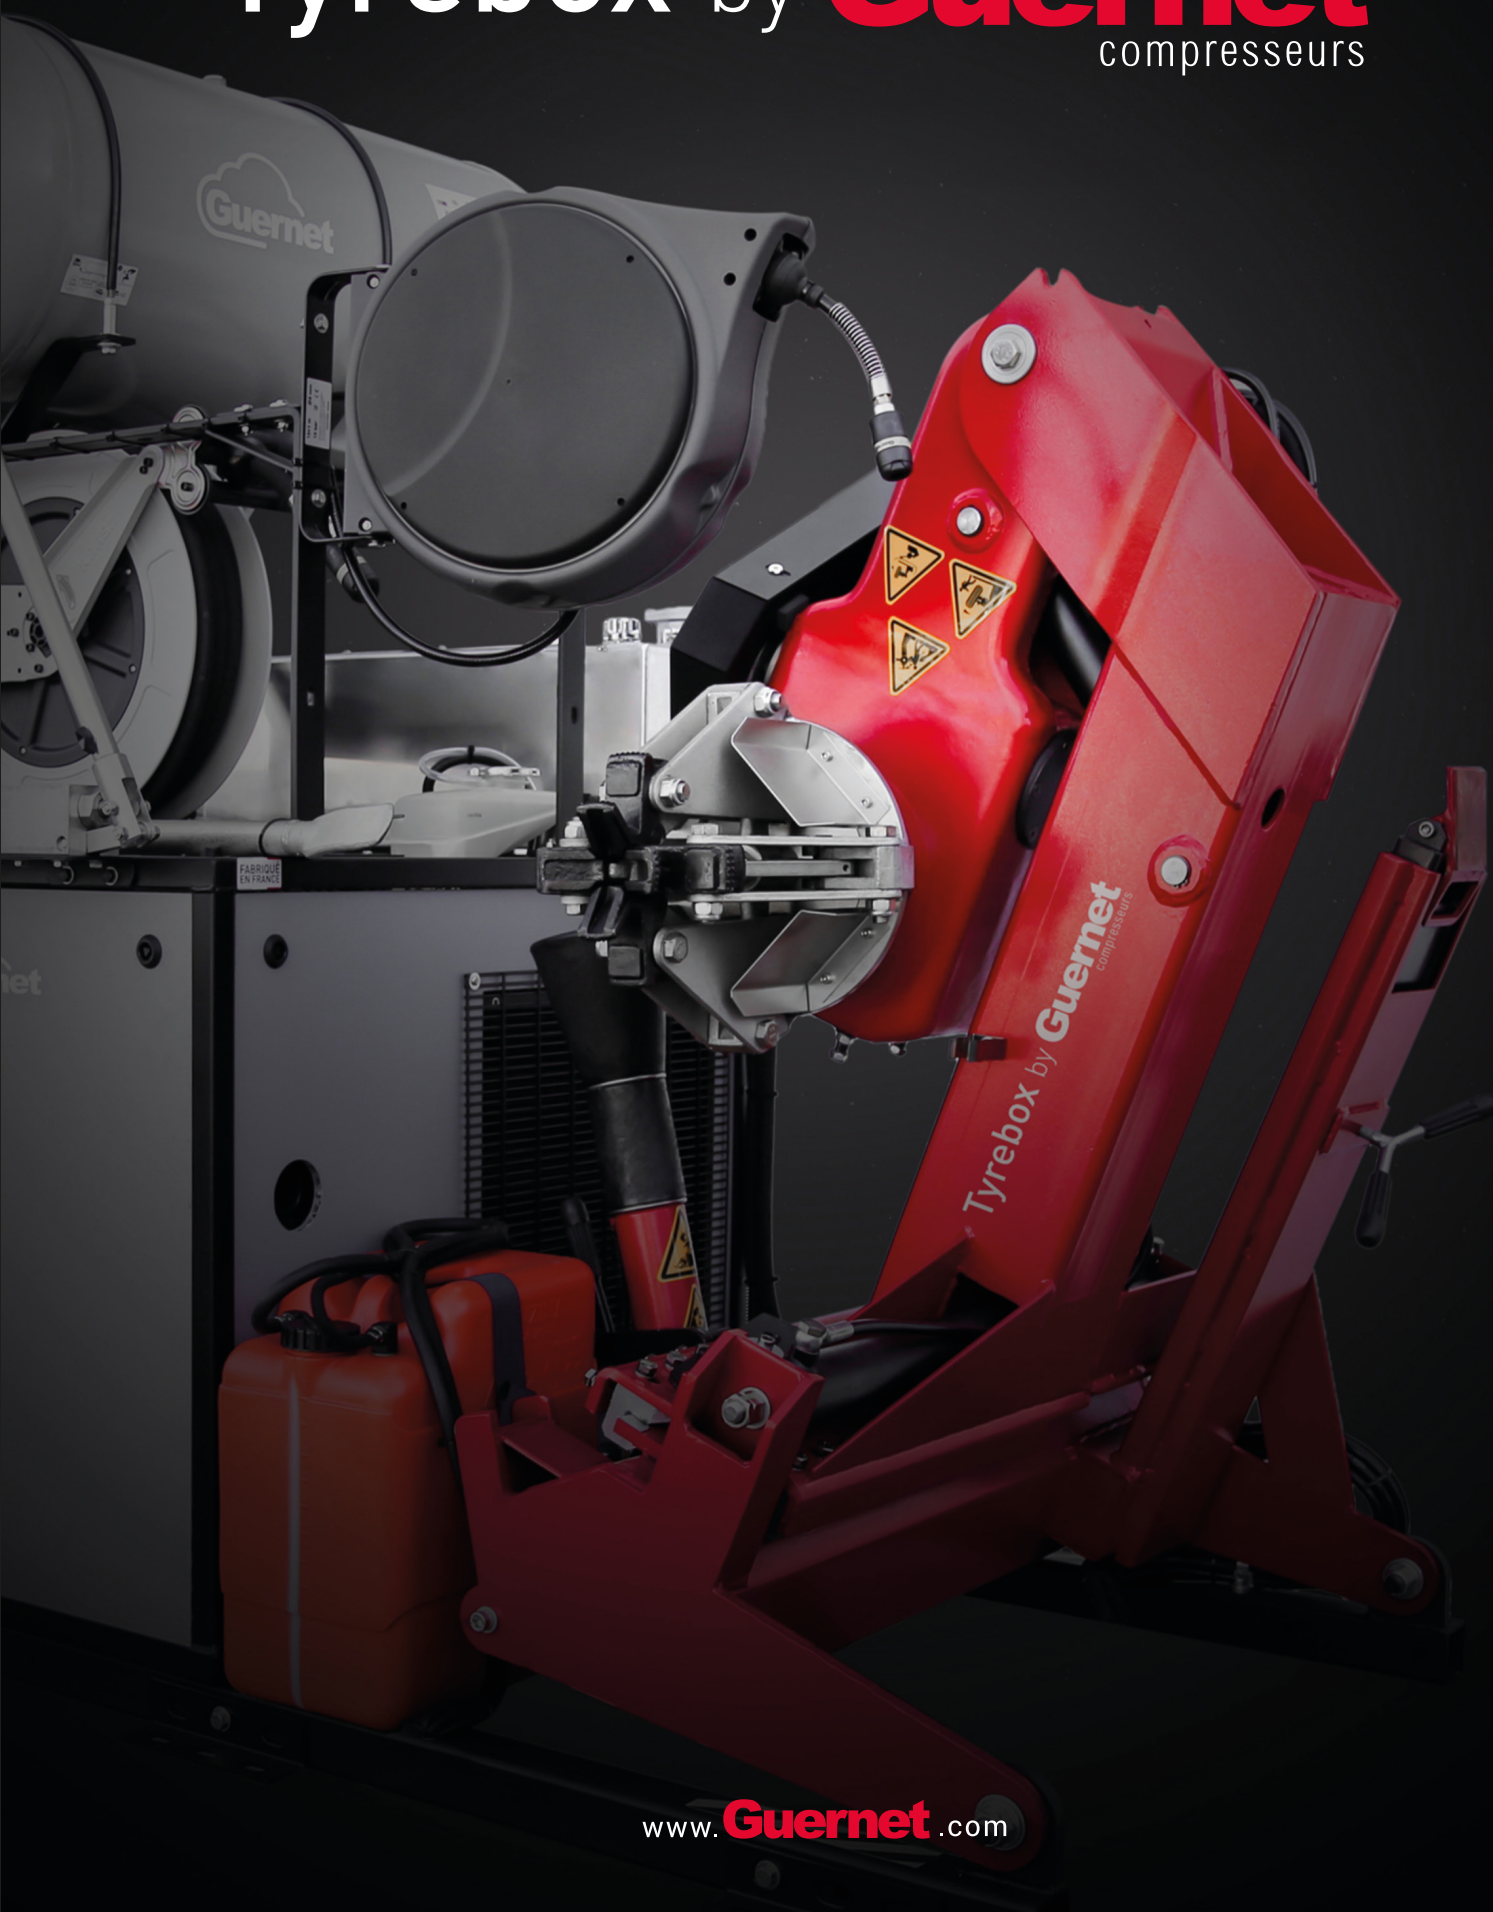

Tyrebox by **Guernet** compresseurs

No.1 of on-board systems !

The **Tyrebox®**, set of compressor + truck tyre changer, is the most **efficient** and **practical** on the market. It fits your vehicle and has all the features **to save time and space**.

You can work on rims ranging from **13" to 26"** without damage.

COMPACT DESIGN TO OPTIMISE THE STORAGE SPACE OF THE VEHICLE

TYREBOX
126L



TYREBOX
126LHY

PATENTED
DESIGN



TB126L: AIR AND CURRENT VERSION

TB126LHY: AIR AND HYDRAULIC VERSION

KG 779 KG

DIMENSIONS L.1780 x W.1090 x H.1745

KG 698 KG

DIMENSIONS L.1700 x W.1090 x H.1200

- Power generator **230V single-phase / 400V three-phase**
- 1 plug **2 kVA** single-phase / 1 plug **7 kVA** three-phase for tyre changer
- **Electro-hydraulic** operation

- Tyre changer driven by **hydraulic pump**
- **220V single-phase** power produced by a 1000W pure sine wave power converter
- **Hydraulic** operation
- **Option:** 1500W pure sine wave power converter

TECHNICAL FEATURES

- **17 HP Lombardini LDW702** diesel engine
- **Water cooling**
- **Electric starter** with charging alternator and **battery**
- **Bi-cylinder bi-staged** air pump
- **Pressure setting:** 10/12 BAR - 145/174 PSI
- **Free air delivery:** 45 m³/h - 750 L/min - 26.5 Cfm
- **Dashpot system:** pneumatic regulation on the air pump
- **120 L** horizontal air tank
- **Noise level at 1 meter:** 85 dB(A)
- **Fixed hose reel for cars:** 20 meters, 8x15 with quick coupling
- **Fixed hose reel for trucks:** 20 meters, 12x20 with quick coupling
- **Filter regulator lubricator**
- **Remote control unit**

TOOL-HOLDER ARM

- **Maximum axial force of inner bead loosener:** 25.000 N

CHUCK TROLLEY

- **Axial hydraulic movement:** 670 mm

CHUCK MOTOR

- **TB126L:** 1.1 kW electric motor
- **TB126LHY:** hydraulic motor

CHUCK

- **Hydraulic self-centering** clamping system
- **Rotation speed:** 6 rpm
- **Clamping system:** 4 jaws with plastic protection for alloy rims
- **Rim clamping:** 13" to 26"
- **Maximum tyre diameter:** 1380 mm
- **Maximum tyre width:** 930 mm
- **Maximum wheel weight:** 1000 kg
- **Working height** at the chuck shaft from 350 mm to 650 mm



Installation
with a **simple**
fork-lift truck




Jerrycan
to make
fill up more
convenient



OTHER MODELS

TB126L-20 & TB126LHY-20 :

Models designed for high ground clearance vehicles. Maximum working height at the chuck shaft of 1040 mm instead of 650 mm.

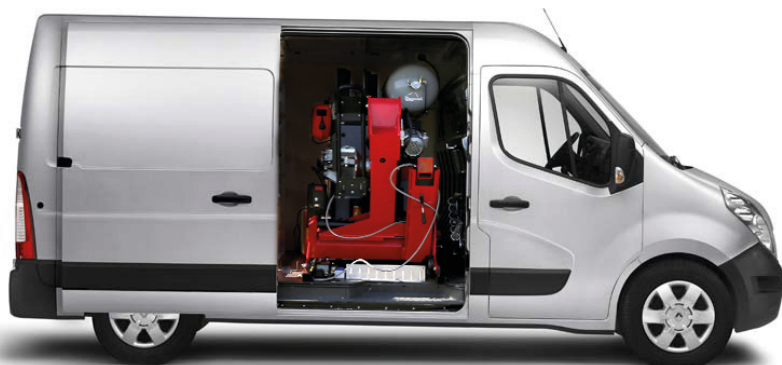

Tyrebox by **Guernet**
compresseurs

TYREBOX
126L

TYREBOX
126LHY

OPTIONS

ACCESSORIES, TOOLS AND SUPPORTS



CNTOCA0053AP
Top desk in aluminium to carry
tools and mounting paste



ACTU803949R
Electric cable reel
with power socket



WIRELESS REMOTE CONTROL
in aluminium



MAAP886259
Set of 4 protection rings
for alloy rims



MAAP888168
Set for light and commercial
vehicles (except for alloy rims)



MAAP20169082
Bead breaker disc and hook



PROTECT YOUR EQUIPMENT !
H-shape separation in aluminium



KIT-EV-PURGE
Automatic drain



CNTOCA0082P
Support for regroover



MAAP2016908.1
Bead breaker disc


ADDITIONAL EQUIPMENTS



EQUIBOX B160
On-board wheel balancer



CYBAIR RANGE
Automatic tyre inflator

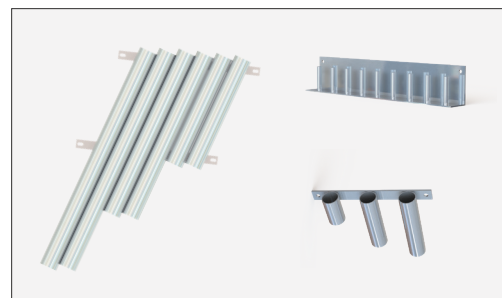

VARIOUS SUPPORTS
Aluminium supports for all your tools and levers



EASY SERVICE

Removable panels to make **service operations easier**. Panels in polyurethane can be removed with a triangular key to make service operations easier. We can provide you with **complete service kits** and **technical assistance** through our **after-sales customer service**.

Video demonstration

Available on our website or directly by flashing this **QR code** with your smartphone!

www.**Guernet**.com



NEW

TB126L-SKIDAIR Diesel compressor + truck tyre changer

TECHNICAL FEATURES

- **Lombardini 15LD440** diesel engine
- **Engine power:** 8 kW - 11 HP
- **Air cooling**
- **Electric starter**
- **Battery as standard**
- **Piston compressor**
- **Belt driven**
- **After and intermediate cooler (air/air exchanger)**
- **Pneumatic regulation on the air pump**

- **Max pressure:** 12 BAR - 174 PSI
- **Free air delivery:** 41 m³/h - 683 L/min - 24,1 Cfm
- **Air tank:** 50 L
- **Fitted with all securities:** glycerin pressure gauge, safety valve, drain valve, non-return valve
- **1 hose reel for cars and 1 for trucks** with quick couplings
- **Filter regulator lubricator**
- **Power generator:** 7 kVA / 1 plug 220 V single-phase + 1 plug 380 V three-phase
- **Floor exhaust extraction hose of 1m50**

ECONOMICAL ALTERNATIVE EQUIPMENT TB126L-SKIDAIR: AIR OR CURRENT VERSION



735 KG



L. 1780 x W. 1200 x H. 1600

TOOL-HOLDER ARM


- **Maximum axial force of inner bead loosener:** 25.000 N

CHUCK TROLLEY

- **Axial hydraulic movement:** 670 mm

CHUCK MOTOR


- **Hydraulic self-centering** clamping system
- Electro-hydraulic operation
- **Rotation speed:** 6 rpm
- **Clamping system:** 4 jaws with plastic protection for alloy rims
- **Rim clamping:** 13" to 26"
- **Maximum tyre diameter:** 1380 mm
- **Maximum tyre width:** 930 mm
- **Maximum wheel weight:** 1000 kg
- **Working height** at the chuck shaft from 350 mm to 650 mm

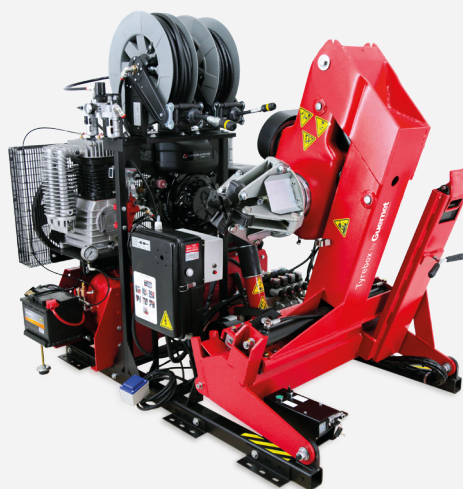

The complete wheel balancing system the EQUI-BOXB160

With our EQUI-BOXB160, enjoy time saving and convenience of operation.

Easy to install, handy and easy to carry, the EQUI-BOXB160 deeply changes the way of balancing.



Visit our website

Find catalogs, news, videos and information on our website or follow us on social networks:    


www.**Guernet**.com



Guernet

compresseurs

constructor of en[air]gy

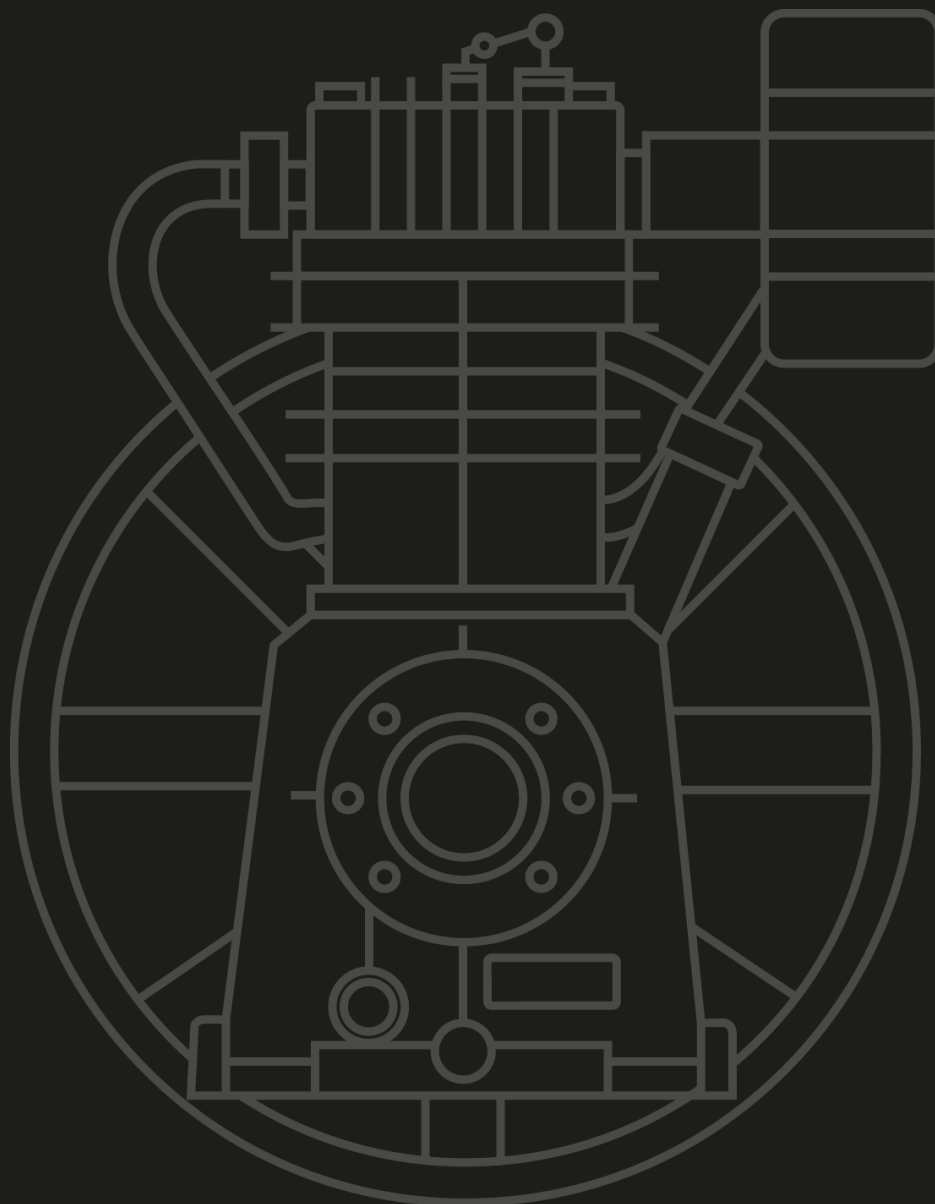

PHONE +33 (0)3 45 88 30 30

51 Route de Montargis BP170 89304 Joigny Cedex (FRANCE)

contact@guernet.com

www.Guernet.com

Fax **[general / customer service]**: +33 (0)3 45 88 30 34 - Fax **[order service]**: +33 (0)3 45 88 30 06
Fax **[spare parts]**: +33 (0)3 45 88 30 22 - Fax **[after sales]**: +33 (0)3 45 88 30 38