


KROFtools®

PROFESSIONAL TOOLS

automechanika
FRANKFURT

WHEREVER WE GO, WE GO TOGETHER

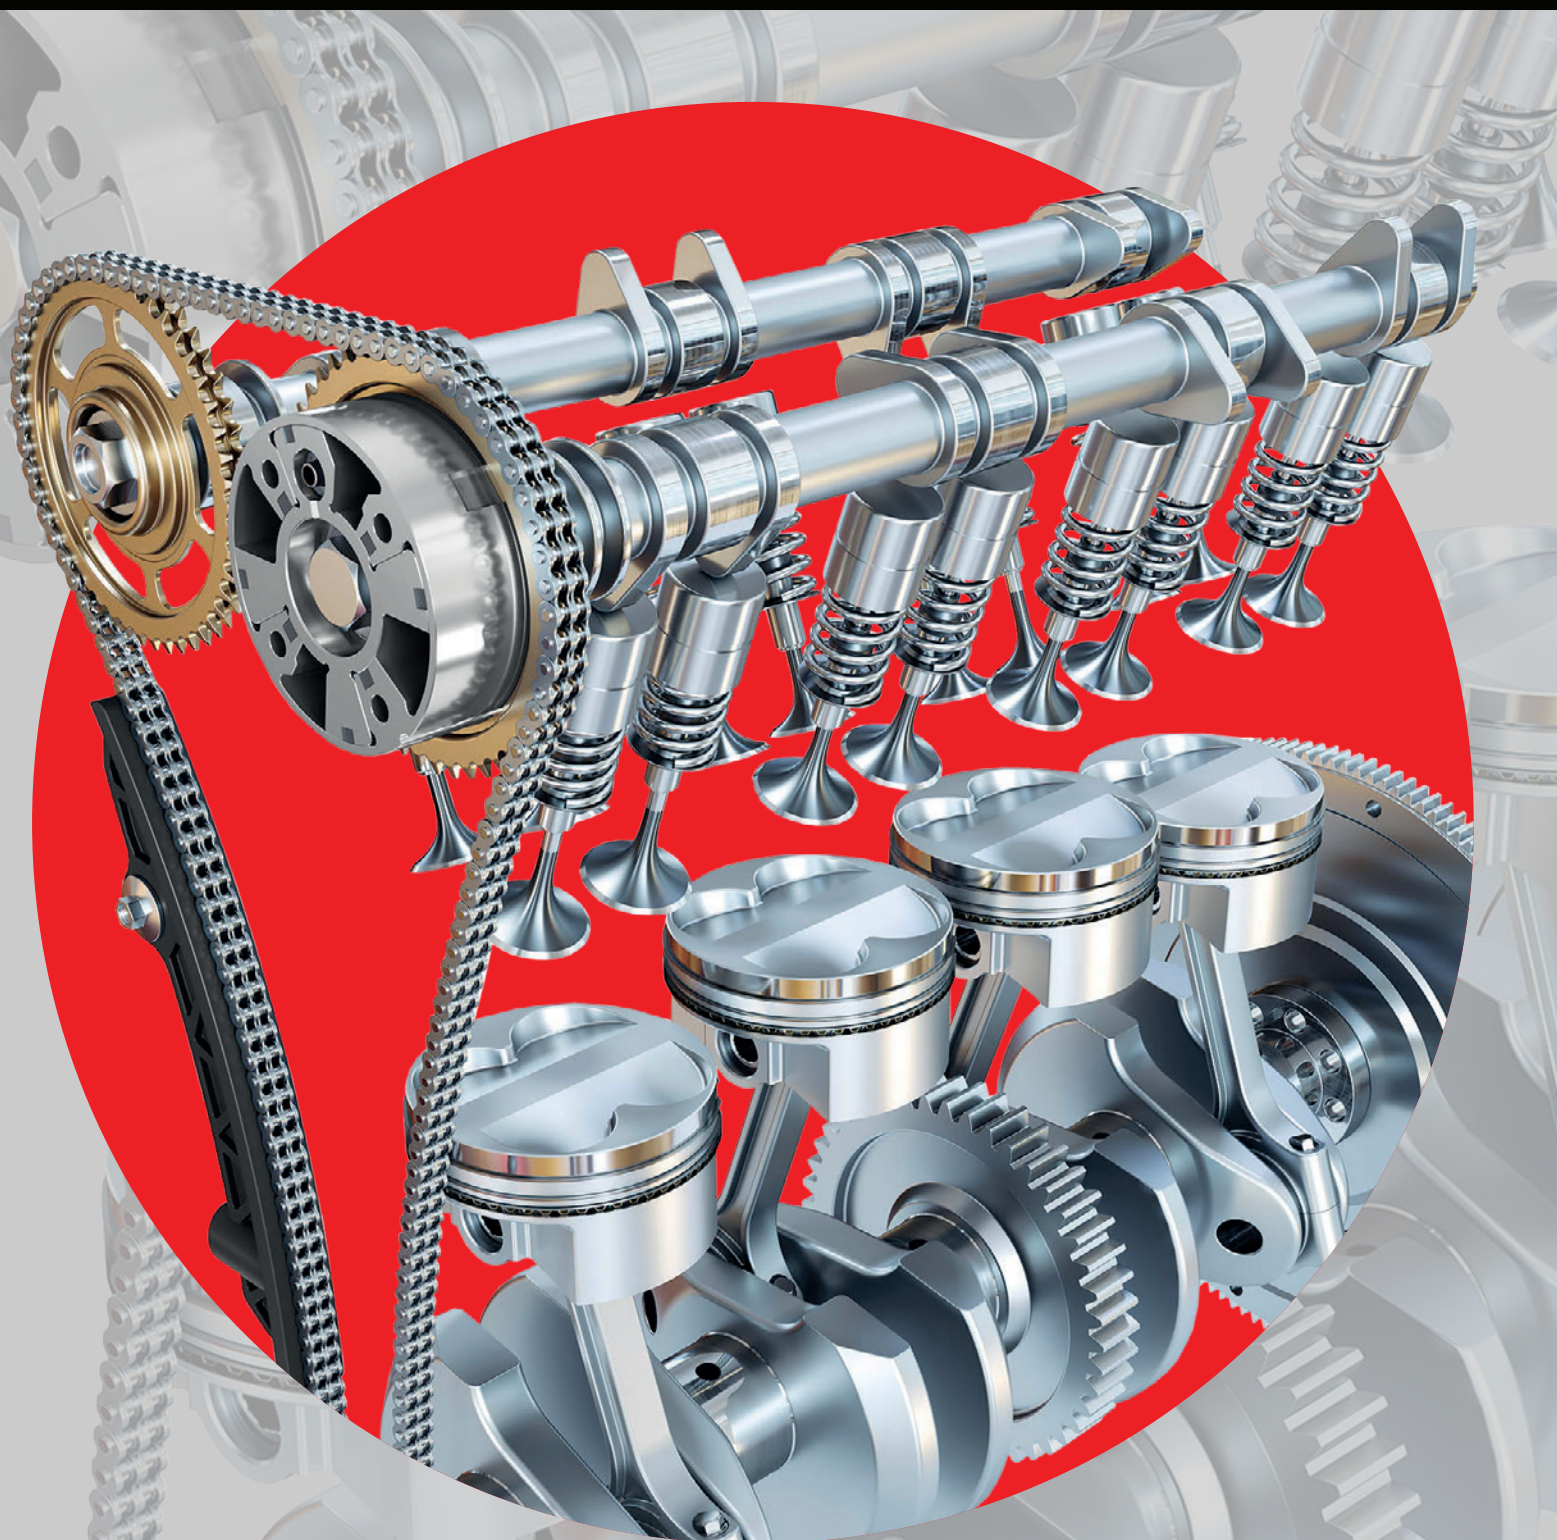

KROFTOOLS



KROFTOOLS.COM

EMPTY TOOL CABINET 7 DRAWERS

REF: 8611



Car measures:

Height (with wheels):
980 mm
Height: 820mm
Width: 460 mm
Length: 680 mm

Drawer dimensions:

(5x) 65x390x530 mm
(2x) 145x390x530 mm

Possibility of
choice of colour:

RED and BLACK

TOOL CABINET 7 DRAWER 160 PCS

REF: 8612



Car measures:

Height (with wheels):
980 mm
Height: 820mm
Width: 460 mm
Length: 680 mm

Drawer dimensions:

(5x) 65x390x530 mm
(2x) 145x390x530 mm

Composition modules:

- 1- Module 68 pieces socket wrenches and ratchets 1/4 ", 3/8" and 1/2
- 2- Module 35 pieces wrenches combined spanner, double open spanner, ring spanner
- 3- Module 34 pieces screwdrivers and electrician screwdrivers
- 4- Module 9 pieces pliers
- 5- Module 14 pieces hammer and wrenches in umbrako and torx

Possibility of
choice of colour:

RED and BLACK

236PCS TOOLS SET FOR 6 DRAWERS
REF: 86236


- MÓD 1** - Ratchet handle and Metric socket 1/4" 1/2"
MÓD 2 - (16x) Combination spanners
MÓD 3 - Socket, impact and bit keys
MÓD 4 - (18x) T ball hex key
MÓD 5 - (19x) Screwdrivers
MÓD 6 - Pliers

84" MOBILE WORKBENCH
REF: 8630

Characteristics:

Supported capacity:
 Wooden top: 136.1 kg
 Cabinet: 56.8 kg
 Large top drawer: 9.1 kg
 Large central drawer: 15.9 kg
 Large lower drawer: 27.3 kg
 Small top drawer: 4.5 kg
 Small medium drawer: 9.1 kg

Small bottom drawer: 13.6 kg
 Small tray: 4.5 kg
 Large tray: 9.1 kg

Car Dimension:

Height: 1450mm (with panel)
 Width: 485mm
 Length: 2133mm

Drawer measurement:

(3x) 950.2x398.2x65.7mm
 (1x) 950.2x398.2x144.7mm
 (1x) 950.2x398.2x224.7mm
 (3x) 430.7x398.2x65.7mm
 (1x) 430.7x398.2x144.7mm
 (1x) 430.7x398.2x224.7mm

KROFTTOOLS GARAGE CABINET COMBO

REF: 8680



Characteristics:

Dimensions: 950 x 472 x 1925mm
Steel thickness: 0.8mm

Composition:

(1x) Locker
(2x) Wall Cabinet

(1x) 2 door base cabinet
(1x) 47" wood work top
(1x) 4 drawer cabinet

(2x) Pegboard

CORNER CABINET SET

REF: 8682



1/4" - 1/2" SOCKETS SET 110 PCS

REF: 21110



Composition:

1/2" Drive
 (17x) Socket: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32mm
 (17x) Bits 30mm: TX: 40, 45, 50, 55, 60; PH: 3,4; PZ: 3,4; FD:8, 10,12 ;
 HEX: 7,8,10,12,14
 (8x) E-type Socket: E10, E11, E12, E14, E16, E18, E20, E24
 (5x) Deep Socket: 14, 15, 17, 19, 22mm
 (2x) Spark Plug Socket: 16mm, 21mm
 (2x) Extension Bar: 125mm, 250mm
 (1x) Universal Joint
 (1x) 5/16" Bits Holder
 (1x) 72T Ratchet
 (1x) Adaptor
 1/4" Drive
 (18x) Bits Socket TX: 8, 10, 15, 20, 25, 27, 30; PH: 1, 2; PZ: 1, 2; FD: 4, 5, 5, 7; HEX: 3, 4, 5, 6
 (13x) Socket 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm
 (8x) Deep Socket: 6, 7, 8, 9, 10, 11, 12, 13mm
 (5x) E-type Socket: E4, E5, E6, E7, E8
 (4x) Hex key Wrenches 1.27, 1.5, 2, 2.5mm
 (2x) Extension Bar: 50mm, 100mm
 (1x) L 1/4" Hex Bit Adaptor
 (1x) Universal joint
 (1x) Sliding Bar 115mm
 (1x) Spinner Bar 150mm
 (1x) Ratchet 72D

1/4"-3/8"-1/2" SOCKETS SET 218pcs

REF: 2218

Composition:

(44x) Bits 1/4" Torx: T8, T10, T15, T20, T25, Hexagonal: 3,4,5,6, Flat: 1, 2mm, Hexagonal inviolable: 3,4,5,6, Flat: 4, 5, 5.5mm, Phillips: PH1,PH2, Pozidriv: PZ1,PZ2, XZN: M5,M6,M8, Flat with pins: 4,6,8mm, Torx inviolable: T8, T10, T10, T15, T20, T20, T25, T25, T40, Tri-wing: 1,2,3, Torq: 6,8,10
 (30x) Bits 5/16" Torx: T25,T27,T30,T35,T40,T45,T50, Hex.: 5,5.5,6,7,8, Flat: 6,6.5,8, Phillips: PH3PH4, Pozidriv: PZ3, PZ4, XZN: M5,M6,M8,M10
 (30x) Bits 1/4" Flat: 4,5,5.5,6.5,7mm, Pozidriv: PZ1,PZ2,PZ3, Torx: T8,T9,T10, T15,T20,T25,T27,T30 Hex :3,4,5,6mm, Phillips: PH1,PH2,PH3
 (15x) 1/2" wrench socket hex.: 10, 11,12,13,14,15,17,19,20,21,22,24, 27,30, 32 mm
 (13x) 1/4" wrench socket hex.:4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm
 (12x) Combination spanner: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm
 (10x) L socket: 1.27, 1.27, 1.5, 1.5, 2, 2, 2.5, 3, 4, 5mm
 (10x) Wrench socket 3/8" hex.: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm
 (7x) 1/4" deep socket hex.:4, 5, 6, 7, 8, 9, 10mm
 (6x) 3/8" deep wrench socket :10, 11, 12, 13, 14, 15mm
 (6x) 3/8" socket wrench torx: E8, E10, E12, E14, E16, E18
 (5x) Deep socket wrench hex.: 16, 17, 18, 19, 22mm
 (5x) 1/4" socket wrench torx: E4, E5, E6, E7, E8
 (3x) 1/2" wrench socket torx: E20, E22, E24
 (3x) Articulation joint: 1/2", 3/8" and 1/4"
 (3x) Adaptors: 1/4"x1/4", 3/8"x5/16", 1/2"x5/16"
 (3x) Ratchet: 3/8", 1/4", 1/2"
 (2x) 1/2" glowplug: 16, 21mm
 (2x) 1/4" extension 50 and 100mm
 (2x) Extensions 1/2" 125 and 250mm
 (2x) 1/2" wrench socket with bit torx: T55, T60
 (1x) 3/8" glowplug: 18mm
 (1x) Extensions 3/8" 125mm
 (1x) Sliding t bar 1/4"
 (1x) T adaptor 1/2"
 (1x) Handle with 1/4" bit adapter
 (1x) Square Handle 1/4"



20PCS 1/2" VDE INSULATED TOOL SET

REF: 3020



Composition:

(x13) Bit socket: 10mm, 11mm, 12mm, 13mm, 14mm, 16mm, 17mm, 18mm, 19mm, 21mm, 22mm, 24mm, 27mm
(x4) Hex. wrenches: 4*120mm, 5*120mm, 6*120mm, 8*120mm
(x1) Increase: 250mm
(x1) T handle: 200mm
(x1) Ratchet: 250mm

FLEXIBLE HOSE CLAMP PLIERS

REF: 2416



Application:

Indicated to access locations with reduced space

INJECTOR COPPER RING ASSORTMENT 551PCS

REF: 4400



Composition:

(50x) Washers 10x6.0x1.0
(30x) Injector nozzles plastic type L
(30x) Washers aluminum 8x5.8x11
(30x) Washers brass 15.8x7.5x3.0
(30x) Washer Injector Copper Mercedes 16.5x7.5x2
(30x) Washer Injector Copper: Ford 13.5x7.5x1.5
(30x) Washer Injector Copper: Renault 15.0x7.5x3.0
(30x) Washer Injector Copper: Ford 15.5x7.5x2.5
(30x) Washer Injector Copper: Universal 15.45x8.0x2.0
(30x) Washer Injector Copper: Iveco / Ford 15.0x7.5x2.0
(30x) Washer Injector Copper: Iveco / Ford 15.0x7.5x1.5
(30x) Washer Injector Copper: Renault 13.0x7.5x2.5
(30x) Injector Copper Washers: Universal 15.0x8.0x1.5
(25x) Springs
(20x) nozzles plastic injectors type T
(12x) Washer Injector Copper Kia 13.7x7.3x2
(12x) Washer Injector Copper KIA 13.7x7.3x3
(12x) Washer Injector Copper: Land Rover 15.5x7.5x1
(12x) Washer Injector Copper: Fiat 15.0x7.5x1.5
(12x) Washer Injector Copper: Deutz 13.0x7.0x1.5
(12x) Washer Injector Copper: Land Rover 15.5x7.5x1.5
(12x) Washer Injector Copper: Mazda 13.5x10x2.0
(12x) Washer Injector Copper: Mercedes 15.0x7.0x1.5

DIESEL INJECTOR REMOVER HYDRAULIC KIT
REF: 8450

Characteristics:

Universal kit complete with hydraulic cylinder for removing seized fuel injectors
 Hydraulic cylinder with 10 tonnes of force
 Máx. PSI 7000
 Can be used as a mechanical kit for confined spaces -i.e. against a bulkhead
 Can be used as a hydraulic kit for maximum power to help

release tightly seized injectors
 Can be used in-situ saving time and expense
 Adjustable supporting feet allow for angle and position setting
 Main side and top bars allow for various engine configurations

BATTERY TESTER WITH PRINTER
REF: 6164

Application:

6V/12V batteries test and 12V /24V Starting /Charging system test


REFRIGERATION TESTER 26 PCS
REF: 2514

Specifications:

- Filling unit
- Test Adapter Tool
- Mercedes Benz W123 , W126, W124 , W201 , Buick , Chrysler , Chevrolet , Dodge , Jeep , Oldsmobile , Pontiac
- Acura , Chevrolet , Chrysler , Dodge , Ford , GM , Honda , Hyundai , Infiniti , Isuzu , Kia , Lexus , Mazda , Mercury , Mitsubishi , Mercedes Benz , Nissan , Subaru , Suzuki , Peugeot , Toyota
- Acura , Chevrolet , Dodge , Eagle , Honda , Lexus , Mercedes Benz M-Klasse , Mitsubishi , Suzuki , Toyota
- Cadillac , Daewoo , Ford , GM , Jaguar , Jeep , Land Rover , Mercedes Benz , Mercury , Pontiac , Porsche , Saab , Saturn
- Alfa Romeo , Citroen , Fiat , Mini Cooper , Peugeot , Renault , Saab , Sterling , Jeep , Volvo
- VW Vento , T4 , Passat 1996 , Golf Beatle , Sharan
- Audi A4 , A5 , A6 , BMW 345 , VW Passat 1997-2002 , Porsche Cayenne
- BMW E32 , E34 , E36 , E 38 , E39 , E46 , E90
- Audi 1975-1993 e VW 1975-1993 with male thread
- Ford Mondeo , International , Land Rover , Opel , Ssangyong
- Mercedes Benz (C-,E-und S-Klasse) W140 , W124 , W210 , W211 , W215 , W216 , W220 , R230
- Ford Mondeo , Focus , C-Max
- Mazda (M3)
- Mercedes Benz A-Klasse W168 , Vito
- BMW E60 , E63 , E64 , E65
- VW Sharan 1.8T u. 2.8
- Toyota Celica , RAV4 , Previa , MR2
- Saab
- Opel , Fiat , Chevrolet , Buick , Cadillac , Ford (USA) , Saab , GMC , Suzuki , Vauxhall , Mazda , Lincoln , Oldsmobile , Isuzu , Hummer
- BMW , Land Rover , Mini
- Connector part R123/R124 (Black)
- Connector part R123/R125 (Blue)
- Universal Adapter
- Hand pump with pressure gauge
- Hose
- Loading Hose
- Thermometer

HEADLIGHT TESTER

REF: 6900

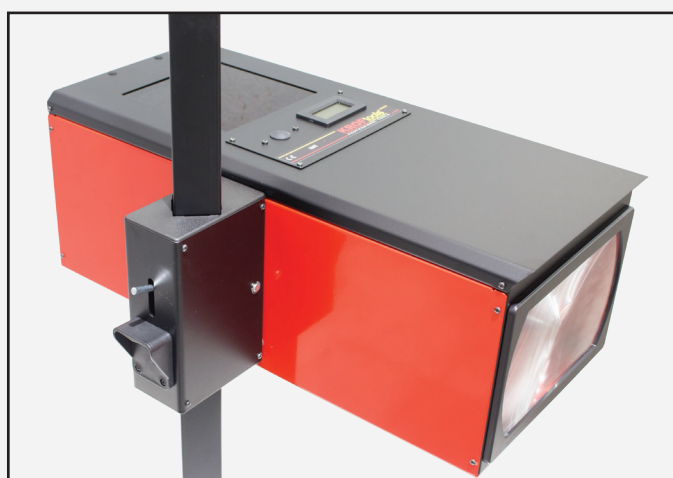

Characteristics:

Suitable for checking and adjusting any type of headlight (high, low and fog lights), including headlights with XENON and LED lamps
Suitable for use in garages and technical inspection lines
For light and heavy vehicles. Internal sighting screen with scale for vehicles with steering wheel on the right and left
Steel wire alignment visor with calibration system

Height adjustment system with locking system
Digital lux meter
Convenient use due to the positioning of the wheels
Robust non slip base
Supplied with assembly, operation and calibration manuals

NITROGEN TYRE INFLATION SYSTEM

REF: 9500



Characteristics:

Energy: 100-240V 50 / 60hz
Air inlet interval: 87-123PSI / 6-8.5Bar
Quality compressed air: 0.01ppm
Recommended air inlet pressure: 44psi, 300kpa or 3Bar
Nitrogen purity: 95-99%
Nitrogen output: 42L / min (1.5cfm) 116psi
Maximum pressure of nitrogen in the tank: 102psi
Operating range: 5-90psi

Description:

(1x) Generator
(1x) 10 meter/390 inch hose with quick couplers which connect the Generator unit and your tire inflation gun
(1x) Hose/Cord Storage Hook

ADBLUE DIGITAL FLOW METER

REF: 3284



12V 400L DIESEL TANK

REF: 3294



30PCS OIL FILTER WRENCH SET

REF: 6515



Application:

For use in Adblue ® REF 3286 tank

Characteristics:

Tank capacity: 400L
Flow Rate: 40 ltr / min
Fuel: Diesel
Voltage: 12V DC
Lockable filler cap
Delivery hose: 4M

3/4"

Cable: 4M
Size: 1110 * 960 * 660mm
Material: Polyethylene

Description:

(1x) 3 claw filter extractor
(1x) reduction 1/2 "F x 3/8" M
(28x) filter wrenches

TIMING TOOL BMW N47/N47S 2.0D

REF: 1550



Description:

Flywheel Plate Timing Pin
Tensioner locking pins (x2)
Crankshaft pulley turning tool
Camshaft alignment tool
Steering plate adjustment pin
Adaptador
Fuel pump extraction tool

TIMING TOOL 1.4-1.6 16V

REF: 1553



Description:

Suitable for timing 1.4 and 1.6 16V Valvetronic direct injection petrol chain drive engines, fitted in BMW Mini, Citroen and Peugeot vehicles

ENGINE TIMING SET RENAULT/OPEL/NISSAN 1.6DCI

REF: 1620



Models: Renault; Espace/Grand Espace IV (06-10), Kaleos (08-11), Laguna II (05-07), Laguna III (07-12), Master III (10-12), Magane II (06-10), Scenic/ Grand Scenic II (06-09), Scenic/Grand Scenic III (09-12), Trafic II (06-12), Vel Satis (05-10)

176 LED LAMP FOR CAR HOOD

REF: 1054



Characteristics:

Minimum opening: 1270mm
Maximum opening: 2100mm

Power consumption: 15W

Classification: IP44
176 LEDs

Output: 1300

Cable length: 4.85m

MULTIFUNCTION LAMP FOR CAR HOOD 2x5W COB

REF: 1076



Characteristics:

Charger: 5 V; 2 A; B.C; USB
Button function: 50% - 100% - OFF lighting

Battery: 2 x 3.7 V; 2600 mAh Li-ion

Charging time: 3-4 h

Operating time: 3-4h (100%) and 5-6h (50%)

Luminous flux: 1000 Lm (100%) / 500 Lm (50%)

With Micro USB charger

7WCOB+3W RECHARGEABLE SLIMLIGHT

REF: 1091



Characteristics:

Light Source: Front-COB LED High Power
Top-SMD LED high power
Luminous Flux: Front - 60-700LM (min.-max.) / Top- 120L
Operating time: Front - 16.5-1.4h / Top - 10h
Battery: Li-ion 3.7V, 2600mAh, 9.62Wh
Charging time: 4.15h

700 LM FOLDABLE SLIM LIGHT

REF: 1098



Characteristics:

Main light: 60-700LM
Top light: 130LM
Working Time: 16h - 2h (full power mode) of the main light. 9h top light

Battery Specifications:

Li-Ion 3.7V, 2600mAh, 9.62 Wh
Charging Time: 4h
Charging input: DC 5V 1A
Degree of protection: IP 54, IK 07

1/2" IMPACT WRENCH 650NM 18V BATTERY

REF: 9900



Characteristics:

1/2" square (12.7mm)
Uncharged speed: (L) 0~900 / min, (M) 0~1200 / min, (H) 0~1900 / 500 / min
Impact per minute: (L) 0-1200 IP, (M) 0-1600 IP, (H) 0-2400 IP
Maximum power: 650NM
Height: 260mm
Length: 200mm

PNEUMATIC IMPACT WRENCH 1/2" 1112/1756Nm

REF: 9200



Specifications:

Speed: 8,000rpm
Tightening force: 1112nm
Force (max) release: 1756nm
Square: 1/2 "(13mm)
Air consumption: 113l / m
Air inlet: 1/4 "(recommended air pressure 90psi (6.2bar))

COMPACT PNEUMATIC WRENCH 1/2" 678/1302Nm

REF: 9204



Specifications:

Speed: 10,000rpm
Tightening force: 678nm
Force (max) release: 1302nm
Square: 1/2 "(13mm)
Air consumption: 113l / m
Air inlet: 1/4 "(recommended air pressure 90psi (6.2bar))

IMPACT WRENCH 1/2" 678/1275Nm

REF: 9216



Characteristics:

Composite housing
Speed: 10,000rpm
Tightening force: 678nm
Max. Power released: 1275nm
Square: 1/2 "(13mm)
Air consumption: 164l / m
Air inlet: 1/4 "(recommended air pressure 90psi (6.2bar))

3T TROLLEY HIDRAULIC JACK

REF: 4809



Caracteristics:

Minimum height: 95mm
Maximum height: 500mm
Nylon wheels
Foot pedal
Lower control system
Handle with automatic return



HYDRAULIC PNEUMATIC JACK 20-40T (SHORT)

REF: 4817



Characteristics:

Working pressure: 0.9-1.2Mpa
Minimum height: 150mm
Maximum height: 409mm
Height 40T: 73mm
Height 20T: 66mm
Extensions: 75mm and 45mm
Weight: 40kg
Slow down valve
Overload safety valve

Oil anti-return system
Automatic return switch for one safe operation
Rugged chrome finish on the cylinder internal and external
Oil Capacity: 1L

HYDRAULIC PNEUMATIC JACK 15-30T (SHORT)

REF: 4816



Caracteristics:

Working pressure: 0.9-1.2Mpa
Minimum height: 150mm
Maximum height: 409mm
Height 30T: 73mm
Height 15T: 66mm
Extensiones: 75mm y 45mm
Weight: 38kg
Relaxation valve
Overload safety valve

Oil anti-return system
Automatic return switch for one safe operation
Rugged chrome finish on the cylinder internal and external
Oil Capacity: 0,9L

TRANSMISSION JACK 500kg**REF: 4825****Caracteristics:**

Capacity: 500kg
Minimum height: 1189mm
Maximum height: 2000mm
Product weight: 28,5kg
Double pump (Quick lift)
With safety valve

Description:

The maximum load capacity is 0.5 ton
DO NOT exceed this rated capacity
This jack is used as an aid in the removal and installation of a transmission or a differential as individual components
DO NOT use it for any other purpose it is not designed to perform
DO NOT use this transmission jack as a vehicle lifting device or as a vehicle support
Only use this equipment on a surface that is stable, level, smooth and capable of sustaining the load
Keep the surface clean, tidy and free from unrelated materials and ensure that there is adequate lighting

1TON SHOP CRANE**REF: 4863****Caracteristics:**

Capacity: 1T
Min height: 70mm
Stroke: 2160
Gross weight: 80kg
Net weight: 70kg

Attention:

Do not overload. Overloading can damage the crane mechanism, leading to failure
Never use the crane on an uneven surface as the crane may tip over
Lock the crane legs before lifting the load
Before each use, check that the crane bolts are tightened
Note the weights of the goods, do not exceed the maximum allowed





30TON SHOP PRESS

REF: 4885

Characteristics:

Capacity: 30T
Working range: 151-1031mm
Stroke: 150mm
Lateral stroke: 200mm
Width: 535mm

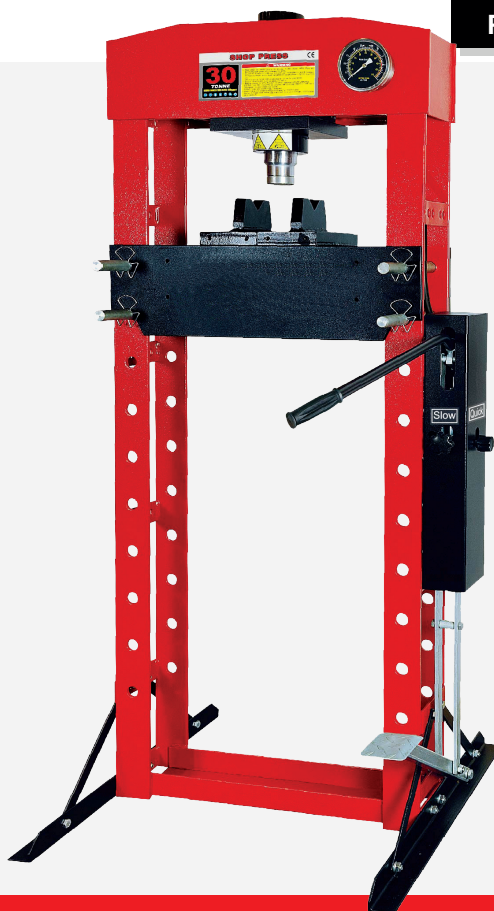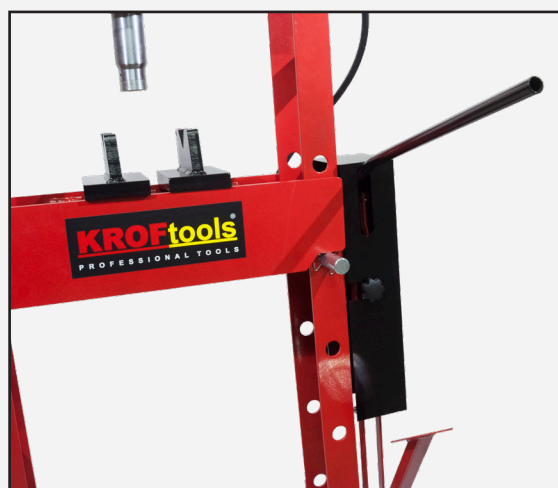

3TON TROLLEY JACK

REF: 4900

Characteristics:

Capacity: 3T
Minimum height: 75 mm
Maximum height: 510 mm



AIR HOSE REEL 12,5x18,8mm 12M PVC

REF: 2073



Measures:

Hose length: 12m(outlet)+1m(inlet)
Hose diameter: 12.5*18.8mm

Characteristics:

Fitting: 3/8"BSPT+EURO quick connector
Working/Burst pressure: 150PSI

AIR HOSE REEL 7,5x11,5mm 10M PVC

REF: 2074



Measures:

Hose length: 10m(output)+1m(input)
Hose diameter: 7,5x11x5mm

Characteristics:

Features: Housing Material: Polypropylene (PP) - Red
Hose material: PVC
Fitting: 1/4"BSPT+EURO quick connector
Working/Bursting pressure: 150PSI

AIR+CABLE REEL KIT

REF: 2075



Characteristics:

Air hose:
Diameter: 6.5 x 10 mm
Length: 10m
Electric cable: 3x1,5mm²

NOTE:

Air gun not included. Reference 2090 - BLOW GUN 100MM and 2093 - BLOW GUN 250MM compatible.

1/2 20M OIL/GREASE/HIGH PRESSURE WATER HOSE REEL

REF: 2076



Characteristics:

Internal hose diameter: 1/2"
Hose length: 20m
Working pressure: 160bar/2320psi
Inlet connection: F1/2"G
Outlet connection: M1/2"G

WATER HOSE REEL 1/2" 15M

REF: 2080



Measures:

Hose diameter: 1/2"
Hose length: 15m(outlet)+1.5m(inlet)

Characteristics:

Working/Burst pressure: 150PSI
Housing material: Polypropylene (PP)
Hose material: PVC
Fitting: 3/4"

AIR HOSE REEL 8x12m/15m

REF: 2084



Measures:

Hose diameter: 5/16 "
Hose length: 15m(outlet)+1.5m(inlet)

Characteristics:

150psi working pressure
Case Material : Polypropylene (PP) - Red
Hose material: Black PU MESH
Fitting: 1/4"BSPT+EURO quick connector

ELECTRIC REEL 3x1,5mm/15m

REF: 2085



Measures:


Hose length: 15m(outlet)+1.5m(inlet)
Electric cable diameter 3x1.5mm

Characteristics:

Case Material: Polypropylene (PP)-RED
Voltage: 230V
Power: 1000W / 2300W
Cable material: H05VV-F 3G1.5mm2

AUTOMATIC TIRE CHANGER 380V

REF: 9010

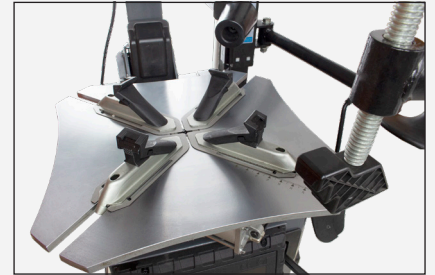

Characteristics:

Rim diameter (external locking): 12-24"
Rim diameter (internal locking): 14-16"
Max Wheel diameter: 45"
Wheel width: 16"
Working pressure: 8-10bar
Voltage: 380V 3PH 60HZ
Motor power: 1.1KW
Max. Height: 1900mm
Length: 1900mm
Width: 1900mm
Working speed: 6-8 n/min
Noise level: 72db

AUTOMATIC WHEEL BALANCER 10"-24"

REF: 9012

Characteristics:

Wheel Weight: 67kg/147lb
Wheel Diameter: 47"
Rim Diameter: 10"-24"
Rim Width: 1.5"-20"
Speed: 200rpm
Accuracy: 1g
Power Supply: 110V 60Hz 1PH/230V 50Hz 1PH
Balance time: 6-8s Noise Level: ≤65dB




90L OIL DRAINER WITH PRECHAMBER

REF: 9710

Characteristics:

Tank capacity: 90 L
Bowl capacity: 14L
Display capacity: 8 L
Depressurization time: 2 min
Suction speed (oil 70-90 °C, 6 mm probe): 1.5-2 L / min
Total suction capacity: 60-65 L
Suction hose: 2 M
Drain hose: 2 M
Maximum drainage pressure: 4-7 bar

A-1730mm , B-1190mm

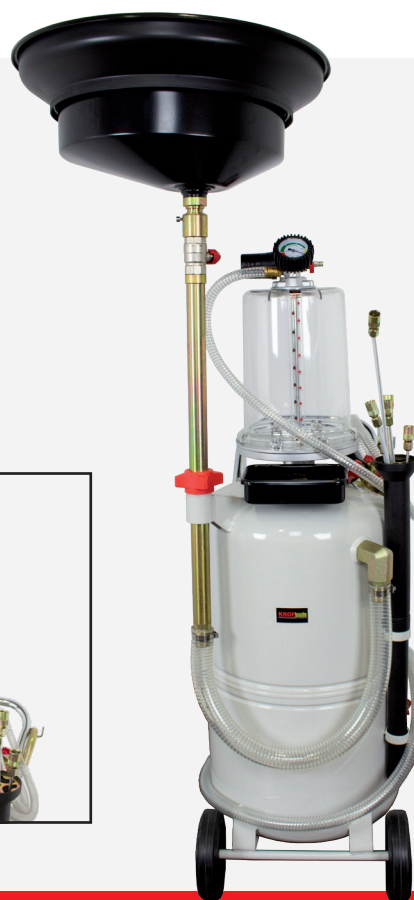

ELECTRONIC PARTS WASHER 150L

REF: 9745



Characteristics:

Overall dimensions: 1130x545x900mm
Tank dimensions: 1060x520x200mm
Tank capacity: 50L
Electrical current: 240V 50hz 0.5A
Maximum pump flow capacity: 20L / min

SANDBLASTER CABINET 990L

REF: 9771

**Characterísticas:**

General dimensions: 1330x1240x1770mm
Maximum working pressure 125PSI (8.6Bar)
Air Consumption: 17,4 M³/h
Voltage 220 ~ 240V / 50HZ 26W

Work Light:

Fluorescent light 4 pieces
Each Dimension: 16x890
Power: 110~120V,60Hz (220~240V,50Hz), 26W

Technical specifications:

Sturdy steel construction with top cover
Window with transparent glass
For cleaning parts in the cabin with sand
Use with glass microspheres with granulation between 200-300

4 TON ELECTRO HYDRAULIC LIFT TWO COLUMNS 380V

REF: 9805



Characteristics:

Drive: Electrical hydraulic
Max lifting weight: 4T
Lifting height: 1760/1790mm
Initial height: 100/130mm
Lifting time: ≤50S
Lowering time: ≤60S
Pass width: 2436mm
Overall width: 3440mm

Overall weight: 870 kg
Machine power: 2.2 KW
Hydraulic oil: 7L 20#
Working temperature: 5-40°C
Working humidity: 30-95%
Noisy level: < 76db
Installation height: ≤1000M above sea level
Storage temperature: -25°C~55°C
Installation place: Indoor

5,5TON DOUBLE SCISSOR LIFT FOR ALIGNMENT W/ LED

REF: 9822

**Characteristics:**

Capacity: 5.5T
Electrical driving: Electrical hydraulic
Main platform lifting height: 1850mm
Secondary platform lifting height: 450mm
Initial height: 330mm
Main platform length: 5030mm
Secondary platform length: 1775-2075mm
Main platform width: 620mm

Secondary platform width: 550mm
Main platform elevation time: 50s
Platform descent time main: 60s
Elevation time platform secondary: 20s
Platform descent time secondary: 30s
Total width: 2160mm
Total length: 5510mm
Noise: 76db

ELECTRIC-HYDRAULIC LIFTING TABLE 1.2T

REF: 9839

NOTE: Demonstration Image



Characteristics:

Lifting Capacity: 1.2T
Minimum height: 570mm
Maximum lifting Height: 1920mm
Platform Length: 1300mm
Platform Width: 770mm
Ground Clearance: 140mm
X Axle Direction Movement: 50mm
Y Axle Direction Movement: 50mm

Platform Tilting X Axle: 5°
Platform Tilting Y Axle: 5°
Motor power: 2.2kW
Lifting time with load: 60s
Lowering Time with load: 40s
Power Supply: 220V/50Hz/1Ph

4 COLUMNS LIFT 6.5TON 5,5MT

REF: 9834




Characteristics:

Drive: Electrical hydraulic
Maximim lift weight: 6500kg
Lift height: 1800mm
Platform initial height: 210mm
Platform length: 5498mm
Platform width: 510mm
Lifting time: ≤50S
Lowering time: ≤60s

Overall width: 3426mm
Overall length: 7020mm
Overall weight: 2100kg
Power supply: AC 400V
Hydraulic oil: 16L 20#

automechanika

FRANKFURT

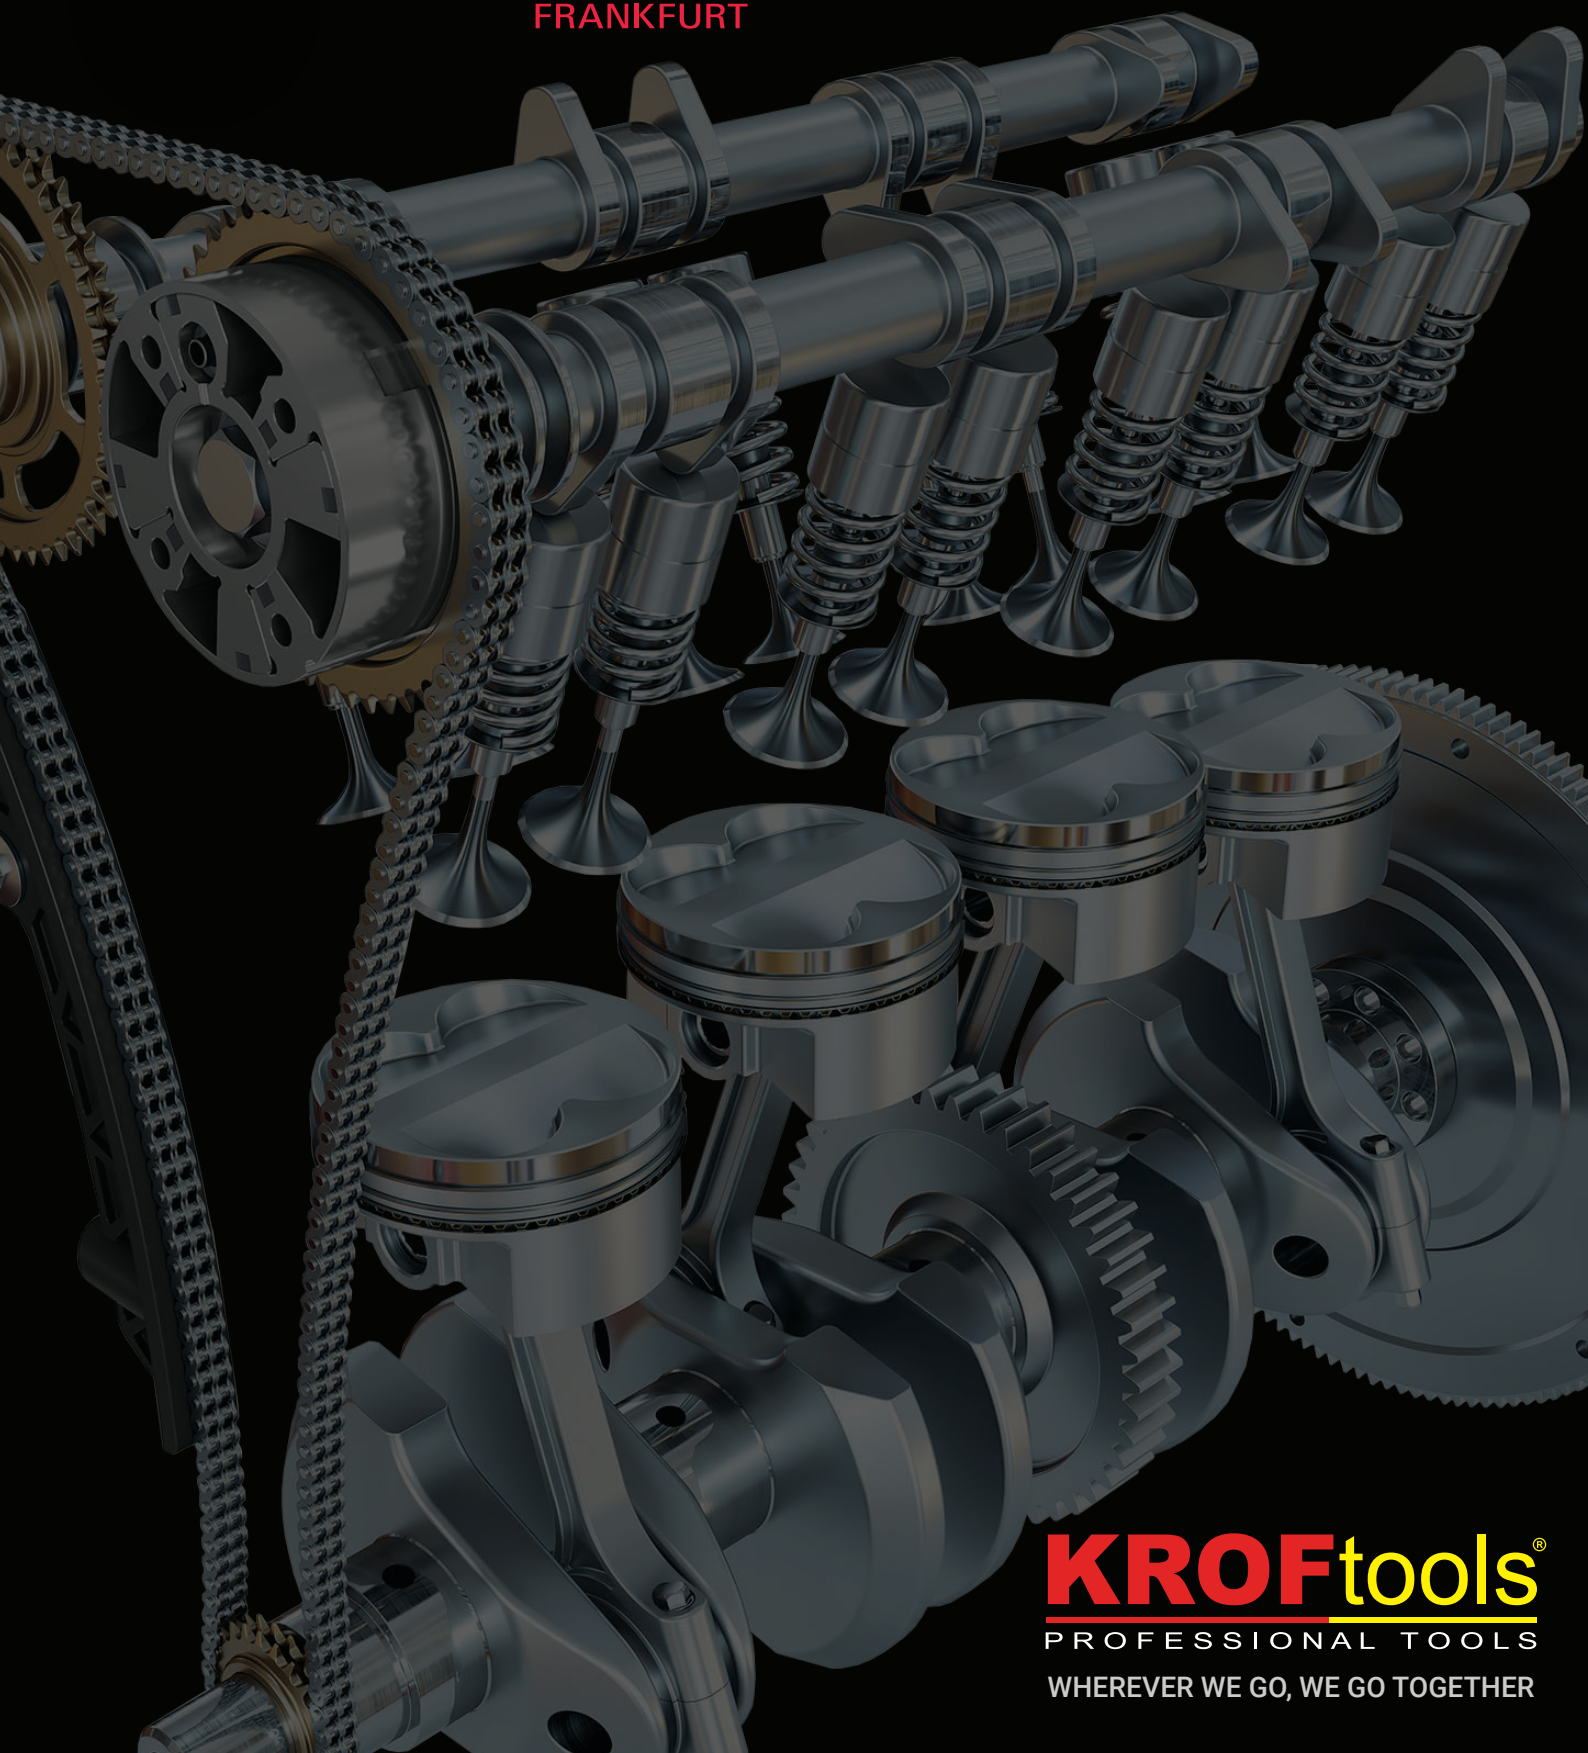

KROFtools®
PROFESSIONAL TOOLS
WHEREVER WE GO, WE GO TOGETHER

Cofinanciado por:



UNIÃO EUROPEIA
Fundo Europeu
de Desenvolvimento Regional