

CP9

Technical specifications

Standard voltage
230 VAC

Frequency
50 Hz

Max electricity consumption
1 A


Fuse max
13 A

Pressure
6.4-10 bar

litre air per minute
25 l/m

Working frequency
27.12 MHz



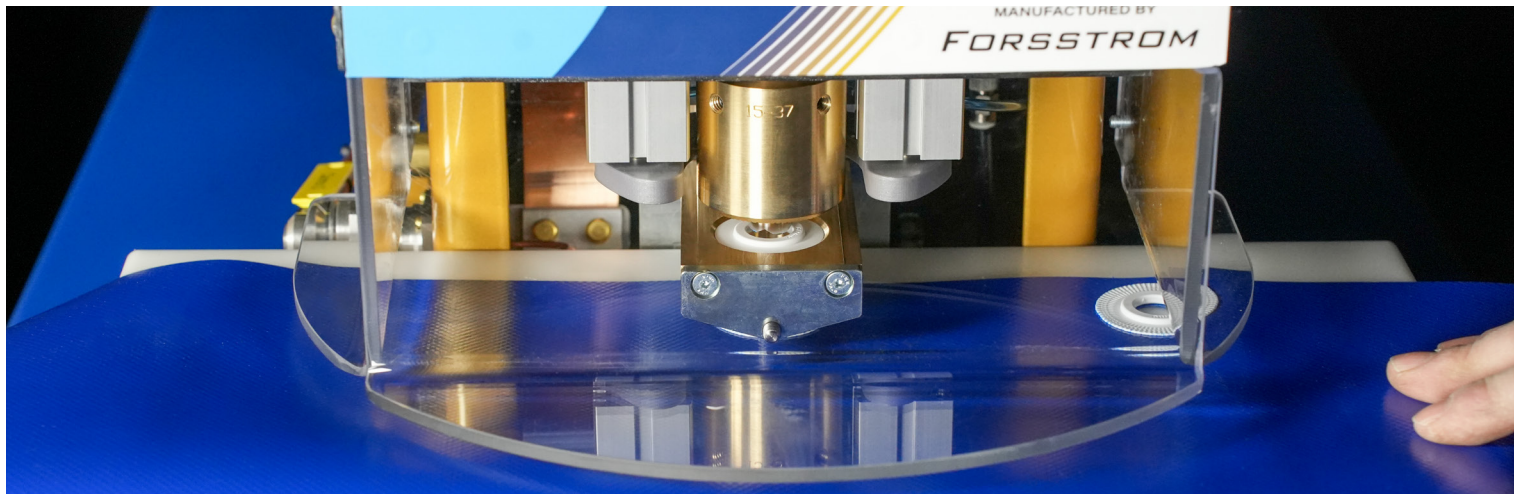

New and Improved

Eyelet change

The CP9 features a redesigned eyelet change mechanism for effortless operation. Backed by Forsstrom's service team, the CP9 sets a new standard in reliability and performance.

HF Generator

The FG 120 is a small 3kW HF-generator with built-in control system for controlling welding parameters. It is suitable as a stand-alone unit for eyelet welding.

Electrodes for eyelets

11/27



13/32



15/37




19/43




Dimensions

Front

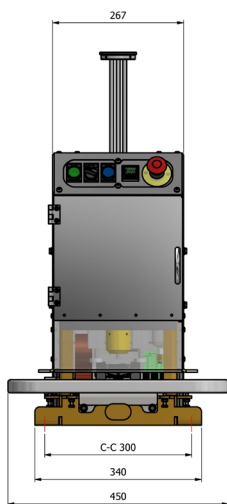

Side

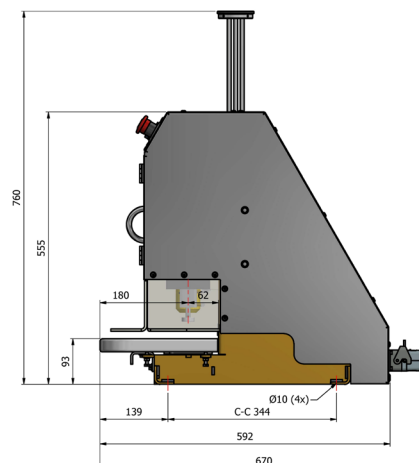

forsstrom.com/machine/cp9

Learn more about the benefits of having the Forsstrom x Carmo CP9 as part of your production.

Call or email Forsstrom sales:

Tel: +46 523 66 66 61

sales@forsstrom.com