

EPIC SERIES (AM)




EPIC (AM)

Designed base on the concept of "light engine modularization", making EPIC series possible to be more flexible, more practical and expandable.


The features are as follows:

- * Modularized design—easy maintenance & replacement
- * Maximize common components to reduce stock cost
- * Speed up the progress of new series development in the future
- * Interchangeable design to increase product flexibility
- * Set up design norms by modularization, minimize possible faults


Shape (Baffle size)

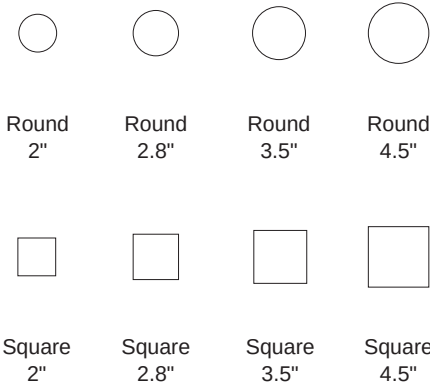


Mountings



Light distributions




EPIC (AM)

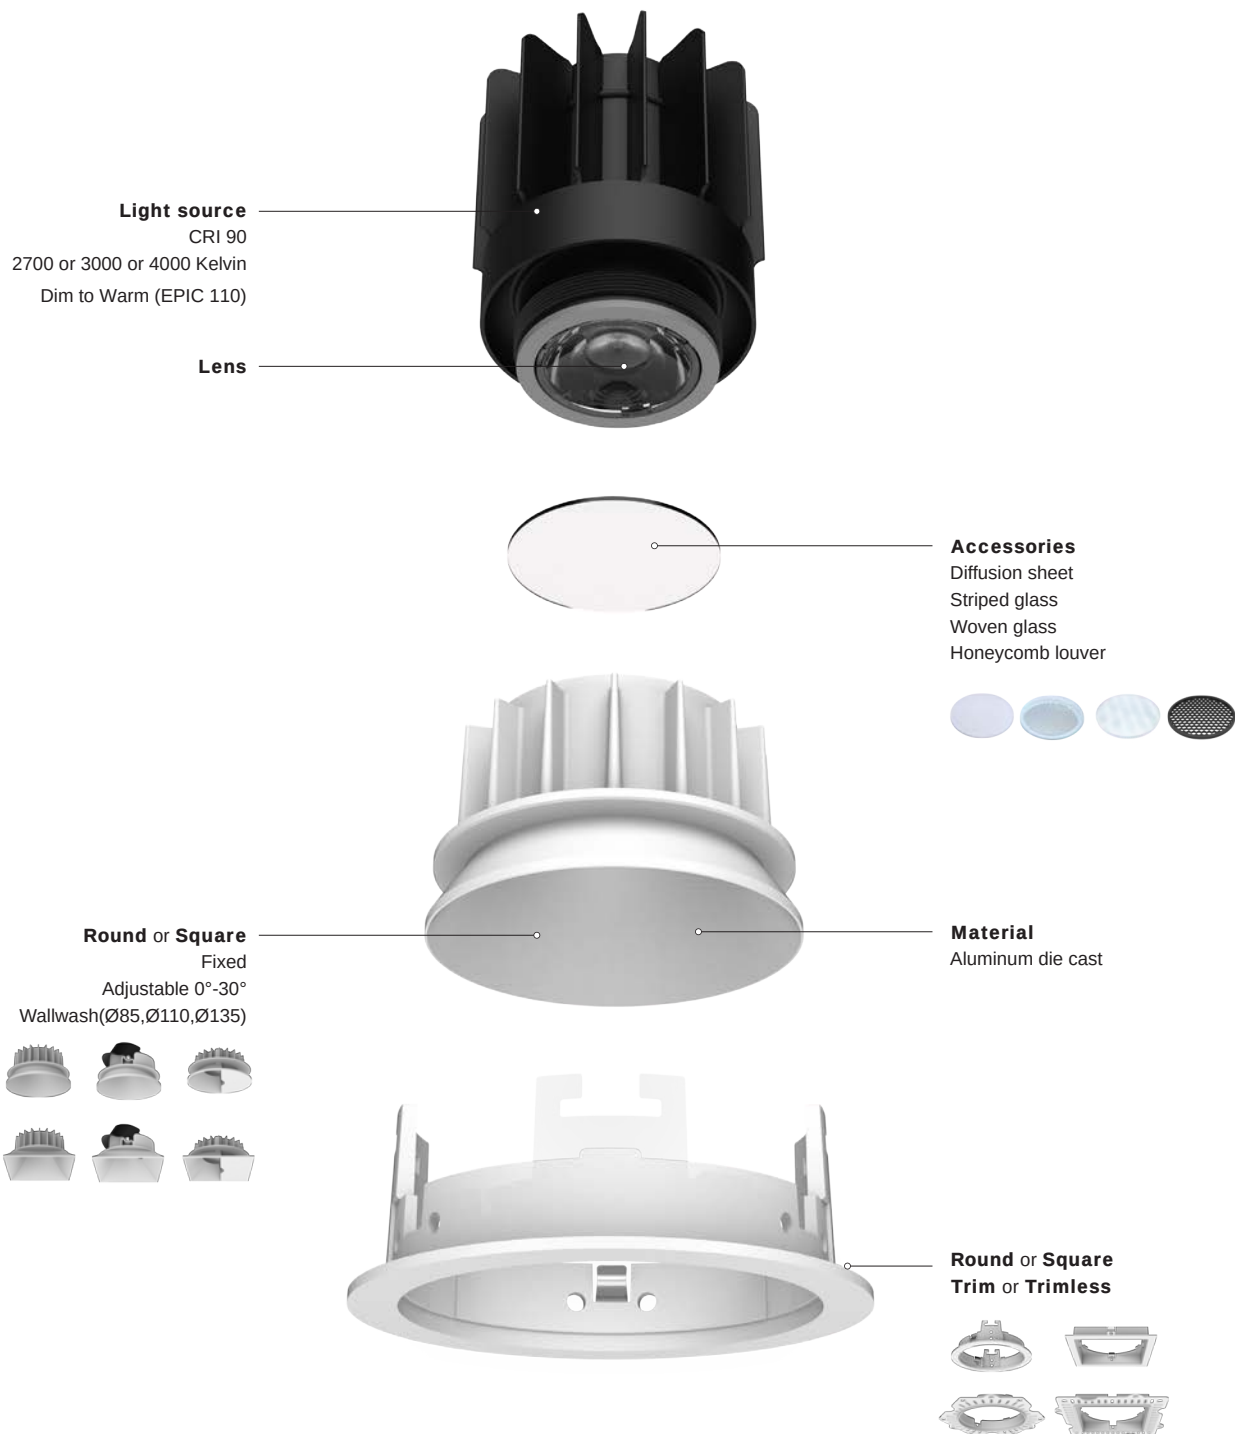



Light distributions

Three light patterns to meet all the essential functions of your lighting concept Vertical lighting is provided by downlights with different beam angles; wall-wash and floor-mounted optics provide a wide range of wall and floor lighting; adjustable spotlight settings . If the functional area changes, the optics in the luminaire housing can be easily replaced without tools.

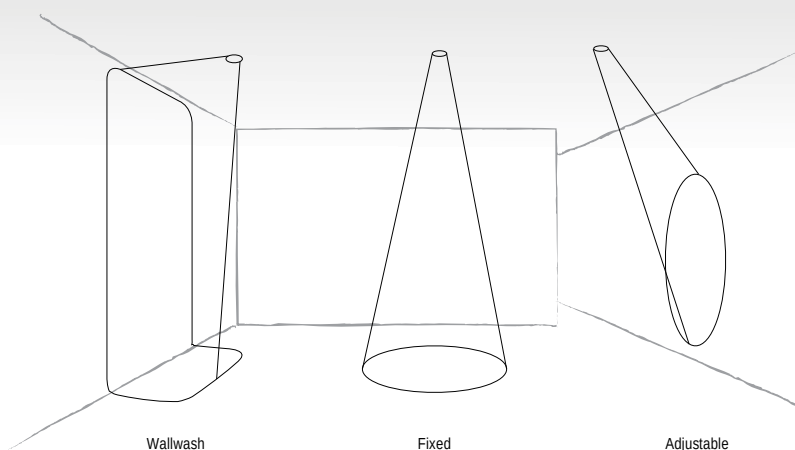

Wallwash


Fixed

Adjustable

Easy installation

Easy to replace, quick to assemble and completely tool-free.



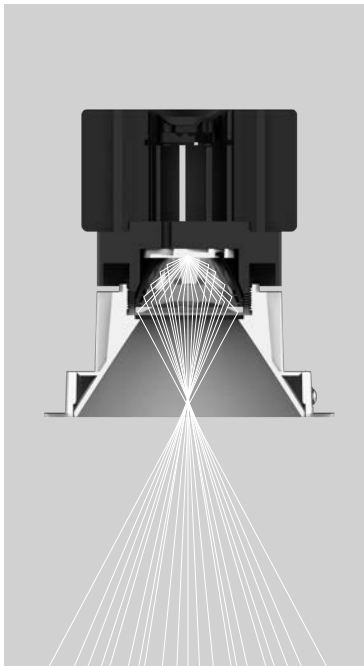


optics



Deep baffle design helps reduce glare, equipped with special selected lens, the light is evenly spread towards the centre to achieve the beam angles needed, making EPIC a unique series.

Low glare baffle


Design with 30° cut-off angle, this series ensures the low glare function that able to create a soft visual effect.

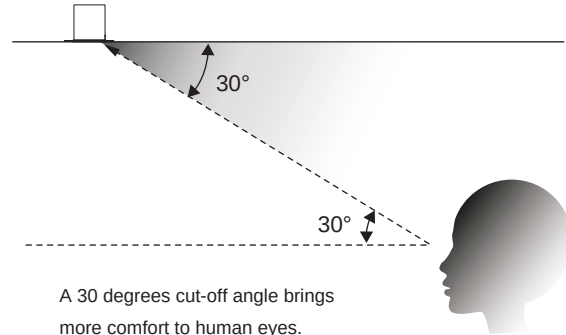


Adding an extra component to the fixture prevent people seeing through the fixture a very tender thought from our designer

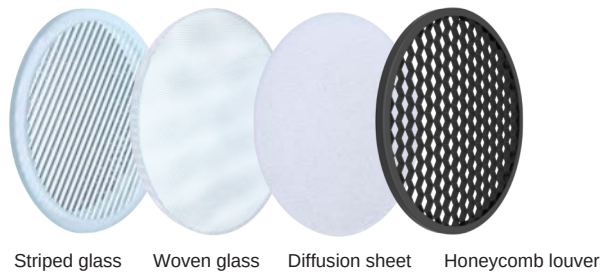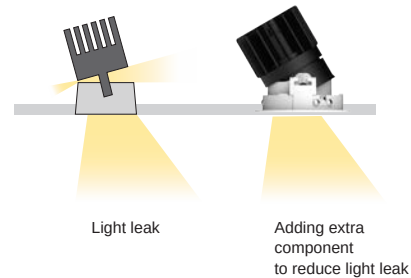

With more options to the accessories, EPIC adds more flexibility and freedom for the lighting designer. Honeycomb reduces glare; strip glass creates oval distribution; diffusion sheet & woven glass soften and even spread the light.


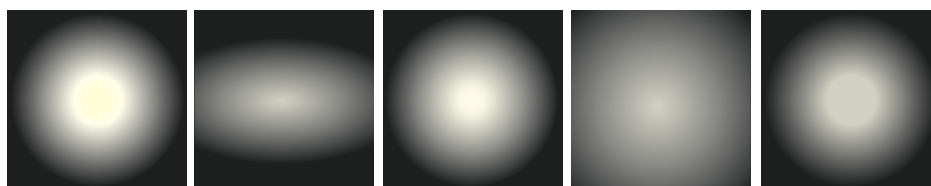


Lens (no accessory) Striped glass Woven glass Diffusion sheet Honeycomb louver

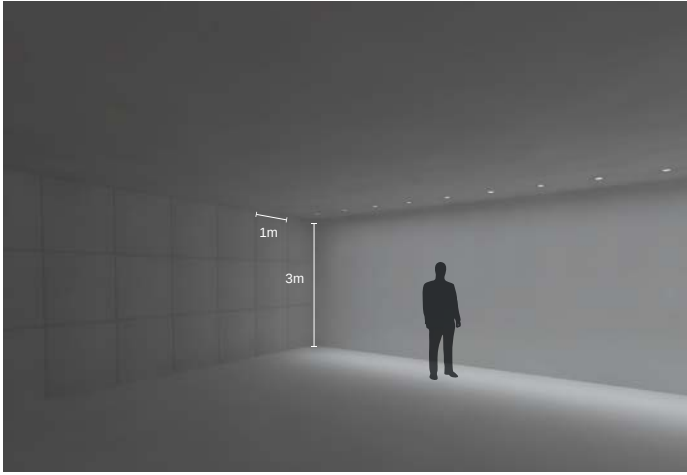

Wallwash

EPIC a wallwash enables even illumination on the target wall without shadows. It supplies an overall effect that is clean and elegant. Generally speaking, the distance between the lighting fixture and the height of the illuminated wall ranges from 1/3 to 1/5. This wallwash function; not only broadens the illumination effect with smooth lights performance but also makes the entire area feels brighter. When combining with other function fixtures together, it can form a fusion of beauty.

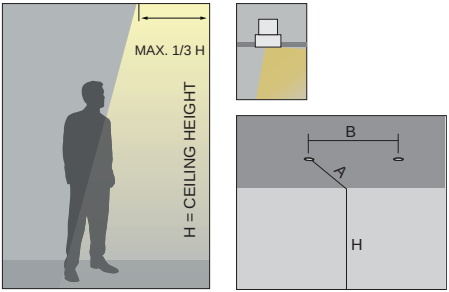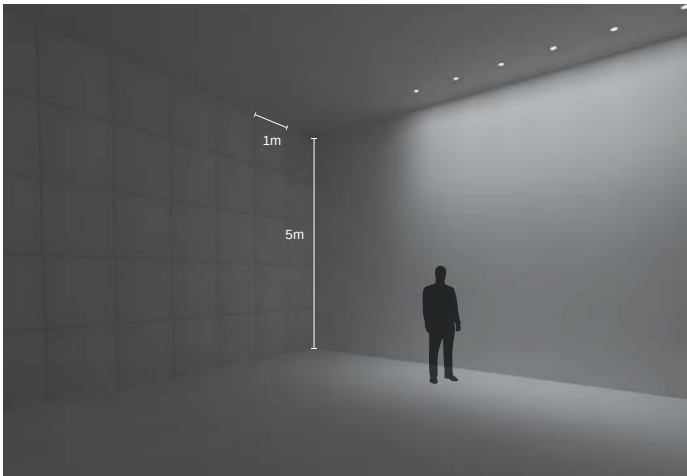

RECOMMENDED DISTANCES (Meter)	EPIC 2.8"	A : H : B	0.75 : 3 : 0.75 (m)
	EPIC 3.5"	A : H : B	0.75 : 5 : 0.75 (m)
	EPIC 4.5"	A : H : B	0.75 : 5 : 0.75 (m)



Dim to Warm 1800-3000K (for EPIC 110)

This light engine features Dim to Warm, the ultimate in dimming comfort, where the light changes its colour temperature according to the dimming curve; the darker the light, the warmer the light. Like a sunset effect, the gradual change replicates the transition from a comfortable ambience to a relaxing and soothing environment.

Dim to Warm is the term used to describe the function of LEDs to reduce the colour temperature (CCT) of the light as it dims, from 3000K at 100% to 1800K at nearly 0%.

The light provides a relaxing ambience for a typical evening dining experience, reading in bed, a moody hotel lobby or bar environment. By moving from dim to warm, we provide a light source that is alert and bright when cooking or working, then dimmed to provide a warm ambience for hosting and relaxing in the evening.



Fixed



Specification

2700 K, 3000 K, 4000 K,
Dim to Warm (EPIC 110)
CRI ≥ 90
TRIAC, 1-10V , DALI

Types (round & square)



Colours

Bezel :  
Black White

Baffle :    
Black White Haze Gold

Beam Angle



20°/40°/55° (Lens) for EPIC-65
25°/35°/45°/55° (Lens) for EPIC-85
30°/40°/50°/60° (Lens) for EPIC-110
20°/30°/45°/55° (Lens) for EPIC-135



Adjustable



Specification

2700 K, 3000 K, 4000 K,
Dim to Warm (EPIC 110)
CRI ≥ 90
TRIAC, 1-10V , DALI
30° Tilt

Types (round & square)

	EPIC 2"	EPIC 2.8"	EPIC 3.5"	EPIC 4.5"
Trim	 2.56" (65mm)	 3.46" (88mm)	 4.41" (112mm)	 5.51" (140mm)
Trimless	 2.17" (56mm)	 2.93" (75mm)	 3.73" (95mm)	 4.74" (121mm)

Colours

Bezel :  Black  White

Baffle :  Black  White  Haze  Gold

Beam Angle



20°/40°/55° (Lens) for EPIC-65
25°/35°/45°/55° (Lens) for EPIC-85
30°/40°/50°/60° (Lens) for EPIC-110
20°/30°/45°/55° (Lens) for EPIC-135



30° Tilt




Wallwash



Specification

2700 K, 3000 K, 4000 K,
Dim to Warm (EPIC 110)
CRI ≥ 90
TRIAC, 1-10V , DALI

Types (round & square)



Colours

- Bezel :  Black  White
- Baffle :  Black  White  Haze  Gold

Beam Angle



Wallwash (Lens)




B GALLERY

B GALLERY





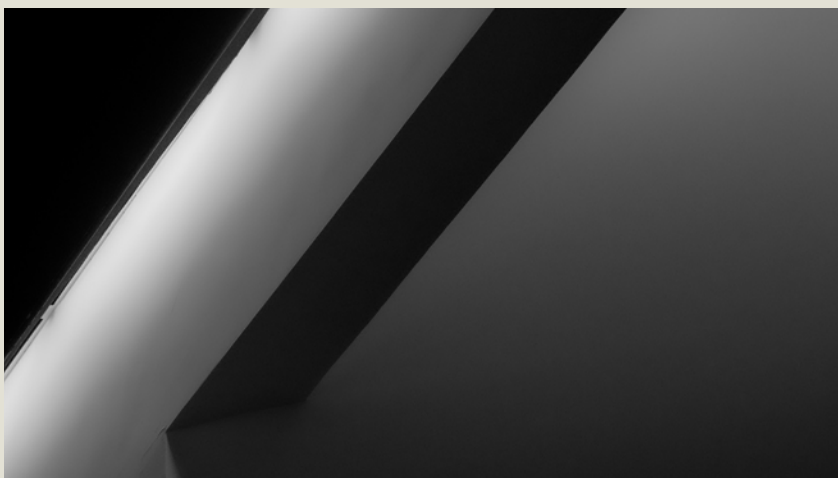

EPIC-65

2"



Round / Square

Fixed
Adjustable


EPIC-65-RTF



Article number	2118.137-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	766 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

**Dimmable**



Cut out : 2 12/32" (60mm)

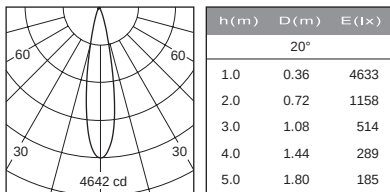



EPIC-65-RTA




Article number	2118.138-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	767 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

**Dimmable**



Cut out : 2 12/32" (60mm)

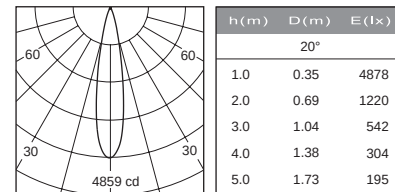**Accessories**ACSG-5
Striped glassACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup


EPIC-65-RTL

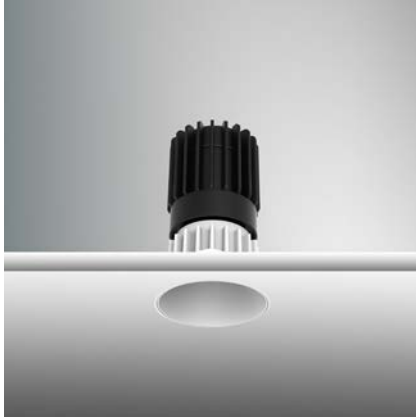


Article number	2118.237F-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	766 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

**Dimmable**



⌀ Cut out : 2 12/32" (60mm)

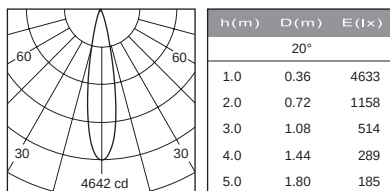



EPIC-65-RTLA

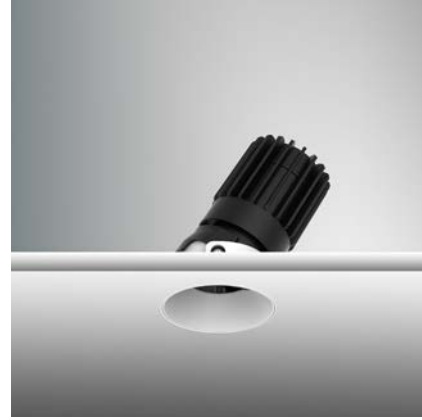


Article number	2118.238F-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	767 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

**Dimmable**



⌀ Cut out : 2 12/32" (60mm)

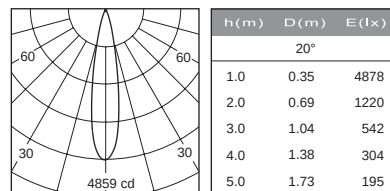**Accessories**ACSG-5
Striped glassACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup


EPIC-65-STF

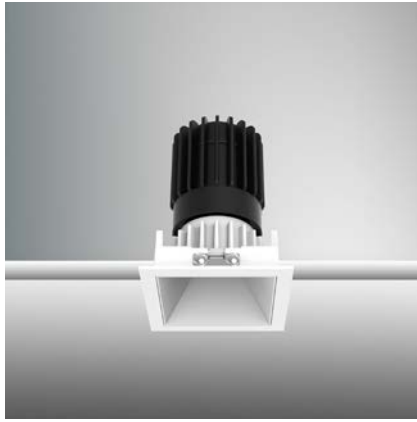

Article number	2118.140-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	796 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350


**Dimmable**

Cut out : 2 12/32"X2 12/32" (60X60mm)





h (m)	D (m)	E (lx)
	20°	
1.0	0.35	4705
2.0	0.70	1176
3.0	1.05	522
4.0	1.39	294
5.0	1.74	188


EPIC-65-STA

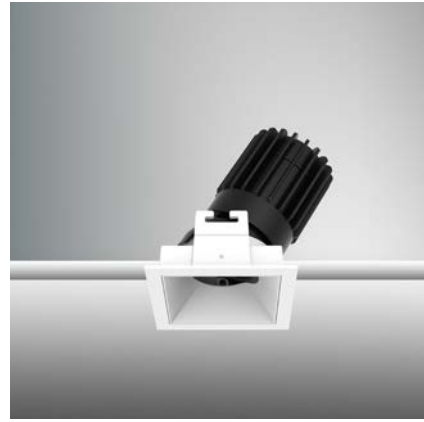


Article number	2118.141-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	755 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

**Dimmable**


Cut out : 2 12/32"X2 12/32" (60X60mm)




h (m)	D (m)	E (lx)
	20°	
1.0	0.35	4619
2.0	0.69	1155
3.0	1.04	513
4.0	1.38	288
5.0	1.73	184

AccessoriesACSG-5
Striped glassACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup


EPIC-65-STLF

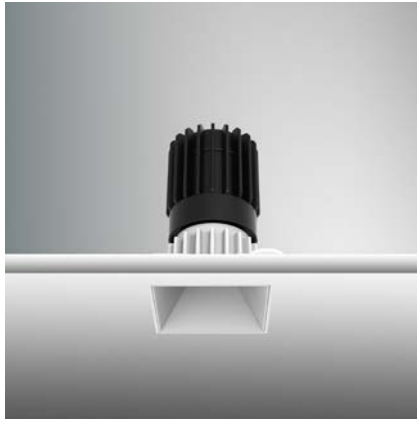


Article number	2118.240A-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	796 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

**Dimmable**


Cut out : 2¹²/₃₂"X2¹²/₃₂" (60X60mm)

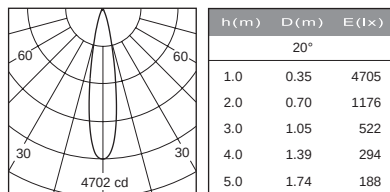



EPIC-65-STLA

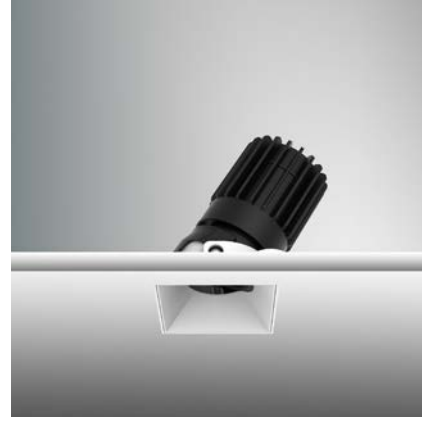


Article number	2118.241A-LEA-13
Fixture Consumption	12W
Current	250 (mA)
Delivered Lumen	755 (lm)
Beam Angle	20°/40°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP10A-1WMC-350

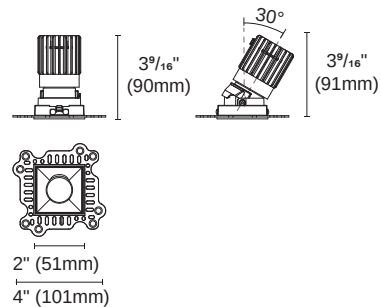**Dimmable**

Cut out : 2¹²/₃₂"X2¹²/₃₂" (60X60mm)

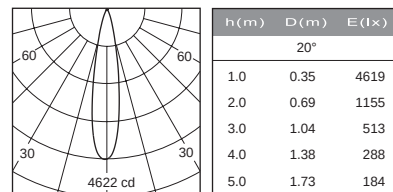**Accessories**ACSG-5
Striped glassACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup



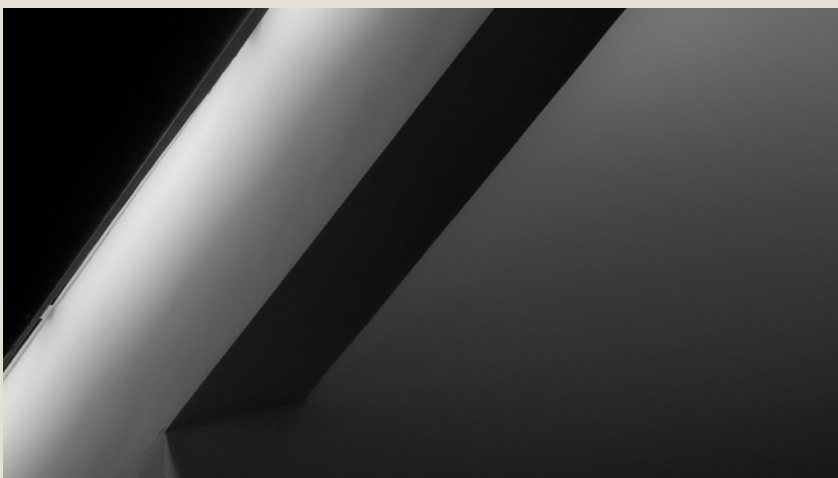

EPIC-85

2.8"



Round / Square

Fixed
Adjustable
Wallwash


EPIC-85-RTF



Article number	2118.125-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1362 (lm)	1231 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**



⌀ Cut out : 3 5/32" (80mm)

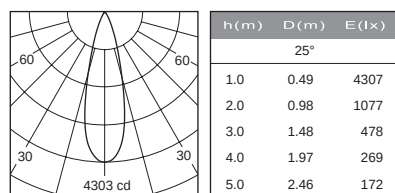


EPIC-85-RTA



Article number	2118.126-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1350 (lm)	1196 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**



⌀ Cut out : 3 5/32" (80mm)

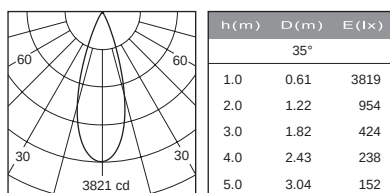


EPIC-85-RTW



Article number	2118.127-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	853 (lm)	850 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	


**Dimmable**

⌀ Cut out : 3 5/32" (80mm)



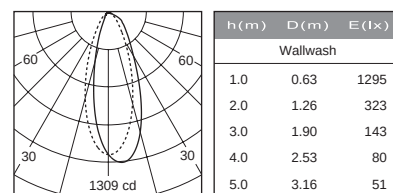
**Accessories**ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-85-RTLFL

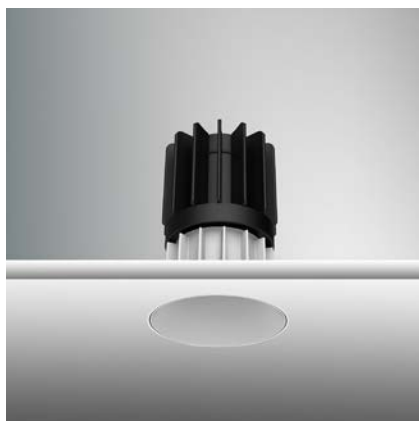

Article number	2118.225F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1362 (lm)	1231 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**



⊖ Cut out : 3 5/32" (80mm)

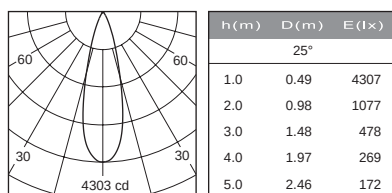


EPIC-85-RTLAL




Article number	2118.226F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1350 (lm)	1196 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**



⊖ Cut out : 3 5/32" (80mm)

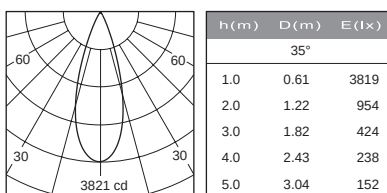


EPIC-85-RTLWL

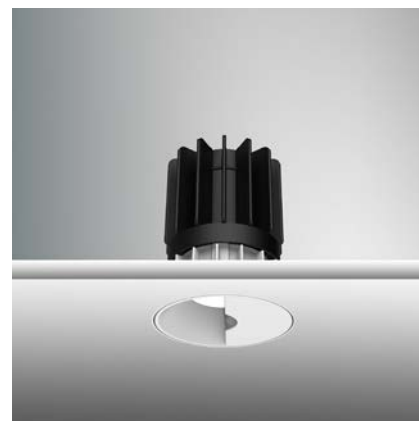

Article number	2118.227F-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	853 (lm)	850 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**

⊖ Cut out : 3 5/32" (80mm)


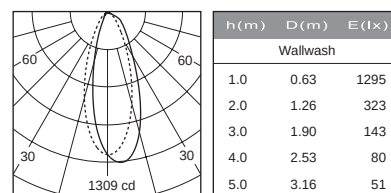
**Accessories**ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-85-STF



Article number	2118.128-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1374 (lm)	1235 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**



Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

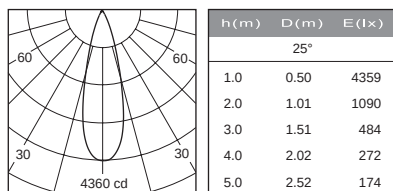


EPIC-85-STA



Article number	2118.129-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1357 (lm)	1216 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**




Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

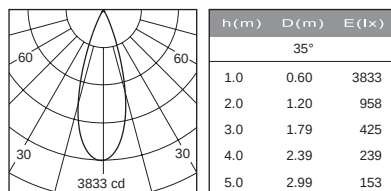


EPIC-85-STW



Article number	2118.130-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	867 (lm)	839 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**

Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)



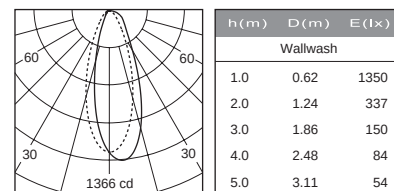
**Accessories**ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-85-STLF



Article number	2118.228A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1374 (lm)	1235 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**



Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

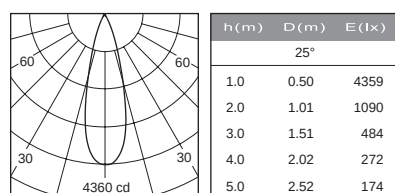


EPIC-85-STLA



Article number	2118.229A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	1357 (lm)	1216 (lm)
Beam Angle	25°/35°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	

**Dimmable**



Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

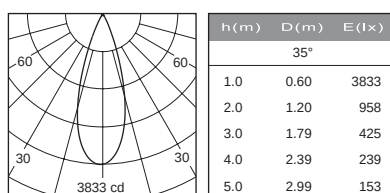


EPIC-85-STLW



Article number	2118.230A-LEA-14	
	NON-IC	IC
Fixture Consumption	20W	18 W
Current	450 (mA)	400 (mA)
Delivered Lumen	867 (lm)	839 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP20A-1WMC	


**Dimmable**

Cut out : 3⁵/₃₂"X3⁵/₃₂" (80X80mm)

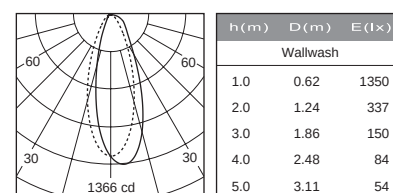**Accessories**ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cup

Accessories are not suitable for wallwash fixtures



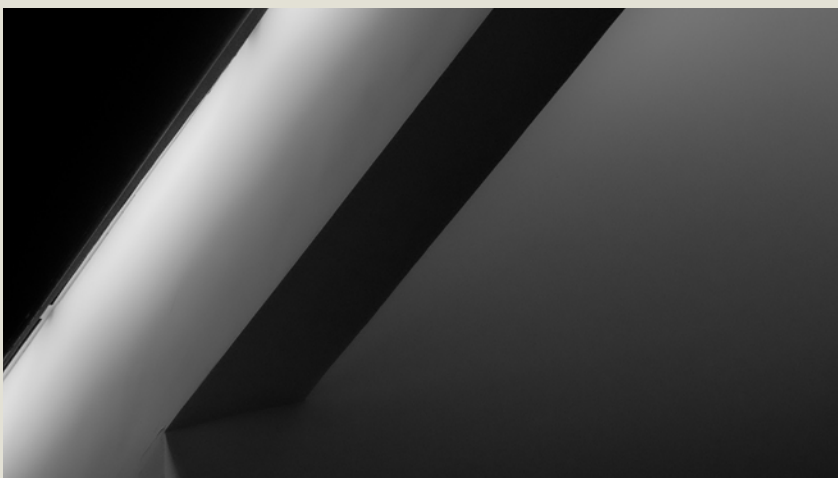

EPIC-110 ▶

3.5"

Round / Square



Fixed
Adjustable
Wallwash

EPIC-110-RTF1



Article number	2018.481-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1697 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.481-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1200 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**



⌀ Cut out : 3³⁰/₃₂" (100mm)

EPIC-110-RTA1




Article number	2018.494-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1702 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.494-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1190 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**



⌀ Cut out : 3³⁰/₃₂" (100mm)

EPIC-110-RTW1

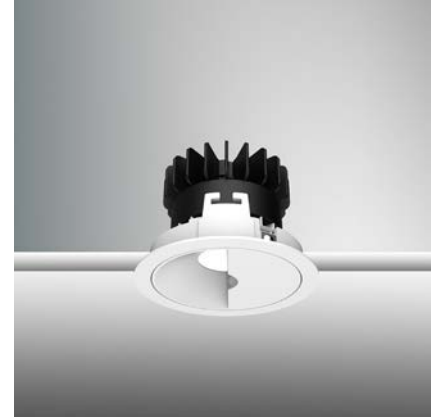

Article number	2018.482-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1100 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.482-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	713 (lm)
Beam Angle	Wallwash (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC


**Dimmable**

⌀ Cut out : 3³⁰/₃₂" (100mm)

AccessoriesSG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup



Accessories are not suitable for wallwash fixtures

EPIC-110-RTL1F1

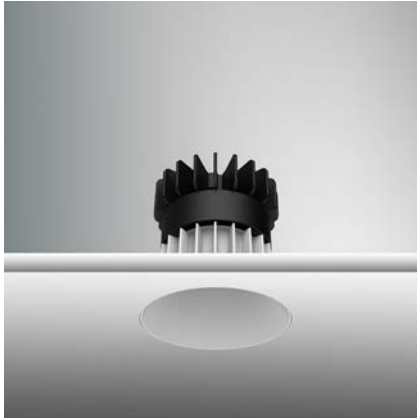


Article number	2018.275F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1697 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.275F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1200 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**



⌀ Cut out : 3³⁰/₃₂" (100mm)

EPIC-110-RTLA1

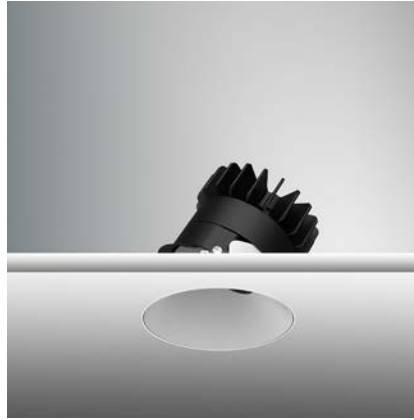


Article number	2018.294F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1702 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.294F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1190 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**




⌀ Cut out : 3³⁰/₃₂" (100mm)

EPIC-110-RTLW1

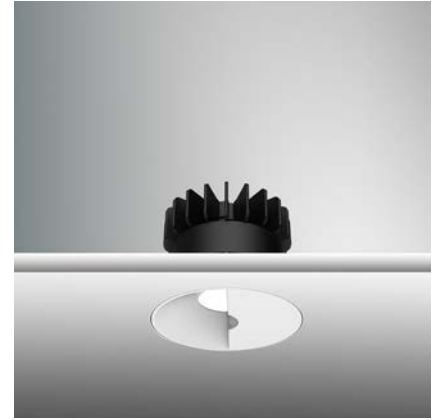

Article number	2018.276F-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1100 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.276F-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	713 (lm)
Beam Angle	Wallwash (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**

⌀ Cut out : 3³⁰/₃₂" (100mm)

AccessoriesSG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup



Accessories are not suitable for wallwash fixtures

EPIC-110-STF1



Article number	2018.483-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1639 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.483-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1212 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**



⚠ Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

EPIC-110-STA1




Article number	2018.495-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1616 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.495-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1227 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**



⚠ Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

EPIC-110-STW1

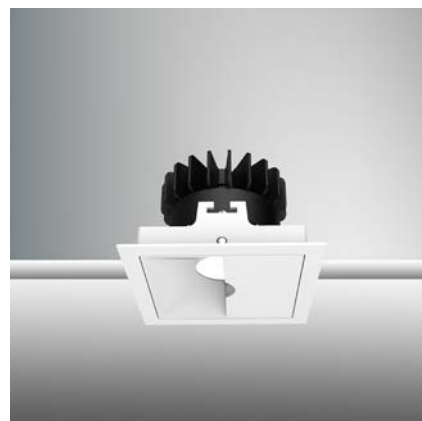

Article number	2018.484-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1062 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.484-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	740 (lm)
Beam Angle	Wallwash (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC


**Dimmable**

⚠ Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

AccessoriesSG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup


Accessories are not suitable for wallwash fixtures

EPIC-110-STLF1

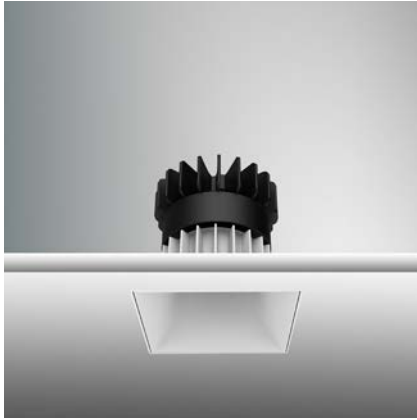

Article number	2018.277A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1639 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.277A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1212 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

EPIC-110-STLA1




Article number	2018.295A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1616 (lm)
Beam Angle	20°/30°/45°/55° (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.295A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	1227 (lm)
Beam Angle	20°/25°/40°/50° (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

EPIC-110-STLW1

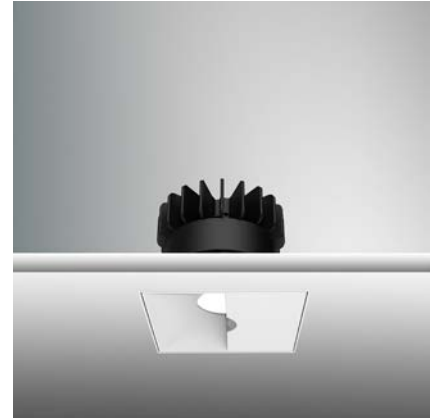

Article number	2018.278A-LEA-15
Fixture Consumption	21W
Current	500 (mA)
Delivered Lumen	1062 (lm)
Beam Angle	Wallwash (Lens)
CCT	3000K
CRI	90+
Driver Model	PUP20A-1WMC

Article number	2018.278A-LEA-15-DW
Fixture Consumption	18W
Current	450 (mA)
Delivered Lumen	740 (lm)
Beam Angle	Wallwash (Lens)
CCT	1800-3000K
CRI	90+
Driver Model	PUP20A-1WMC

**Dimmable**

Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)


AccessoriesSG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-110-RTF



Article number	2018.481-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2263 (lm)	1846 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

**Dimmable**


⌀ Cut out : 3³⁰/₃₂" (100mm)

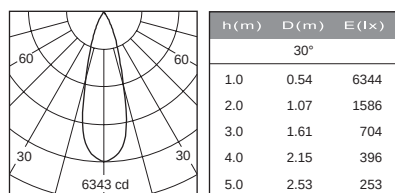


EPIC-110-RTA



Article number	2018.494-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2235 (lm)	1871 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

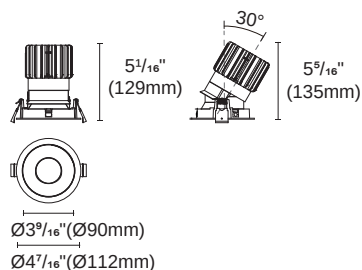**Dimmable**


⌀ Cut out : 3³⁰/₃₂" (100mm)

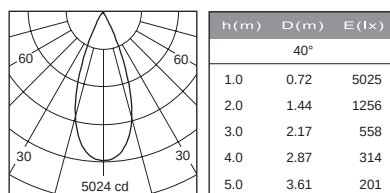


EPIC-110-RTW



Article number	2018.482-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1497 (lm)	1184 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	


**Dimmable**

⌀ Cut out : 3³⁰/₃₂" (100mm)


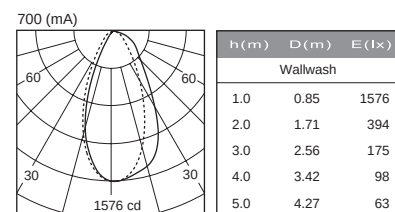
**Accessories**SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-110-RTL

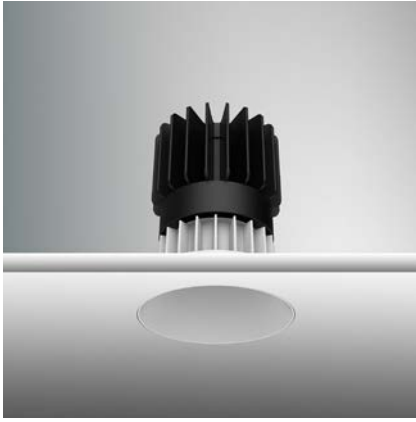

Article number	2018.275F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2263 (lm)	1846 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

**Dimmable**


⌀ Cut out : 3³⁰/₃₂" (100mm)

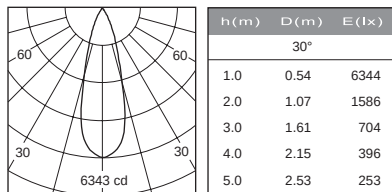


EPIC-110-RTL




Article number	2018.294F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2235 (lm)	1871 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

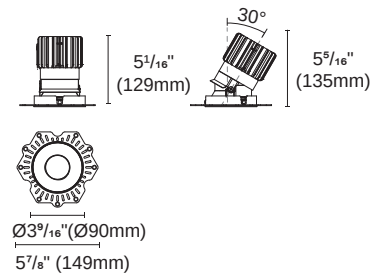**Dimmable**


⌀ Cut out : 3³⁰/₃₂" (100mm)

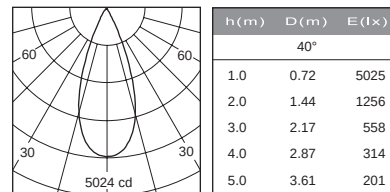


EPIC-110-RTL

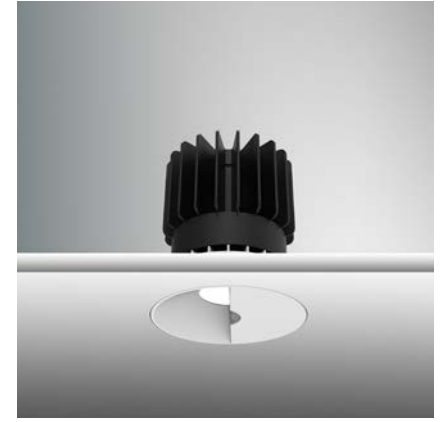

Article number	2018.276F-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1497 (lm)	1184 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

**Dimmable**

⌀ Cut out : 3³⁰/₃₂" (100mm)

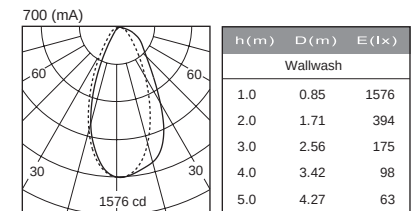**Accessories**SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures

EPIC-110-STF



EPIC-110-STA





EPIC-110-STW





Article number	2018.483-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2307 (lm)	1852 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

Article number	2018.495-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2250 (lm)	1877 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	



Article number	2018.484-ACOT-84-AM	
	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1500 (lm)	1172 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

**Dimmable****Dimmable****Dimmable**




Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)




Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

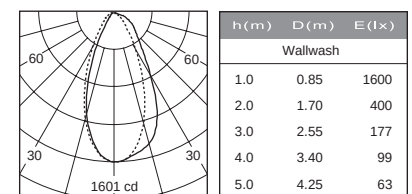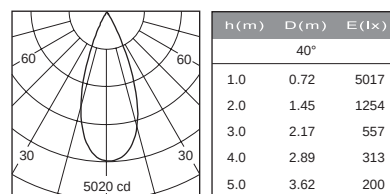
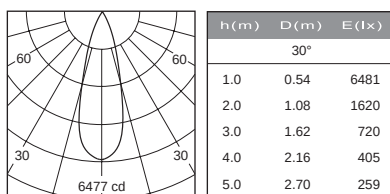
**Accessories**SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-110-STLF

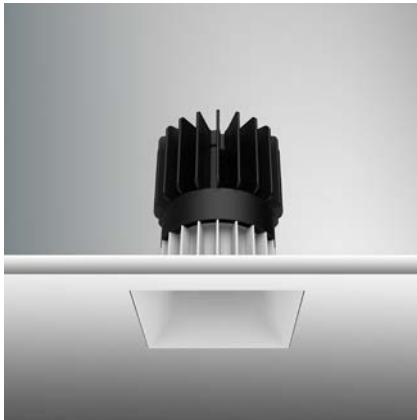**Article number** 2018.277A-ACOT-84-AM

	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2307 (lm)	1852 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

**Dimmable**



Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

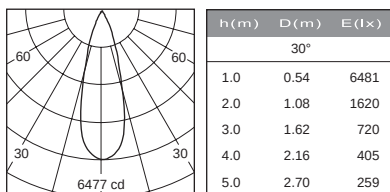


EPIC-110-STLA

**Article number** 2018.295A-ACOT-84-AM

	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	2250 (lm)	1877 (lm)
Beam Angle	30°/40°/50°/60° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	

**Dimmable**




Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)

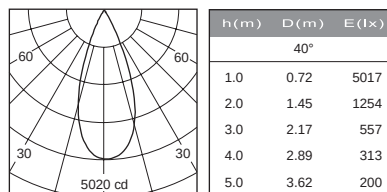


EPIC-110-STLW

**Article number** 2018.278A-ACOT-84-AM

	NON-IC	IC
Fixture Consumption	30W	25W
Current	700 (mA)	600 (mA)
Delivered Lumen	1500 (lm)	1172 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-850	





**Dimmable**

Cut out : 3³⁰/₃₂"X3³⁰/₃₂" (100X100mm)




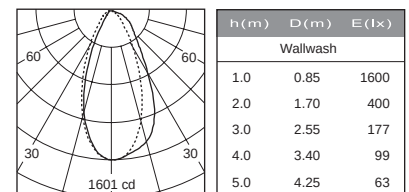
**Accessories**SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures





2018.481-LEA-15
2018.275F-LEA-15

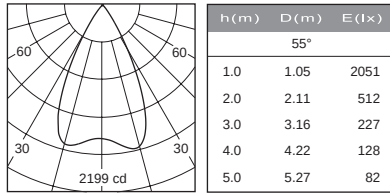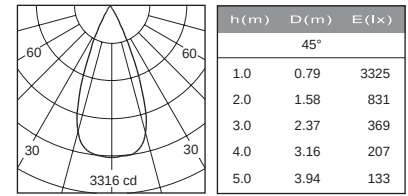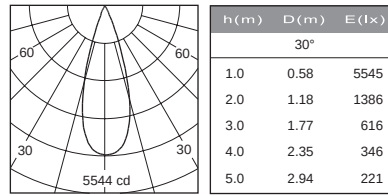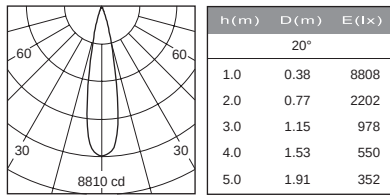





2018.481-LEA15DW
2018.275F-LEA15DW

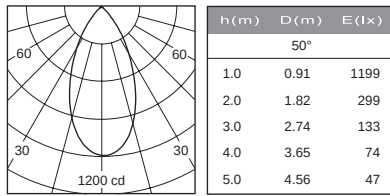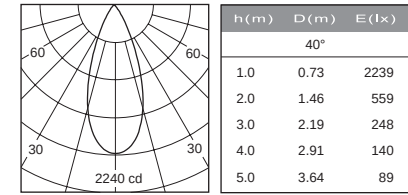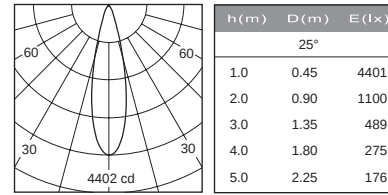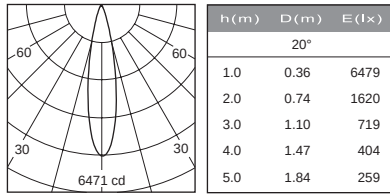


2018.494-LEA-15
2018.294F-LEA-15

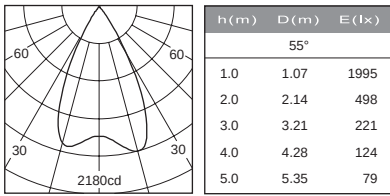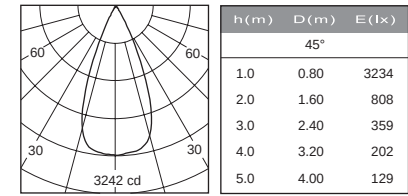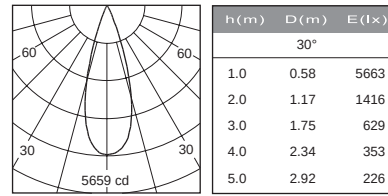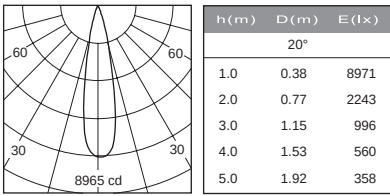

2018.494-LEA15DW
2018.294F-LEA15DW

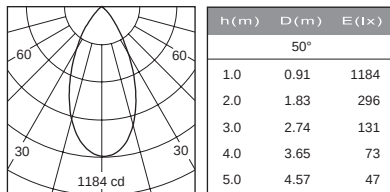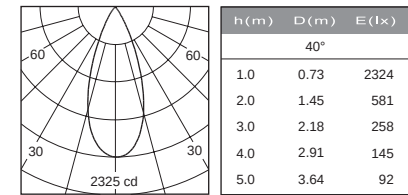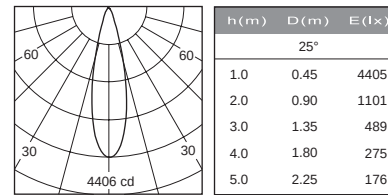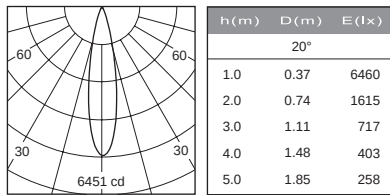


2018.482-LEA-15
2018.276F-LEA-15




h (m)	D (m)	E (lx)
Wallwash		
1.0	0.77	1360
2.0	1.54	340
3.0	2.32	151
4.0	3.09	85
5.0	3.86	54

2018.482-LEA15DW
2018.276F-LEA15DW




h (m)	D (m)	E (lx)
Wallwash		
1.0	0.80	811
2.0	1.60	202
3.0	2.40	90
4.0	3.21	50
5.0	4.01	32


2018.483-LEA-15
2018.277A-LEA-15




h (m)	D (m)	E (lx)
20°		
1.0	0.38	8437
2.0	0.77	2109
3.0	1.15	937
4.0	1.54	527
5.0	1.92	337



h (m)	D (m)	E (lx)
30°		
1.0	0.59	5246
2.0	1.17	1312
3.0	1.76	582
4.0	2.34	327
5.0	2.93	209




h (m)	D (m)	E (lx)
45°		
1.0	0.82	2999
2.0	1.63	749
3.0	2.45	333
4.0	3.26	187
5.0	4.08	120




h (m)	D (m)	E (lx)
55°		
1.0	1.06	2014
2.0	2.12	503
3.0	3.18	223
4.0	4.25	125
5.0	5.31	80


2018.483-LEA15DW
2018.277A-LEA15DW




h (m)	D (m)	E (lx)
20°		
1.0	0.37	6596
2.0	0.74	1649
3.0	1.10	732
4.0	1.47	412
5.0	1.84	263



h (m)	D (m)	E (lx)
25°		
1.0	0.45	4486
2.0	0.90	1121
3.0	1.35	498
4.0	1.80	280
5.0	2.25	179




h (m)	D (m)	E (lx)
40°		
1.0	0.72	2359
2.0	1.44	589
3.0	2.15	262
4.0	2.87	147
5.0	3.59	94




h (m)	D (m)	E (lx)
50°		
1.0	0.89	1273
2.0	1.77	318
3.0	2.66	141
4.0	3.55	79
5.0	4.44	50


2018.495-LEA-15
2018.295A-LEA-15




h(m)	D(m)	E(lx)
20°		
1.0	0.38	8345
2.0	0.77	2086
3.0	1.15	927
4.0	1.53	521
5.0	1.91	333



h(m)	D(m)	E(lx)
30°		
1.0	0.59	5262
2.0	1.18	1316
3.0	1.77	584
4.0	2.36	328
5.0	2.95	210




h(m)	D(m)	E(lx)
45°		
1.0	0.80	3244
2.0	1.60	761
3.0	2.40	338
4.0	3.20	190
5.0	4.01	121




h(m)	D(m)	E(lx)
55°		
1.0	1.05	2042
2.0	2.10	510
3.0	3.15	226
4.0	4.20	127
5.0	5.25	81


2018.495-LEA15DW
2018.295A-LEA15DW




h(m)	D(m)	E(lx)
20°		
1.0	0.37	6941
2.0	0.74	1735
3.0	1.11	771
4.0	1.48	433
5.0	1.85	277



h(m)	D(m)	E(lx)
25°		
1.0	0.45	4437
2.0	0.90	1109
3.0	1.34	493
4.0	1.79	277
5.0	2.24	177




h(m)	D(m)	E(lx)
40°		
1.0	0.70	2420
2.0	1.41	605
3.0	2.11	268
4.0	2.82	151
5.0	3.52	96




h(m)	D(m)	E(lx)
50°		
1.0	0.89	1239
2.0	1.78	309
3.0	2.67	137
4.0	3.57	77
5.0	4.46	49

2018.484-LEA-15
2018.278A-LEA-15



h(m)	D(m)	E(lx)
Wallwash		
1.0	0.78	1264
2.0	1.56	316
3.0	2.34	140
4.0	3.12	79
5.0	3.90	57


2018.484-LEA15DW
2018.278A-LEA15DW



h(m)	D(m)	E(lx)
Wallwash		
1.0	0.76	859
2.0	1.58	214
3.0	2.38	95
4.0	3.17	53
5.0	3.96	34





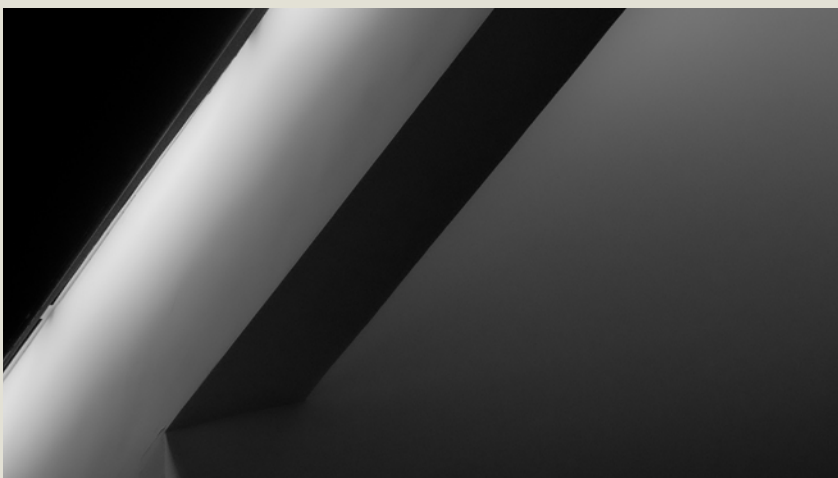

EPIC-135 ▶

4.5"


Round / Square

Fixed
Adjustable
Wallwash


EPIC-135-RTF



Article number	2018.464-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3305 (lm)	2775 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable**



⌀ Cut out : 5 1/32" (128mm)

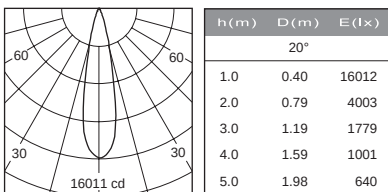


EPIC-135-RTA



Article number	2018.463-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3190 (lm)	2721 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

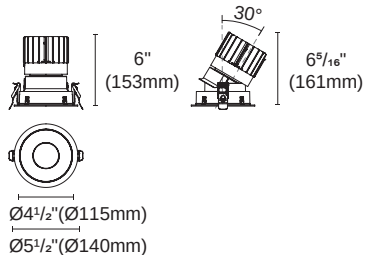**Dimmable**



⌀ Cut out : 5 1/32" (128mm)

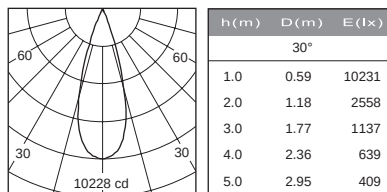


EPIC-135-RTW



Article number	2218.146-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	1961 (lm)	1667 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	


**Dimmable**

⌀ Cut out : 5 1/32" (128mm)

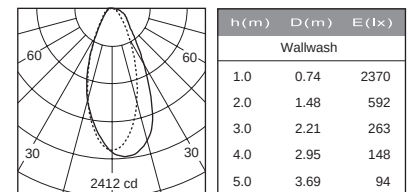**Accessories**ACSG-1
Striped glassACHO-2
Honeycomb louverACDS-6
Diffusion sheetACWG-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-135-RTL F

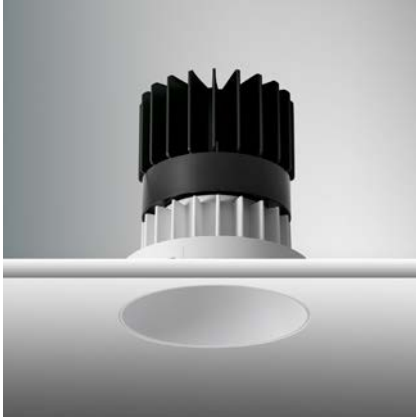

EPIC-135-RTL A



EPIC-135-RTL W

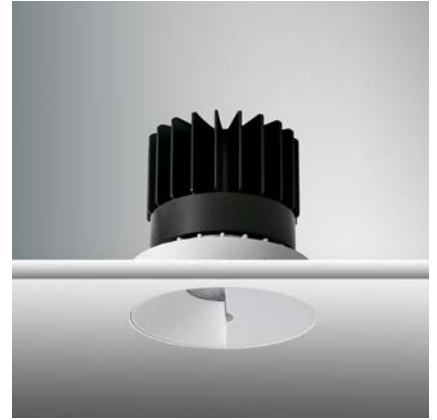**Article number 2018.256F-ACOT-73-AM**


	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3305 (lm)	2775 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

Article number 2018.255F-ACOT-73-AM


	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3190 (lm)	2721 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

Article number 2218.218F-ACOT-73-AM


	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	1961 (lm)	1667 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable****Dimmable****Dimmable**




⌀ Cut out : 5 1/32" (128mm)

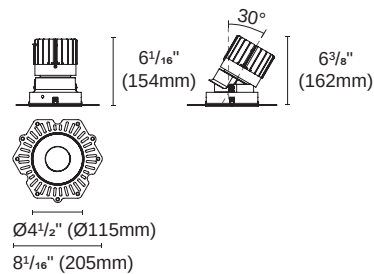

⌀ Cut out : 5 1/32" (128mm)




⌀ Cut out : 5 1/32" (128mm)

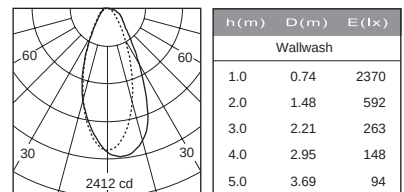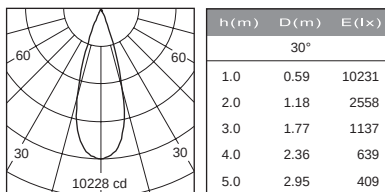
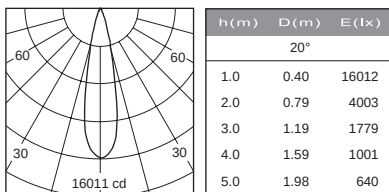
**Accessories**ACSG-1
Striped glassACHO-2
Honeycomb louverACDS-6
Diffusion sheetACWG-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-135-STF

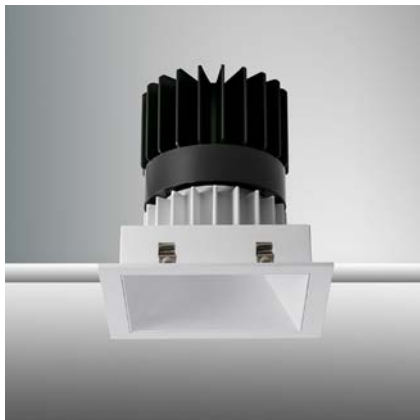

Article number	2018.466-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3258 (lm)	2810 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable**


Cut out : 5 1/32"X5 1/32" (128X128mm)

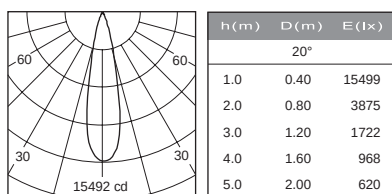


EPIC-135-STA



Article number	2018.465-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3242 (lm)	2765 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable**



Cut out : 5 1/32"X5 1/32" (128X128mm)

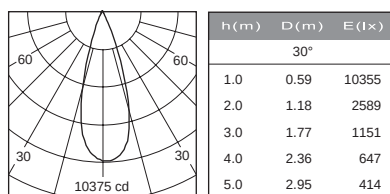


EPIC-135-STW



Article number	2218.147-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	2017 (lm)	1674 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	


**Dimmable**

Cut out : 5 1/32"X5 1/32" (128X128mm)

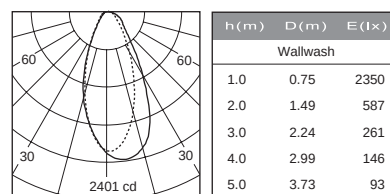
**Accessories**ACSG-1
Striped glassACHO-2
Honeycomb louverACDS-6
Diffusion sheetACWG-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures


EPIC-135-STLF

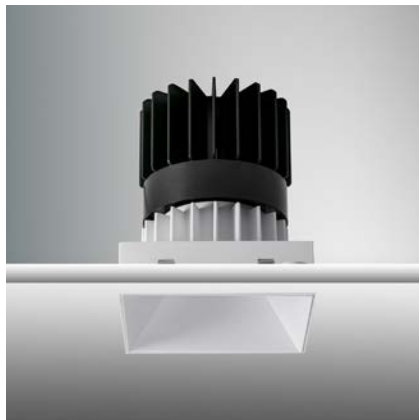

Article number	2018.258A-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3258 (lm)	2810 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable**


Cut out : 5 1/32"X5 1/32" (128X128mm)

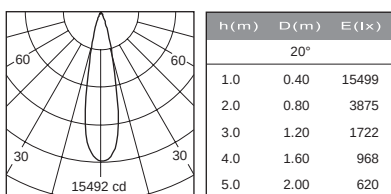


EPIC-135-STLA




Article number	2018.257A-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	3242 (lm)	2765 (lm)
Beam Angle	20°/30°/45°/55° (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

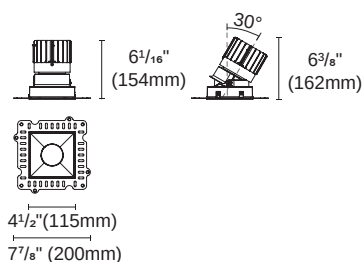**Dimmable**



Cut out : 5 1/32"X5 1/32" (128X128mm)

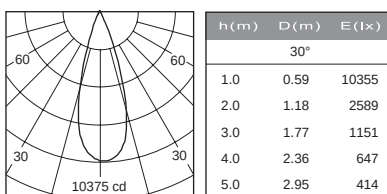


EPIC-135-STLW

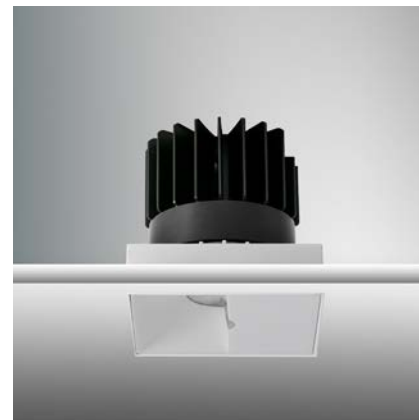

Article number	2218.219A-ACOT-73-AM	
	NON-IC	IC
Fixture Consumption	45W	35W
Current	1050 (mA)	850 (mA)
Delivered Lumen	2017 (lm)	1674 (lm)
Beam Angle	Wallwash (Lens)	
CCT	3000K	
CRI	90+	
Driver Model	PUP40A-1WMC-1200	

**Dimmable**

Cut out : 5 1/32"X5 1/32" (128X128mm)

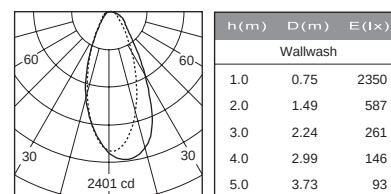
**Accessories**ACSG-1
Striped glassACHO-2
Honeycomb louverACDS-6
Diffusion sheetACWG-1
Woven glassACOT-109
Suction cup

Accessories are not suitable for wallwash fixtures

INSTALLATION OPTIONS




ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
 for EPIC65-2"
 Type: Gear box

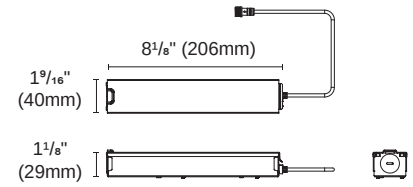

Internal space dimension:
 L 4³/₄" (108mm) X W 1³/₈" (35mm) X H 1" (26mm)




ACCG-22B-PUP20A-1WMC 0/1-10V
ACCG-22B-PUP20D-1WMC DALI
ACCG-22B-PUP20T-1LMC TRIAC
 for EPIC85-2.8"
 EPIC110-3.5" (18-21W)
 Type: Gear box

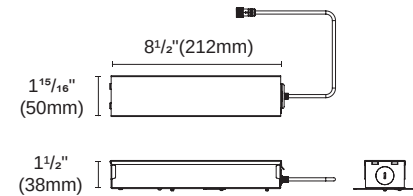

Internal space dimension:
 L 8³/₄" (209mm) X W 1⁷/₈" (48mm) X H 1⁵/₁₆" (33mm)



ACCG-16B-PUP40A-1WMC-850 0/1-10V
ACCG-16B-PUP40D-1WMC-850 DALI
ACCG-16B-PUP40T-1LMC-850 TRIAC
 for EPIC110-3.5" (30W)
 Type: Gear box

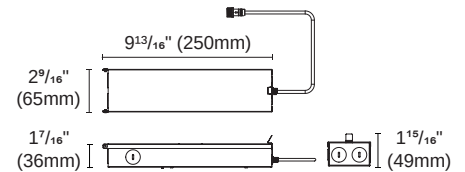


Internal space dimension:
 L 9¹³/₁₆" (250mm) X W 2¹/₂" (64mm) X H 1⁵/₁₆" (34mm)



* For single fixture connection only, not available for parallel multiple connection




ACCH-12-60 for EPIC65-2"
ACCH-12-80 for EPIC85-2.8"
 Type: New construction plate




ACCH-12H-100 for EPIC110-3.5"
 Type: New construction plate

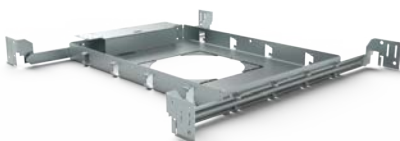


ACCH-12H-125
 for EPIC135-4.5"
 Type: New construction plate



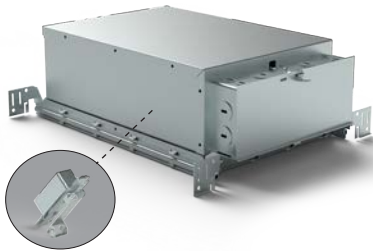


Driver is secured on patent designed bracket


ACCH-12D-60-PUP10A-1WMC-350 0/1-10V
ACCH-12D-60-PUP10D-1WMC-350 DALI
ACCH-12D-60-PUP10T-1LMC-350 TRIAC
 for EPIC65-2"
 Type: IC Box



ACCH-12D-80-PUP20A-1WMC 0/1-10V
ACCH-12D-80-PUP20D-1WMC DALI
ACCH-12D-80-PUP20T-1LMC TRIAC
 for EPIC85-2.8"
 Type: IC Box




ACCH-12B-100-PUP20A-1WMC 0/1-10V
ACCH-12B-100-PUP20D-1WMC DALI
ACCH-12B-100-PUP20T-1LMC TRIAC
 for EPIC110-3.5" (18-21W)
 Type: IC Box

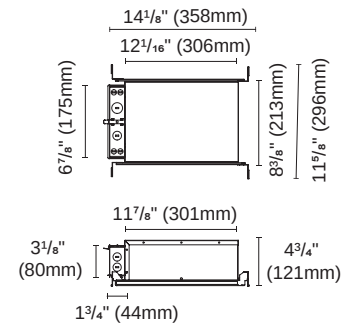


ACCH-7B-100-PUP40A-1WMC-850 0/1-10V
ACCH-7B-100-PUP40D-1WMC-850 DALI
ACCH-7B-100-PUP40T-1LMC-850 TRIAC
 for EPIC110-3.5" (25W)
 Type: IC Box

ACCH-7B-125-PUP40A-1WMC-1200 0/1-10V
ACCH-7B-125-PUP40D-1WMC-1200 DALI
ACCH-7B-125-PUP40T-1LMC-1200 TRIAC
 for EPIC135-4.5"
 Type: IC Box

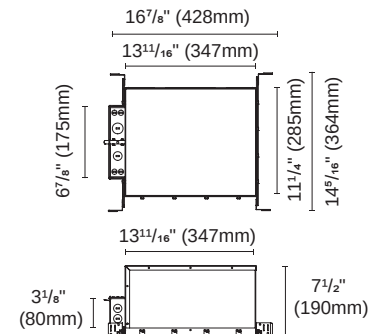

ACCI-3
 Type: Emergency battery holder
 For BillDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY

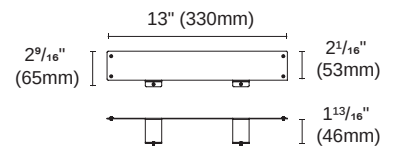

ACCI-5
 Type: Remodel stand

