


# VIVID steel

Sıva Üstü ve Sarkıt Armatürler / Surface Mounted and Suspended Luminaires

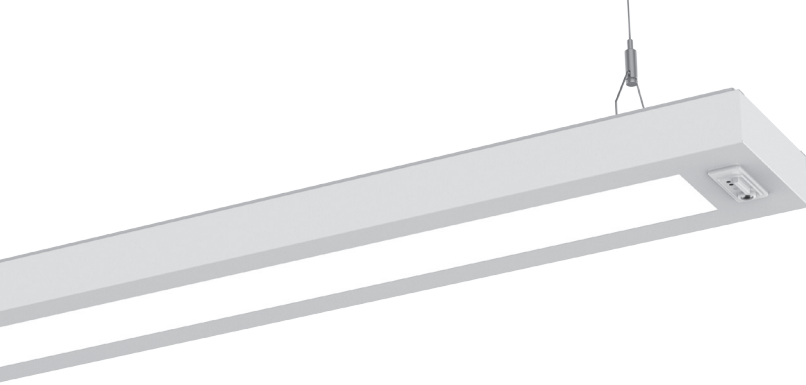

Polyester elektrostatik toz boyalı sac gövde/  
Electrostatic polyester powder coated steel body

Yüksek geçirgenlikli satine PMMA veya PS opal difüzör /  
High diffusion and transmission satin opal PMMA or PS diffuser

Mikroprizmatik lens opsiyonu /  
Microprismatic lens option (UGR<19)

Homojen aydınlatma / Uniform illumination

MacAdam 3 LED renk toleransı /  
Colour tolerance MacAdam 3

The life time of LEDs: L90B10 (25 °C) = 60 000 h.


## Özellikler / Specifications




## Renk Seçenekleri / Colour Options




## Fotometrik Bilgi / Photometric Data

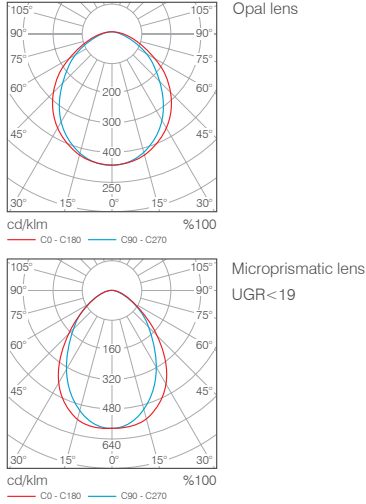

## Tavan Bilgi / Ceiling Data

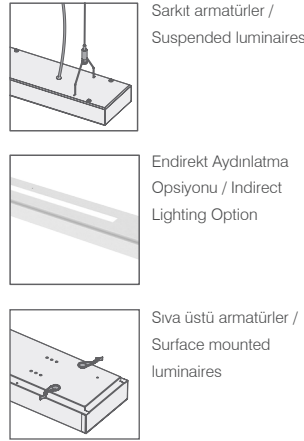

## Teknik Çizim / Technical Drawing

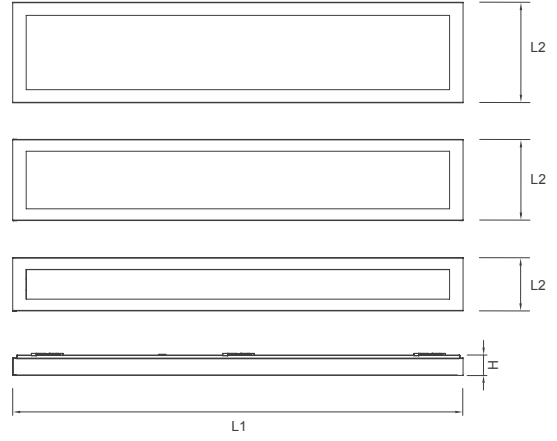

## Teknik Bilgi / Technical Data

Güç (W)	Çıkış / Output (Lumen (lm))	Verimlilik (lm/W)	CRI (Ra)	Renk Sıcaklığı (K)	Ölçüler / Dimensions (mm)	Ağırlık (kg)	Ürün Kodu (Item Code)
					A1 A2 L1 L2 H		
34W	4180	123	>80	4000	- - 1182 144 56	3,5	122 3 144429034W-MP
34W+12W	4180+1940	133	>80	4000	- - 1182 144 56	3,5	127 3 144429046W-MP
50W	6300	126	>80	4000	- - 1182 220 56	4,6	122 3 220429050W-MP
50W+12W	6300+1940	133	>80	4000	- - 1182 220 56	4,6	127 3 220429062W-MP
75W	9675	129	>80	4000	- - 1182 270 56	5,5	122 3 270429075W-MP

## Ek Kod / Suffix Code

- (100) 1 saat Acil çıkış kiti / 1 hour Emergency gear
- (300) 3 saat Acil çıkış kiti / 3 hours Emergency gear
- (010) DALI

\* Tavan tipini belirtiniz. / Please indicate type of ceiling.

\*\* Lütfen daha fazla bilgi için satış temsilcileri ile görüşün. / Please contact for more information.