



SINCE 1987



安徽世林照明股份有限公司
ANHUI SHILIN LIGHTING CO.LTD.

目录 CONTENTS

- 关于我们 ABOUT US
- 企业展示 COMPANY INTRODUCTION
- 产品介绍 MAIN PRODUCTS
- 企业资质 CERTIFICATES
- 主要市场 MAIN MARKETS



创建于1987 Established in 1987

占地600亩 Covering over 400,000 s.q.m.

注册资金1.1亿元 Registered Capital US\$17million

员工1550人 1550 Employees

全产业链LED产品制造商

Leading LED manufacturer with Complete Industry Chain

年产值20亿元, Annual Sales US\$300 million

**关于世林
ABOUT
SHILIN**

Contact us by Email: shilin@shilinlighting.com

厂区全景 Factory Overview



企业展示 Company Introduction

LED 灯带工厂 LED Strip Factory

LED 灯具结构件车间 LED Fixture Parts Plant

LED 面板灯工厂 LED Panel Factory

LED 吸顶灯工厂 LED Ceiling Light Factory

LED 灯管工厂 LED Tube Factory

LED 球泡工厂 LED Bulb Factory

LED 灯丝灯工厂 LED Filament Bulb Factory

LED 驱动工厂 LED Driver Factory

LED 支架工厂 LED Tube Linear Fixture Factory

玻璃工厂 Glass Factory

现代化仓库 Modern Warehouse

检测中心 Testing Center

研发中心 R&D Center



LED 灯带工厂 LED Strip Factory




主要产品 Main Products

- 高压灯带 High Voltage AC strip
- 低压灯带 Low Voltage DC strip
- 裸板 IP20 bare strip
- 滴胶 IP44 PU coated strip

月产能 Monthly Capacity

- 200万米 2 million meters

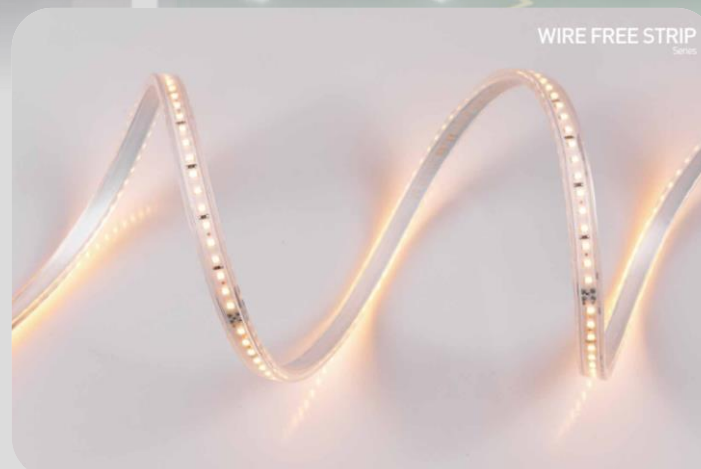

Contact us by Email: shilin@shilinlighting.com

LED 灯具结构件工厂 LED Fixture Parts Plant



主要设备 Main Equipment

- 冲压设备 Pressing Machine
- 喷涂线 Coating Line
- 挤出铝设备 Alum. Extruding Line
- 铝框焊接自动线 Automatic Alum. Frame Welding Line

Contact us by Email: shilin@shilinlighting.com

LED 面板灯工厂 LED Panel Factory



主要产线 Main Equipment

- 自动打胶机 Automatic Gluing Machine
- 自动焊线机 Automatic Wire-welding Machine
- 自动组装线 Automatic Fixing Lines
- 自动老炼检测线 Auto Testing & Aging Lines
- 自动包装线 Auto Packing Line



月产能 Monthly Capacity

- 1,000,000sets in 2022

LED 吸顶灯工厂 LED Ceiling Light Factory



主要产线 Main Equipment

- 冲压线 Pressing Line
- 喷涂线 Coating Line
- 自动吹塑机 Automatic Plastic-blowing Machine
- 组装线 Fixing Lines

月产能 Monthly Capacity

- 30万套 300,000sets



主要产线 Main Equipment

- 玻璃涂粉线 Glass tube Coating Lines
- 贴片机 SMT lines
- 自动组装线 Auto Fixing Lines
- 自动检测老化线 Auto Testing & Aging Lines

月产能 Monthly Capacity

- 500万只 5,000,000pcs



主要产线 Main Equipment

- 贴片机 SMT lines
- 自动组装线 Auto Fixing Lines
- 包装线 Automatic Packing Lines

月产能 Monthly Capacity

- 500万只 5,000,000pcs

LED 灯丝灯工厂

LED Filament Bulb Factory



主要产线 Main Equipment

- 自动焊条机 Auto Filament Soldering Machine
- 自动组装线 Auto Fixing Lines
- 自动老炼检测线 Auto Testing & Aging Lines

月产能 Monthly Capacity

- 200万只 2,000,000pcs



主要产线 Main Equipment

- 自动贴片机
Automatic SMT Machines
- 驱动插件线
Driver fixing lines
- 自动检测线
Auto Testing Lines

月产能 Monthly Capacity

- 1300万只 13,000,000pcs

LED 支架工厂

LED Tube Linear Fixture Factory



主要产线 Main Equipments

- 自动拉管焊接机
Automatic Tubing
and Welding Machine
- 组装线 Fixing Line
- 喷漆线 Coating Line

月产能 Monthly Capacity

- 20万套 200,000pcs





主要产线 Main Equipment

- 玻璃炉 Glass Furnace
- 吹泡机 Bulb Shell Machines
- 拉管机 Glass Tubing Machines

月产能 Monthly Capacity

- 1000万只泡壳 10 million Glass shells
- 600支灯管 6 million tubes

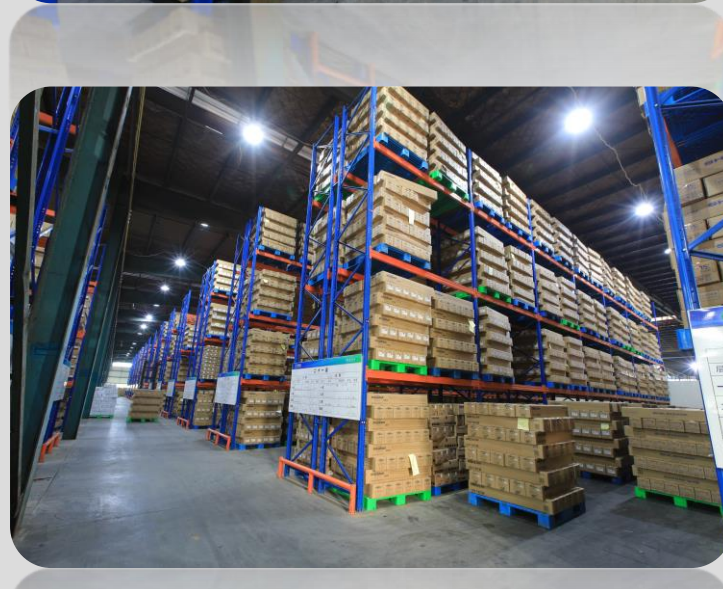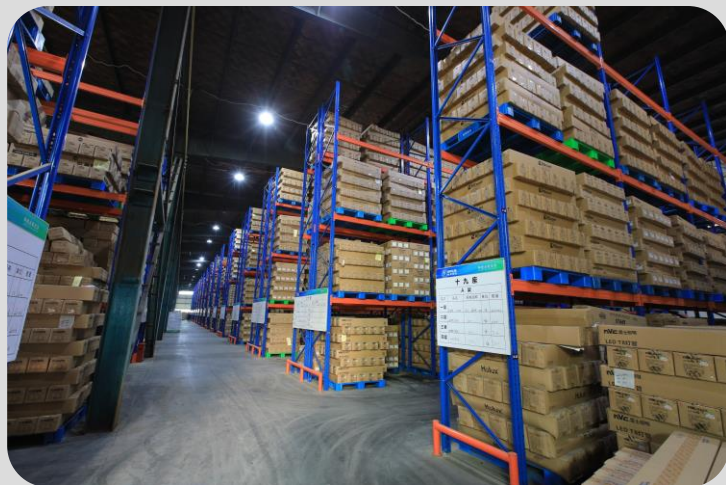

SHILIN 世林照明检测中心



主要测试设备 Main Equipment

- 光电测试 Integrated Spheres
- 光分布测试 Light Distribution Testing
- 电磁干扰测试 EMC Testing
- 电源检测分析 Driver Testing
- 老化寿命测试 Aging and Life Testing
- 安规测试 Safety Testing

Contact us by Email: shilin@shilinlighting.com



研发团队 R&D Team

- 研发工程师40余人
Over 40 R&D Engineers
- 独立研发实验室
Independent R&D Labs





产品介绍 MAIN PRODUCTS

LED 面板灯 LED Backlit Panel

LED 筒灯/天花灯 LED Down Lights

LED 高压/低压灯带 LED AC/DC Strip

LED 灯带铝型材 LED Strip Alum. Profile

LED 吸顶灯 LED Ceiling Cloud Light

LED 灯丝灯 LED Filament bulb

LED 灯管 LED Tube

LED 球泡 LED SMD Bulb

LED 灯管支架 LED Tube Linear Fixture



Contact us by Email: shilin@shilinlighting.com



LED 面板灯 LED Backlight Panel

EU Series-Embedded

欧标产品-暗装

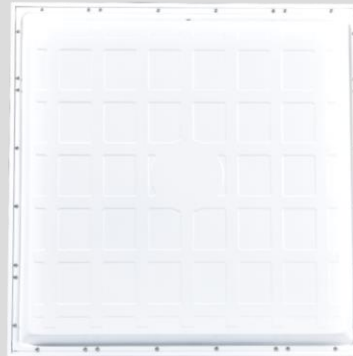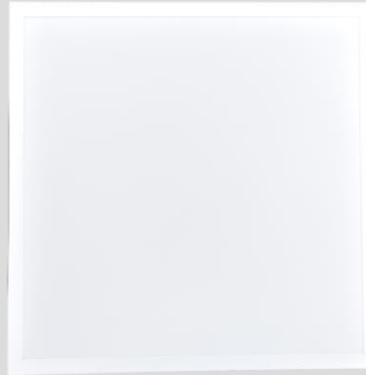

- 4 Typical Sizes:
 - 595*595mm, 295*595mm, 295*1195mm, 595*1195mm
- Both Isolated Driver and Non-isolated driver available
- Up to 140lm/w
- CCT selectable
- UGR<16 model available
- CE, ENEC certified
- Surface Mounting Adaptor, Hanging Kit and Embedded clips Available



CE new ERP RoHS 2.0

Contact us by Email: shilin@shilinlighting.com




LED 面板灯 LED Backlight Panel

EU Series-Surface mounted

欧标产品-明装

- **Typical Sizes**
 - 600*600mm
 - 300*1200mm
- **Both Isolated Driver and Non-isolated driver available**
- **Smart panel with Remote Control**
- **CE, ENEC certified**

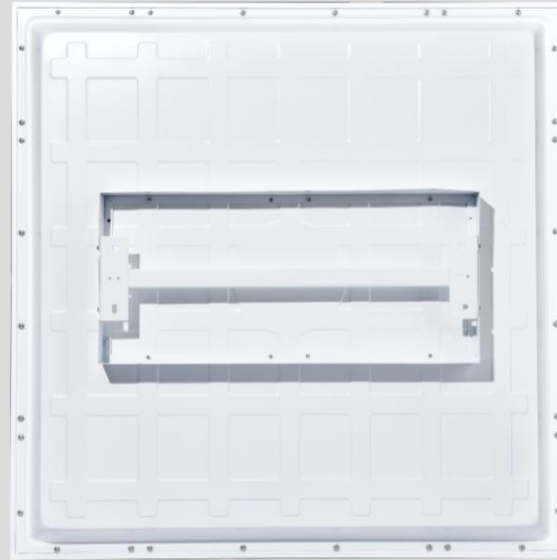





LED 面板灯 LED Backlight Panel

Brazilian Series-Embedded

巴西产品-暗装

- **Typical Sizes**
 - 620*620mm
 - 320*1220mm
- **Both Isolated Driver and Non-isolated driver available**
- **Embedded clips included**



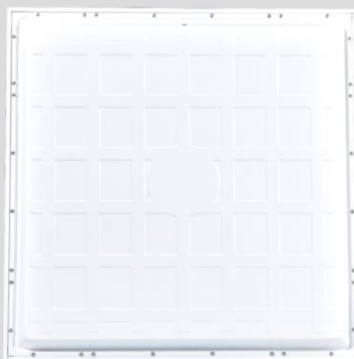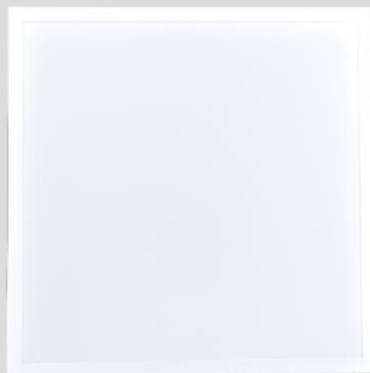

LED 面板灯

LED Backlight Panel

Latin Series-Recessed

拉美产品-暗装

- Typical Sizes
 - 2ft x 2ft 603*603mm
 - 1ft x 4ft 303*1213mm
 - 2ft x 4ft 603*1213mm
- Both Isolated Driver and Non-isolated driver available
- CCT selectable
- Surface Mounting Adaptor, Hanging Kit and Embedded clips Available

LED 面板灯 LED Backlight Panel

American Series-Recessed
美标产品-暗装



- Typical Sizes
 - 2ft x 2ft 603*603mm
 - 1ft x 4ft 303*1213mm
 - 2ft x 4ft 603*1213mm
- 120-277V input
- Dimming and CCT selectable
- Earthquake proof hooks included
- ETL complied

LED 面板灯 LED Backlight Panel




Eco Series-Recessed

经济款产品-暗装

- **Typical Sizes:**
 - 595*595mm, 295*595mm, 295*1195mm, 595*1195mm
- 176-265V or 100-265V input
- Both Isolated Driver and Non-isolated driver available
- Surface Mounting Adaptor, Hanging Kit and Embedded clips Available
- Different frames for choice


LED 面板灯 LED Backlight Panel

Super Slim Series 超薄产品

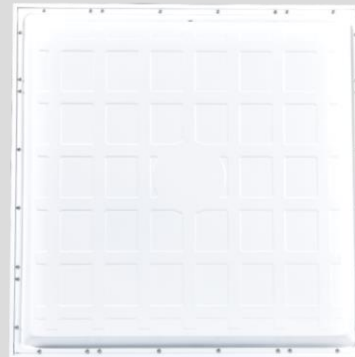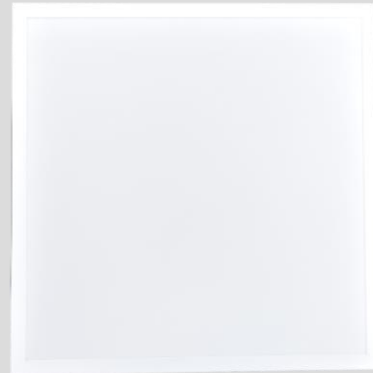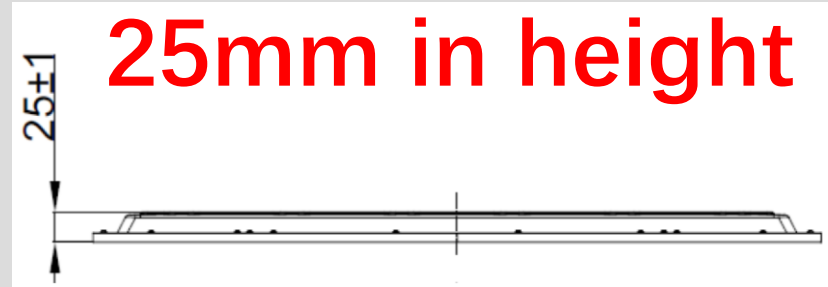

- Super slim model to 25mm in height
- Save 20% in transportation cost*
- Both Isolated Driver and Non-isolated driver available
- CCT selectable
- Surface Mounting Adaptor, Hanging Kit and Embedded clips Available

LED 面板灯 LED Backlight Panel

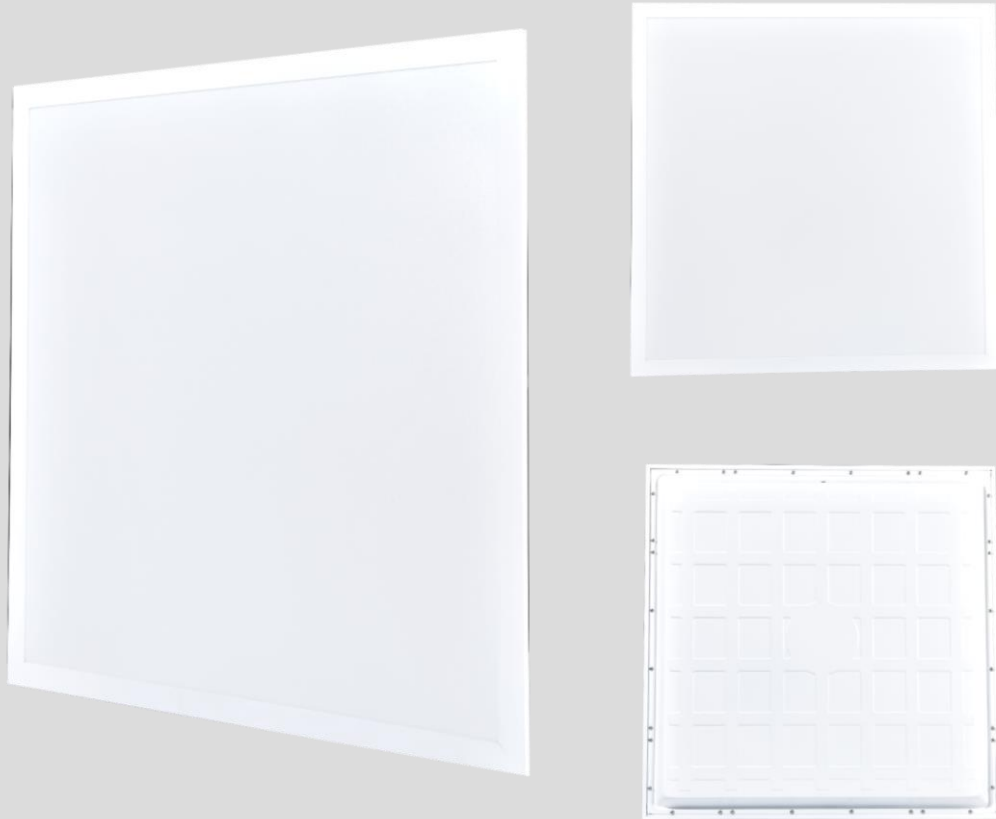

Smart Panel Series

智能产品

- **Typical Sizes available**
- **Tuya control**
- **DALI control**
- **Remote control**

LED铁皮 筒灯 LED DOWN LIGHT-Steel type RECESSED, 嵌入式安装



LED筒灯 DOWN LIGHT

- SLIM IN SIZE 超薄设计
- Built-in driver 内置驱动
- One piece structure 一体成型

月产能 Monthly Capacity

- 300,000sets / 30万套



LED铁皮 筒灯

LED DOWN LIGHT-Steel type


RECESSED, 嵌入式安装

MDDEL 型号	最大面径φ (mm)	Height 整灯厚度 (mm)	Diffuser 发光面直径 (mm)	Cut-out size 开孔 (mm)	Ra 显指	光效 (LM/W)	Working Voltage 工作电压	Power 功率	PF 功率因素
2.5" 7W	φ 95	30	φ 66.7	φ 75	70	60	176-264V	7W±10%	≥0.5
3.5" 10W	φ 119	30	φ 86	φ 90	70	70	176-264V	10W±10%	≥0.5
4" 15W	φ 145	30	φ104.8	φ 115	70	70	176-264V	15W±10%	≥0.5
6" 20W	φ 185	30	φ134.6	φ 150	70	75	176-264V	20W±10%	≥0.5
8" 26W	φ 220	38	φ 168.5	φ 185	70	80	176-264V	26W±10%	≥0.5
2.5" 7W	φ 95	30	φ 66.7	φ 75	70	60	100-240V	7W±10%	≥0.5
3.5" 10W	φ 119	30	φ 86	φ 90	70	70	100-240V	10W±10%	≥0.5
4" 15W	φ 145	30	φ104.8	φ 115	70	70	100-240V	15W±10%	≥0.5
6" 20W	φ 185	30	φ134.6	φ 150	70	75	100-240V	20W±10%	≥0.5
8" 26W	φ 220	38	φ 168.5	φ 185	70	80	100-240V	26W±10%	≥0.5

Contact us by Email: shilin@shilinlighting.com



LED 塑料筒灯 LED DOWN LIGHT-Plastic type IP44 RECESSED/SURFACE, 嵌入式安装/明装

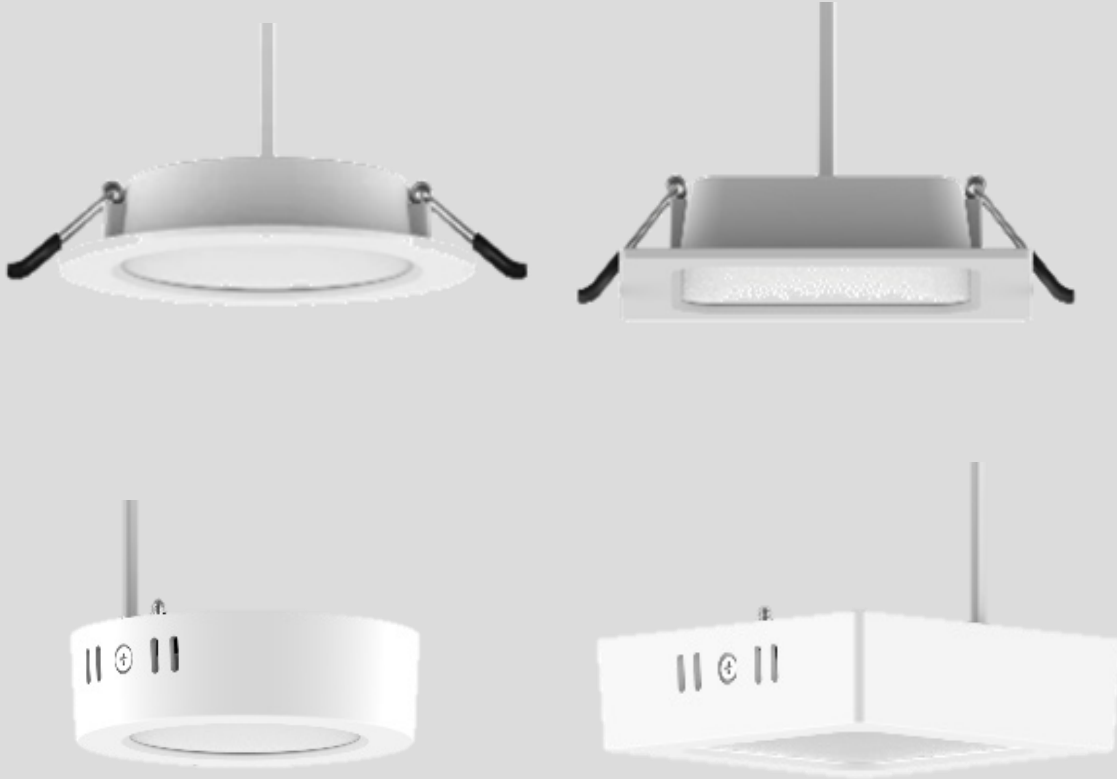

LED筒灯 DOWN LIGHT

- SLIM IN SIZE IP44 超薄设计, IP44级防尘防水
- Round and Square, Recessed and Surface Mounting 圆形方形, 暗装明装
- Built-in driver内置驱动
- Typical size: 3.5" 6" 8" 12"
- High Output/Normal output options 高光通 普通光通可选
- CCT Selectable with DIP switch 拨码调色温
- New ERP match 符合新ERP要求

Contact us by Email: shilin@shilinlighting.com

CE new ERP RoHS 2.0



LED 筒灯

LED DOWN LIGHT-Plastic type IP44

ROUND RECESSED 圆形暗装

Description	Driver					Light Source						Structure	
	Power	Voltage	DF	Freq.	Dimmability	Luminous Flux lm	Efficacy lm/W	CCT K	SDC M	Beam Angel	CRI	Dimension (mm)	IP Rating
3.5' 6W	6	220-240	≥0.5	50/60	N/A	510	85	3000/4000/6500	≤6	≥120	≥80	φ117*25.5	IP44
6' 12W	12	220-240	≥0.7	50/60	N/A	1,200	100	3000/4000/6500	≤6	≥120	≥80	φ173*26.5	IP44
8' 18W	18	220-240	≥0.7	50/60	N/A	1,820	101	3000/4000/6500	≤6	≥120	≥80	φ220*27.5	IP44
12' 24W	24	220-240	≥0.7	50/60	N/A	2,500	104	3000/4000/6500	≤6	≥120	≥80	φ295*28.5	IP44
3.5' 9W	9	220-240	>0.7	50/60	NO	765	85	3000/4000/6500	≤6	≥120	≥80	φ117*25.5	IP44
6' 18W	18	220-240	>0.7	50/60	NO	1800	100	3000/4000/6500	≤6	≥120	≥80	φ173*26.5	IP44
8" 24W	24	220-240	>0.7	50/60	NO	2424	101	3000/4000/6500	≤6	≥120	≥80	φ220*27.5	IP44
12' 30W	30	220-240	>0.7	50/60	NO	3120	104	3000/4000/6500	≤6	≥120	≥80	φ295*28.5	IP44

Contact us by Email: shilin@shilinlighting.com

new ERP RoHS 2.0



LED 筒灯

LED DOWN LIGHT-Plastic type IP44

SQUARE RECESSED 方形暗装

Description	Driver					Light Source						Structure	
	Power	Voltage	DF	Freq.	Dimmability	Luminous Flux lm	Efficacy lm/W	CCT K	SDC M	Beam Angel	CRI	Dimension (mm)	IP Rating
3.5' 6W	6	220-240	≥0.5	50/60	N/A	510	85	3000/4000/6500	≤6	≥120	≥80	120*120*26.5	IP44
6' 12W	12	220-240	≥0.7	50/60	N/A	1,200	100	3000/4000/6500	≤6	≥120	≥80	174*174*26.5	IP44
8' 18W	18	220-240	≥0.7	50/60	N/A	1,820	101	3000/4000/6500	≤6	≥120	≥80	218*218*27	IP44
12' 24W	24	220-240	≥0.7	50/60	N/A	2,500	104	3000/4000/6500	≤6	≥120	≥80	295*295*28	IP44
3.5' 9W	9	220-240	>0.7	50/60	NO	765	85	3000/4000/6500	≤6	≥120	≥80	120*120*26.5	IP44
6' 18W	18	220-240	>0.7	50/60	NO	1,800	100	3000/4000/6500	≤6	≥120	≥80	174*174*26.5	IP44
8' 24W	24	220-240	>0.7	50/60	NO	2,424	101	3000/4000/6500	≤6	≥120	≥80	218*218*27	IP44
12' 30W	30	220-240	>0.7	50/60	NO	3,120	104	3000/4000/6500	≤6	≥120	≥80	295*295*28	IP44




LED 筒灯

LED DOWN LIGHT-Plastic type IP44

ROUND SURFACED 圆形明装

Description	Driver					Light Source						Structure	
	Power	Voltage	DF	Freq.	Dimmability	Luminous Flux lm	Efficacy lm/W	CCT K	SDC M	Beam Angel	CRI	Dimension (mm)	IP Rating
6' 12W	12	220-240	≥0.7	50/60	N/A	1,200	100	3000/4000/6500	≤6	≥120	≥80	φ175*35	IP44
8' 18W	18	220-240	≥0.7	50/60	N/A	1,820	101	3000/4000/6500	≤6	≥120	≥80	φ224*35	IP44
12' 24W	24	220-240	≥0.7	50/60	N/A	2,500	104	3000/4000/6500	≤6	≥120	≥80	φ299*35	IP44
6' 18W	18	220-240	>0.7	50/60	NO	1,800	100	3000/4000/6500	≤6	≥120	≥80	φ175*35	IP44
8' 24W	24	220-240	>0.7	50/60	NO	2,424	101	3000/4000/6500	≤6	≥120	≥80	φ224*35	IP44
12' 30W	30	220-240	>0.7	50/60	NO	3,120	104	3000/4000/6500	≤6	≥120	≥80	φ299*35	IP44

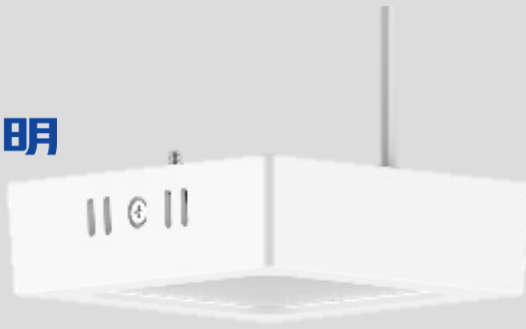

LED 筒灯

LED DOWN LIGHT-Plastic type IP44

SQUARE SURFACED 方形明装

Description	Driver					Light Source						Structure	
	Power	Voltage	DF	Freq.	Dimmability	Luminous Flux lm	Efficacy lm/W	CCT K	SDC M	Beam Angel	CRI	Dimension (mm)	IP Rating
6' 12W	12	220-240	≥0.7	50/60	N/A	1,200	100	3000/4000/6500	≤6	≥120	≥80	173*173*35	IP44
8' 18W	18	220-240	≥0.7	50/60	N/A	1,820	101	3000/4000/6500	≤6	≥120	≥80	225*225*35	IP44
12' 24W	24	220-240	≥0.7	50/60	N/A	2,500	104	3000/4000/6500	≤6	≥120	≥80	299*299*35	IP44
6' 18W	18	220-240	>0.7	50/60	NO	1,800	100	3000/4000/6500	≤6	≥120	≥80	173*173*35	IP44
8' 24W	24	220-240	>0.7	50/60	NO	2,424	101	3000/4000/6500	≤6	≥120	≥80	225*225*35	IP44
12' 30W	30	220-240	>0.7	50/60	NO	3,120	104	3000/4000/6500	≤6	≥120	≥80	299*299*35	IP44

LED 天花灯 LED CEILING LIGHT

LED CEILING DOWN LIGHT



- **Bi-volt input**
- **Built-in IC driver**
- **Mounting: Recessed**
- **Angle Adjustable**
- **Plastic Structure**



LED 天花灯

LED CEILING DOWN LIGHT

MODEL	Voltage	Power (W)	Lumen	Beam Angle	CRI	PF	Material	Cut-out (mm)	Dimension (mm)
ROUND	100-240V	3	210	38°	Ra>80	>0.4	Plastic	55-60	Φ75*30
ROUND	100-240V	5	350	38°	Ra>80	>0.5	Plastic	70-75	Φ86*25
ROUND	100-240V	7	490	38°	Ra>80	>0.5	Plastic	70-75	Φ86*25
ROUND	100-240V	9	630	38°	Ra>80	>0.5	Plastic	90-95	Φ105*32
ROUND	100-240V	12	840	38°	Ra>80	>0.5	Plastic	110-115	Φ125*35
SQUARE	100-240V	3	210	38°	Ra>80	>0.4	Plastic	55-60	75*75*30
SQUARE	100-240V	5	350	38°	Ra>80	>0.5	Plastic	70-75	86*86*25
SQUARE	100-240V	7	490	38°	Ra>80	>0.5	Plastic	70-75	86*86*25
SQUARE	100-240V	9	630	38°	Ra>80	>0.5	Plastic	90-95	105*105*32
SQUARE	100-240V	12	840	38°	Ra>80	>0.5	Plastic	110-115	125*125*35

Contact us by Email: shilin@shilinlighting.com

LED 灯带 LED Strip



高压灯带 LED AC strip

- Wireless PCB Design
- High Efficiency
- High Endurability
- IP65 Weather resistant, UV resistant
- 60LEDs/M, 120LEDs/M
- 120V or 220V input



Model	灯珠型号 (SMD)	LEDs/M (颗/米)	色温CCT (K)	显指CRI (Ra)	Power/M 功率 (W/米 ±10%)	光通量Lumen (Lm/M±5%)	PCB	PCB Width (MM)	Cut size(cm) (CM/剪)	灯珠排布 LED PLAN	IP Grade	Size (宽*高) mm
2835-60D-20R-8MM	2835	60	3000/4000/6500	70	6	260	Double Layer	8	100	单直排/SINGLE LINE	IP65	11*6.5
2835-60D-20R-8MM	2835	60	3000/4000/6500	80	6	300	Double Layer	8	100	单直排/SINGLE LINE	IP65	11*6.5
2835-60D-20R-8MM	2835	60	3000/4000/6500	80	7	600	Double Layer	8	20	单直排/SINGLE LINE	IP65	11*6.5
2835-60D-28R-8MM	2835	60	3000/4000/6500	70	9	650	Double Layer	8	100	单直排/SINGLE LINE	IP65	13*7
2835-120D-28R-9.2MM	2835	120	3000/4000/6500	70	8	600	Double Layer	9.2	100	单直排/SINGLE LINE	IP65	12.2*6.8
2835-120D-28R-9.2MM	2835	120	3000/4000/6500	80	8	650	Double Layer	9.2	100	单直排/SINGLE LINE	IP65	12.2*6.8
2835-120D-28R-11MM	2835	120	3000/4000/6500	70	11	800	Double Layer	11	100	双直排/Double Line	IP65	14*7.5
2835-120D-28R-11MM	2835	120	3000/4000/6500	80	11	850	Double Layer	11	100	双直排/Double Line	IP65	14*7.5
2835-120D-28R-12MM	2835	120	3000+6500K	80	7	/	Double Layer	12	100	双斜排/Double Diagonal Line	IP65	15*7.8
2835-120D-28R-12MM	2835	120	3000+BLUE	80	7	/	Double Layer	12	100	双斜排/Double Diagonal Line	IP65	15*7.8
5050-60D-28R-10MM	5050	60	3000/4000/6500	80	7	420	Double Layer	10	100	单直排/SINGLE LINE	IP65	13*7
5050-60D-30R-10MM	5050	60	R/G/B	/	7	/	Double Layer	10	100	单直排/SINGLE LINE	IP65	13*7
5050RGB-60D-30R-12MM	5050	60	RGB	/	8	/	Double Layer	12	100	单直排/SINGLE LINE	IP65	13*7

LED 灯带 LED Strip



低压灯带 LED DC strip


- Double Layer PCB Design
- High Efficiency
- High Endurability
- IP20 and Coated IP44 Model
- Weather resistant, UV resistant
- 60LEDs/M, 120LEDs/M, 180LEDs/M, 240LEDs/M
- 12V or 24V input
- AC adaptor available

LED 低压灯带 LED DC Strip

Input (V)	Model	灯珠型号 (SMD)	LEDs/M (颗/米)	色温CCT (K)	显指CRI (Ra)	Power/M 功率 (W/米±10%)	光通量Lumen (Lm/M±5%)	PCB	PCB Width (MM)	Cut size(cm) (CM/剪)	IP Grade
12/24V	2835-60D-20R-8MM	2835	60	3000/4000/6500	70/80	5	450	Single Layer	8	5	IP20
12/24V	2835-60D-20R-8MM	2835	60	3000/4000/6500	70/80	5	450	Double Layer	8	5	IP20
12/24V	2835-60D-20R-8MM	2835	60	3000/4000/6500	70/80	5	450	Double Layer	8	5	IP44
12/24V	2835-60D-20R-8MM	2835	60	3000/4000/6500	70/80	5	450	Double Layer	8	5	IP44
12/24V	2835-120D-40R-8MM	2835	120	3000/4000/6500	70/80	10	900	Double Layer	8	5	IP20
12/24V	2835-120D-40R-8MM	2835	120	3000/4000/6500	70/80	10	900	Double Layer	8	5	IP44
12/24V	2835-120D-40R-8MM	2835	120	3000/4000/6500	70/80	10	900	Double Layer	8	5	IP44
12/24V	2835-180D-60R-10MM	2835	180	3000/4000/6500	70/80	17	1530	Double Layer	10	5	IP20
12/24V	2835-240D-80R-10MM	2835	240	3000/4000/6500	70/80	22	1980	Plated PCB	10	5	IP20
12/24V	5050-60D-40R-9.6MM	5050	60	3000/4000/6500	80	10	700	Double Layer	9.6	5	IP20
12/24V	5050-60D-40R-9.6MM	5050	60	R/G/B color	/	10	/	Double Layer	9.6	5	IP20
12/24V	5050RGB-60D-60R-9.4MM	5050	60	RGB	/	12	/	Double Layer	9.4	5	IP20
12/24V	5050RGB-60D-60R-9.4MM	5050	60	RGB	/	12	/	Double Layer	9.4	5	IP44
12/24V	5050RGB-60D-60R-9.4MM	5050	60	RGB	/	12	/	Double Layer	9.4	5	IP44

Contact us by Email: shilin@shilinlighting.com

Alum. Profile 铝型材

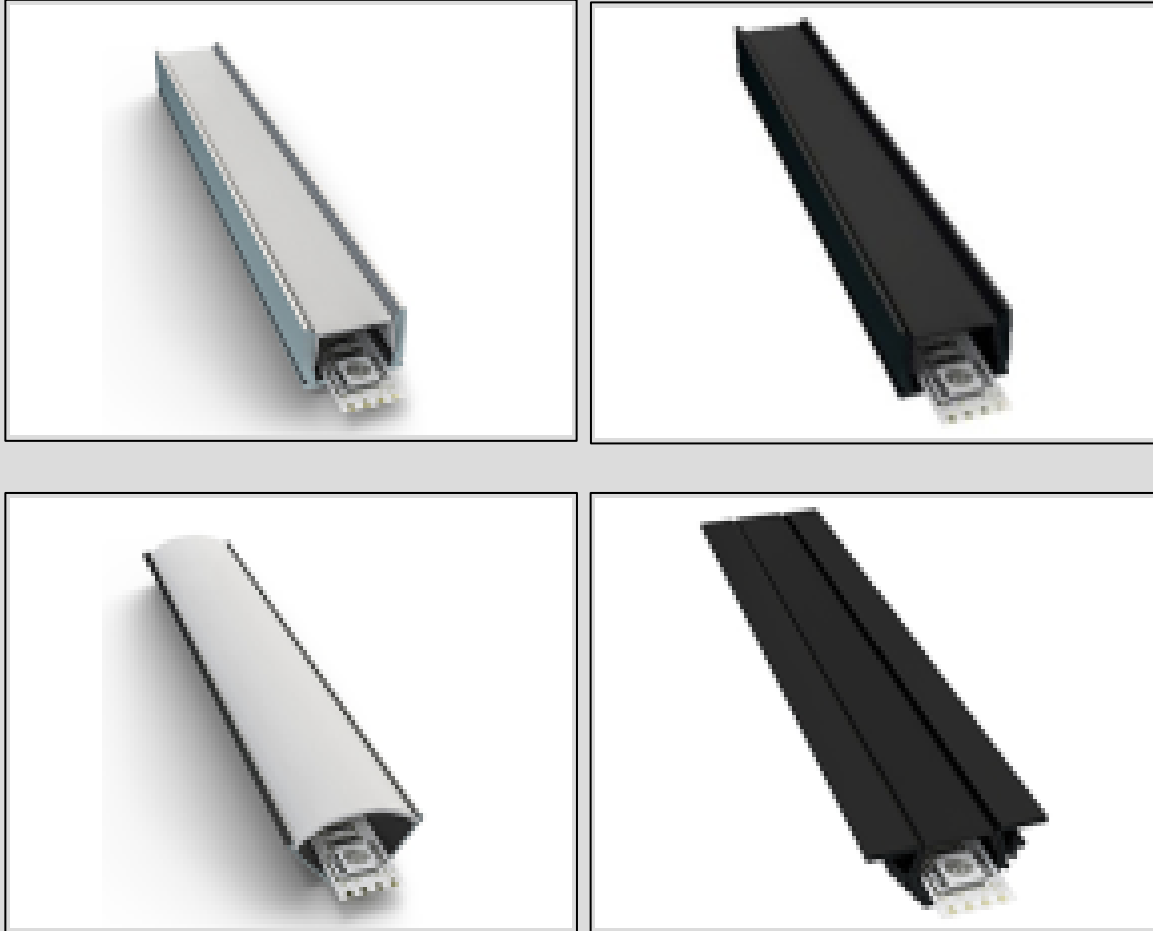

LED灯带用铝型材

ALU. Profile for LED Strip

- 加工尺寸Size: up to 50*50*1400mm
- 自有挤出设备 In-house extrusion line
- 自有喷涂设备 In-house painting line
- 欢迎客供设计加工 ODM service

LED 吸顶灯 LED Ceiling Cloud Light

ECO series-Sunflower太阳花款



- 尺寸Size: $\varnothing$ 260mm 330mm 380mm
- Flat Diffuser/Bread Diffuser 平罩,面包罩可选
- 100-240V or 176-264V
- 12W / 18W / 24W
- Ra>70 or Ra>80
- 80lm/w

LED 吸顶灯 LED Ceiling Cloud Light

ECO series-JY model



- **Size: $\varnothing$ 260mm 330mm 380mm 480mm**
- **Flat Diffuser/Bread Diffuser**
- **100-240V or 176-264V**
- **12W / 18W / 24W / 45W**
- **Ra>70 or Ra>80**
- **80lm/w**
- **Radar Sensor/PIR sensor available**



LED 吸顶灯 LED Ceiling Cloud Light

Smart series 智能系列

- Smart lamp
- RGB-W color change
- 10-100% dimming
- WIFI+Bluetooth control
- Variety of Diffusers optional
- High Efficiency



Contact us by Email: shilin@shilinlighting.com



LED 灯丝灯 LED Filament Bulb

EU Series 欧标系列



- **Model: ST64 A60 C35 G45**
- **Finish: Transparent, Opal, Rustic**
- **220-240V**
- **2.5W to 12W**
- **Ra > 80**
- **Up to 150lm/w**
- **Dimming models available**

Contact us by Email: shilin@shilinlighting.com

CE new ERP RoHS 2.0

LED 灯丝灯 LED Filament Bulb



Latin Series 拉美系列

- **Model: ST64 A60 C35 G45**
- **Finish: Transparent, Opal, Rustic**
- **100-240V**
- **2.5W to 12W**
- **Ra>80**
- **Up to 150lm/w**



American Series 北美系列

- **Model: ST19 A19 B11**
- **Finish: Transparent, Opal, Rustic**
- **115-125V**
- **4W 5.5W 6W**
- **Ra>80**



EU Series 欧标系列



- **Model: T8 0.6M 0.9M 1.2M 1.5M**
- **Ra>80**
- **DF>0.7**
- **PF>0.5 and PF>0.9**
- **Efficiency: up to 180lm/w**
- **Flicker free**
- **PC tube / Shatter proof Glass tube available**



LED 玻璃管 LED Glass Tube

Brazilian Series 巴西系列



- Model: T8 0.6M 1.2M
- Ra>80 R9>0
- 100-240V Bi-Volt
- PF>0.92
- INMETRO AND PROCEL



LED 玻璃管 LED Glass Tube



Eco Series 经济款

- Model: T8 0.6M 0.9M 1.2M 1.5M
- Finish: Clear or Opal
- Ra>80 or Ra>70
- 100-240V or 176-265V
- PF>0.5 and PF>0.9
- Efficiency: 90lm/w 100lm/W
- Variety of cap on choice
- PC tube / Shatter proof Glass tube available



EU Series 欧标系列



- **Model: A60 C37 G45 GU10**
- **Ra > 80**
- **DF > 0.7 PF > 0.5**
- **Flicker free**

CE ERP RoHS 2.0



Brazilian Series 巴西系列



- **Model: A60 T-Series**
- **IC driver**
- **Ra > 80, R9 > 0**
- **100-240V**
- **4.9W to 50W**



Eco Series 经济款


- **Model: A T C37 G45 GU10**
- **IC driver DOB or Linear Driver**
- **$R_a > 80$, $R_9 > 0$**
- **$PF > 0.5$ or $PF > 0.9$**
- **100-240V or 176-264V**
- **3W to 100W**



Smart series 智能系列

- **Smart lamp**
- **RGB-W color change**
- **10-100% dimming**
- **WIFI+Bluetooth control**
- **High Efficiency**



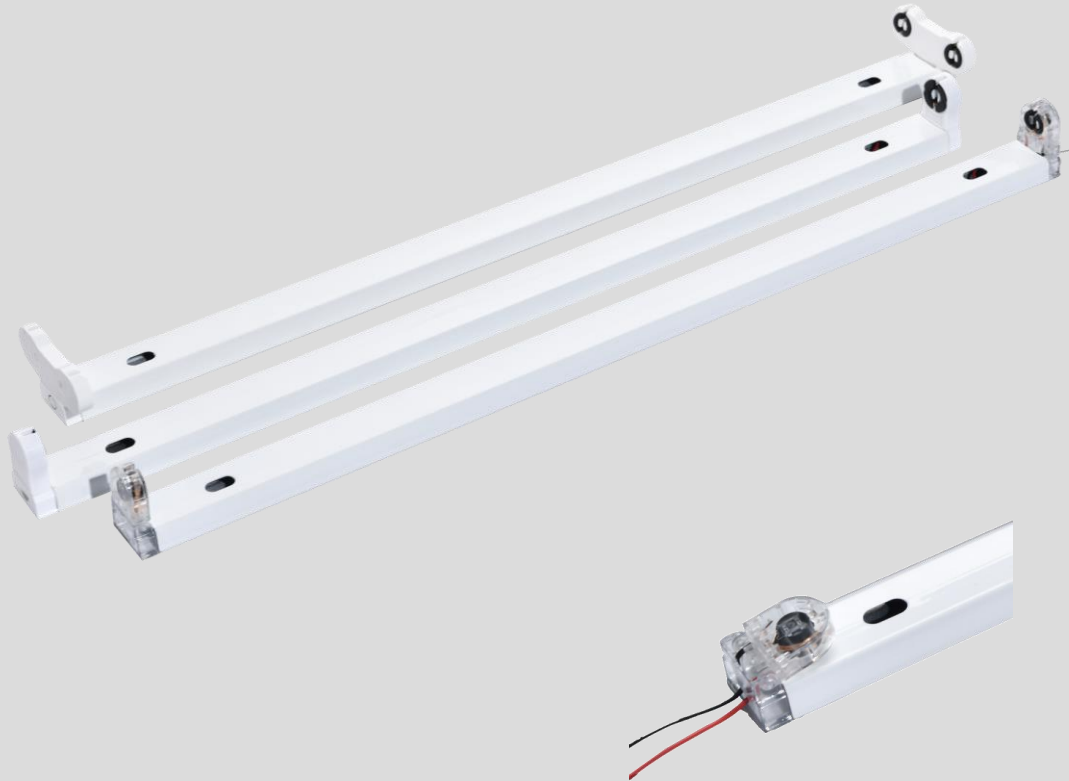

LED 灯管支架 LED Tube Linear Fixture

Eco Series 经济款


- Model: T8 0.6M 1.2M
- Single Tube / Twin Tubes
- Single/Double End Active
- Universal Input Voltage
- Foldable Cap Available



企业资质 Certificates



ISO9001

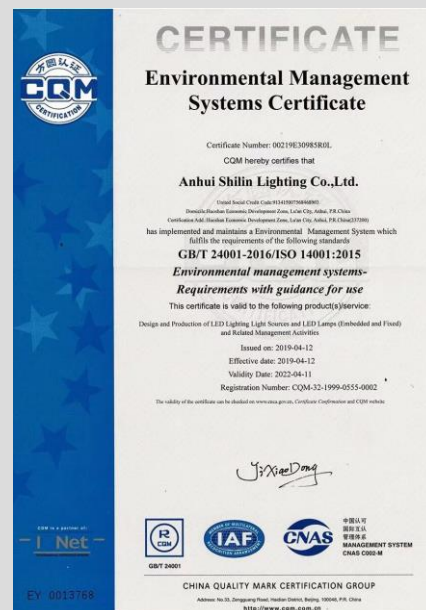

ISO14001



ISO45001



BSCI



Contact us by Email: shilin@shilinlighting.com



E504864



215725



Europe Safe
www.enec.com

产品认证
Product
Certificates



www.tuv.com
ID 1111225056



INMETRO



PROCEL



RoHS 2.0

主要市场 Main Markets



Contact us by Email: shilin@shilinlighting.com

主要市场 Main Markets

Percentage of Sales

