


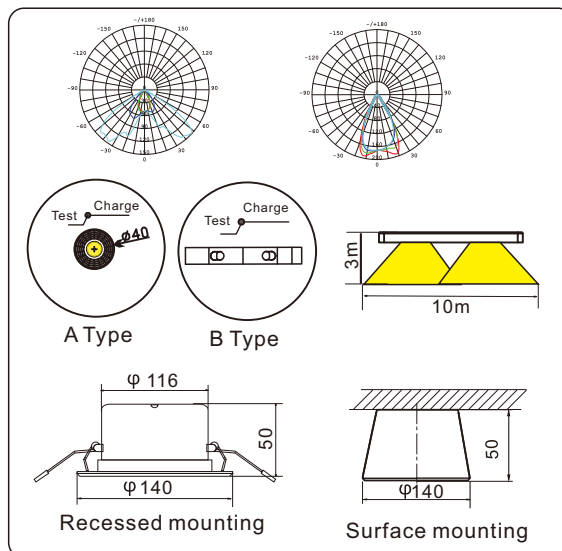

SPECIFICATION/DESCRIPTION:

LED Emergency Light : non-maintained working mode, provide battery charge and discharge ,with DALI-2 function or individual auto-test function

WORKING VOLTAGE:220-240VAC 50-60Hz

INSTALLATION :Recessed/Surface mounting

LENS: A/B two type lens can be replaced

OUTPUT VOLTAGE:12V

DISCHARGE CURRENT:400/550mA

OUTPUT MODE: Constant power

EMERGENCY POWER:2.5/4.0W

LED CCT:6000K

AMBIENT TEMPERATURE TA: -5...55°C

WARRANTY:3Years

AUTO TEST FEATURES

Performs 5 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date.

Indication through a bi-colour LED, fault indication beeper

STANDARDS

EN 60598-1,EN 60598-2-22,EN61347-2-7,EN61000-2-3,EN61000-3-3,EN55015,EN61547,IEC TR62778, IEC 62034,IEC 62386

DALI-2 protocol: 101 102 202 150 251 252 253 254

DALI-2 No:6292 (LC-ND001)

Certificates:CB,CE,EMC

Besteil-Nr	Type No	Power	Battery	LM	Function	Packaging	Qty	Weight
31503080	LCDJ-SJ0037-A	3W	6.4V1.5Ah LiFePO4	300	Autotest	310X310X260	20Pcs	6.0Kg
31503081	LCDJ-SJ0037-B	2X1.5W	6.4V1.5Ah LiFePO4	220	Autotest	310X310X260	20Pcs	7.0Kg
32503082	LCDJ-SJ0037AD	3W	6.4V1.5Ah LiFePO4	300	DALI-2	310X310X260	20Pcs	6.0Kg
32503083	LCDJ-SJ0037BD	2X1.5W	6.4V1.5Ah LiFePO4	220	DALI-2	310X310X260	20Pcs	7.0Kg
31501080	LCDJ-SJ0037-A	4W	7.2V2.0Ah Ni-Mh	350	Autotest	310X310X260	20Pcs	6.0Kg
31501081	LCDJ-SJ0037-B	2X2W	7.2V2.0Ah Ni-Mh	240	Autotest	310X310X260	20Pcs	7.0 Kg
32501080	LCDJ-SJ0037AD	4W	7.2V2.0Ah Ni-Mh	350	DALI-2	310X310X260	20Pcs	6.0Kg
32501081	LCDJ-SJ0037BD	2X2W	7.2V2.0Ah Ni-Mh	240	DALI-2	310X310X260	20Pcs	7.0Kg