


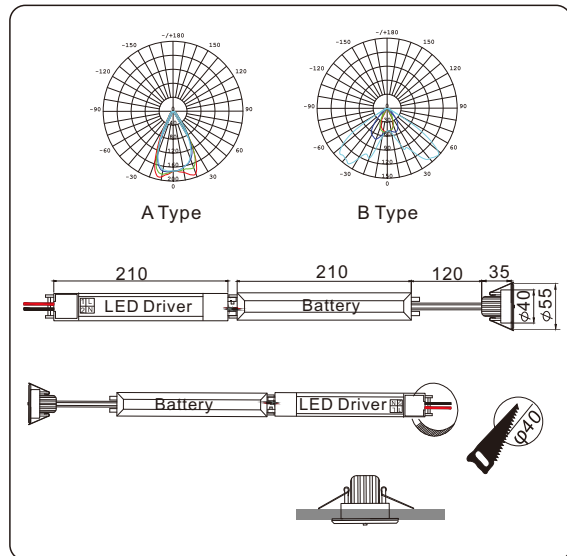

LCDJ-SC0032

LED EMERGENCY LIGHT

**SPECIFICATION/DESCRIPTION:**

LED Emergency Light : non-maintained working mode, provide battery charge and discharge ,with DALI-2 function or individual auto-test function

WORKING VOLTAGE:220-240VAC 50-60Hz**INSTALLATION :**Recessed mounting**LENS:** A/B two type lens can be replaced**OUTPUT VOLTAGE:**3V**DISCHARGE CURRENT:**560mA**OUTPUT MODE:** Constant current**EMERGENCY POWER:**2W**LED CCT:**6000K**AMBIENT TEMPERATURE TA:** -5...55°C**WARRANTY:**3Years**AUTO TEST FEATURES**

Performs 5 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date.

Indication through a bi-colour LED, fault indication beeper

STANDARDS

EN 60598-1,EN 60598-2-22,EN61347-2-7,EN61000-2-3,EN61000-3-3,EN55015,EN61547,IEC TR62778, IEC 62034,IEC 62386

DALI-2 protocol: 101 102 202 150 251 252 253 254

DALI-2 No:6292 (LC-ND001)

Certificates:CB,CE,EMC

LCDJ-SC0032 Series

Besteil-Nr	Type	Power	Battery	ELT LM	Function	Packaging	Qty	Weight
31500040	LCDJ-SC0032-A	3W	3.6V2.0Ah Ni-Mh	180	Autotest	490X290X250	20Pcs	9.5Kg
31500041	LCDJ-SC0032-B	3W	3.6V2.0Ah Ni-Mh	160	Autotest	490X290X250	20Pcs	9.5Kg
32500040	LCDJ-SC0032-AD	3W	3.6V2.0Ah Ni-Mh	180	DALI-2	490X290X250	20Pcs	9.5Kg
32500041	LCDJ-SC0032-BD	3W	3.6V2.0Ah Ni-Mh	160	DALI-2	490X290X250	20Pcs	9.5Kg
32500042	LCDJ-SC0032-AD	3W	6.4V1.5Ah LiFePO4	200	DALI-2	490X290X250	20Pcs	9.5Kg
32500043	LCDJ-SC0032-BD	3W	6.4V1.5Ah LiFePO4	180	DALI-2	490X290X250	20Pcs	9.5Kg