


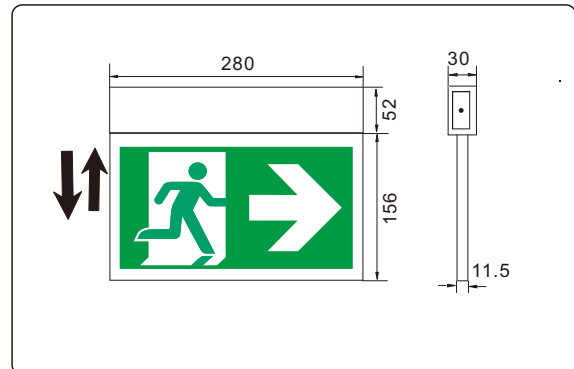

SPECIFICATION/DESCRIPTION:

LED Emergency Sign Light: maintained working mode, configured with driver , provide battery charge and discharge, with DALI-2 function or individual auto-test function

INPUT VOLTAGE:220-240AC 50/60Hz

EFFICACY:130Lm/W(LED)

LUMINOUS BODY: 3MM light guide plate

LUMINANCE:52>2cd/m²

PATTERN BOARD: 1.5mm PMMA (can be replaced)

WARRANTY:3Years

AUTO TEST FEATURES

Performs 5 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date


Indication through a bi-colour LED, fault indication beeper

STANDARDS

EN 60598-1,EN 60598-2-22,EN61347-2-7,EN61000-2-3,EN61000-3-3,EN55015,EN61547,IEC TR62778, EN 62034,IEC 62386

DALI No.6255(LC-ZD001), DALI-2 protocol: 101 102 202 150 250 251 252 253 254

Certificates:CB,CE,EMC

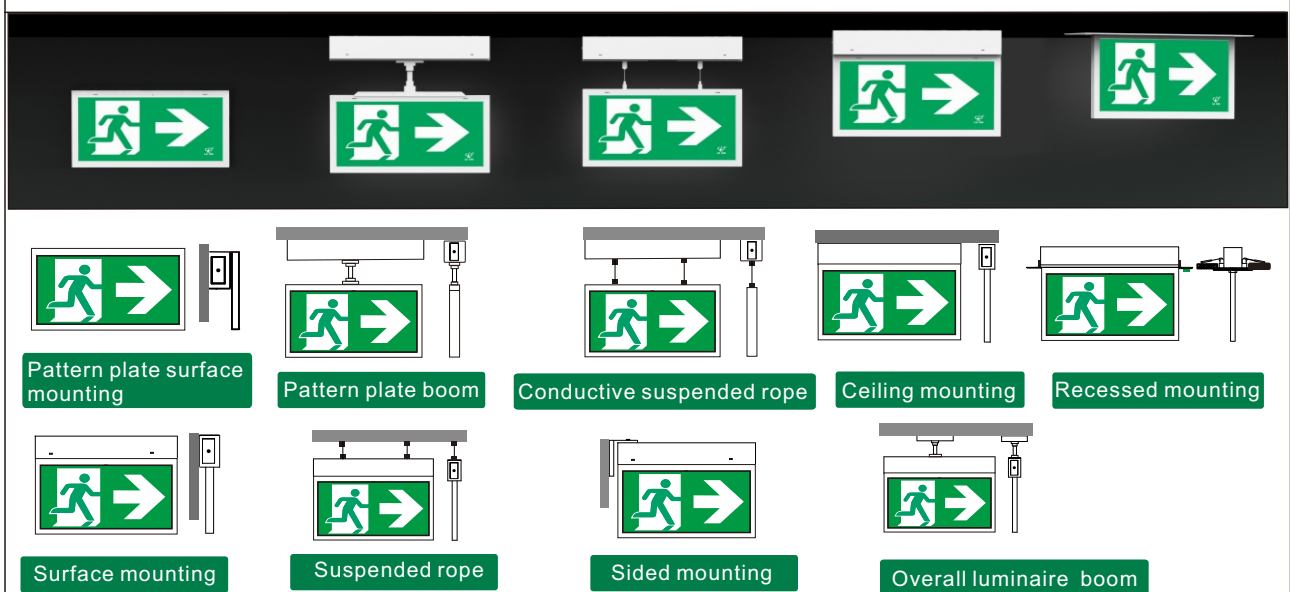

Besteil-Nr	Type No	light	Battery	Emergency	Function	Packaging	Qty	Weight
41303180	LCDJ-SL0018	1W	3.6V1.2Ah Ni-Mh	1W	Autotest	360X360X310	20Pcs	16kg
42303180	LCDJ-SL0018-D	1W	3.6V1.2Ah Ni-Mh	1W	DALI-2	360X360X310	20Pcs	16kg