


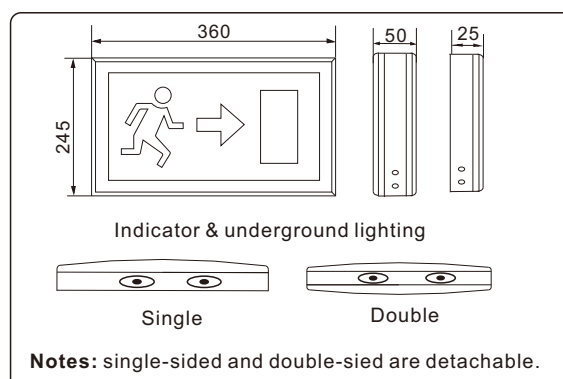

SPECIFICATION/DESCRIPTION:

LED Emergency Sign Light: maintained working mode, configured with driver, provide battery charge and discharge, with DALI-2 function or individual auto-test function

INPUT VOLTAGE: 220-240AC 50/60Hz

EFFICACY: 130Lm/W(LED)

LUMINOUS BODY: 3MM light guide plate

LUMINANCE: 46 > 2cd/m²

PATTERN BOARD: 2.0mm PMMA (can be replaced)

WARRANTY: 3Years

AUTO TEST FEATURES

Performs 5 second functional test every 30days

Rated duration test every 52 weeks in accordance with EN 50172:2004

The product will automatically choose one random date from 1-30 days as base date for calculating the rated duration test date.

Indication through a bi-colour LED, fault indication beeper


STANDARDS

EN 60598-1, EN 60598-2-22, EN 61347-2-7, EN 61000-2-3, EN 61000-3-3, EN 55015, EN 61547, IEC TR 62778, EN 62034, IEC 62386

DALI No.6255, (LC-DZ001)

DALI-2 protocol: 101 102 202 150 250 251 252 253 254

Certificates: CB, CE, EMC

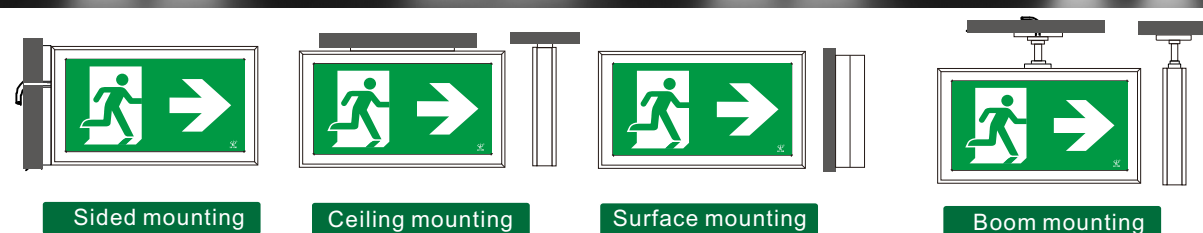

Besteil-Nr	Type No	Window	Ground	Display	Battery	Function	Packaging	Qty	Weight
41703010	LCDJ-AD0001-A	2X1W	2X1W	Double	7.2V2.0Ah Ni-Mh	Autotest	450X380X270	10pcs	20Kg
42703010	LCDJ-AD0001-AD	2X1W	2X1W	Double	7.2V2.0Ah Ni-Mh	DALI-2	450X380X270	10pcs	20Kg
41603010	LCDJ-AD0001-B	1W	2X1W	Single	7.2V1.5Ah Ni-Mh	Autotest	380X370X240	10pcs	14Kg
42603010	LCDJ-AD0001-BD	1W	2X1W	Single	7.2V1.5Ah Ni-Mh	DALI-2	380X370X240	10pcs	14Kg