

Less Series - Recessed Downlight



Light distribution
3000K CRI 90

KT7387			25°
h (m)	E0° (lx)		Φ (m)
1	6702		0.49
2	1676		0.90
3	744.7		1.35
4	418.9		1.80
5	268.1		2.24



Light distribution
3000K CRI 90

KT7388			39°
h (m)	E0° (lx)		Φ (m)
1	6236		0.71
2	1559		1.41
3	692.9		2.15
4	389.7		2.90
5	249.4		3.53



Light distribution
3000K CRI 90

KT7389			38°
h (m)	E0° (lx)		Φ (m)
1	8432		0.69
2	2108		1.37
3	936.9		2.06
4	527.0		2.80
5	337.3		3.42

Control Type



Luminaire specifications Die-casting Aluminum

Mode	Power	Lumen	CCT	BA.	Cutout	Light Source	Driver	IP	CRI
KT7387	15W	2065	3000K	26°	Φ95	Bridgelux	AGT	20	90
KT7388	20W	2700	3000K	39°	Φ110	Bridgelux	AGT	20	90
KT7389	30W	4331	3000K	38°	Φ147	Bridgelux	AGT	20	90


Frame finishing colour



Colour temperature range





Colour Rendering Index



Beam angle



Front Ring Finishing color

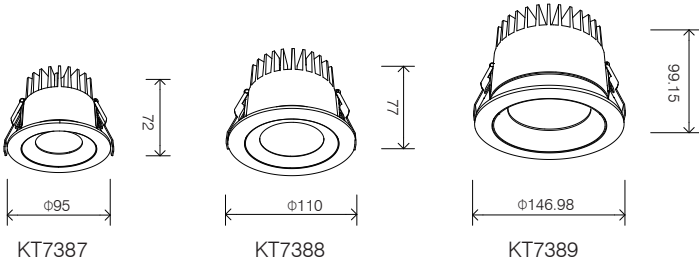

Remark: ●Technical information may change, please refer to the datasheet.
A31