

LED ROADWAY LIGHT



YZDL751

110-150lm/W

A:40/60W B:80/100W C:120/150W

Main/secondary roads, parks,
city squares, community areas, etc

LED ROADWAY LIGHT



IP66

IK09

WF1

YZDL751

- Die-casting aluminum fixture with corrosion -resistant electrostatic powder coat finish.
- 4mm super clear tempered glass.
- IP66
- IK09
- Stainless steel screws for exterior of fixture.

LED ROADWAY LIGHT


YZDL751

Product parameters


Product code	YZDL751A	YZDL751B	YZDL751C
Input Power	40W / 60W	80W / 100W	120W / 150W
Rated Voltage	100-277V		
Frequency	50/60Hz		
Power Factor	>0.9		
Light efficiency	110-150lm/W		
Lighting Angle	TYPE II/III		
Color Temperature	3000K/4000K/5000K/5700K		
Color Rendering Index	>70		
Operating Temperature	-20℃-+45℃		
IP grade	IP66		
Weight	4.5KG	6.8KG	10.5KG
Lumen maintenance	L90>36000h L70>50000h @85℃		
Product standard	cETLus,LM79,LM80		
Quality Assurance	5 years		
Intended use	Main/secondary roads, parks, city squares, community areas, etc		

Dimensions


YZDL751A

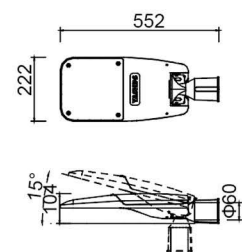

YZDL751B

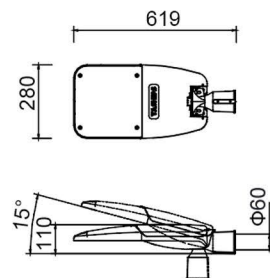

YZDL751C

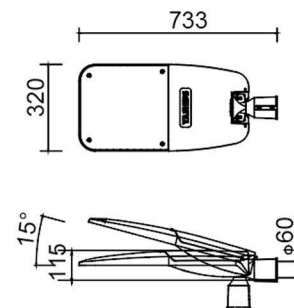

LED ROADWAY LIGHT

YZDL751


Die-casting aluminum fixture with corrosion -resistant electrostatic powder coat finish.

Elegant curved shape, better performance windresistance.



Glare free design optical lens TYPE II/III


- Suggest for height: 6-8m
- Horizontal & Vertical mounting optional,
- Angle adjustable
- Suitable for Ø60mm



RAL7035



RAL7016

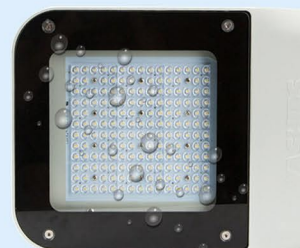

IP66




LED ROADWAY LIGHT

YZDL751



press the button



open the back cover

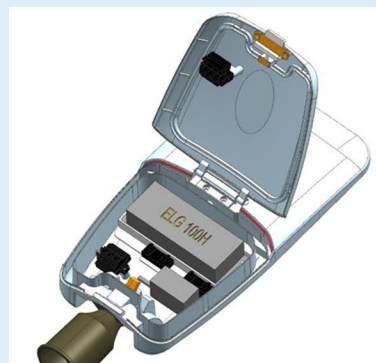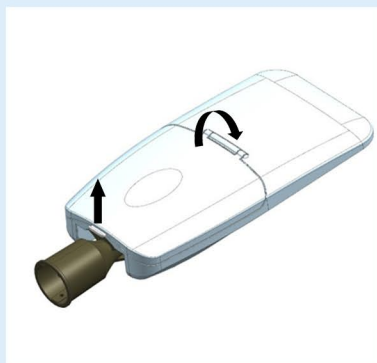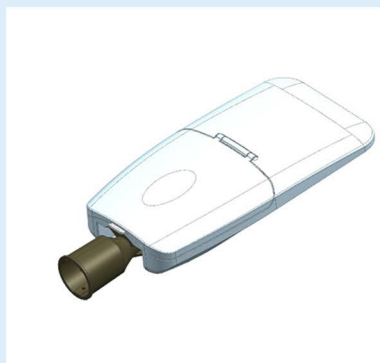




LED ROADWAY LIGHT

YZDL751


YZDL751A

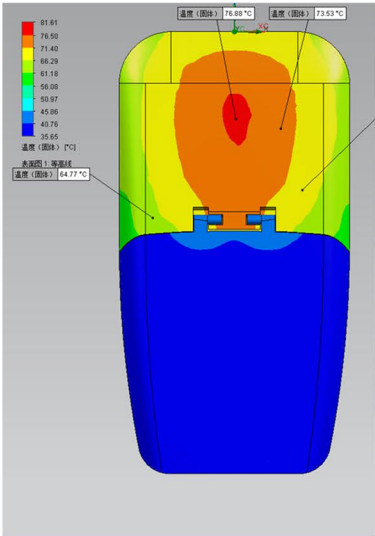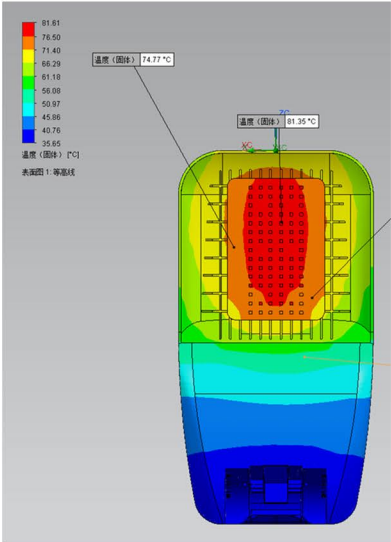

YZDL751B

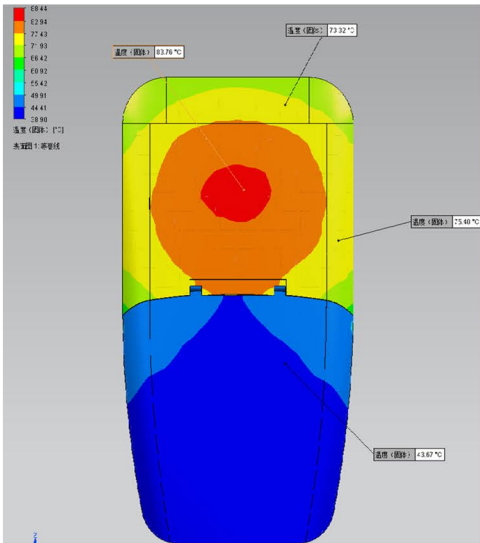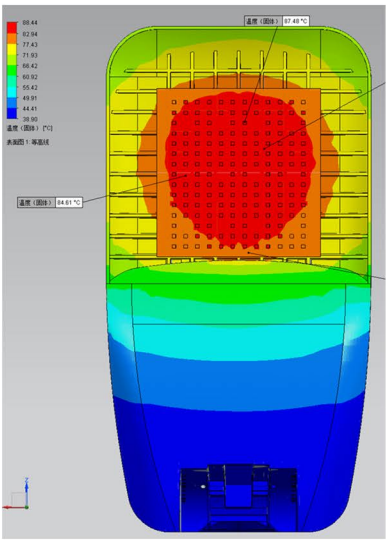

TYPE II



TYPE III

LED ROADWAY LIGHT

YZDL751

