

YASHIPS®

Devotion · Innovation · Solution

LED LIGHT YXL861



LED LIGHT



YXL861

Die-cast aluminum lamp body, corrosion & shock resistant


IP66 , IK08

Light distribution:

Circular lens (TYPE IV/TYPE V available)

Self-clean design

Diffuser: Sand-blasted glass at request

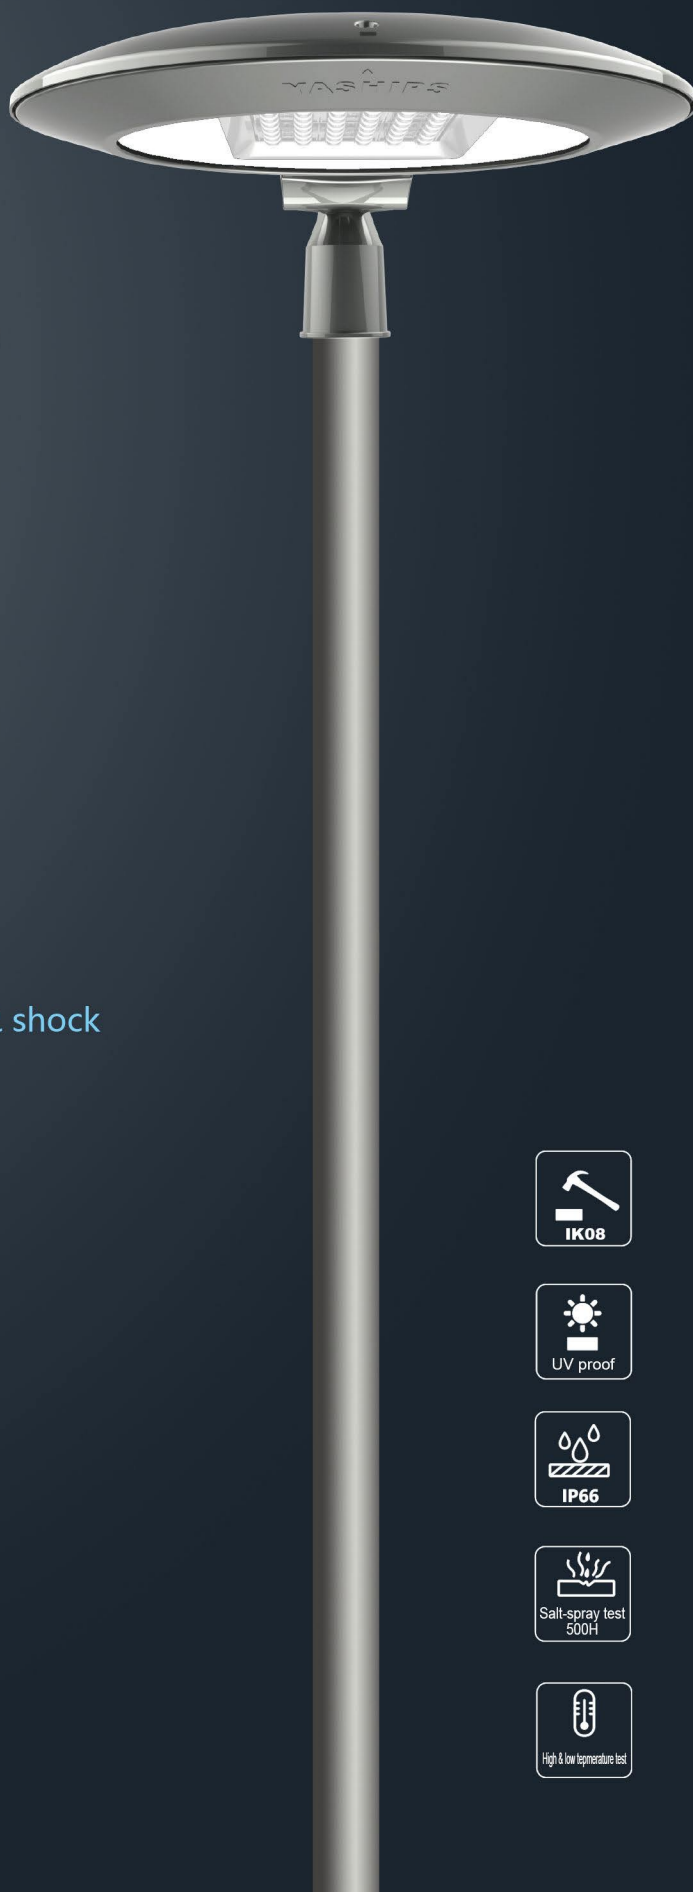


Product parameters


Series	LED Road Light	LED Post Top Light
Product code	YXL861-D	YXL861-P
Input Power	60W/80W/100W/120W	
Rated Voltage	100-277V	
Frequency	50/60Hz	
Power Factor	>0.9	
Light efficiency	3030 100-120 lm/W	5050 110-130lm/W
Lighting Angle	TYPE II/III	TYPE IV/V
Color Temperature	3000K/4000K/5000K/5700K	
Color Rendering Index	>70	
Operating Temperature	-20℃-+45℃	
IP grade	IP66	
Weight	7.5KG	8.4KG
Application	Main/secondary roads, parks, city squares, community areas, etc	Communities, squares, parks, sidewalks, bicycle lanes, etc.

Dimensions

YXL861-D

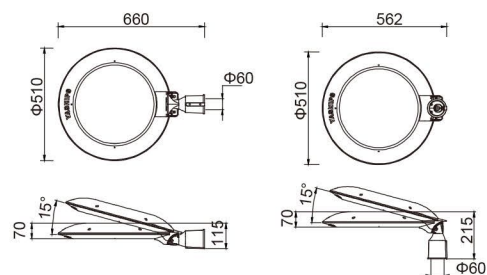


YXL861-P



Distribution


YXL861-D

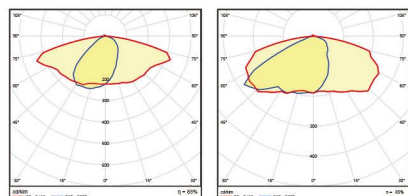

TYPE II

TYPE III

YXL861-P

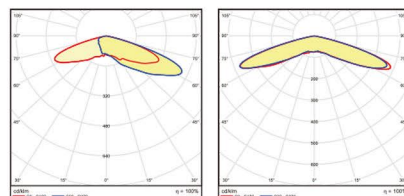


TYPE IV

TYPE V



Circular lens

3030/3535: TYPE IV / TYPE V


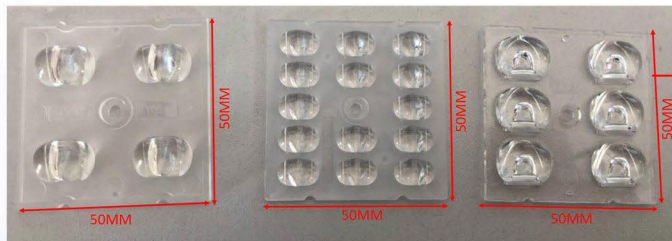




50x50mm

3030 : TYPE II / III


5050 : TYPE I / II / III / IV / V

5050 : TYPE II / III / IV / V

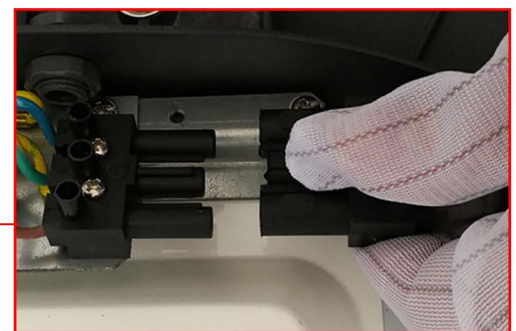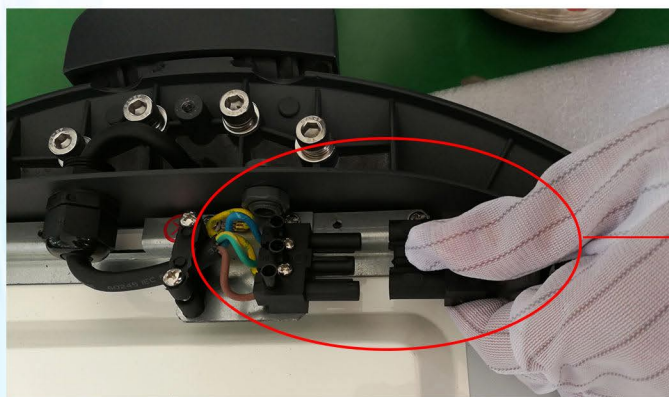Various light distribution optional**Disconnector equipped**

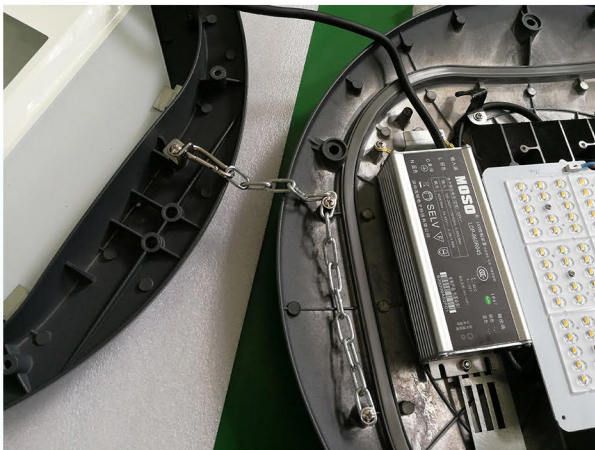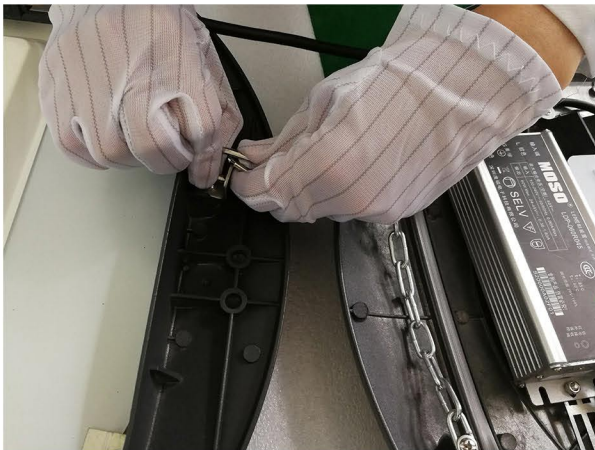

Falling-protect chain with ergonomic design provide safe & easy maintenance, can be done by one person completely.

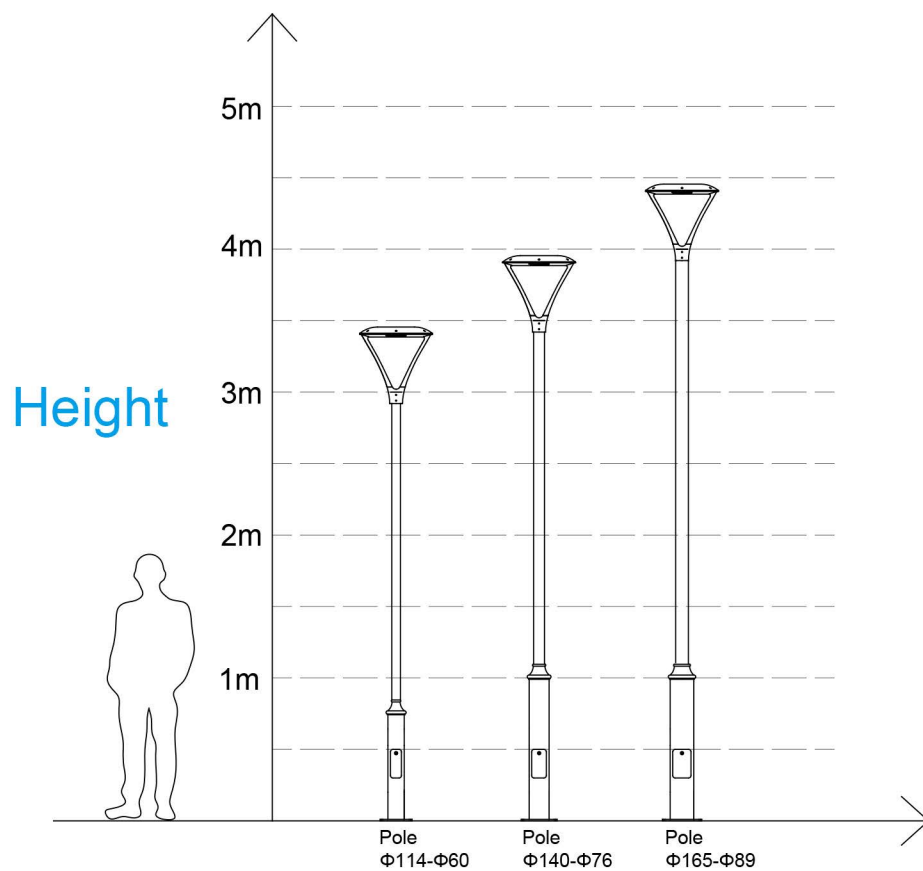

Control optional

Motion sensor



Photocell



LED LIGHT

YXL86I-D



YXL86I-P

