

YASHIPS[®]

Devotion · Innovation · Solution


LED FLOOD LIGHT

YGTL325

3W-240W

Wide power range

Suitable for facade, landscape and bridge lighting

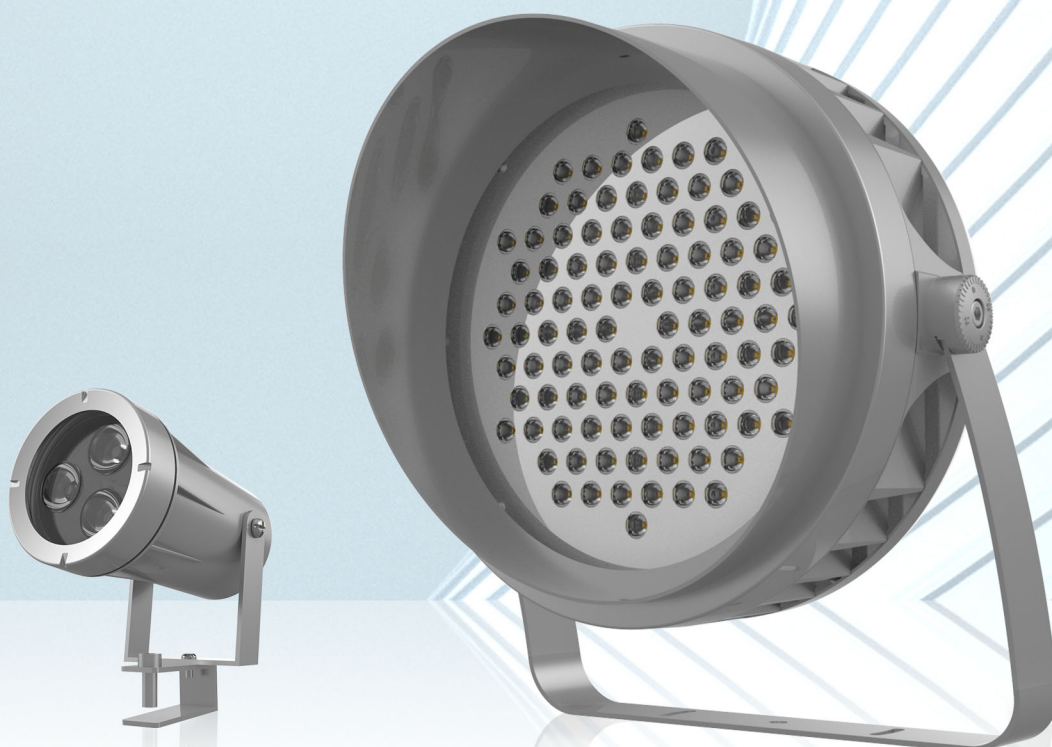

FEATURE



1W-3W

4W-6W

8W-12W

15W-18W

24W-48W



54W-72W

90W-120W

150W-180W

200W-240W

YGTL325

- Integrated design of electrical box and optical compartment with the appearance concise and elegant.
- Specific aesthetic design of non-screw on the frame.
- Separated optical & electrical compartments design provides the optimal thermal dissipation performance.
- High transmittance optical lens with various beam angles available meet the different application requests.
- High-pressure die-casting aluminum fixtures with super clear 5mm tempered glass provides high performance of transmittance and excellent impact resistance.
- DMX control on color temperature and brightness.



IK08



IP66



UV Proof



Salt-spray Test




High & low Temp. Test


Product parameters

Product Code	YGTL325
Input Power	3W/6W/12W/18W/48W/72W/120W/180W/240W
Rated Voltage	100-240V
Frequency	50/60Hz
Power Factor	>0.9
Light Efficiency	80 lm/W
Lighting Angle	4° / 10° / 15° / 30° / 60° / 90°
Color Temp.	3000K/4000K/5000K/5700K/RGB/RGBW
CRI	>70
Operating Temp.	-20℃~+45℃
IP Grade	IP66
Optional Control	DMX


Dimensions

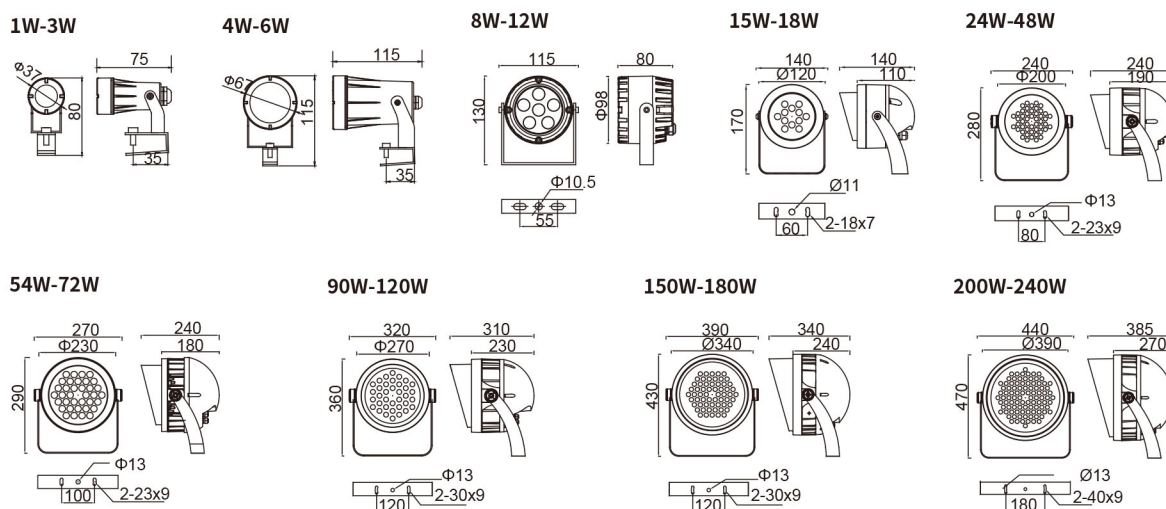

Distribution

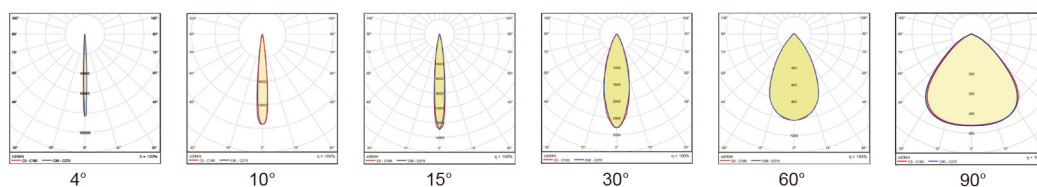

DETAILS

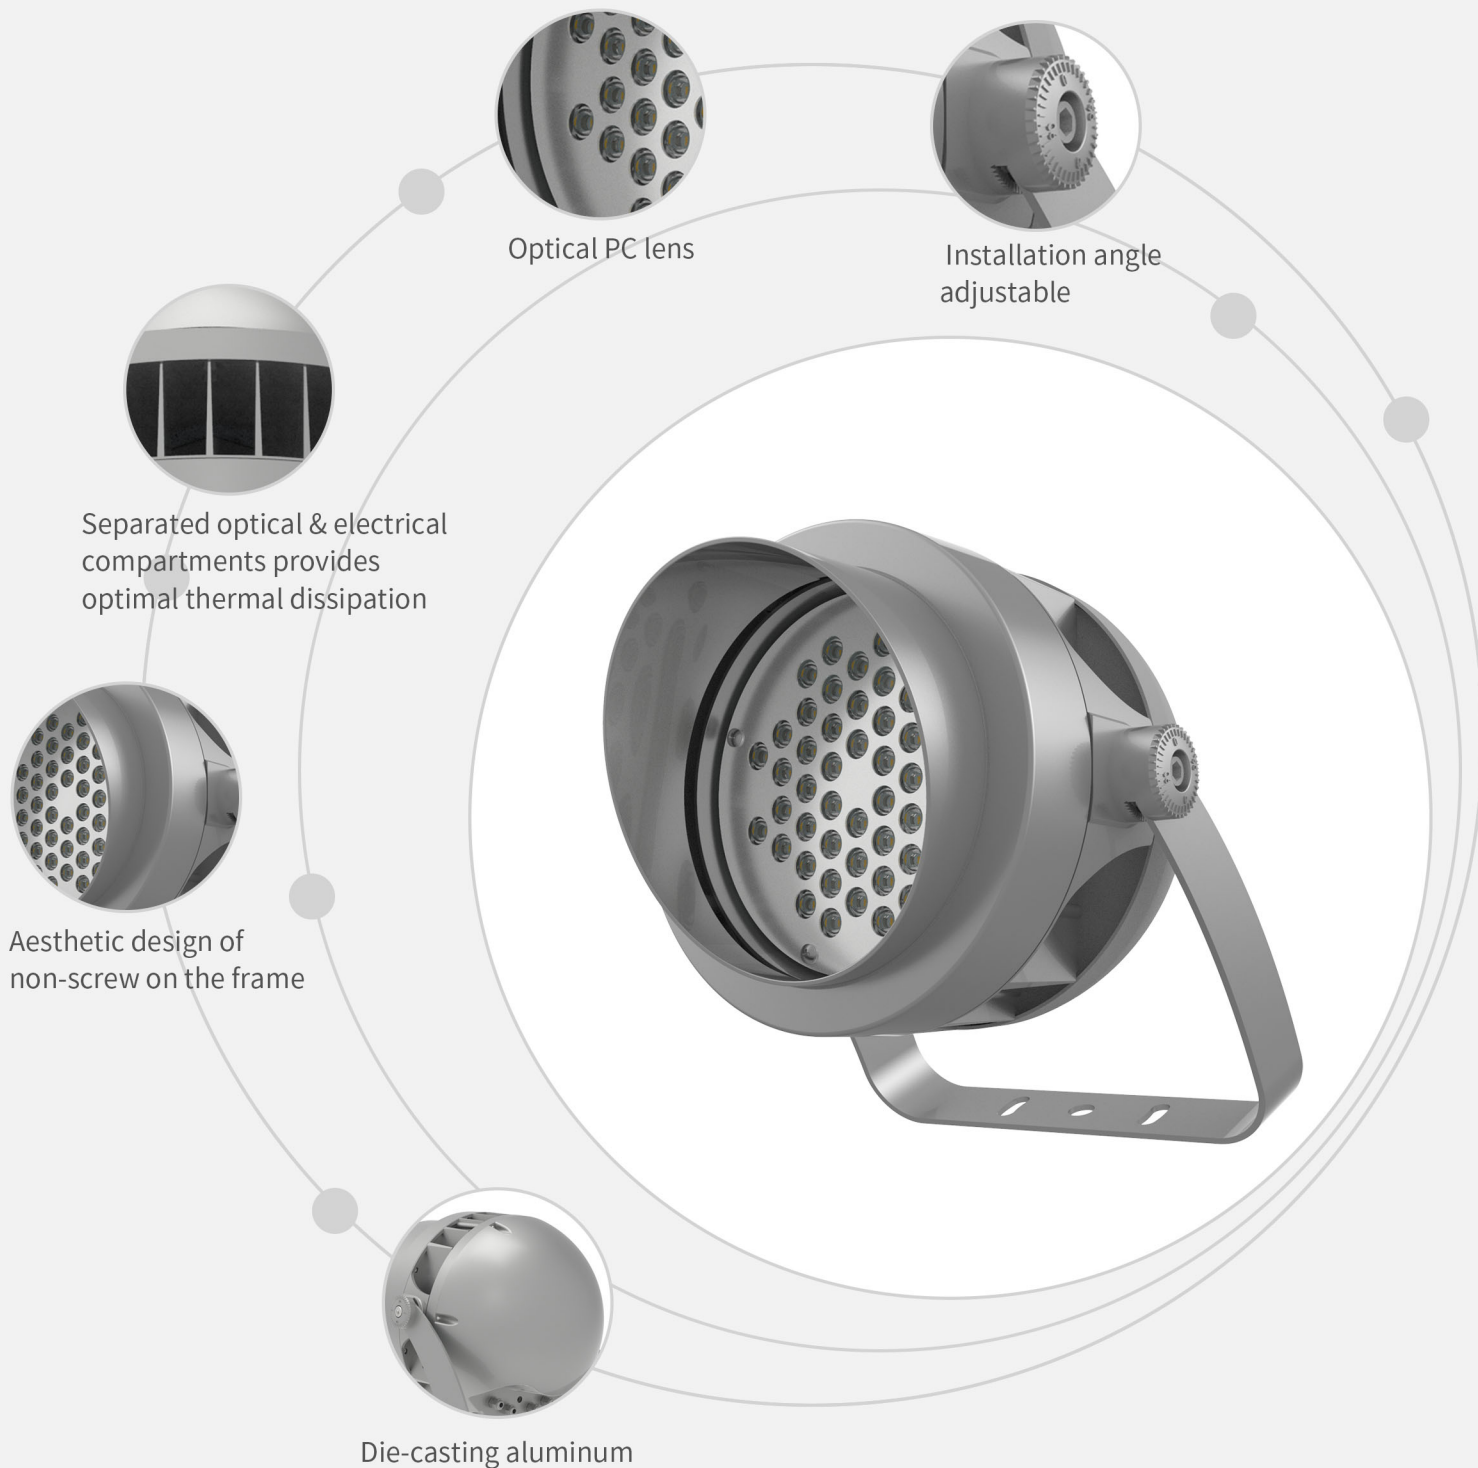

APPLICATIONS



Bridge
lighting



Façade
lighting



Landscape
lighting

