
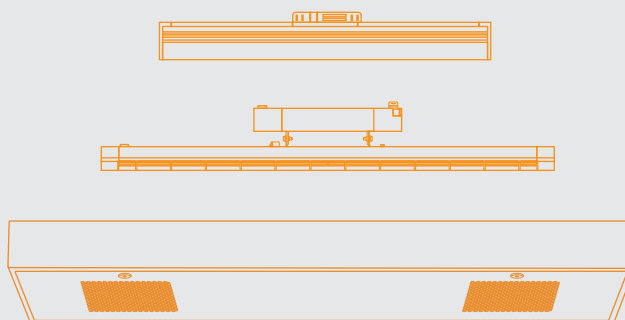


LED | SHINING ELECTRONIC CO.,LTD.
LIGHTING CATALOG

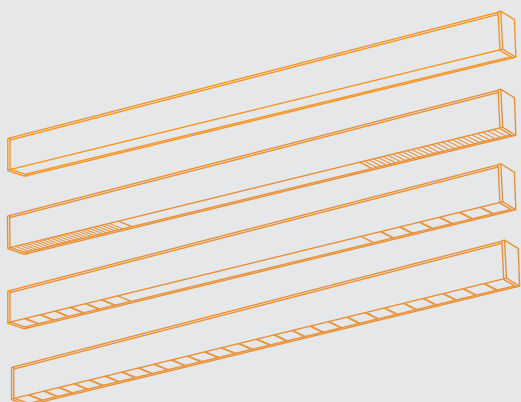

SHINING ELECTRONIC CO.,LTD.

ABOUT SHINING

COMPANY OVERVIEW

Shining Electronic Co., Ltd was established in 2001. We have a long experience in lighting products manufacturing. Our main products are 1. Panel Light; 2. Air Purifier; 3. Downlight; 4. Spotlight; 5. Cabinet Light; 6. Magnetic Track Light; 7. Linear Light; 8. School Light; 9. Ceiling Light; 10. High Bay.

Up to now, our factory base has 30,000 square meters with more than 300 employees work in our factory, including 20 administrative and professional engineers.

We own the most advanced testing equipment as well as the first class automatic production lines.

We have our quality control practices and procedures which embodied in the strict product quality control management, to ensure that each product delivered to customer have the same high quality.

Our customers are widely distributed around the world such as Europe, Asia, North America, South America, Middle-Asia etc. gained wide acclaim and recognition from customers.



ABOUT SHINING

QUALITY CONTROL PROCESS



Testing Records



Plugging Line



Package




IPQC-Welding

QUALITY CONTROL EQUIPMENT



Photoelectric Parameter



IES Test Darkroom



Oven Testing



AOI

PRODUCTION LINE PROFILE



SMT



Driver Assembling



Plugging Line



Aging Line



Laser Cutting



Stamping Workshop



Bending Machine



Assembly Line



Tunnel Drying Room



Powder Spraying System



Product Warehouse



Incoming Warehouse

HIGH-TECH ENTERPRISE



The image displays two ISO 9001:2015 certification certificates. The left certificate is for Zhejiang Tai-G Photoelectric technology Co., Ltd., and the right certificate is for Zhejiang Taisheng Optoelectronic Technology Co., Ltd. Both certificates are issued by Intertek and feature the company logos and the ISO 9001:2015 standard logo. The certificates are presented in a side-by-side comparison, highlighting the differences in the company names and logos.

CERTIFICATION



The image displays four patent certificates for the invention "农业机械" (Agricultural Machine), arranged in a 2x2 grid. Each certificate is issued by the State Intellectual Property Administration (SIPO) and features the SIPO logo and the Great Seal of the People's Republic of China.

- Top Left: Invention Patent Certificate (发明专利证书)**
Patent No.: ZL 2014 1 0000000.0
Applicant: 申请人: 中国农业银行 (Agricultural Bank of China)
Inventor: 发明人: 李向东 (Li Xiangdong)
Patentee: 专利权人: 中国农业银行 (Agricultural Bank of China)
IPC Class: A01D 33/00 (2006.01)
Filing Date: 申请日期: 2014年01月01日
Priority Date: 优先权日期: 2014年01月01日
Abstract: 摘要: 本发明公开了一种农业机械, 包括机架、动力装置、传动装置、作业部件等, 用于农田作业。
- Top Right: Utility Model Patent Certificate (实用新型专利证书)**
Patent No.: ZL 2014 2 0000000.0
Applicant: 申请人: 中国农业银行 (Agricultural Bank of China)
Inventor: 发明人: 李向东 (Li Xiangdong)
Patentee: 专利权人: 中国农业银行 (Agricultural Bank of China)
IPC Class: A01D 33/00 (2006.01)
Filing Date: 申请日期: 2014年01月01日
Priority Date: 优先权日期: 2014年01月01日
Abstract: 摘要: 本实用新型公开了一种农业机械, 包括机架、动力装置、传动装置、作业部件等, 用于农田作业。
- Bottom Left: Invention Patent Certificate (发明专利证书)**
Patent No.: ZL 2014 1 0000000.0
Applicant: 申请人: 中国农业银行 (Agricultural Bank of China)
Inventor: 发明人: 李向东 (Li Xiangdong)
Patentee: 专利权人: 中国农业银行 (Agricultural Bank of China)
IPC Class: A01D 33/00 (2006.01)
Filing Date: 申请日期: 2014年01月01日
Priority Date: 优先权日期: 2014年01月01日
Abstract: 摘要: 本发明公开了一种农业机械, 包括机架、动力装置、传动装置、作业部件等, 用于农田作业。
- Bottom Right: Utility Model Patent Certificate (实用新型专利证书)**
Patent No.: ZL 2014 2 0000000.0
Applicant: 申请人: 中国农业银行 (Agricultural Bank of China)
Inventor: 发明人: 李向东 (Li Xiangdong)
Patentee: 专利权人: 中国农业银行 (Agricultural Bank of China)
IPC Class: A01D 33/00 (2006.01)
Filing Date: 申请日期: 2014年01月01日
Priority Date: 优先权日期: 2014年01月01日
Abstract: 摘要: 本实用新型公开了一种农业机械, 包括机架、动力装置、传动装置、作业部件等, 用于农田作业。

PHOTO INDEX

Downlight P08-P32	SEC-L-DL192  P09	SEC-L-DL248  P10	SEC-L-DL260  P11	SEC-L-DL261  P12-P13	SEC-L-DL262-A  P14
SEC-L-DL262-B  P15	SEC-L-DL262-C  P16	SEC-L-DL262-D  P17	SEC-L-DL262-E-M  P18	SEC-L-DL262-N  P19	SEC-L-DL264  P20
SEC-L-DL265  P21-P22	SEC-L-DL267  P23	SEC-L-DL269  P24	SEC-L-DL270  P25	SEC-L-DL272  P26	SEC-L-DL273  P27
SEC-L-DL277  P28	SEC-L-DL279  P29	SEC-L-SL209  P30	SEC-L-SL211  P31	SEC-E-SL214  P32	

Linear system P33-P55	SEC-L-LL133  P34	SEC-L-LL166  P35	SEC-L-LL170  P36	SEC-L-LL188  P37	SEC-L-LL189  P38
SEC-L-LL192  P39	SEC-L-LL193  P40	SEC-L-LL195  P41	SEC-L-LL197  P42	SEC-L-LL198  P43	SEC-L-LL199  P44
SEC-L-LL200  P45	SEC-L-LL202  P46	SEC-L-LL203  P47	SEC-L-LL207  P48	SEC-L-LL209  P49	SEC-L-LL210  P50

PHOTO INDEX


SEC-L-LL211  P51	SEC-L-LL212  P52	SEC-L-LL213  P53-P54	SEC-L-CG237  P55		
Track light ≡≡≡ P56-P61	SEC-L-DG122  P57-P58	SEC-L-LL205  P59	SEC-L-LL208  P60	SEC-L-PL245  P61	
Panel light ≡≡≡ P62-P98	SEC-L-GL121  P63	SEC-L-GL124  P64	SEC-L-GL133  P65	SEC-L-PL100  P66	
SEC-L-PL108  P67	SEC-L-PL111  P68	SEC-L-PL122  P69	SEC-L-PL138  P70	SEC-L-PL140  P71	SEC-L-PL165  P72
SEC-L-PL174  P73	SEC-L-PL187  P74	SEC-L-PL203  P75	SEC-L-PL206  P76	SEC-L-PL208  P77	SEC-L-PL211  P78
SEC-L-PL217  P79	SEC-L-PL219  P80	SEC-L-PL220  P81	SEC-L-PL222  P82	SEC-L-PL223  P83	SEC-L-PL225  P84
SEC-L-PL227  P85	SEC-L-PL228  P86	SEC-L-PL232  P87	SEC-L-PL233  P88	SEC-L-PL234  P89	SEC-L-PL235  P90

PHOTO INDEX

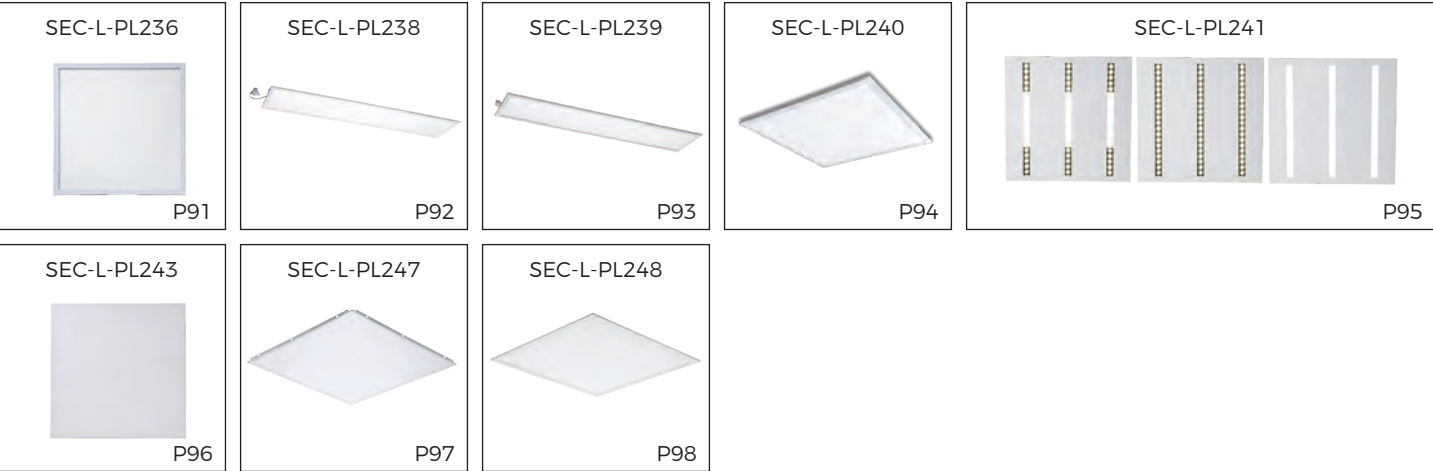


PHOTO INDEX

Accessory

 P118-P120

SEC-E-PL224



P119

SEC-L-EL124



P120

High bay

 P121-P124

SEC-L-GD119



P122

SEC-L-GD120



P123

SEC-L-GD131



P124



DOWNLIGHT



3CCT IP44 DOWNLIGHT

5W


SEC-L-DL192



Features

- 3CCT in one lamp, saving stock.
- Using PBT material housing, excellent insulation and heat dissipation.
- Opal PC diffuser, soft and uniform light.
- IP44 waterproof design.


Drawing

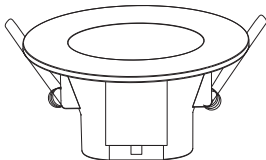

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
5W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.5	Ø 85x48mm

Details

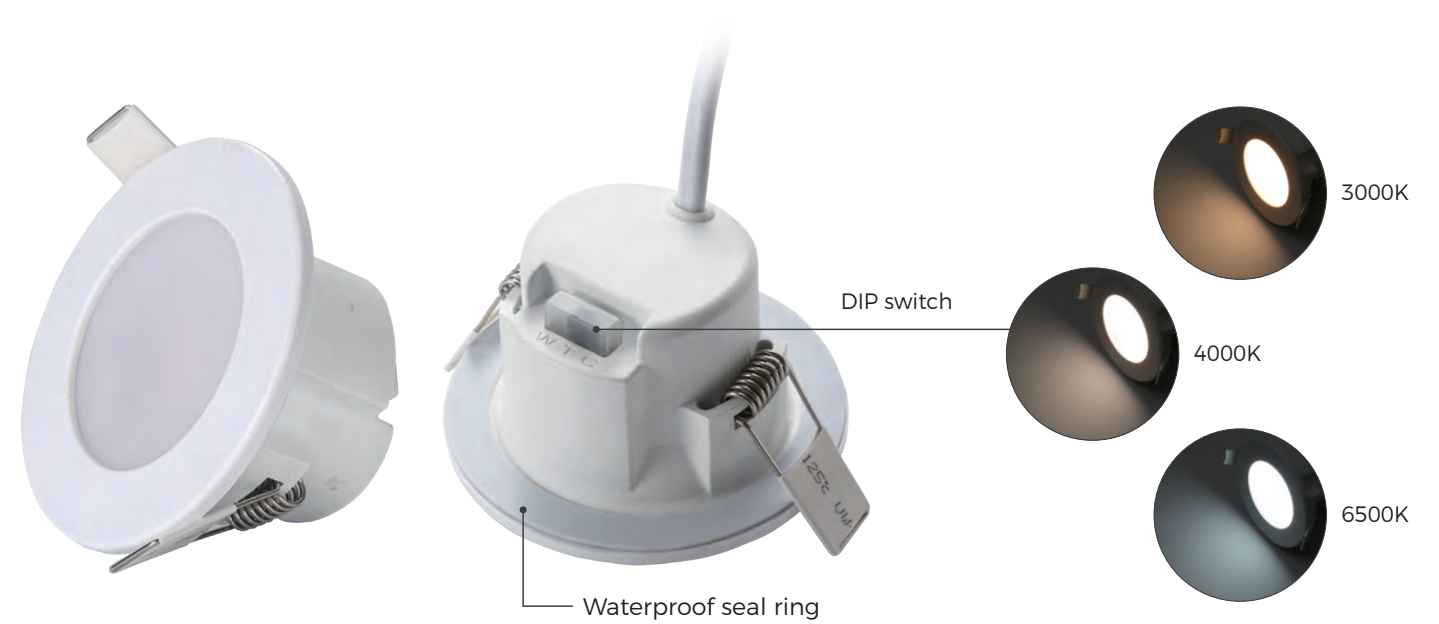

2 IN 1 ULTRA-THIN DOWNLIGHTS

7W / 10W / 15W


SEC-L-DL248



Features

- The integrated design of two ways of Installation. Surface mounted 1.8cm, Recessed 0.9cm.
- Single CCT or CCT switchable models optional for customers.
- Optional Color Trim: White, Black, Chrome, Bronze, Nickle
- Built-in driver, Easy and convenient wiring.
- Good quality LGP and diffuser plate.


Drawing

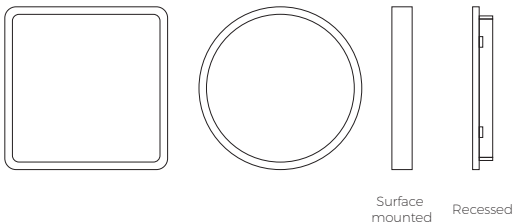

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
7W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.5	Ø 120x18mm
10W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.5	Ø 170x18mm
15W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.5	Ø 225x18mm
7W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.5	120x120x18mm
10W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.5	170x170x18mm
15W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.5	225x225x18mm

Details

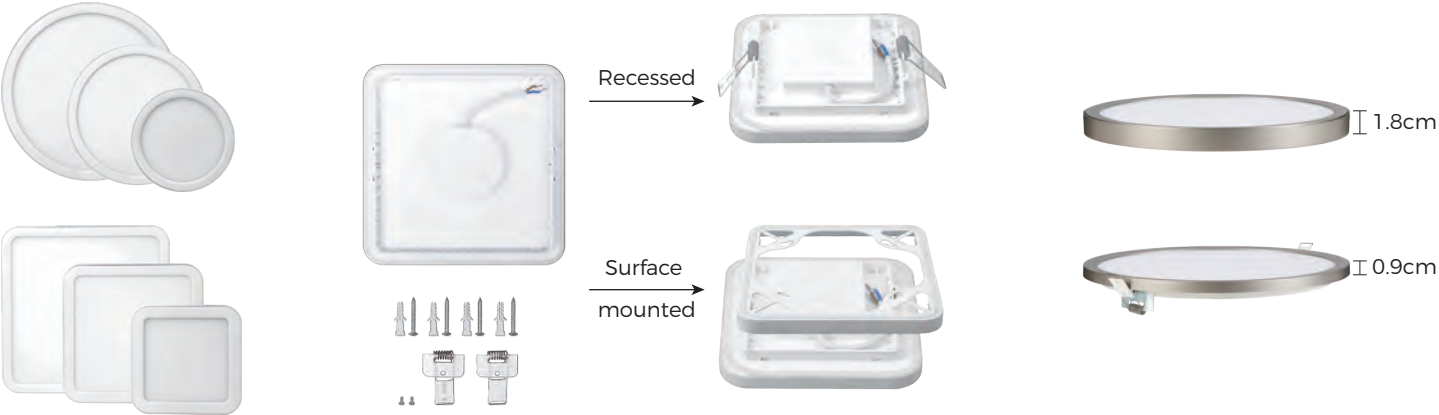

HIGH POWER LED DOWNLIGHT

7W / 15W / 20W / 30W / 40W / 50W

SEC-L-DL260



PF
>0.5

PF
>0.9


60°

5
YEARS
WARRANTY

Features

- Reflective cup plated with mirror aluminum, high reflectivity.
- White reflective bowl, protect your eyes.
- Anti-glared diffuser, unique narrow frame design.
- High level CREE COB lamp & LIFUD driver.
- High-transparency soft light panel.
- Die-cast aluminum shell + commercial spring.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size	Cut out Size
7W	AC220-240V	3500/4500K/6500K	65lm/W	> 80	> 0.5	Ø 92x53mm	Ø 75mm
15W	AC220-240V	3500/4500K/6500K	80lm/W	> 80	> 0.5	Ø 135x66mm	Ø 115mm
20W	AC220-240V	3500/4500K/6500K	80lm/W	> 80	> 0.9	Ø 135x66mm	Ø 115mm
20W	AC220-240V	3500/4500K/6500K	85lm/W	> 80	> 0.9	Ø 190x90mm	Ø 165mm
30W	AC220-240V	3500/4500K/6500K	85lm/W	> 80	> 0.9	Ø 190x90mm	Ø 165mm
30W	AC220-240V	3500/4500K/6500K	95lm/W	> 80	> 0.9	Ø 224x98mm	Ø 195mm
40W	AC220-240V	3500/4500K/6500K	95lm/W	> 80	> 0.9	Ø 224x98mm	Ø 195mm
50W	AC220-240V	3500/4500K/6500K	95lm/W	> 80	> 0.9	Ø 224x98mm	Ø 195mm

Details



2 IN 1 DOB ULTRA-THIN BACKLIT PANEL LIGHT

5W / 9W / 12W / 18W / 24W


SEC-L-DL261



Features

- DOB integrated design, without screw design, compact structure.
- Intelligent constant current, over temperature, short circuit open circuit protection.
- High light effect lamp bead, no stroboscopic, bottom luminous design.
- IP20 and IP54 waterproof grades are optional.
- In line with the EU new ERP standard, the whole lamp three levels of light effect is optional 85/100/120lm/W.
- Independent mounting frame, surface mounted, recessed, easy installation.
- IP20/IP54 junction box with built-in fuse to protect the lamp from damage.
- Multi-color face frame available: White / Silver / Golden.

Drawing

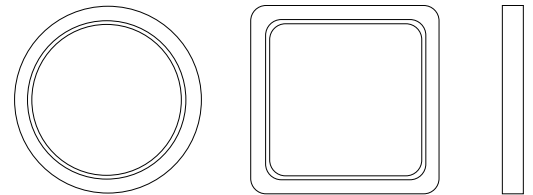

Details



2 IN 1 DOB ULTRA-THIN BACKLIT PANEL LIGHT

5W / 9W / 12W / 18W / 24W

SEC-L-DL261

Parameter



Embedded Installation

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size	Cut out Size
5W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	Ø 95x26mm	Ø 75-90mm
9W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	Ø 120x26mm	Ø 90-110mm
12W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	Ø 145x26mm	Ø 120-135mm
18W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	Ø 170x26mm	Ø 140-160mm
24W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	Ø 220x26mm	Ø 190-210mm



Embedded Installation

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size	Cut out Size
5W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	95x95x26mm	75-90mm
9W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	120x120x26mm	90-110mm
12W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	145x145x26mm	120-135mm
18W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	170x170x26mm	140-160mm
24W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	220x220x26mm	190-210mm



Surface Mounting

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
9W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	Ø 120x38mm
12W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	Ø 145x38mm
18W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	Ø 170x38mm
24W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	Ø 220x38mm



Surface Mounting

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
9W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	120x120x38mm
12W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	145x145x38mm
18W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	170x170x38mm
24W	AC170-260V	3500/4500K/6500K	85-120lm/W	> 80	> 0.7	220x220x38mm

PLASTIC FRAME FOR GU10 LAMP/MODULE

5-10W


SEC-L-DL262-A



Features

- Surface mounted round downlights, no trepanning, easy to install, universal.
- PC material, lighter and thinner, strong and not easy to crack.
- The matching inner ring can be plated in various colors, simple and beautiful.
- It can be used with various light sources such as, MR16, GU10, modules, etc.
- The light source is easily replaceable, environmental friendly simple.
- Suitable for many occasions, Living room, Corridor, Bedroom, Hall, Shop.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
5-10W	AC220-240V	3000K/4000K/6000K	90lm/W	> 80	> 0.5	Ø 72x103mm

Details



PLASTIC FRAME FOR GU10 LAMP/MODULE

5-10W


SEC-L-DL262-B



Features

- Surface mounted square downlights, no trepanning, easy to install, universal.
- PC material, lighter and thinner, strong and not easy to crack.
- The matching inner ring can be plated in various colors, simple and beautiful.
- It can be used with various light sources such as, MR16, GU10, modules, etc.
- The light source is easily replaceable, environmental friendly simple.
- Suitable for many occasions, Living room, Corridor, Bedroom, Hall, Shop.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
5-10W	AC220-240V	3000K/4000K/6000K	90lm/W	> 80	> 0.5	76x76x103mm

Details

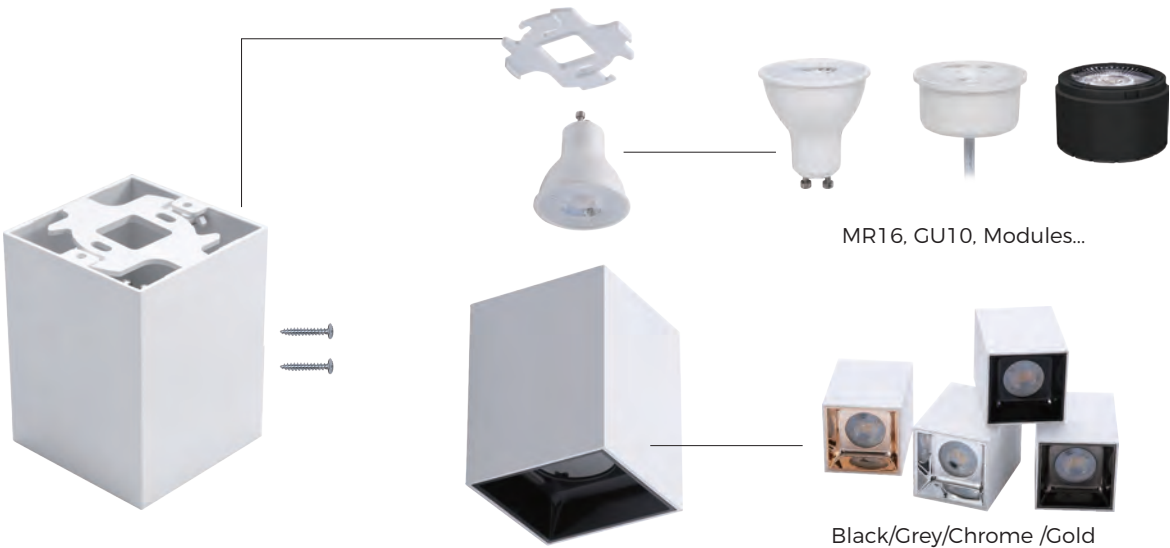

PLASTIC FRAME FOR GU10 LAMP/MODULE

5-10W


SEC-L-DL262-C



Features

- Recessed downlights, rotatable inner ring.
- PC material, lighter and thinner, strong and not easy to crack.
- The matching inner ring can be plated in various colors, simple and beautiful.
- It can be used with various light sources such as, MR16, GU10, modules, etc.
- The light source is easily replaceable, environmental friendly simple.
- Suitable for many occasions, Living room, Corridor, Bedroom, Hall, Shop.

Drawing

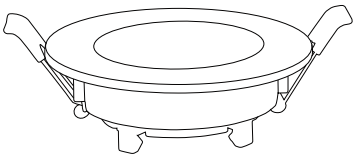

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size	Cut out Size
5-10W	AC220-240V	3000K/4000K/6000K	90lm/W	> 80	> 0.5	Ø 90x25mm	Ø 75mm


Details



PLASTIC FRAME FOR GU10 LAMP/MODULE

5-10W


SEC-L-DL262-D

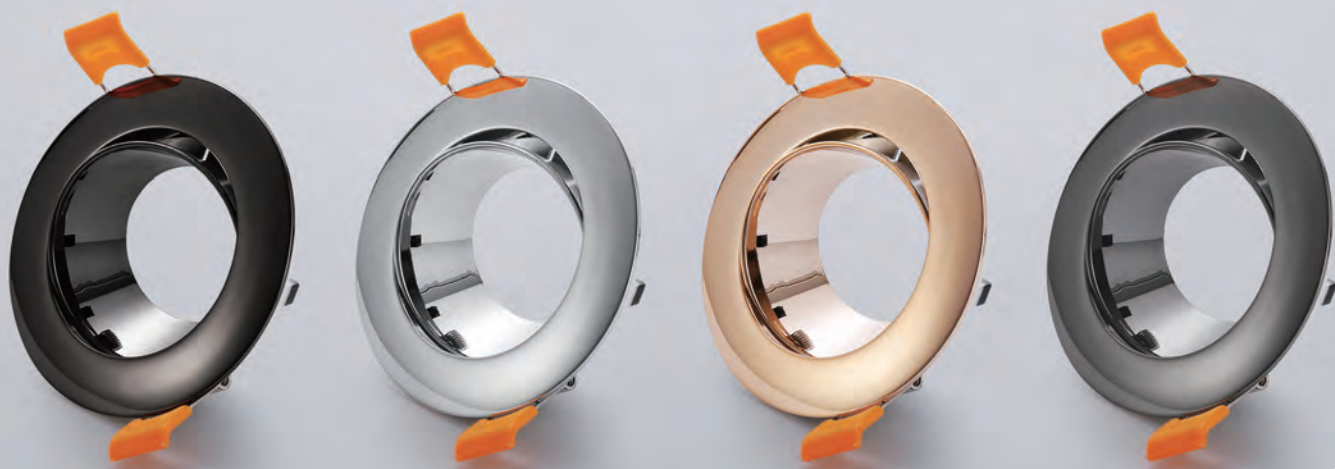

Features

- Recessed downlights, rotatable inner ring.
- PC material, lighter and thinner, strong and not easy to crack.
- The matching inner ring can be plated in various colors, simple and beautiful.
- It can be used with various light sources such as, MR16, GU10, modules, etc.
- The light source is easily replaceable, environmental friendly simple.
- Suitable for many occasions, Living room, Corridor, Bedroom, Hall, Shop.

Drawing

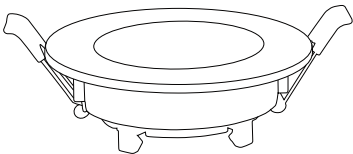

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size	Cut out Size
5-10W	AC220-240V	3000K/4000K/6000K	90lm/W	> 80	> 0.5	Ø 90x25mm	Ø 75mm


Details



PLASTIC FRAME FOR GU10 LAMP/MODULE

5-10W


SEC-L-DL262-E~M

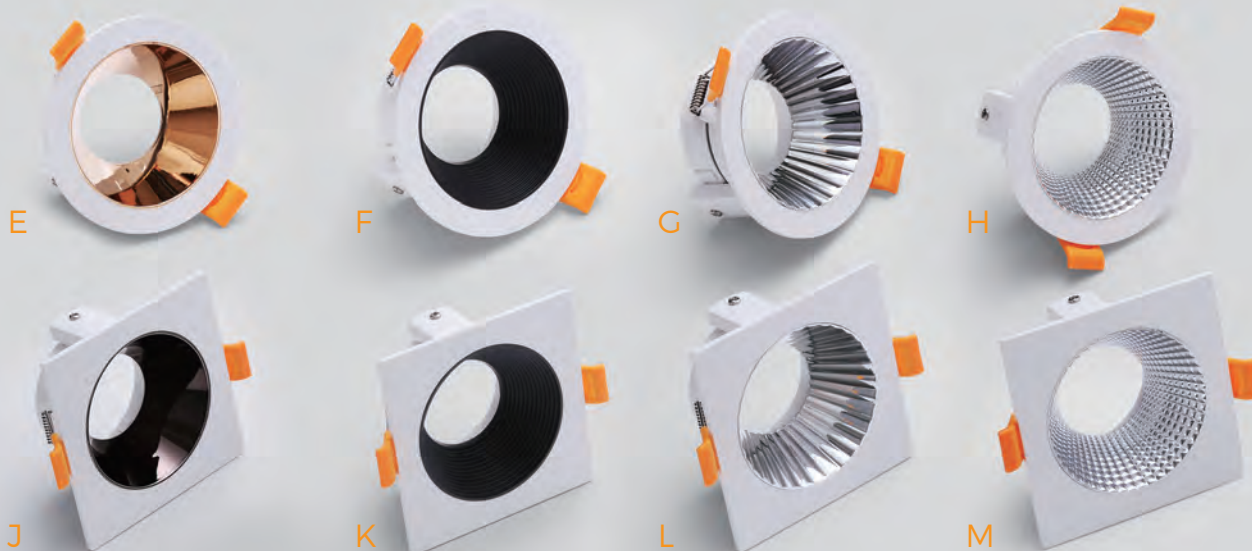

Features

- Recessed square/circular anti-glare downlight, inner ring with horizontal stripes.
- PC material, lighter and thinner, strong and not easy to crack.
- The matching inner ring can be plated in various colors, simple and beautiful.
- It can be used with various light sources such as, MR16, GU10, modules, etc.
- The light source is easily replaceable, environmental friendly simple.
- Suitable for many occasions, Living room, Corridor, Bedroom, Hall, Shop.

Drawing

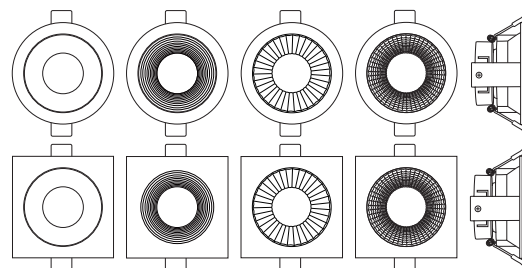

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size	Cut out Size
5-10W	AC220-240V	3000K/4000K/6000K	90lm/W	> 80	> 0.5	Ø 86x42mm	Ø 75mm

Details



PLASTIC FRAME FOR GU10 LAMP/MODULE

5-10W


SEC-L-DL262-N



Features

- Grille spot lights, with checked inner ring.
- PC material, lighter and thinner, strong and not easy to crack.
- The matching inner ring can be plated in various colors, simple and beautiful.
- It can be used with various light sources such as, MR16, GU10, modules, etc.
- The light source is easily replaceable, environmental friendly simple.
- Suitable for many occasions, Living room, Corridor, Bedroom, Hall, Shop.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size	Cut out Size
1x 5-10W	AC220-240V	3000K/4000K/6000K	90lm/W	> 80	> 0.5	92x92x25mm	75x75mm
2x 5-10W	AC220-240V	3000K/4000K/6000K	90lm/W	> 80	> 0.5	172x92x28mm	150x75mm
3x 5-10W	AC220-240V	3000K/4000K/6000K	90lm/W	> 80	> 0.5	255x92x28mm	225x75mm

Details



4CCT SELECTABLE LED DOWNLIGHT

7W


SEC-L-DL264



Features

- Die-cast aluminum body, PC frame and cover, fire-rated materials.
- Two kinds of bezels available, multiple colors available.
- Built-in non-isolated driver, compact design.
- 2700K-3000K-4000K-6500K 4CCT Selectable + Triac dimmable with OSRAM LED.
- IP65 waterproof at front side, IP20 at back side.

Drawing

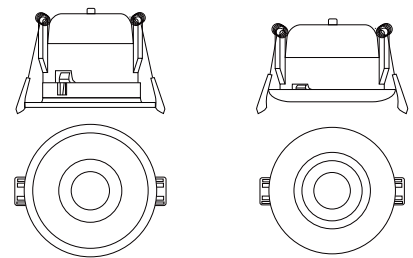

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
7W	AC220-240V	2700K-3000K-4000K-6500K 4CCT	80-90lm/W	> 80	> 0.9	Ø 85x48 / Ø 85x60mm

Details



DIP switch



IP65 seal ring

LED MODULAR DOWNLIGHT

7W / 9W / 12W


SEC-L-DL265



Features

- Modular lighting solution, more flexible for stock and projects, easy repairing.
- Bridgelux COB CRI>90.
- Lifud brand driver, no flicker, 5 years warranty.
- Matte white powder coating, anit-UV, 10 years fastness.
- Classic black and white color.
- Suitable for many occasions: Living room, Porch, Bedroom, Shop, Hotel.

Drawing

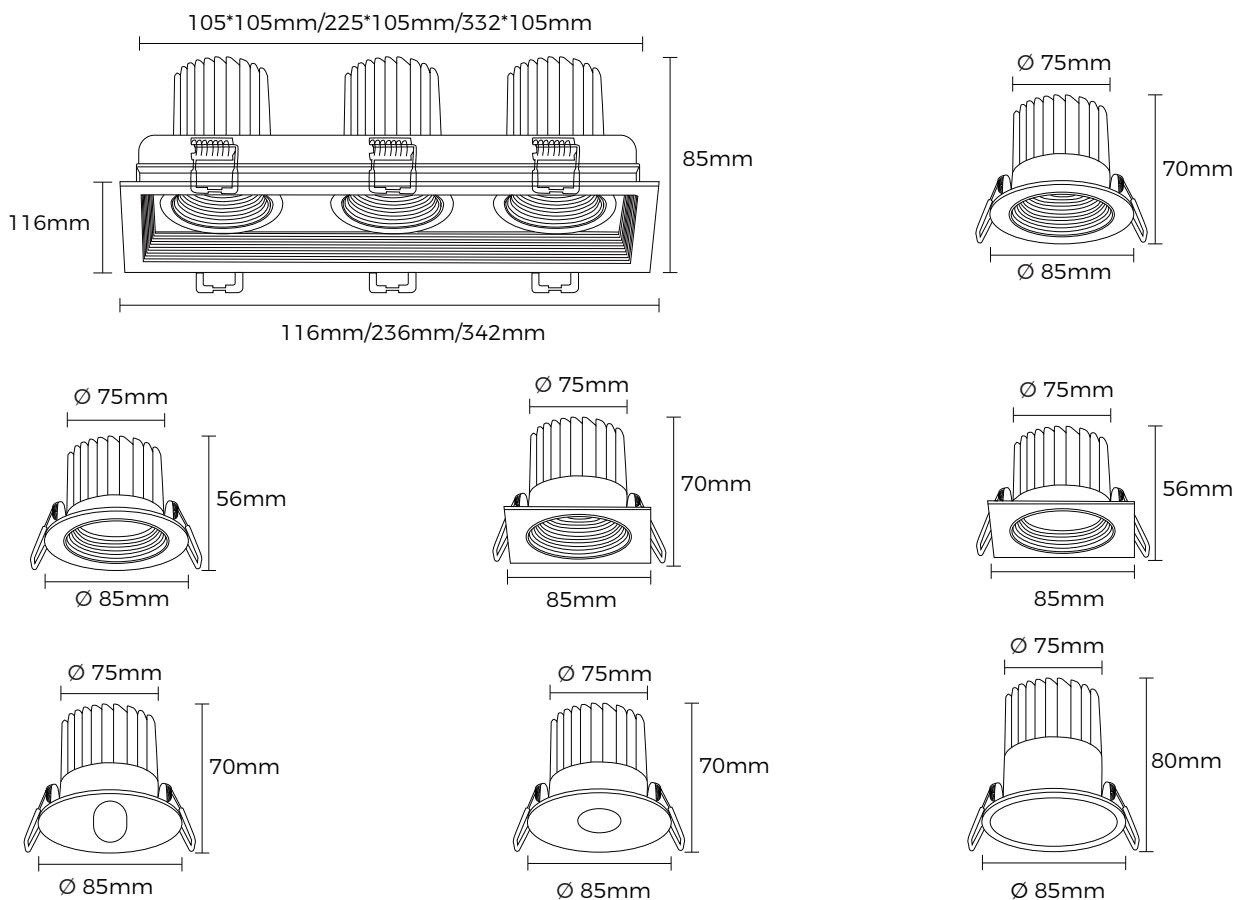

LED MODULAR DOWNLIGHT

7W / 9W / 12W

SEC-L-DL265

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF
7W / 9W / 12W	AC220-240V	3000K/4000K/6500K	80lm/W	> 90	> 0.5

Details



3CCT SLECTABLE LED DOWNLIGHT

8W


SEC-L-DL267



Features

- Two options are available, 3CCT selectable, 3CCTselectable + Triac dimmable.
- Luminous evenly, the light color is bright and soft.
- PA material, cost-effective.

Drawing

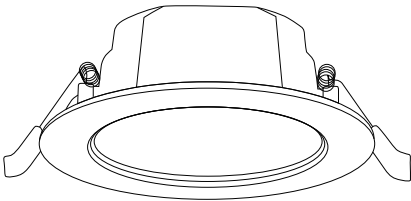

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size	Cut out Size
8W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.5	Ø 108x38mm	Ø 90mm

Details



ANTI-GLARE IP65 LED DOWNLIGHT

7W / 10W / 15W / 20W / 30W / 40W


SEC-L-DL269



Features

- IP65 waterproof, suitable for wet environment.
- Waterproof screw / rubber ring double protection.
- Deep reflector anti glare design, soft light effect, anti-glare.
- Efficient heat dissipation, high quality 5 Years warranty.

Drawing

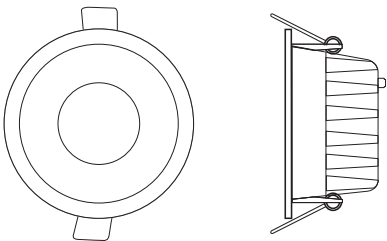

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size	Cut out Size
7W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.5	Ø 90x45mm	Ø 70mm
10W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.5	Ø 105x85mm	Ø 85mm
15W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.9	Ø 130x68mm	Ø 105mm
20W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.9	Ø 165x90mm	Ø 140mm
30W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.9	Ø 190x95mm	Ø 165mm
40W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.9	Ø 225x105mm	Ø 200mm

Details



DIRECTION ADJUSTABLE 3CCT LED DOWNLIGHT

40W


SEC-L-DL270



Features

- 3CCT selectable.
- Direction adjustable and rotatable.

Drawing

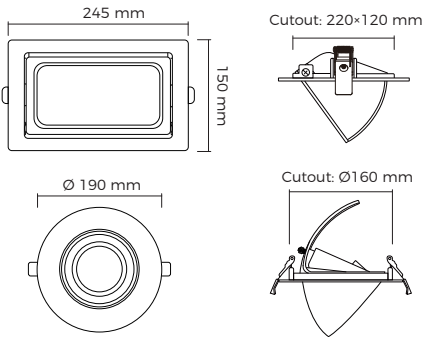

Parameter

Shape	Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	LED Chips	Beam Angle
Square	40W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.9	SMD2835	120°
Round	40W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.9	COB	36°

Details



3CCT Selectable

3CCT Selectable

3CCT LED MODULAR DOWNLIGHT

5W / 7W


SEC-L-DL272



Features

- 3 CCT adjustable in one light, good for stock.
- Module replacment from front side good for installation and maintainment.
- Recyling downlight surface, cost-effective and eco-friendly.
- Adjustable angle design, adjust left and right to change the irradiation direction.

Drawing

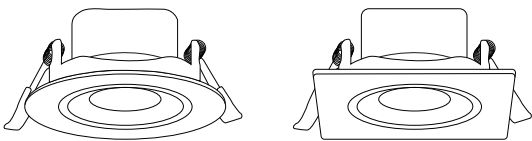

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size	Cut out Size
5W / 7W	AC220-240V	3000K-4000K-6000K 3CCT	90lm/W	> 80	> 0.5	Ø 90x46mm	Ø 75mm
5W / 7W	AC220-240V	3000K-4000K-6000K 3CCT	90lm/W	> 80	> 0.5	90x90x46mm	Ø 75mm

Details



SLIM AND NARROW FRAME 3CCT LED DOWNLIGHT

10W / 15W / 24W / 30W


SEC-L-DL273



Features

- Aluminum housing with good heat dissipation.
- Extremely narrow bezel design, simple and compact.
- Prismatic diffuser, soft light.
- 3 CCT selectable 3000K-4000K-6500K.
- Flicker free LIFUD driver, ERP approved.
- IP44 waterproof optional.

Drawing

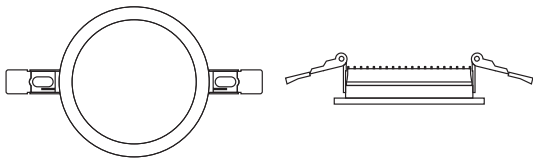

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size	Cutout
10W	AC220-240V	3000K-4000K-6500K 3CCT	80-90lm/W	> 80	> 0.5	Ø 95x35/95x95x35mm	Ø 90
15W	AC220-240V	3000K-4000K-6500K 3CCT	80-90lm/W	> 80	> 0.5	Ø 140x35/140x140x35mm	Ø 135
24W	AC220-240V	3000K-4000K-6500K 3CCT	80-90lm/W	> 80	> 0.5	Ø 170x35/170x170x35mm	Ø 165
30W	AC220-240V	3000K-4000K-6500K 3CCT	80-90lm/W	> 80	> 0.9	Ø 220x35/220x220x35mm	Ø 205

Details



3CCT + MICROWAVE SENSING LED DOWNLIGHT

9W / 12W / 18W / 24W


SEC-L-DL277



Features

- High end design with nice outlook.
- Recessed and surface mounting Intergrated, good for stock.
- Cut hole size adjustable, convenient for installation.
- 3CCT selectable.
- Mircowave sensing, more smart.

Drawing

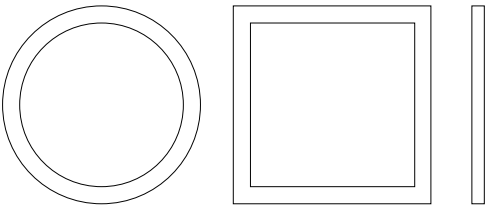

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	PF	Size(Round)	Size(Square)	Cut Hole
9W	AC100-265V	3000K-4000K-6000K 3CCT	90lm/W	> 0.9	Ø 155x20mm	155x155x20mm	Ø 55~130mm
12W	AC100-265V	3000K-4000K-6000K 3CCT	90lm/W	> 0.9	Ø 175x20mm	175x175x20mm	Ø 55~150mm
18W	AC100-265V	3000K-4000K-6000K 3CCT	90lm/W	> 0.9	Ø 225x20mm	225x225x20mm	Ø 55~200mm
24W	AC100-265V	3000K-4000K-6000K 3CCT	90lm/W	> 0.9	Ø 300x20mm	300x300x20mm	Ø 55~280mm

Details



IP65 LED MODULAR DOWNLIGHT

5W


SEC-L-DL279



Features

- Modular construction, easily replaceable round face ring, square face ring.
- 3 CCT in 1 lamp, saving much stock.
- Lens design, optional small angle, large angle illumination.
- Modular design allows for individual ordering of face rings.
- Product colors can be changed at will.
- Plastic material, high quality-price ratio.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size(Round)	Size(Square)	Cutout
5W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.5	Ø 85x30mm	90x90x30mm	Ø 75mm

Details




DALI DIMMING ANTI-GLARE LED SPOT LIGHT

10W / 14W / 20W

SEC-L-SL209



- Features
- DALI Driver dimming, it can be adapted to the DALI control system.
 - Realize scene control, pre-set multiple modes; or control lamps of different lines in groups.
 - Support scene control, group control and accurate control of a single lighting device.
 - Die-cast aluminum shell, good heat dissipation, long lifetime.
 - Ra>90 high color render, high lumen, 3 beam angle for choice

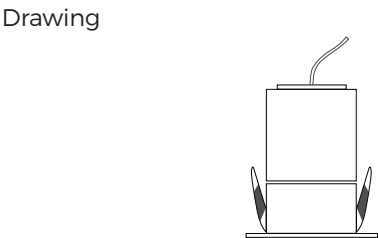

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size	Cutout
10W	AC220-240V	3000K/4000K/6500K	90lm/W	> 95	> 0.9	Ø 85x105mm	Ø 75
14W	AC220-240V	3000K/4000K/6500K	90lm/W	> 95	> 0.9	Ø 85x105mm	Ø 75
20W	AC220-240V	3000K/4000K/6500K	90lm/W	> 95	> 0.9	Ø 105x112mm	Ø 95

Details



3CCT AND DIMMABLE LED DOWNLIGHT

3W / 5W / 7W / 9W / 12W


SEC-L-SL211



Features

- Two options are available---1. CCT3 selectable 2. CCT3 selectable+Triac dimmable.
- Two beam angles-38°/60°.
- PA material, cost-effective.
- Driver built-in, with terminal block, easy to use.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size(Square)	Size(Round)	Cutout
3W	AC185-265V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	70x70x43mm	Ø 70x43mm	Ø 55-60
5W	AC185-265V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	90x90x42mm	Ø 90x42mm	Ø 70-75
7W	AC185-265V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	90x90x42mm	Ø 90x42mm	Ø 70-75
9W	AC185-265V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	118x118x52mm	Ø 118x52mm	Ø 90-95
12W	AC185-265V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	140x140x55mm	Ø 140x55mm	Ø110-115
5W	AC185-265V	3000K-4000K-6500K 3CCT	80-100lm/W	> 80	> 0.5	90x90x42mm	Ø 90x42mm	Ø 70-75
7W	AC185-265V	3000K-4000K-6500K 3CCT	80-100lm/W	> 80	> 0.5	90x90x42mm	Ø 90x42mm	Ø 70-75

Details

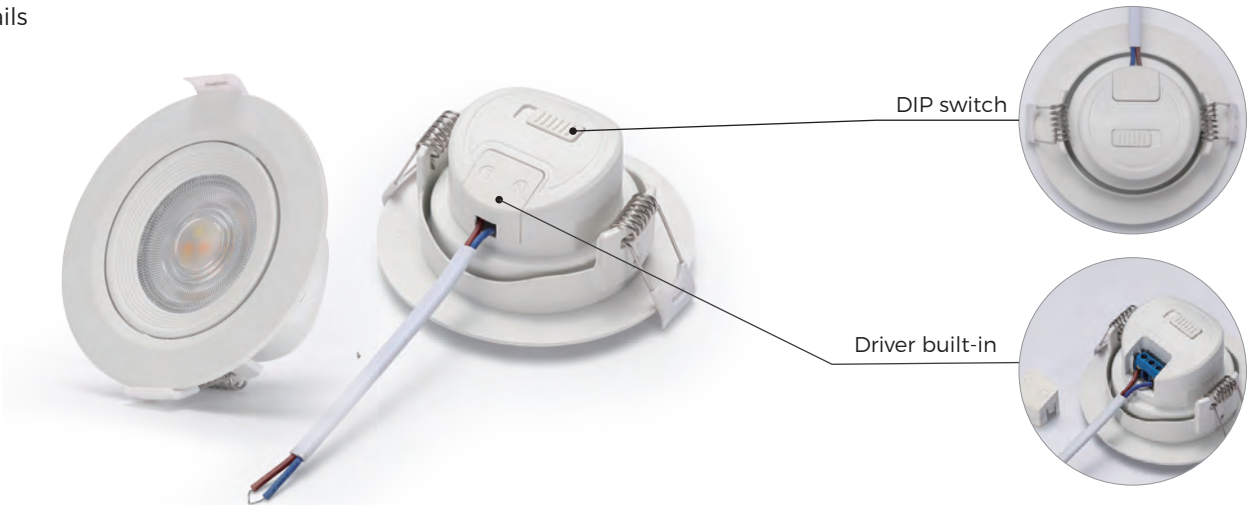

PLASTIC FRAME FOR GU10 MODULES

5-7W


SEC-E-SL214



Features

- Multiple combinations, anti-glare, None anti-glare, rotatable or none rotatable.
- A variety of colors are available, white, black, gold, silver or other combination color.
- New PC material, 150°C resistance.
- Cut out 75mm, it can be used with various light sources such as MR16, GU10, modules.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Cutout
5-7W	AC220-240V	3000K/4000K/6500K	90lm/W	> 80	> 0.5	Ø 75mm

Details





LINEAR SYSTEM



T4 LED FIXTURE

4W / 5W / 6W / 8W / 10W / 12W / 14W


SEC-L-LL133



Features

- Ultra-thin size, can be vertical and horizontal installed.
- Can be connected and linked with traditional T4 fluorescent fixture.
- Energy saving with long lifetime, saving up to 60% cost,economical.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
4W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	270x20x44mm
5W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	392x20x44mm
6W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	420x20x44mm
8W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	519x20x44mm
10W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	618x20x44mm
12W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	704x20x44mm
14W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	814x20x44mm

Details

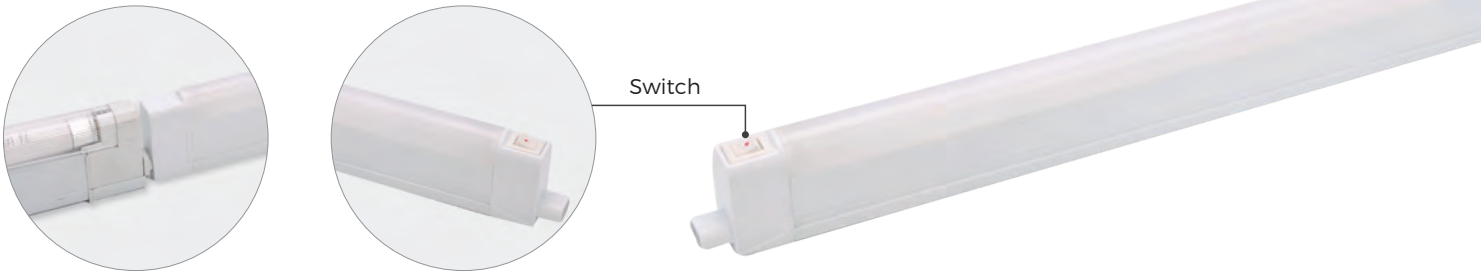

3CCT SELECTABLE T5 LINEAR FIXTURE

3W / 4W / 8W / 9W / 10W / 12W / 14W

SEC-L-LL166




120°

Features

- With slide switch to adjust color temperature and turning off the light.
- Direct connection.
- Can be connected T5 fixture directly.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
3W	AC100-240V	3000K-4000K-6000K 3CCT	80-100lm/W	> 80	> 0.5	236x22x30mm
4W	AC100-240V	3000K-4000K-6000K 3CCT	80-100lm/W	> 80	> 0.5	313x22x30mm
8W	AC100-240V	3000K-4000K-6000K 3CCT	80-100lm/W	> 80	> 0.5	573x22x30mm
9W	AC100-240V	3000K-4000K-6000K 3CCT	80-100lm/W	> 80	> 0.5	609x22x30mm
10W	AC100-240V	3000K-4000K-6000K 3CCT	80-100lm/W	> 80	> 0.5	873x22x30mm
12W	AC100-240V	3000K-4000K-6000K 3CCT	80-100lm/W	> 80	> 0.5	907x22x30mm
14W	AC100-240V	3000K-4000K-6000K 3CCT	80-100lm/W	> 80	> 0.5	1173x22x30mm

Details

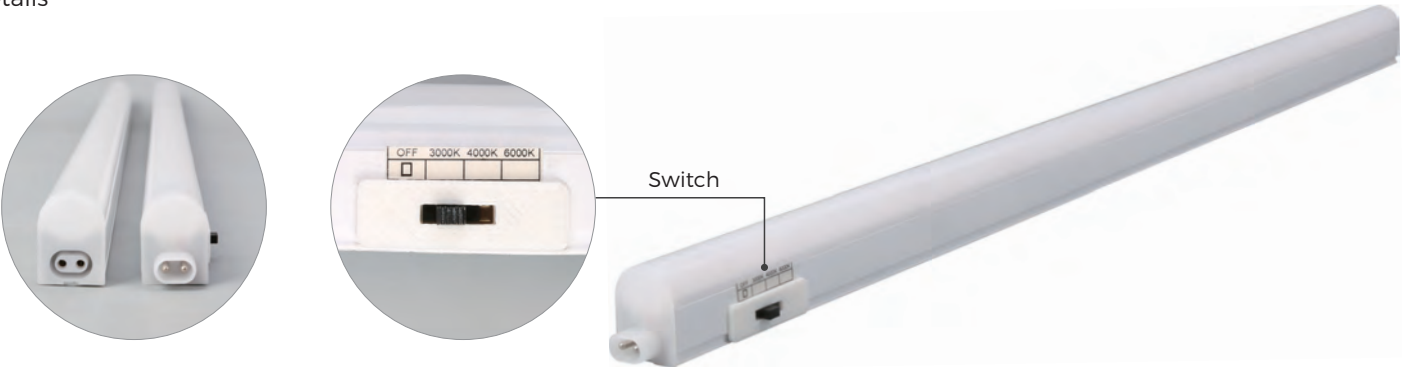

ANTI GLARE DIY LINEAR LIGHT

32W / 40W


SEC-L-LL170



Features

- A variety of connection accessories are available. It can be spliced into various shapes like building blocks.(Linear, Y-shaped, W-shaped, square, cross shaped, etc.)
- Lamps can be installed in series, both ends are equipped with quick installation connector, which is convenient for installation, reduce installation labor and cost.
- The diffuser cover has anti glare effect, UGR is not less than 19; reflector cover UGR < 16, completely anti glare, comfortable for eyes.
- Built in isolated driver, 5 years warranty; preferred by engineering projects.
- Using high quality, high brightness LED.
- Alumina treatment shell,more exquisite matt surface.

Drawing

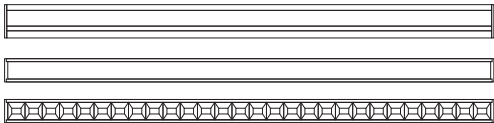

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
32W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	1131x50x76mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	1410x50x76mm

Details




Straight connector



Adjustable angle connector



Quick installation connector



Diffuser cover or reflector cover



Accessories



Built driver

INTEGRATED PC LED LINEAR FIXTURE CABINET LIGHT

4W / 5W / 6.5W / 8W

SEC-L-LL188



Features

- Integrated thickening profile, non-deforming.
- High quality LED chips, 100 lm/W good light effect.
- Built-in LED driver.
- PC diffuser with soft light, non-dazzling.
- Integrated with furnitures, screw installation.
- Mirror cabinet/wardrobe/cabinet, suitable for a variety of application scenarios.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
4W	AC220-240V	4000K	100lm/W	> 80	> 0.5	390x48.8x17.6mm
5W	AC220-240V	4000K	100lm/W	> 80	> 0.5	561x48.8x17.6mm
6.5W	AC220-240V	4000K	100lm/W	> 80	> 0.5	761x48.8x17.6mm
8W	AC220-240V	4000K	100lm/W	> 80	> 0.5	961x48.8x17.6mm

Details

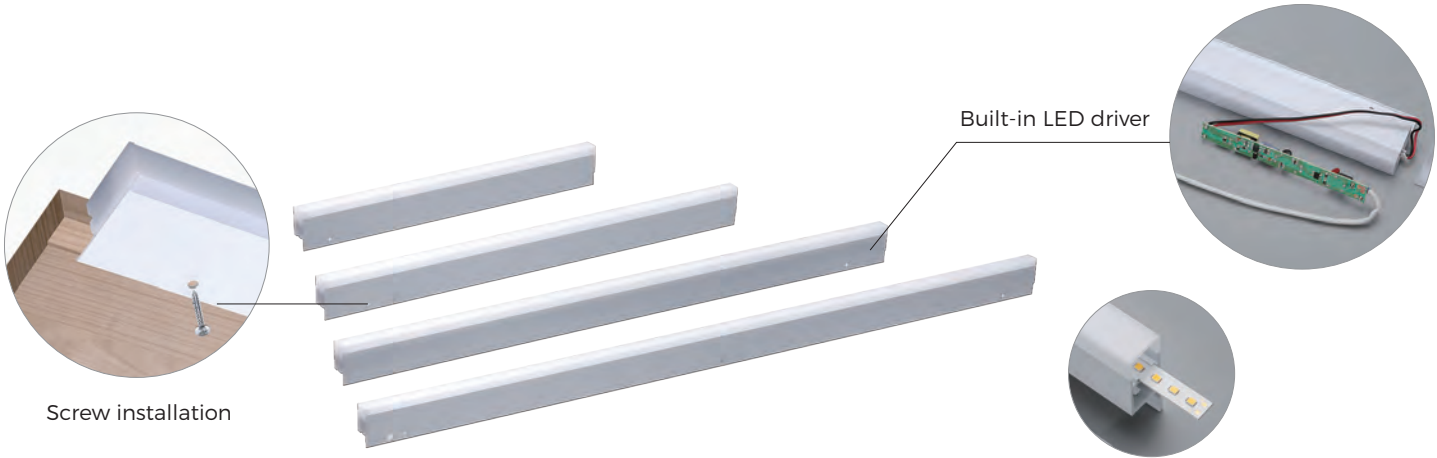

3CCT SELECTABLE T5 LED LINEAR FIXTURE

4W / 8W / 10W / 14W / 18W


SEC-L-LL189



Features

- Double-switch 3 CCT adjustabl, it is more convenient to use.
- The power switch and color temperature selection switch are independent.
- The quick-insertion series mode is adopted, and the lamps are tightly spliced.
- Corners need to be connected in series.
- Isolated electrical port, connect safely and tightly.



Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
4W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.5	313x22x30mm
8W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.5	573x22x30mm
10W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.5	873x22x30mm
14W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.5	1173x22x30mm
18W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.5	1473x22x30mm

Details

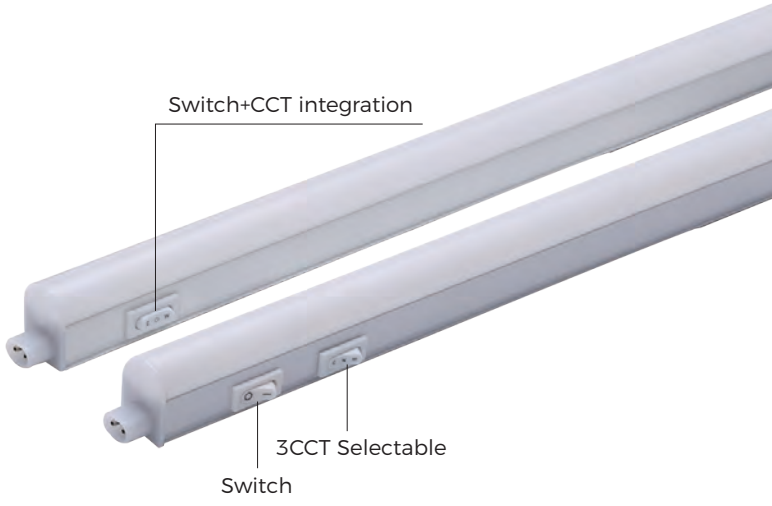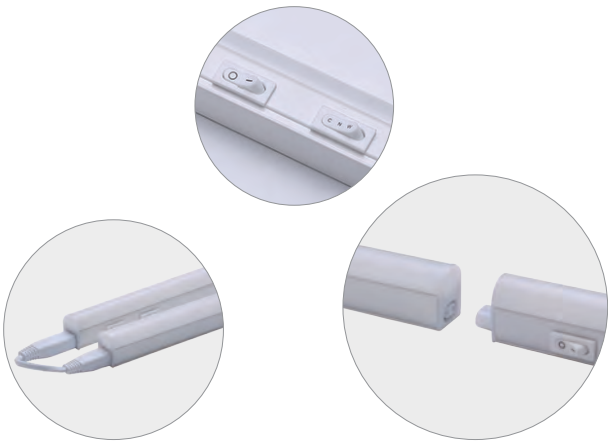

PIR SENSING T5 LED LINEAR FIXTURE

4W / 8W / 12W / 16W


SEC-L-LL192



Features

- PIR human body infrared sensor design, sensing people to light up.
- Infrared trigger 60 seconds bright, people walk and sleep automatically.
- Lamps can be connected in series, quick installation.
- Whole lamp PC material, stable quality, safe and reliable.
- Easy installation, two wiring methods, convenient wiring.
- Multiple sizes suitable for different scenarios.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
4W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	313x22x35mm
8W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	573x22x35mm
12W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	873x22x35mm
16W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	1173x22x35mm

Details



CRI95 ANTI-GLARE LED BLACKBORAD LIGHT

36W


SEC-L-LL193



Features

- Anti-glare/no blu-ray/full spectrum, protect students' eyesight.
- Single and double row lens for choice, double row lens can emit light in both directions, softer light, the downward light can illuminate the podium.
- Specially designed diffuse reflection grating, can see the light but not the lamp beads, good light quality, anti-glare.
- High-quality LED chip, precise LED display, make the light soft and high luminous efficiency.

Drawing

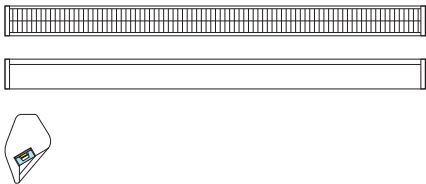


Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	Uniformity	SCDM	R9	PF	Size
36W	AC220-240V	5000K	90lm/W	> 95	> 80	< 3	> 95	> 0.9	1195x106x101mm

Details



Suspension mounting

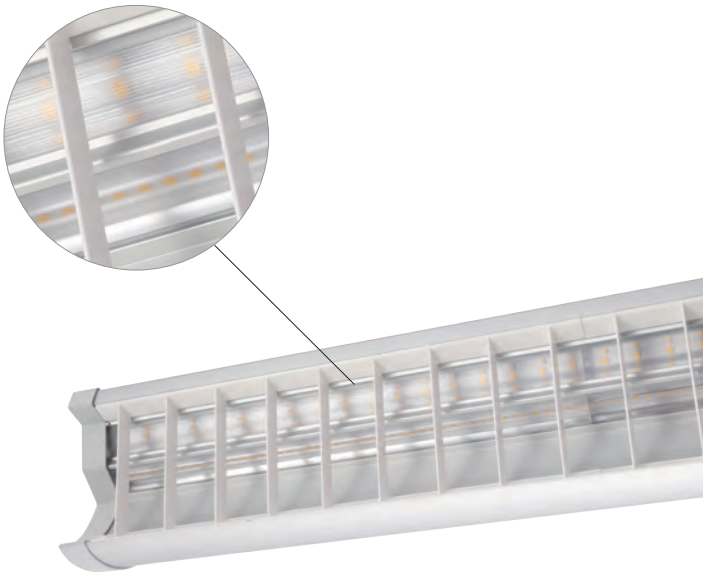

ECO LED BATTEN LIGHT

9W / 18W / 36W / 48W / 50W / 72W / 100W


SEC-L-LL195



Features

- High light efficiency, up to 100lm/W.
- With rhombus mirror cover, More upscale appearance.
- High voltage drive scheme, Cost-effective.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
9W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.7	300x75x25mm
18W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.7	600x75x25mm
36W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.7	900x75x25mm
48W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.7	1200x75x25mm
50W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.7	1200x65x24mm
72W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.7	1200x75x24mm
100W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.7	1200x100x24mm

Details



IP44 MIRROR LIGHT FOR BATHROOM

7W / 14W

SEC-L-LL197



Features

- Aluminum housing with PC diffuser.
- IP44 waterproof for bathroom application.
- Compact design with 280mm/540mm length options.
- Simple installation and easy wiring.



Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
7W	AC220-240V	3000K/4000K/6500K	90lm/W	> 80	> 0.5	280x38x55mm
14W	AC220-240V	3000K/4000K/6500K	90lm/W	> 80	> 0.5	540x38x55mm

Details

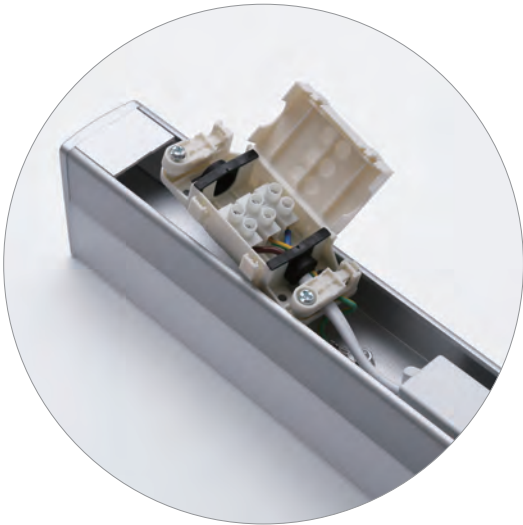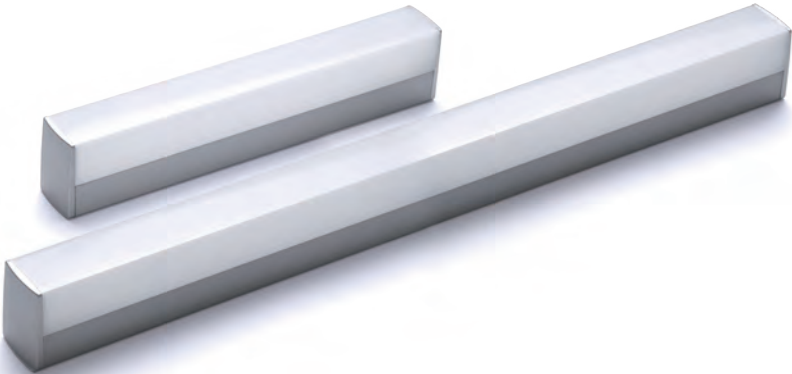

RECESSED LED LINEAR LIGHT

32W


SEC-L-LL198



Features

- Microprisma diffuser, UGR<19.
- Two sizes options, for different applications.
- More thickness aluminum profile housing, better heat dissipation and higher quality.
- Integrated end caps design, not light leak.
- High quality LED driver, without flicker, offering 5 years warranty.
- 1-10V and DALI dimmable are available for customized projects request.


Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
32W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	1200x50x35mm
32W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	1200x70x35mm


Details



Microprisma diffuser



Two sizes options



Recessed Installation



High quality LED driver

LINKABLE AND THREE-SIDE LIGHT LED LINEAR LIGHT

40W


SEC-L-LL199



Features

- Three-side light opal diffuser, offering soft light and wider luminous surface.
- Dedicated connectors provide seamless connection of lamps.
- More thickness aluminum profile housing, better heat dissipation and higher quality.
- Integrated end caps design, not light leak.
- High quality LED driver, without flicker, offering 5 years warranty.
- 1-10V and DALI dimmable are available for customized projects request.



Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	1200x50x75mm

Details

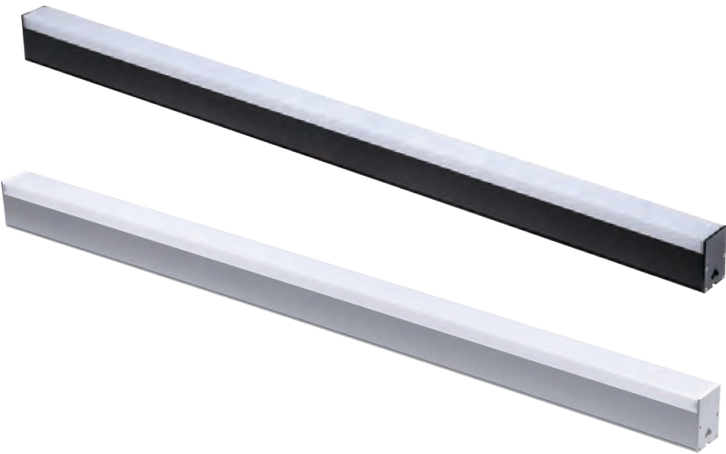

Three-side light opal



Dedicated connectors



Aluminum profile housing



High quality LED driver

LED LINEAR LIGHT SERIES

40W


SEC-L-LL200



Features

- Deep reflector design, free of glaring.
- Up-down light optional.
- More thickness aluminum profile housing, better heat dissipation and higher quality.
- Integrated end caps design, not light leak.
- High quality LED driver, without flicker, offering 5 years warranty.
- 1-10V and DALI dimmable are available for customized projects request.

Drawing

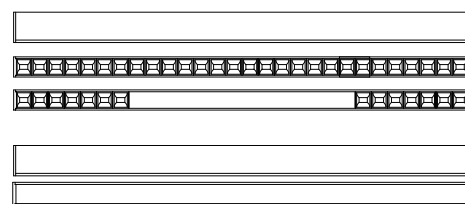


Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	1200x50x75mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	1130x50x75mm

Details



Deep reflector




Microprisma diffuser



Up-down light



Integrated end caps



Aluminum housing



High quality LED driver





Features

- Easy installaton: split design, detachable and easy to install.
- Dual power adjustable: the power can be adjusted by DIP switch.
- CCT3 slectable: the color temperature can be adjusted by DIP switch.

Drawing



Parameter

Power	Input Voltage	3CCT	Lumen	Efficiency	CRI	PF	Size
12W 20W	AC220-240V	3000K-4000K-6000K	100lm/W		> 80	> 0.9	600x69x74mm
24W 40W	AC220-240V	3000K-4000K-6000K	100lm/W		> 80	> 0.9	1135x69x74mm
30W 50W	AC220-240V	3000K-4000K-6000K	100lm/W		> 80	> 0.9	1465x69x74mm

Details



Dual power adjustable



3CCT Selectable

CRI95 ANTI-GLARE LED BLACKBORAD LIGHT

36W


SEC-L-LL203



Features

- Full spectrum glow effect.
- Unique design slider on the back of the product.
- Light sensor probe can be installed.
- High-quality LED chip, no blue light hazard.
- Isolated constant-current control low-voltage power supply.
- High lighting efficiency and low energy consumption.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
36W	AC220-240V	5000K	100lm/W	> 95	> 0.9	1200x88x84mm

Details



E27 BASE DISMOUNTABLE LED LINEAR FIXTURE

9W / 12W / 18W


SEC-L-LL207



Features

- With E27 lampholder, replace the LED bulbs directly.
- E27 base and the fixture are dismountable, saving packing volume.
- E27 lampholder can be rotated in 300°, free to adjust the installation direction.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
9W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.5	606x30x93mm
12W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.5	906x30x93mm
18W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.5	1206x30x93mm

Details



LED LINEAR LIGHT SERIES

40W


SEC-L-LL209



Features

- A variety of anti-glare cover types are available.
- Up-down light optional.
- More thickness aluminum profile housing, better heat dissipation and higher quality.
- Integrated end caps design, no light leak.
- Built-in driver, without flicker, offering 5 years warranty.

Drawing

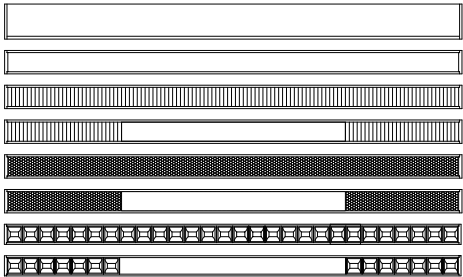

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	1120x50x75mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	1130x50x75mm

Details




Up-down light optional



Multiple splicing installation

Optional covers:

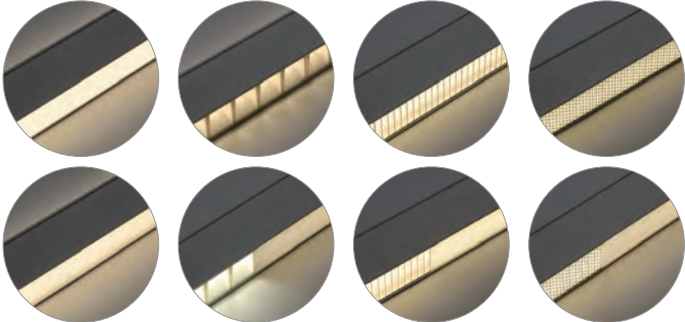

3CCT LED SLIM BATTEN

24W / 36W / 48W


SEC-L-LL210



Features

- 3CCT selectable, 3 CCT in 1 lamp, saving much stock.
- Wide plate and thick shell, can easily pass the European standard certification.
- Easy installation.equipped with detachable anti-pressure thread buckle.
- The power can be 1.5 times that of the same size ordinary batten.
- Compared with ordinary batten, it can reach extra 30% brightness.


Drawing

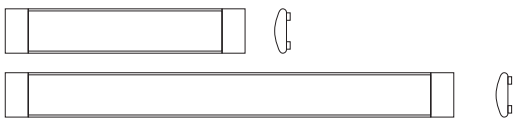

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
24W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.5	613x120x31 mm
36W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	913x120x31 mm
48W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	1213x120x31 mm
24W (CCT)	AC220-240V	3000K-4000K-6500K	100lm/W	> 80	> 0.5	613x120x31 mm
36W (CCT)	AC220-240V	3000K-4000K-6500K	100lm/W	> 80	> 0.9	913x120x31 mm
48W (CCT)	AC220-240V	3000K-4000K-6500K	100lm/W	> 80	> 0.9	1213x120x31 mm

Details

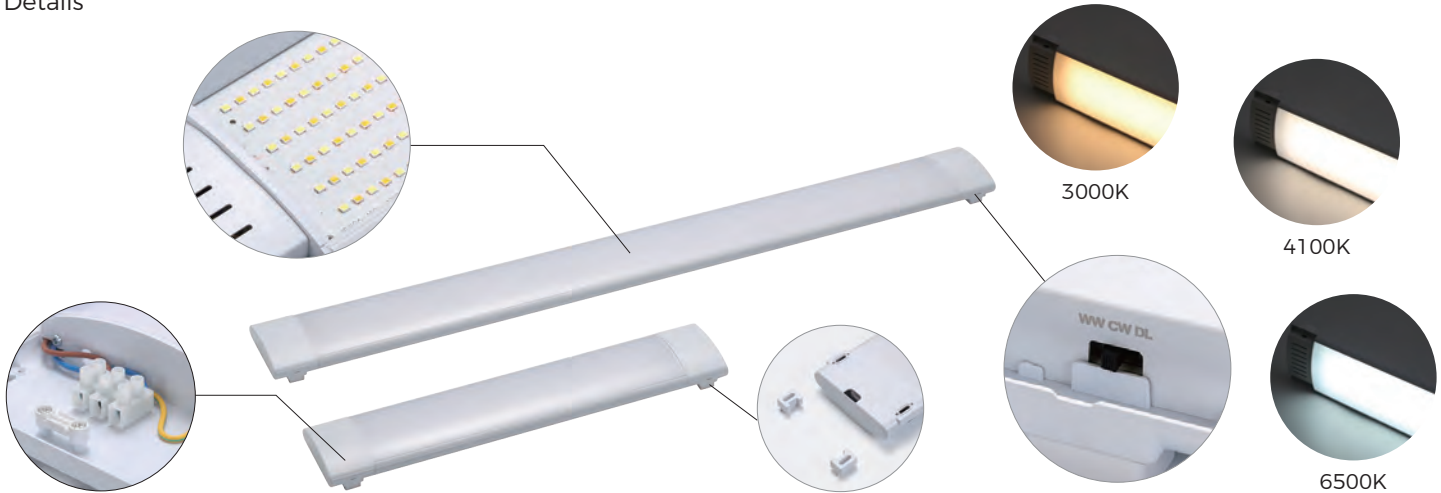

FULL PC LED T8 LINEAR FIXTURE

6W / 10W


SEC-L-LL211



Features

- All-plastic shell, economical and practical.
- Equipped with quick connection terminal, convenient connection.
- Conventional size can be used instead of T8 bracket lamp.
- The luminous surface is large, and the width of the product is smaller than that of similar plate lamps.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
6W	AC220-240V	3000K/4000K/6500K	100-120lm/W	> 80	> 0.7	400x30x45mm
10W	AC220-240V	3000K/4000K/6500K	100-120lm/W	> 80	> 0.7	600x30x45mm

Details



LED CABINET LIGHT

10W / 15W / 20W


SEC-L-LL212



Features

- Aluminum + profile structure is strong and durable.
- Can be applied to the bottom of the cabinet or the corner.
- Optional USB socket for low-voltage appliances or to charge mobile phones.
- With double sockets, suitable for all kinds of electrical appliances, optional sockets.
- With switch, can be used separately part of the socket function.

Drawing

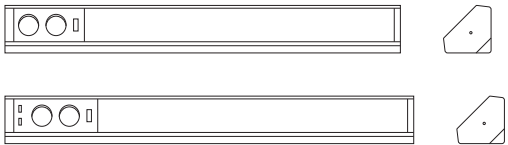

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
10W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.5	501x92x92mm
15W	AC220-240V	3000K/4000K/6500K	90lm/W	> 80	> 0.5	762x92x92mm
20W	AC220-240V	3000K/4000K/6500K	90lm/W	> 80	> 0.5	1062x92x92mm
10W (USB)	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.5	524x92x92mm
15W (USB)	AC220-240V	3000K/4000K/6500K	90lm/W	> 80	> 0.5	785x92x92mm
20W (USB)	AC220-240V	3000K/4000K/6500K	90lm/W	> 80	> 0.5	1085x92x92mm


Details



QUICK CONNECTION LED LINEAR LIGHT SERIES

30W / 40W / 45W / 60W


SEC-L-LL213



Features

- Unique end caps design, connect directly without gap, easy installation.
- 2.4m max length is customized.
- Offering "L, T,X" several connection modules options for multiple shape.
- Installation: 1.suspension installation 2.surface mounting

Drawing

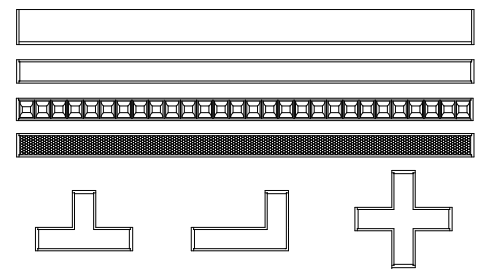

Details

Opal Cover



Prismatic Cover




Reflector Cover





Connect directly without gap:




T-type



L-type



X-type



Unique connector design



SMD 2835

QUICK-SPLICING LINEAR OFFICE LIGHT

30W / 40W / 45W / 60W

SEC-L-LL213

Parameter



Opal Cover

Power	Input Voltage	CCT	Lumen Efficiency	CRI	UGR	Beam Angle	PF	Size
30W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 22	110°	> 0.9	1200x50x75mm
38W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 22	110°	> 0.9	1500x50x75mm
45W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 22	110°	> 0.9	1800x50x75mm
60W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 22	110°	> 0.5	2400x50x75mm



Prismatic Cover

Power	Input Voltage	CCT	Lumen Efficiency	CRI	UGR	Beam Angle	PF	Size
30W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	< 23	80°	> 0.9	1200x50x75mm



Reflector Cover

Power	Input Voltage	CCT	Lumen Efficiency	CRI	UGR	Beam Angle	PF	Size
30W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	< 19	60°	> 0.9	1200x50x75mm



L-Shaped

Power	Input Voltage	CCT	Lumen Efficiency	CRI	Beam Angle	PF	Size
9-12W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	110°	> 0.5	150x150x75mm



T-Shaped

Power	Input Voltage	CCT	Lumen Efficiency	CRI	Beam Angle	PF	Size
7-9W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	110°	> 0.5	250x150x75mm



T-Shaped

Power	Input Voltage	CCT	Lumen Efficiency	CRI	Beam Angle	PF	Size
13-18W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	110°	> 0.5	250x250x75mm

SOLDERLESS PROFILE LED STRIP

8W/m


SEC-L-CG237



Features

- Built-in solderless light strip, one light, one cut, cut at will.
- Specialised conductive plugs plug and play, cable separation.
- Easy Installation, save time.
- High lumen, evenly luminous, bright colour.
- Save on labour costs, cost-effective.


Drawing



Parameter

Power	Input Voltage	CCT	Luminous Flux	CRI
8W/m	DC12V/24V	3000K/4000K/6500K	880lm/m	> 80

Details

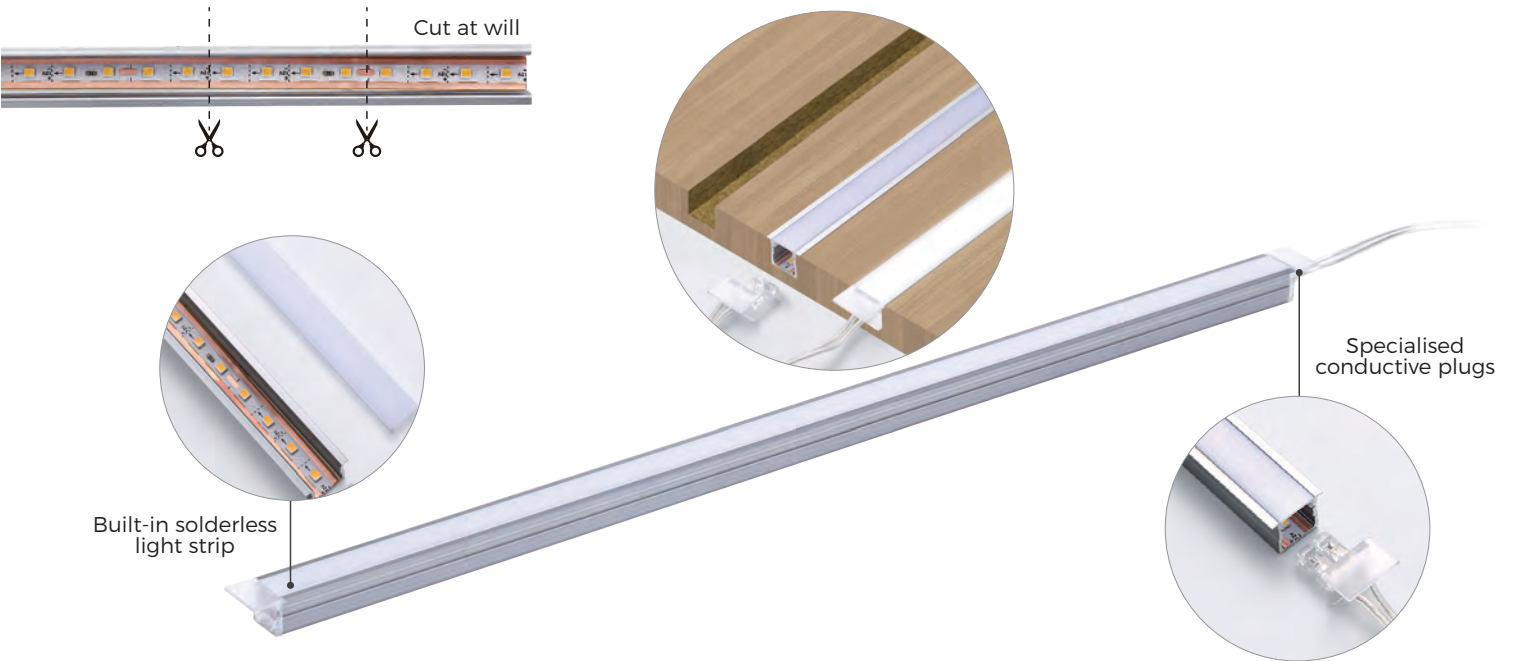



TRACK LIGHT



ULTRATHIN MAGNETIC TRACK SYSTEM

Driver 100W / 200W

SEC-L-DG122



Features

- Open mounted magnetic suction track without ceiling, black/white two colors optional.
- Easy to install, screw fixed, open installation without embedded.
- Super strong magnetic adsorption, adjustable position at any time.
- 48V safe voltage, not afraid of miscontact risk.
- Hidden type wiring module, the power cord is not exposed.
- A complete set of light sources can realize the lighting requirements of various scenes.

Drawing



Details



Strong magnetic back

Conductive pin


ULTRATHIN MAGNETIC TRACK SYSTEM

LED 6W-40W

SEC-L-DG122

Parameter

Power Supply

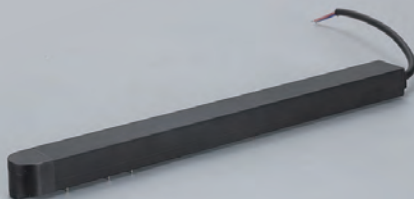


Power: 100W/200W

Input Voltage: 190-245Vac

Dimension: 235x26x20mm/300x26x20mm

Track

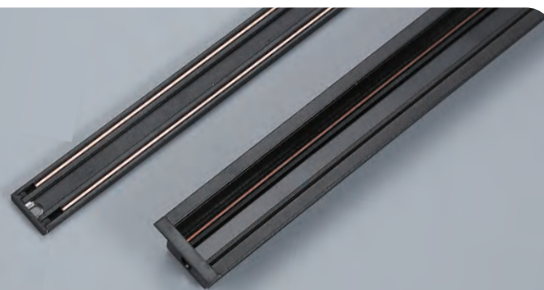


Input Voltage: DC48V

Dimension: 30x5mm/30x27.6mm

Length: 1000/2000/3000mm

90° Connect Module



Spring for Track Recessed



Connect module Light



Power: 20W

Dimension: 232x26x20mm

Connect module Light



Power: 12W

Dimension: 120x26x20mm

Grille Model



Power: 6W/12W/18W/24W

Dimension: 120x26x20mm/232x26x20mm

348x26x20mm/461x26x20mm

Diffused Model



Power: 10W/15W/20W/30W/40W

Dimension: 232x26x20mm/348x26x20mm

575x26x20mm/912x26x20mm

1254x26x20mm

Track light



Power: 12W/20W/30W

Dimension: Ø50x90mm / Ø 65x105mm

Ø 80x135mm

Folded Grille light




Power: 6W/12W/18W

Dimension: 125x30x50mm/240x30x50mm

350x30x50mm

Folded Grille light



Power: 6W/12W/18W


Dimension: 118x22x84mm/226x22x84mm

334x22x84mm

3CCT LED TRACK LINEAR BAR

10W / 15W / 20W / 25W


SEC-L-LL205

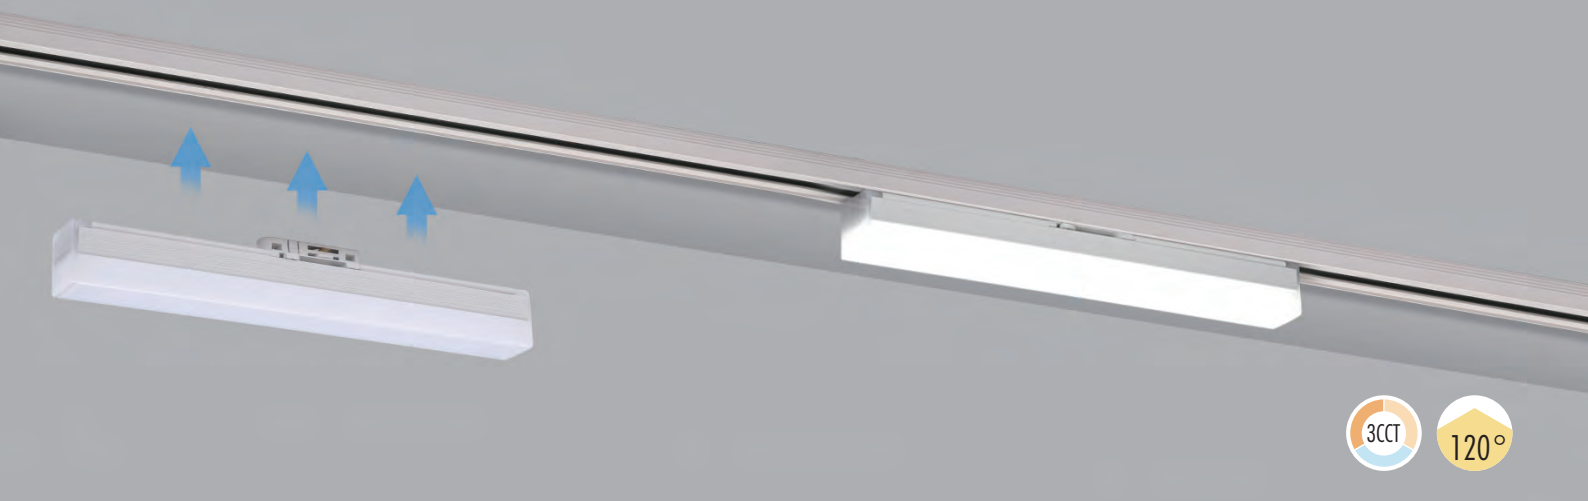

Features

- The color of the lamps can be customized according to the track and needs of the venue.
- Non-isolated constant current drive, high voltage input, easy to use.
- Full PC structure, better texture, sturdy and durable.
- Adopt high brightness LED chip, high luminous efficiency and long life.
- High light uniformity, milky white translucent cover, soft light, no glare, can do CCT adjust & dimmable.
- Track mounted,easy installation and easy replacement.


Drawing



Parameter

Power	Input Voltage	3CCT	Lumen Efficiency	CRI	PF	Size
10W	AC220-240V	3000K-4000K-6500K	120lm/W	> 80	> 0.5	300mm
15W	AC220-240V	3000K-4000K-6500K	120lm/W	> 80	> 0.5	600mm
20W	AC220-240V	3000K-4000K-6500K	120lm/W	> 80	> 0.5	900mm
25W	AC220-240V	3000K-4000K-6500K	120lm/W	> 80	> 0.5	1200mm

Details

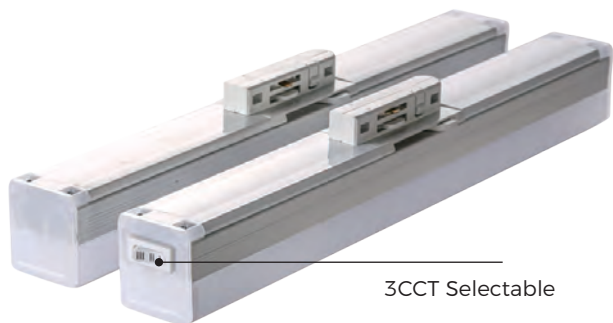

3CCT Selectable



Lamp color can be customized

CRI95 LED TRACK WALL WASHER LIGHT

18W / 28W / 38W


SEC-L-LL208



Features

- Track mounted, easy installation and easy replacement.
- Supports a tilt of up to 40° from left to right, with a wider range of applications.
- Isolated constant current drive, flicker free.
- High brightness LED chip, Ra>95, UGR<16, and long life.
- Hidden type wiring module, the power cord is not exposed.
- Special lens design, make the light more uniform, the luminous uniformity is close to 85.
- Diffusser function, illumilating certain area and peripheral area is not effected.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen	Efficiency	CRI	PF	Size
18W	AC220-240V	5000K	80lm/W		> 95	> 0.9	650x98x55mm
28W	AC220-240V	5000K	80lm/W		> 95	> 0.9	950x98x55mm
38W	AC220-240V	5000K	80lm/W		> 95	> 0.9	1250x98x55mm

Details



LED TRACK PANEL LIGHT


SEC-L-PL245





Features

- Track fixation part, it can be used as a guide rail flat lamp and applied to track lighting system.
- Can be applied to all kinds of flat-panel lamps, and is universal for side-emitting and direct-down flat-panel lamps.
- Widely used in shops, supermarkets and other rail lighting places.
- 2/3/4 lines track optional.

Drawing

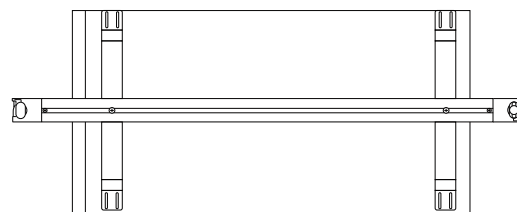

Details

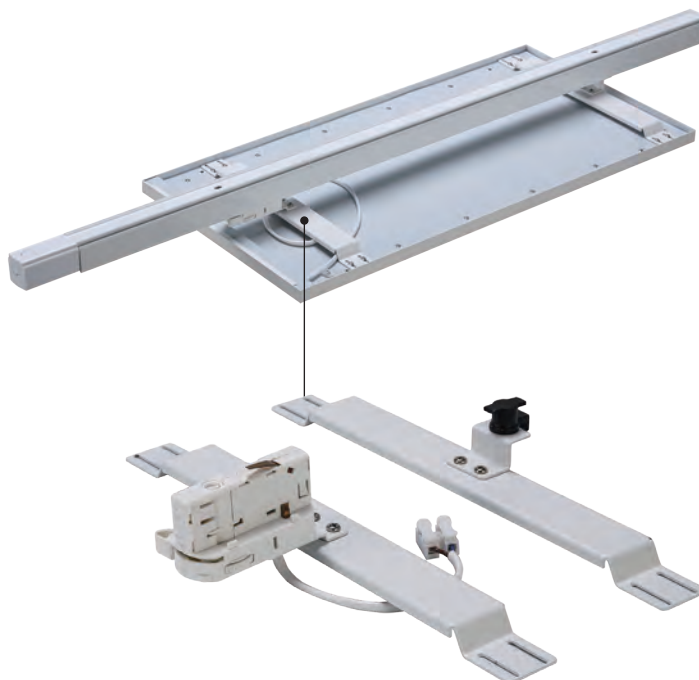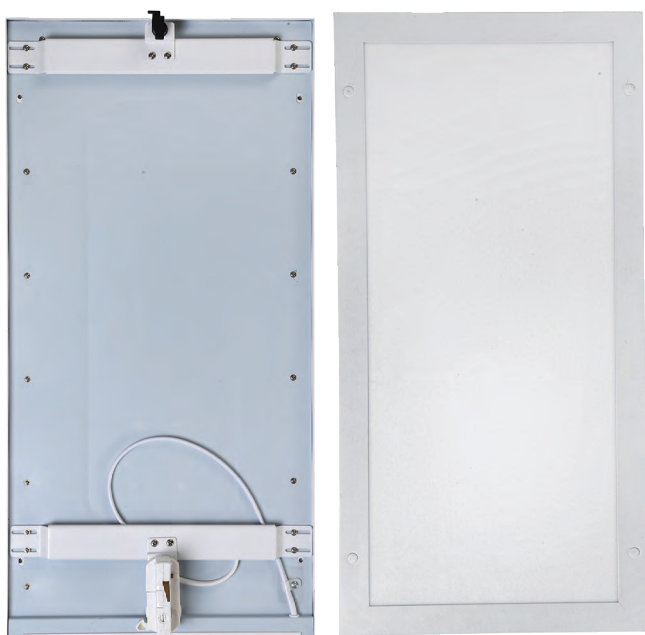



PANEL LIGHT



LED GRILLE LIGHT

40W


SEC-L-GL121



Features

- Body made of high-quality steel.
- Body coated with high quality UV-proof powder electrostatically.
- Louver of code L/S is germany alanod with high reflection, shine or matt finish.
- Material of diffuser UV-proof polystyrene, 80% transmittance.
- LED strips allocated evenly on the baseplate to achieve a even light distribution result.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100-120lm/W	> 80	> 0.9	595x595x32mm
40W	AC220-240V	3000K/4000K/6500K	100-120lm/W	> 80	> 0.9	295x1195x32mm

Details



High-quality steel

High-quality led driver

ULTRA SLIM LED GRILLE PANEL LIGHT

28W / 35W / 40W

SEC-L-GL124




UGR
<15

60°

Features

- Aluminum reflector design, offering anti-glare of UGR<15.
- The luminous efficiency is up to 100lm/W.
- Ultra slim design, 30mm thickness maximum.
- Using UV-proof powder coating, avoid being yellow.

Drawing

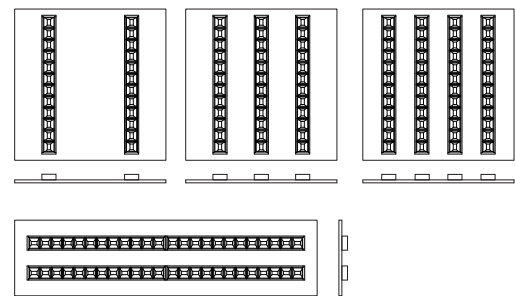

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	UGR	PF	Size
28W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	< 15	> 0.9	595x595x30mm
35W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	< 15	> 0.9	595x595x30mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	< 15	> 0.9	595x595x30mm
35W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	< 15	> 0.9	295x1195x30mm

Details



28W



35W



40W



35W

CRI95 ANTI-GLARE LED CLASSROOM LIGHT

38W


SEC-L-GL133



Features

- Anti-glare cellular classroom lamp, UGR<19, full spectrum, no blue light, anti-glare.
- Ceiling installation, light up and down, honeycomb grid anti-glare grid.
- Comfortable and energy-saving, CRI(Ra)>95 high CRI, 90lm/W high luminous efficiency.
- Scientific light distribution, soft light, blue light hazards RG0 level.
- Safe and fast, integrated design.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	UGR	PF	Size
38W	AC220-240V	5000K	90lm/W	> 95	< 16	> 0.9	1195x295x75mm

Details

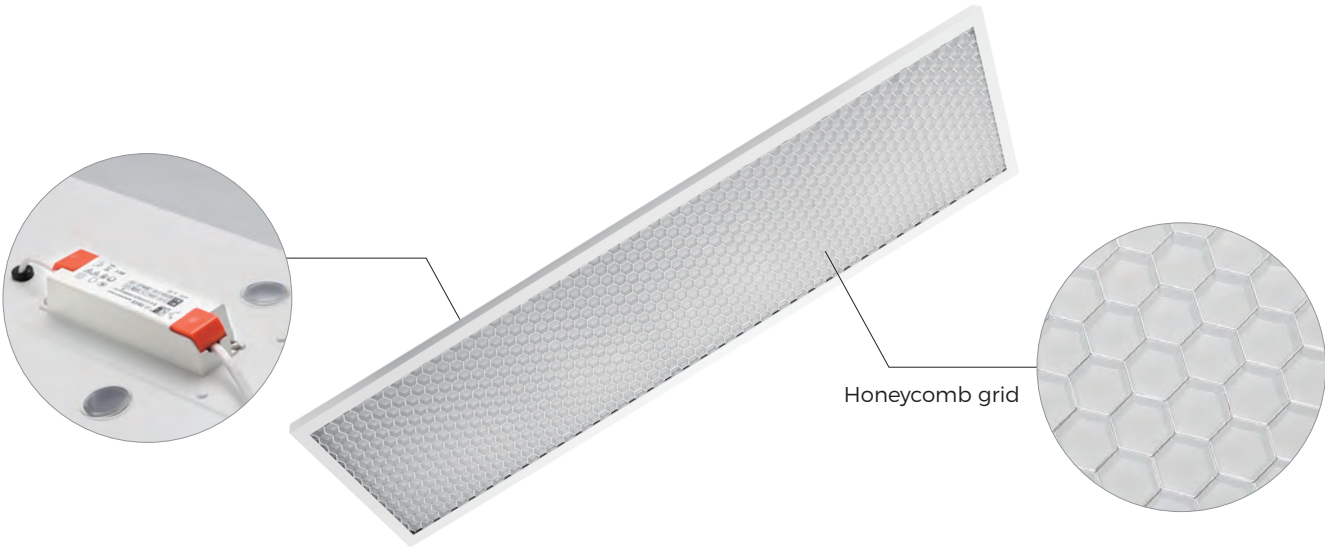

LED EDGE PANEL LIGHT

12W-72W


SEC-L-PL100



Features

- Opal diffuser, soft light, not dazzling.
- Competitive price with european quality.
- Kinds of frame for choice: flat, stage, 4 lines frames.
- Prismatic diffuser for anti-glared optional, UGR<19.
- CRI>90 optional.
- Economic version: PF>0.5 80lm/W, no flicker, 2 years warranty.
- Standard version: PF>0.9 90-100lm/W, no flicker 2 years / 5 years warranty.

Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
12/18W	AC85-265/175-264/220-240V	2700-6500K	80-130lm/W	> 80/> 90	> 0.5/> 0.9	295x295/300x300mm
24/32W	AC85-265/175-264/220-240V	2700-6500K	80-130lm/W	> 80/> 90	> 0.5/> 0.9	295x595/300x600mm
36/40W	AC85-265/175-264/220-240V	2700-6500K	80-130lm/W	> 80/> 90	> 0.5/> 0.9	595x595/600x600/620x620mm
45/48W	AC85-265/175-264/220-240V	2700-6500K	80-130lm/W	> 80/> 90	> 0.5/> 0.9	595x595/600x600/620x620mm
36/40/48W	AC85-265/175-264/220-240V	2700-6500K	80-130lm/W	> 80/> 90	> 0.5/> 0.9	295x1195/300x1200mm
48/56/64/72W	AC85-265/175-264/220-240V	2700-6500K	80-130lm/W	> 80/> 90	> 0.5/> 0.9	595x1195/600x1200mm

Details



High quality

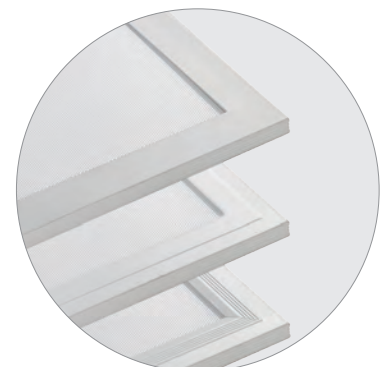

Flat/Stage/4 Lines frames

CCT CHANGEABLE AND DIMMABLE EDGE LED PANEL LIGHT

40W

SEC-L-PL108



Features

- 2700-6500K CCT changeable and 10-100% dimmable by remote.
- Groups control available.
- Night light function.


Drawing



Parameter

Power	Input Voltage	CCT	Dimmable	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	2700K-6500K	10-100%	100lm/W	> 80	> 0.9	595x595x9mm
40W	AC220-240V	2700K-6500K	10-100%	100lm/W	> 80	> 0.9	295x1195x9mm

Details



ANTI-GLARE LED EDGE PANEL LIGHT

18W-72W


SEC-L-PL111



Features

- Prismatic diffuser UGR<19.
- Kinds of frame for choice: flat, stage, 4 lines frames.
- CRI>90 optional.


Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	UGR	Size
18W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	<19	295x295x9mm
24W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.5	<19	295x595x9mm
40W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.9	<19	595x595x9mm
40W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.9	<19	295x1195x9mm
64W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.9	<19	595x1195x9mm
72W	AC220-240V	3000K/4000K/6500K	80-100lm/W	> 80	> 0.9	<19	595x1195x9mm

Details



Prismatic diffuser



Flat/Stage/Lines frames

ULTRA-SLIM SURFACE LED PANEL LIGHT

36W / 40W


SEC-L-PL122



Features

- 25 mm ultra slim design with external driver.
- Surface mounted and suspended installation available.
- Anti-glare prismatic diffuser, UGR <19 no flicker.
- 2700-6500K CCT changeable and 10-100% dimmable by remote.





Drawing



Parameter

Power	Input Voltage	CCT	Dimmable	Lumen Efficiency	CRI	PF	Size
36/40W	AC220-240V	2700-6500K	10-100%	80-100lm/W	> 80/> 90	> 0.5/> 0.9	Ø 600x25mm
36/40W	AC220-240V	CCT DIMM	10-100%	80-100lm/W	> 80/> 90	> 0.5/> 0.9	Ø 600x25mm

Details

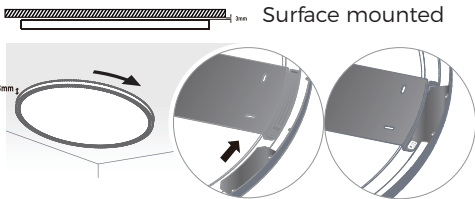

UGR<19 prismatic diffuser

Ultra-slim external driver

Suspension

BLUE SKY SURFACE PANEL LIGHT

12W-48W

SEC-L-PL138



Features

- Blue sky ultra-thin panel light, can realize all weather light adjustment.
- Clear screen, the blue sky and white clouds are vividly designed.
- Narrow frame design, easy to splice installation and use.
- 2700-6500K CCT changeable and 10-100% dimmable by remote.
- Integrated design, can be spelled out directly on the ceiling model.
- Widely used surface mounted for ease of use.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
12/18W	AC220-240V	2700-6500K/CCT Dimm	80-100lm/W	> 80/> 90	> 0.9	295x295x23mm
24/32W	AC220-240V	2700-6500K/CCT Dimm	80-100lm/W	> 80/> 90	> 0.9	295x595x23mm
36/40W	AC220-240V	2700-6500K/CCT Dimm	80-100lm/W	> 80/> 90	> 0.9	595x595x23mm
45/48W	AC220-240V	2700-6500K/CCT Dimm	80-100lm/W	> 80/> 90	> 0.9	595x595x23mm
36/40/48W	AC220-240V	2700-6500K/CCT Dimm	80-100lm/W	> 80/> 90	> 0.9	295x1195x23mm

Details



RGB+W LED PANEL LIGHT

24W / 40W


SEC-L-PL140



Features

- 2 in 1 luminaire for lighting and decorative.
- RGB+W and dimmable functions.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
24W	DC24V	RGB+3000-6500K	80lm/W	> 80	> 0.9	595x595x9mm
24W	DC24V	RGB+3000-6500K	80lm/W	> 80	> 0.9	295x1195x9mm
40W	AC220-240V	RGB+3000-6500K	80lm/W	> 80	> 0.9	595x595x9mm
40W	AC220-240V	RGB+3000-6500K	80lm/W	> 80	> 0.9	295x1195x9mm

Details






Features

- Innovative design with 3 sides light and 180° shining.
- High quality Lifud Driver.
- Dimmable and CCT changing versions are available.
- Recessed installation.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	595x595x12mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	295x1195x12mm
60W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	595x1195x12mm

Details

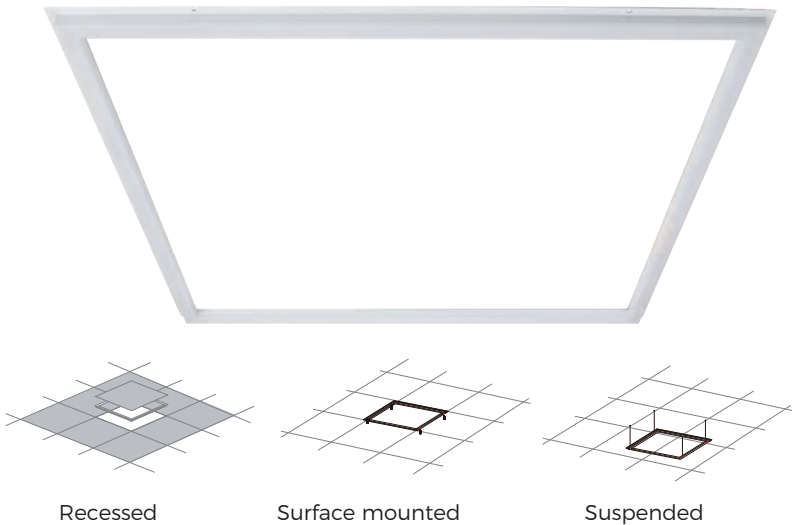

Suspension kit



Lifud Driver



LED BACK-LIT PANEL LIGHT

12W-72W

SEC-L-PL174



Features

- No LGP, no yellowing, long lifetime.
- 30mm thickness regular, 27mm thickness available.
- Competitive prices than edge LED panel light.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
12/18W	AC85-265/175-265/220-240V	2700-6500K	80-140lm/W	> 80/>90	> 0.5/> 0.9	295x295/300x300mm
24/32W	AC85-265/175-265/220-240V	2700-6500K	80-140lm/W	> 80/>90	> 0.5/> 0.9	295x595/300x600mm
36/40W	AC85-265/175-265/220-240V	2700-6500K	80-140lm/W	> 80/>90	> 0.5/> 0.9	595x595/600x600/620x620mm
45/48W	AC85-265/175-265/220-240V	2700-6500K	80-140lm/W	> 80/>90	> 0.5/> 0.9	595x595/600x600/620x620mm
36/40/48W	AC85-265/175-265/220-240V	2700-6500K	80-140lm/W	> 80/>90	> 0.5/> 0.9	295x1195/300x1200mm
48/56/64/72W	AC85-265/175-265/220-240V	2700-6500K	80-140lm/W	> 80/>90	> 0.5/> 0.9	595x1195/600x1200mm

Details

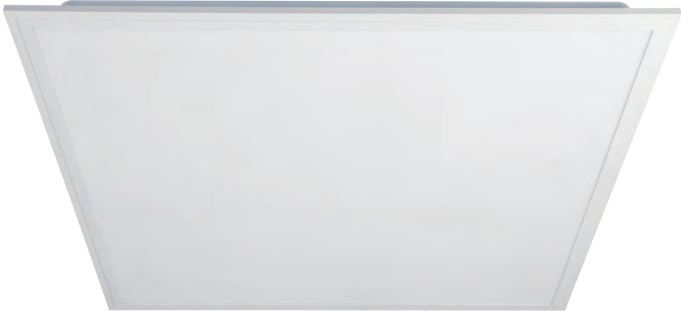

ULTRA-SLIM SURFACE PANEL LIGHT

20W / 40W


SEC-L-PL187



Features

- 23mm ultra-slim design for surface mounted.
- 2700~6500K CCT changeable and 10-100% dimmable by remote.
- 3CCT selectable without dimmable function is optional.

Drawing



Parameter

Power	Input Voltage	CCT	Dimmable	Lumen Efficiency	CRI	PF	Size
20W	AC220-240V	2700-6500K	10-100%	100lm/W	> 80	> 0.9	295x595x23mm
40W	AC220-240V	2700-6500K	10-100%	100lm/W	> 80	> 0.9	595x595x23mm
40W	AC220-240V	2700-6500K	10-100%	100lm/W	> 80	> 0.9	295x1195x23mm
20W	AC220-240V	3000K-4000K-6500K 3CCT	/	100lm/W	> 80	> 0.9	295x595x23mm
40W	AC220-240V	3000K-4000K-6500K 3CCT	/	100lm/W	> 80	> 0.9	595x595x23mm
40W	AC220-240V	3000K-4000K-6500K 3CCT	/	100lm/W	> 80	> 0.9	295x1195x23mm

Details



IP40 LED CLEANROOM PANEL LIGHT

24W / 40W


SEC-L-PL203



Features

- 9mm ultra-slim with bevel frame design, special for dust free environment.
- High quality LED chip, no flicker driver.
- Surface installation by screws at front, no need extra accessories.
- IP40 waterproof, compact structure, dustproof design, suitable for hospital cleanroom and other places.


Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
24W	AC220-240V	3000K/4000K/6500K	90lm/W	> 80	> 0.5	295x595x9mm
40W	AC220-240V	3000K/4000K/6500K	90lm/W	> 80	> 0.9	595x595x9mm
40W	AC220-240V	3000K/4000K/6500K	90lm/W	> 80	> 0.9	295x1195x9mm


Details




9mm ultra slim



Surface installation by screws



No flicker driver



IP40 waterproof

ULTRA-SLIM LED CCSURFACE PANEL LIGHT

15W / 30W / 30W / 10W / 13W / 27W

SEC-L-PL206



Features

- 16mm ultra-slim surface mounted with built-in driver.
- 3CCT selectable optional.
- Surface installation by screws at front, no need extra accessories.
- 6 sizes available with 90-110lm/W optional.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
15W	AC220-240V	3000K/4000K/5000K/6000K	110lm/W	> 80	> 0.9	300x600x16mm
30W	AC220-240V	3000K/4000K/5000K/6000K	110lm/W	> 80	> 0.9	600x600x16mm
30W	AC220-240V	3000K/4000K/5000K/6000K	110lm/W	> 80	> 0.9	300x1200x16mm
15W	AC220-240V	3000K-4000K 3CCT	110lm/W	> 80	> 0.9	300x600x16mm
30W	AC220-240V	3000K-4000K 3CCT	110lm/W	> 80	> 0.9	600x600x16mm
30W	AC220-240V	3000K-4000K 3CCT	110lm/W	> 80	> 0.9	300x1200x16mm
10W	AC220-240V	3000K/4000K/5000K/6000K	90-95lm/W	> 80	> 0.9	200x600x16mm
13W	AC220-240V	3000K/4000K/5000K/6000K	100lm/W	> 80	> 0.9	400x400x16mm
27W	AC220-240V	3000K/4000K/5000K/6000K	110lm/W	> 80	> 0.9	400x800x16mm
10W	AC220-240V	3000K-4000K 3CCT	90-95lm/W	> 80	> 0.9	200x600x16mm
13W	AC220-240V	3000K-4000K 3CCT	100lm/W	> 80	> 0.9	400x400x16mm
27W	AC220-240V	3000K-4000K 3CCT	110lm/W	> 80	> 0.9	400x800x16mm

Details

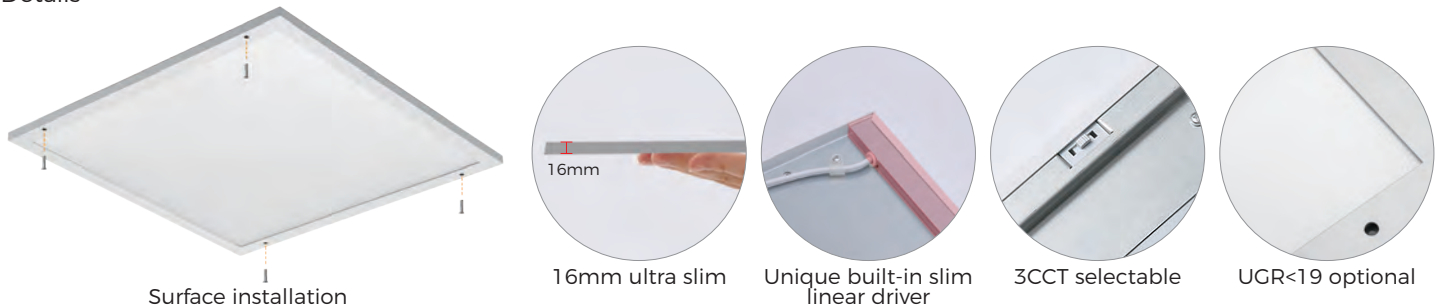

CLIP-IN LED BACK-LIT PANEL LIGHT

20W / 30W / 40W / 72W


SEC-L-PL208



Features

- Back-lit withut LGP, no yellowing, long lifetime.
- Anti-glared design, clip-in installation, suitable for armstrong ceiling.

Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	PF	CRI	Size
20W	AC220-240V	3000K/4000K/6500K	100-120lm/W	> 0.5	> 80	295x295x33mm
30W	AC220-240V	3000K/4000K/6500K	100-120lm/W	> 0.9	> 80	295x595x33mm
40W	AC220-240V	3000K/4000K/6500K	100-120lm/W	> 0.9	> 80	595x595x33mm
40W	AC220-240V	3000K/4000K/6500K	100-120lm/W	> 0.9	> 80	295x1195x33mm
72W	AC220-240V	3000K/4000K/6500K	100-120lm/W	> 0.9	> 80	595x1195x33mm

Details



Anti-glared design

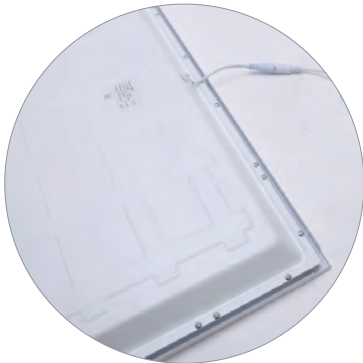

Backlight clip-in design

FRAMELESS LED EDGE PANEL LIGHT

18W / 24W / 40W / 54W

SEC-L-PL211



Features

- Frameless panel light , High power factor without strobe.
- Frameless design, can be assembled into different shapes.
5 years warranty, high quality export standard drive and LED.
- Spliced face frame, leakage proof, high maintenance of light flux.
- Multiple installation modes: Surface mounted/Recessed/Suspended.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
18W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.5	295x295x18mm
24W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.5	295x595x18mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	595x595x18mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	295x1195x18mm
18W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	301x301x18mm
24W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	603x603x18mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	301x1213x18mm
54W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	603x1213x18mm
24W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	400x400x18mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	620x620x18mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	150x1195x18mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	200x1195x18mm

Details

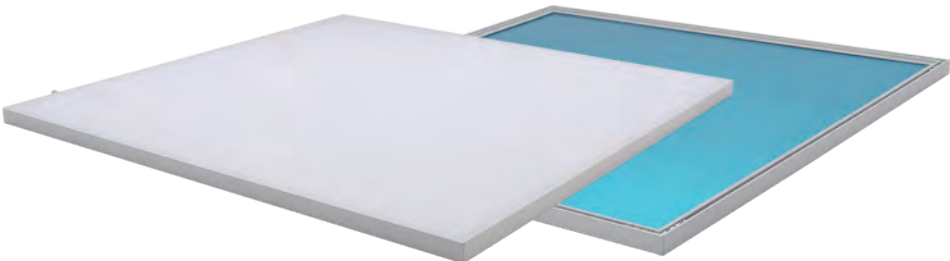

Spliced face frame,leakage proof

DALI + CCT CHANGEABLE LED SURFACE PANEL LIGHT

40W / 50W

SEC-L-PL217



Features

- DALI dimmable and CCT changeable.
- Support scene control, group control and accurate control of individual lighting equipment.
- Diamond pattern diffuser design, uniform light transmission, soft and not dazzling
- Ultra-slim design for surface mounted.

Drawing




Parameter

Power	Input Voltage	CCT	Dimmable	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	2700K-6500K	0-100%	100lm/W	> 80	> 0.9	595x595x23mm
50W	AC220-240V	2700K-6500K	0-100%	100lm/W	> 80	> 0.9	595x595x23mm

Details



DALI control

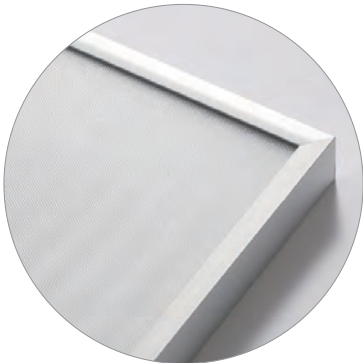

Prismatic diffuer

CCT SELECTABLE LED BACK-LIT PANEL LIGHT

30W / 40W


SEC-L-PL219



Features

- DIP switch for changing CCT, CCTswitch two options.
- Linear driver is stably fixed at the side of backlit panel light.
- Universal design for surface and recessed mounting.
- 3-5 years warranty available, long-term use without changing accessories.
- European export quality, plane frame, spray-painted bottom plate.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
30W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.9	295x595x30mm
40W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.9	595x595x30mm
40W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.9	295x1195x30mm

Details



CCT selectable



Opal diffuser

IP44 LED PBACK-LIT ANEL LIGHT

40W


SEC-L-PL220



Features

- Back-lit design with more comfortable light.
- High light transmittance diffuser, up to 100lm/W-130lm/W optional.
- IP44 protection level, use waterproof cotton and waterproof interface.
- High quality LED driver, no flicker, 5 years warranty.
- High quality LED chips, great heat dissipation performance.
- One-piece metal back plate, strong appearance, not easy to deform.


Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100-130lm/W	> 80	> 0.9	595x595x30mm
40W	AC220-240V	3000K/4000K/6500K	100-130lm/W	> 80	> 0.9	295x1195x30mm

Details

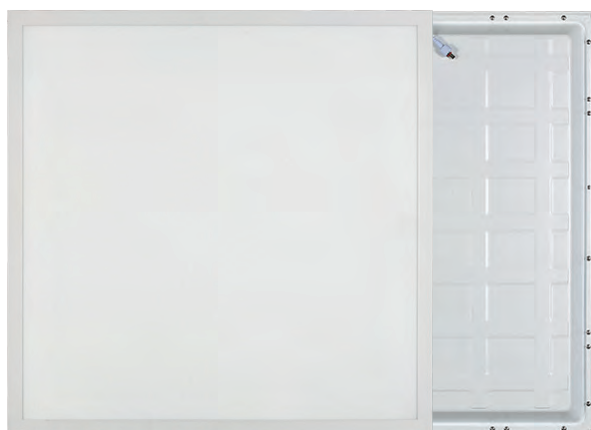

IP44 protection level

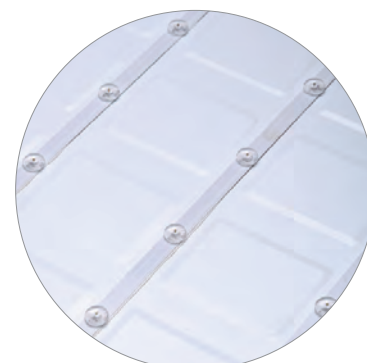

High quality LED chips

FIRE-PROOF LED BACK-LIT PANEL LIGHT

40W

SEC-L-PL222



Features

- Back-lit design with more comfortable light.
- High light transmittance diffuser, up to 100lm/W, 130lm/W optional.
- Fire-proof PC diffuser, offering TPA fire-proof grade.
- High quality LED chips, great heat dissipation performance.
- High quality LED driver, no flicker, 5 years warranty.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100-130lm/W	> 80	> 0.9	595x595x30mm

Details

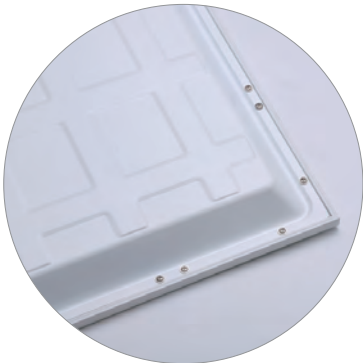

Back-lit design



Fire-proof PC diffuser

FIRE-PROOF LED EDGE PANEL LIGHT

40W


SEC-L-PL223



Features

- PMMA LGP, 5 years no yellowing.
- High light transmittance diffuser, up to 100lm/W-130lm/W optional.
- Fire-proof PC diffuser, offering TPA fire-proof grade.
- High quality LED chips, great heat dissipation performance.
- High quality LED driver, no flicker, 5 years warranty.


Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100-130lm/W	> 80	> 0.9	595x595x10mm

Details

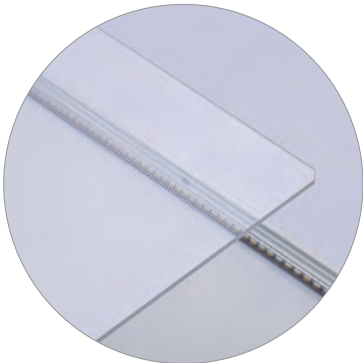

PMMA LGP

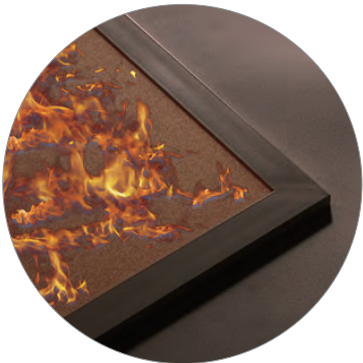

Fire-proof PC diffuser

SPlicing FRAME LED PANEL LIGHT

40W / 48W


SEC-L-PL225



Features

- Elegant with full PC material body.
- Unique splicing design with convenient installation.
- High quality passing new ERP.
- More cost-effective compare to normal panel light.
- Minimum package CBM for superb shipping cost saving.
- One HG container loading about 20000pcs.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W/48W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	595x595x23mm
40W/48W	AC220-240V	3000K-4000K-6500K 3CCT	100lm/W	> 80	> 0.9	595x595x23mm

Details

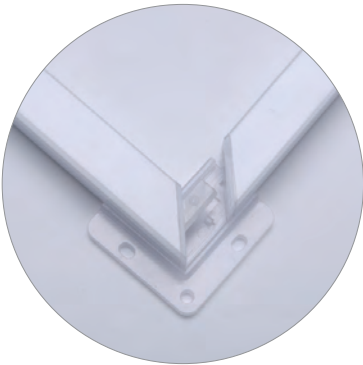

Splicing frame



Interface

SHINY LED BACK-LIT PANEL LIGHT

20W / 30W / 40W / 72W

SEC-L-PL227



Features

- Glossy diffuser to avoid dust buildup and easy to clean.
- Shine light mode, more beautiful.
- No LGP, no yellowing.

Drawing



Parameter

Power	Input Voltage	CCT	Luminous Flux	CRI	PF	Size
20W	AC220-240V	3000K/4000K/6500K	2000lm	> 80	> 0.9	295x295x30mm
30W	AC220-240V	3000K/4000K/6500K	3000lm	> 80	> 0.9	295x595x30mm
40W	AC220-240V	3000K/4000K/6500K	4000lm	> 80	> 0.9	595x595x30mm
40W	AC220-240V	3000K/4000K/6500K	4000lm	> 80	> 0.9	295x1195x30mm
72W	AC220-240V	3000K/4000K/6500K	7200lm	> 80	> 0.9	595x1195x30mm

Details



Easy to clean



Glossy diffuser

ANTI-GLARE LED CLASSROOM LIGHT

38W

SEC-L-PL228



UGR
<19

CRI
>97


IP40

5
YEARS
WARRANTY

Features

- Anti-glare with prismatic diffuser.
- High CRI, high R9 index.
- PMMA LGP, more than 5 years warranty.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	UGR	SDCM	R9	PF	Size
38W	AC220-240V	5000K	120lm/W	> 97	< 19	< 3	> 95	> 0.9	595x595x9mm
38W	AC220-240V	5000K	120lm/W	> 97	< 19	< 3	> 95	> 0.9	1195x295x9mm

Details

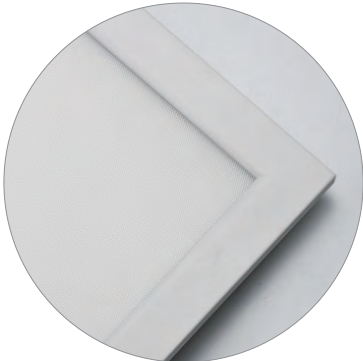

Prismatic diffuser



Suspension

SLIM AND NARROW BEZEL LED BACK-LIT PANEL LIGHT

40W


SEC-L-PL232



Features

- Narrow bezel design: only 15mm bezel width, larger light-emitting area for more even and soft light.
- Ultra-thin design: 27mm thickness of the whole lamp, saving storage space and good luminous effect.
- The whole light effect can reach 100lm/W, using optical lens, the luminous angle is large and uniform, bright without dark area.


Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	595x595x27mm

Details

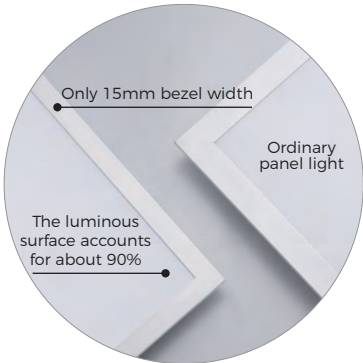

Narrow bezel design

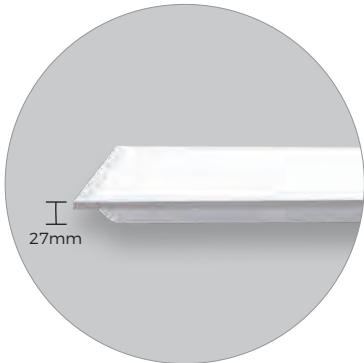


Ultra-thin design

COMPACT ECO LED DRIVBACK-LIT PANEL LIGHT

40W

SEC-L-PL233

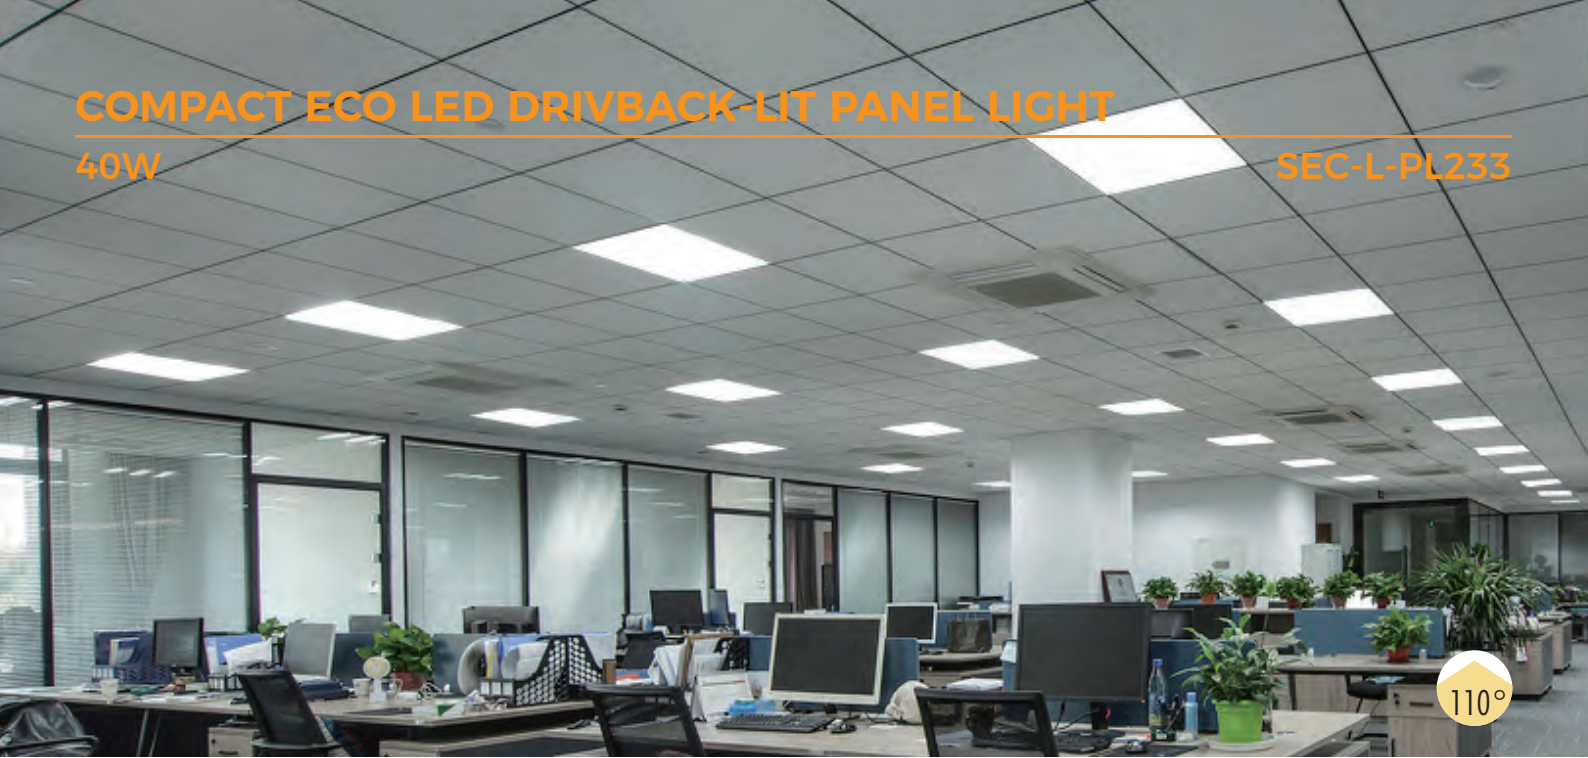

Features

- Compact design with 27mm thickness totally.
- Up to 6000pcs loading for a 40HQ container, saving more than 25% shipping cost than regular back-lit panel light.
- Non-isolated driver, CE ERP approved.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	595x595x27mm

Details

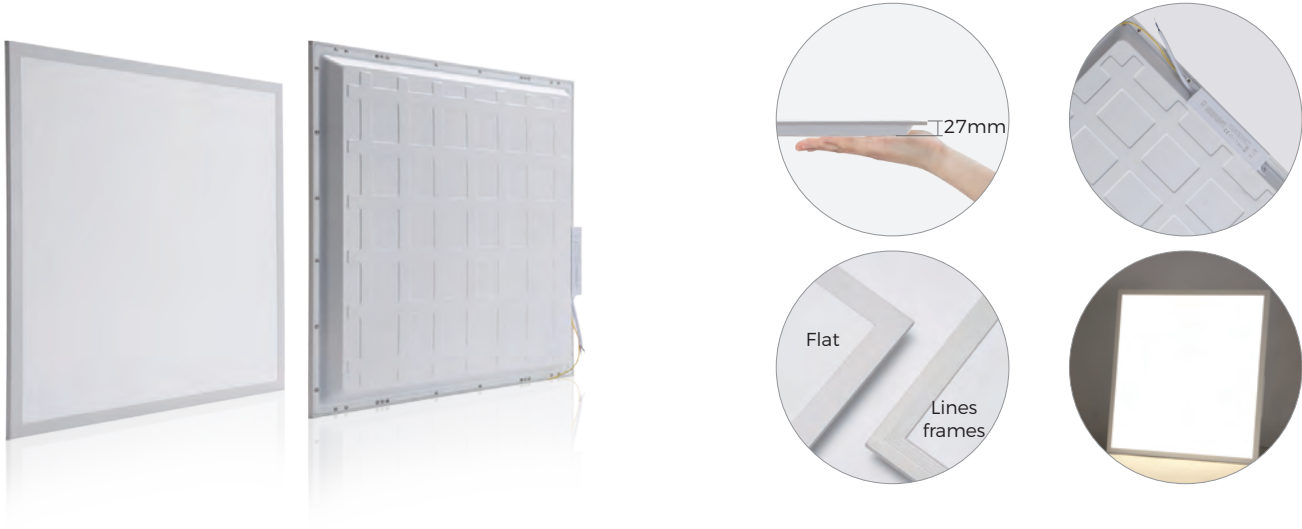

BUILT-IN DRIVER ECO LED BACK-LIT PANEL LIGHT

40W

SEC-L-PL234



Features

- Built-in non-isolated driver, more economical.
- Driver built-in, more space saving.
- 220V input, simple and easy to use.
- Compliant with CE standard, CLASS I standard.
- The light is more even and soft.
- Main application scenarios, office, hallway, meeting room.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.5/> 0.9	595x595x27mm

Details



Driver built-in



220V input

HIGH-EFFICIENCY LED BACK-LIT PANEL LIGHT

24W / 36W


SEC-L-PL235



Features

- The back-lit technology makes the life no longer limited to the LGP, significantly reduce subsequent maintenance costs.
- Special lenses, are used for better luminous efficiency.
- high quality drive, flicker-free, 5-year warranty, DIP color temperature switch.
- CCT Adjust, easy to keep stock, 3500K-4000K-6500K.
- High light transmission diffuser, the whole light efficiency can reach up to 180lm/W.
- Application: Office / Retail / Workshop / School.


Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
24W	AC220-240V	3000K-4000K-6500K 3CCT	180lm/W	> 80	> 0.9	595x595x30mm
36W	AC220-240V	3000K-4000K-6500K 3CCT	160lm/W	> 80	> 0.9	595x595x30mm

Details

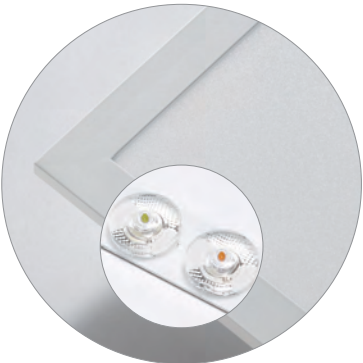

Special lens

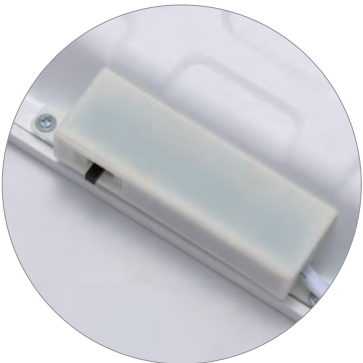

3CCT Selectable

IP65 LED EDGE WATERPROOF LIGHT

40W

SEC-L-PL236



Features

- Structural waterproof design, better waterproof performance.
- PMMA LGP inside, not easy yellowing.
- Using BOKE waterproof driver, offering 50000H lifetime.
- Shining IP65 driver.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	595x595x12mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	1195x295x12mm

Details



IP65 waterproof



PMMA LGP



Waterproof driver



Not easy yellowing

SELF-SENSING DIMMABLE LED PANEL LIGHT

38W

SEC-L-PL238



Features

- With daylight sensors, brightness changed automatically.
- Sensors can be embedded into the ceiling.
- With 0-10V sunlight sensors.
- R9>90 CRI>90 The lighting effect is closer to the sunlight.
- Eye protection, anti-dazzle.
- Light parameters can be customized by customer's needs, energy saving can reach 25% per year.



Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
38W	AC220-240V	4000K	100lm/W	> 95	> 0.9	295x1195x10mm

Details

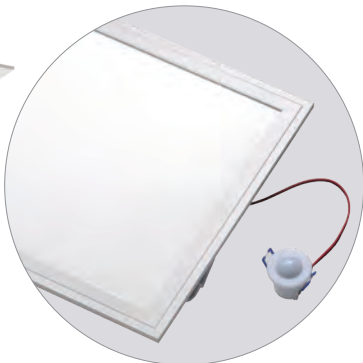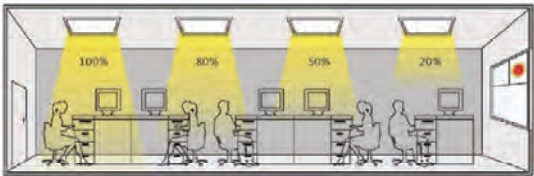

Infrared

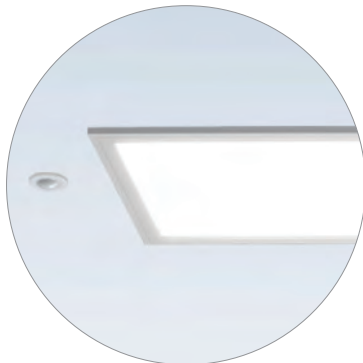

Anti-dazzle

SELF-SENSING DIMMABLE LED PANEL LIGHT

38W


SEC-L-PL239



Features

- With daylight sensors, brightness changed automatically.
- Sensor installed in the lamps, easy to use.
- Special lens to concentrate sunlight for sensor.
- Supporting the drive wireless ZIGBEE, using auxiliary switch panel.
- R9>90 CRI>90 the lighting effect is closer to the sunlight.
- Can do remote APP control with gateway, large engineering can use background database control.

Drawing

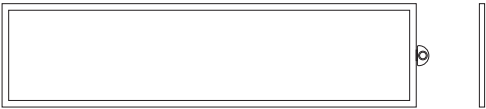


Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
38W	AC220-240V	4000K	100lm/W	> 95	> 0.9	295x1195x10mm

Details



Self-sensing

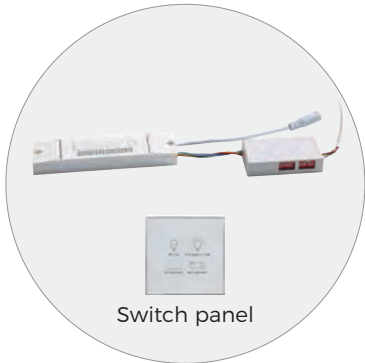

Supporting the drive wireless ZIGBEE

IP65 LED BACK-LIT PANEL LIGHT

18-72W


SEC-L-PL240



Features

- Fixing ways: 1. Suspending、 2. Spring embedded、 3. Embedded.
- 30*30 - 30*60 - 60*60 - 60*120 - 30*120, all series sizes can be made.
- Suitable for indoor corridors, outdoor and indoor damp places.
- IP65 waterproof design.
- Material: Aluminum alloy+PS+LED waterproof silicone.


Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
18W	AC220-240V	4000K	100-140lm/W	> 80	> 0.9	295x295x30mm
24W	AC220-240V	4000K	100-140lm/W	> 80	> 0.9	295x595x30mm
40W	AC220-240V	4000K	100-140lm/W	> 80	> 0.9	595x595x30mm
40W	AC220-240V	4000K	100-140lm/W	> 80	> 0.9	295x1195x30mm
60W	AC220-240V	4000K	100-140lm/W	> 80	> 0.9	595x1195x30mm
72W	AC220-240V	4000K	100-140lm/W	> 80	> 0.9	595x1195x30mm

Details

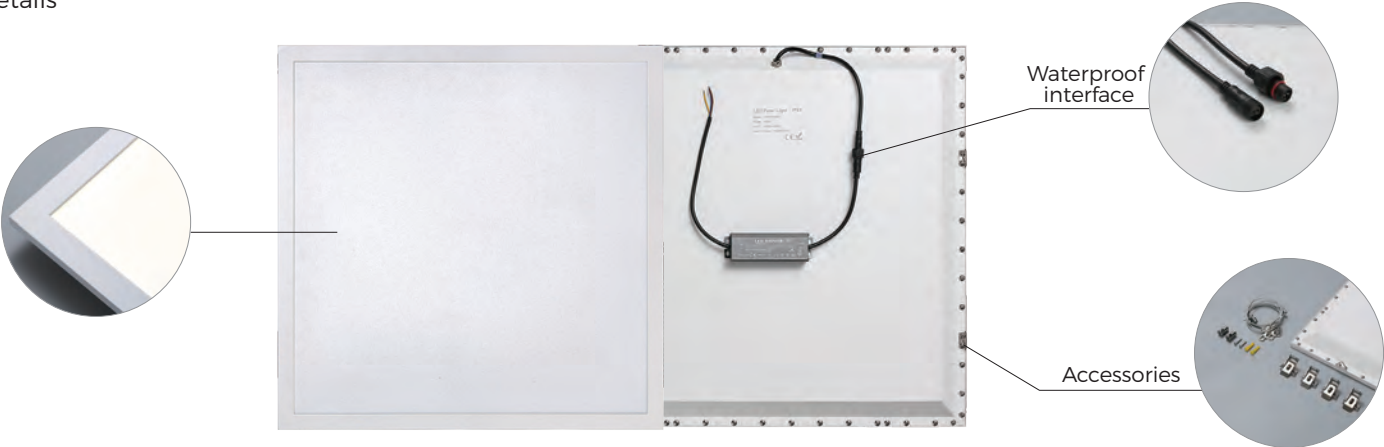


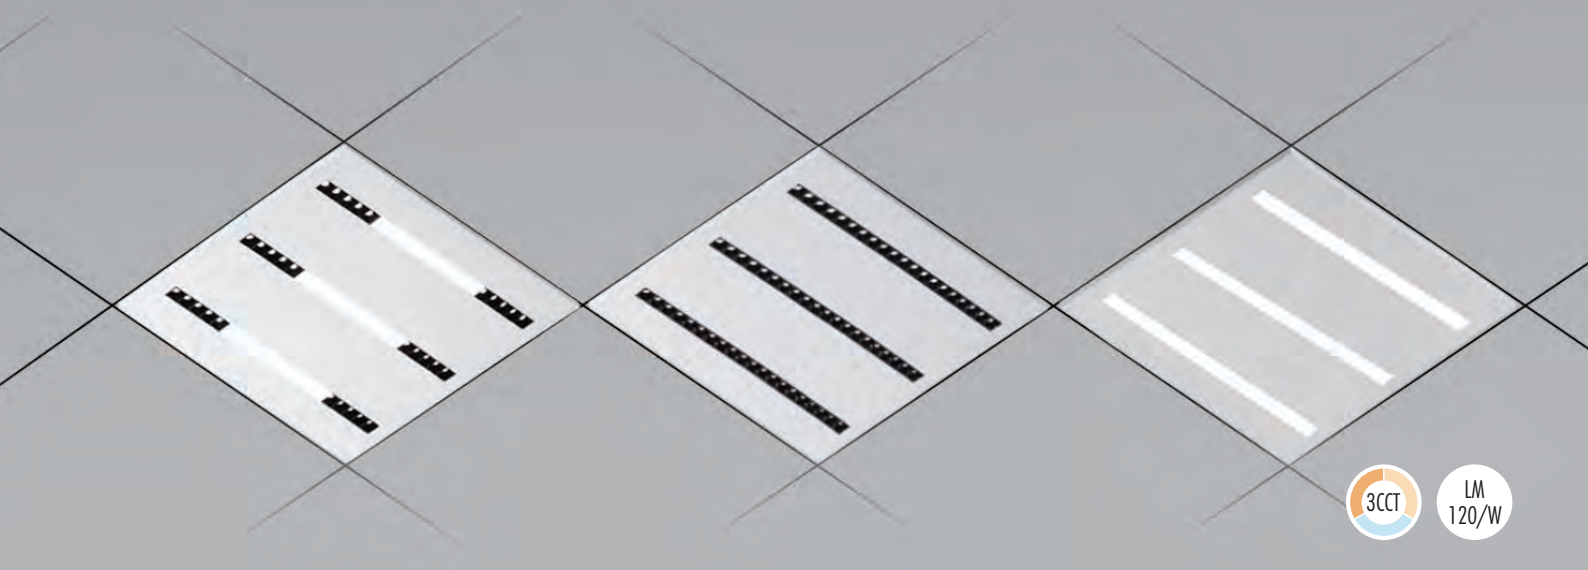

Features

- Luminous efficacy of up to 120 lm/W.
- 3 CCT selectable 3000K-4000K-6500K.
- Recessed luminaire for false ceilings or modular T-bar ceilings.
- Quick and intuitive installation.
- Ultra thin 25mm, high quality aluminum.


Drawing

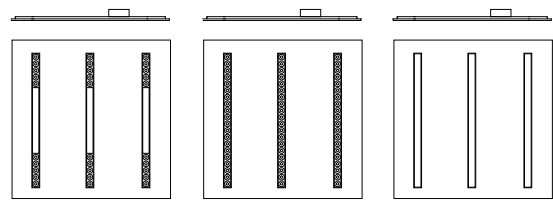

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	Size
48W	AC220-240V	3000K-4000K-6500K 3CCT	120lm/W	> 80	595x595 / 620x620 / 295x1195 / 595x1195mm
60W	AC220-240V	3000K-4000K-6500K 3CCT	120lm/W	> 80	595x595 / 620x620 / 295x1195 / 595x1195mm
96W	AC220-240V	3000K-4000K-6500K 3CCT	120lm/W	> 80	595x595 / 620x620 / 295x1195 / 595x1195mm

Details

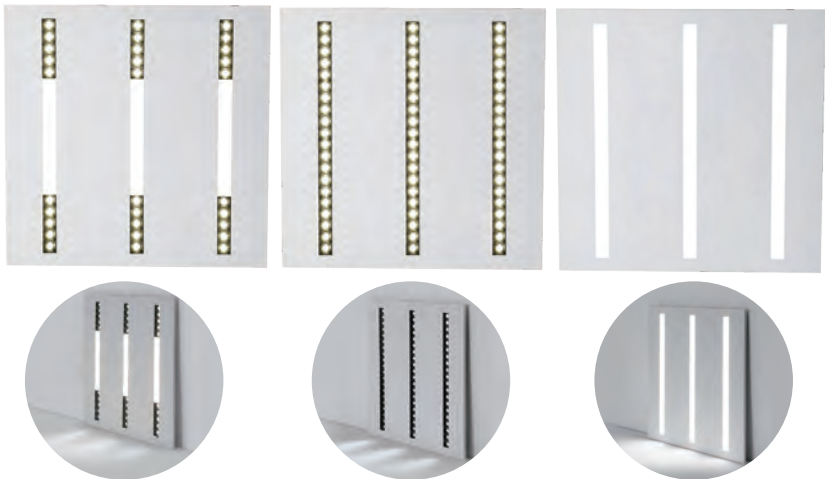

PHILIPS(5 Years warranty)

FRAMELESS LED BACK-LIT PANEL LIGHT

18W / 24W / 40W / 60W / 72W

SEC-L-PL243



Features

- Frameless design can splice seamless patterns.
- Backlit design has advantages in cost.
- Switch Control Mode: 0-10V / DALI / CCT dimm.
- Fixation mode: conventional installation, embedded mating buckle, hangable assembly rope, frameless connector.

Drawing




Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
18W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	295x295x30mm
24W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	295x595x30mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	595x595x30mm
40W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	295x1195x30mm
60W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	595x1195x30mm
72W	AC220-240V	3000K/4000K/6500K	100lm/W	> 80	> 0.9	595x1195x30mm

Details



Accessories

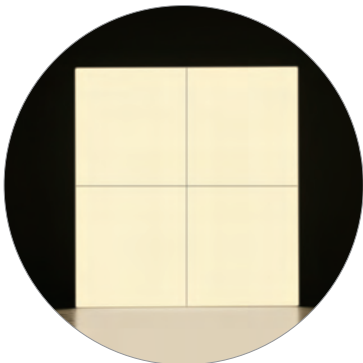

Frameless design

NO SCREW BACK-LIT PANEL LIGHT

40W

SEC-L-PL247



Features

- No screw design, 2 in 1 installation.
- The buckle-type assembly method is adopted, more efficient assembly.
- Back light design, No light guide plate, not yellow, long life It is cheaper and more competitive.
- Efficiency 100-140lm/W, The light is soft and not harsh


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100-140lm/W	> 80	> 0.9	595x595x28mm

Details

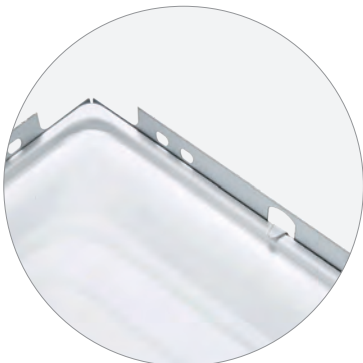

Snap Fit



High-quality led driver

NO SCREW SPLICING EDGE PANEL LIGHT

40W


SEC-L-PL248



Features

- No light leakage, less led chips get higher lumen.
- Adopting splicing structure, no need to play screws, more save material and faster efficiency.
- Pearl cotton layer can be omitted, more material saving and thinner.
- Screwless design makes the backside clean, fresh and beautiful.
- Fully automated splicing and assembling production line for higher production efficiency.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
40W	AC220-240V	3000K/4000K/6500K	100-140lm/W	> 80	> 0.9	595x595x9mm


Details



Screwless Splicing



High-quality led driver

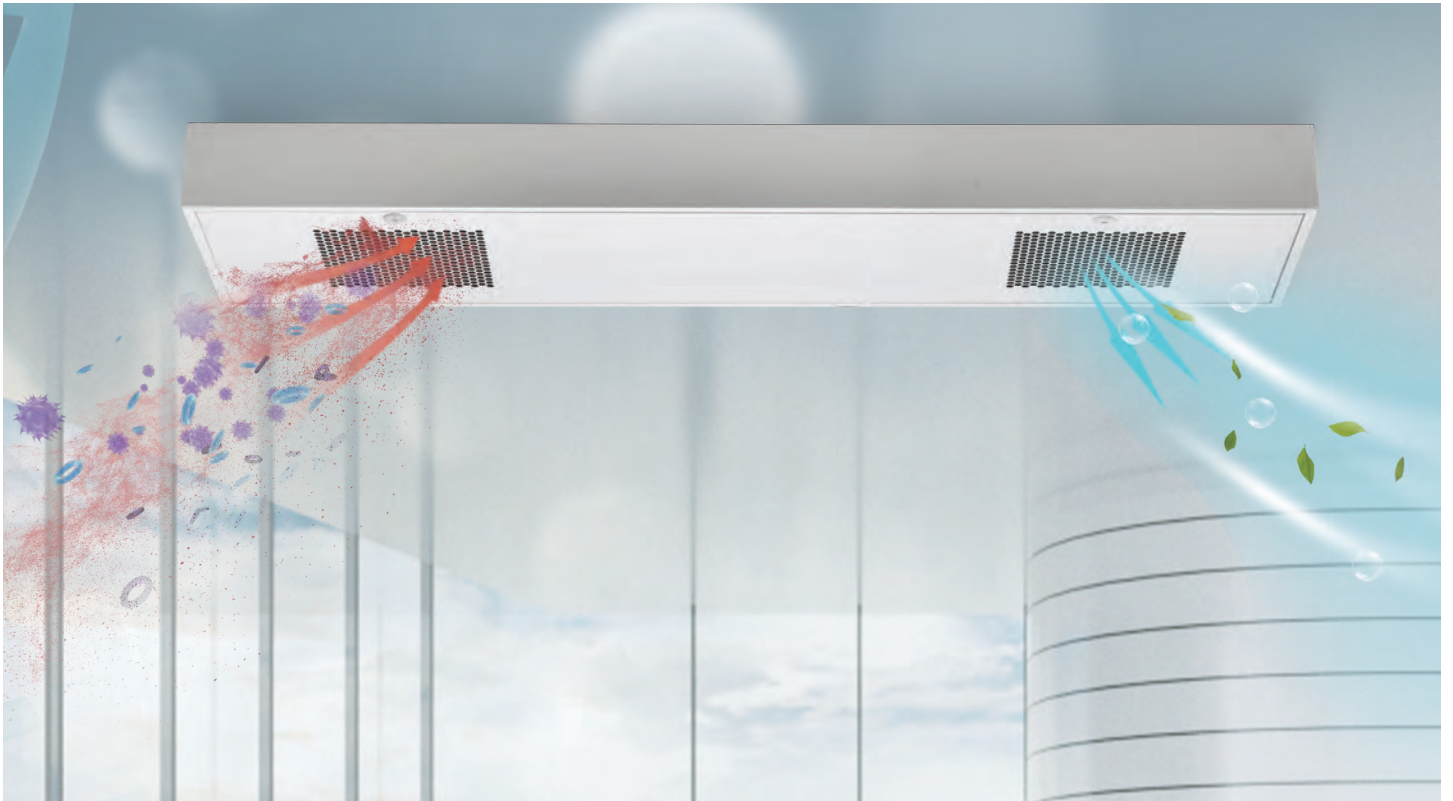

AIR PURIFIER



UV-C AIR DISINFECTION PURIFIERS

36W (2G11 1x36W)


SEC-G-UV122



Features

- UL & CSA certificated UVC germicidal module.
- Strong sterilization, using high-quality PLL quartz UV tube.
- It can sterilize 24 hours a day and kill 99.9% of virus in the air.
- When the equipment is working, the people in the space can move and work normally without avoiding it, and there is no impact on the human body and objects.
- Use air flow to sterilize the air.

Drawing

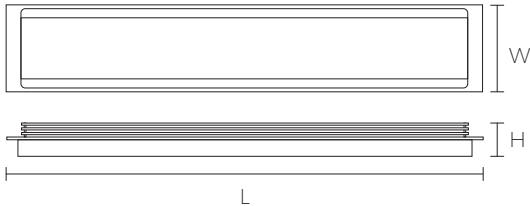

Parameter

Power	Input Voltage	UV light source	UV irradiance	Tube size	Size
36W	AC220-240V	2G11 UVC 254nm	120 $\mu\text{W}/\text{cm}^2$ @ 1M	411mm	530x114x44mm
36W	AC220-240V	2G11 UVC 254nm	120 $\mu\text{W}/\text{cm}^2$ @ 1M	411mm	630x114x44mm

Details



Philips UVC Tube



Human-machine Coexistence

UV-C AIR DISINFECTION PURIFIERS

96W (2G11 2x36W)


SEC-G-UV126



Features

- UVC parts is fully enclosed design, sterilization by irradiating passing air.
- Avoid UVC irradiating human body.
- One sterilizer, 20m³, the sterilization rate for of working 2H is up to.
- Philips UVC tube, wavelength 253.7NM.
- Mirror plate reflector inside, let the circulating air achieve 360° enhanced sterilization.
- Adopt high-power fan, air flow 75-79.6 CFM, about 126m³/H, 1m distance noise as low as 58.3dB.
- Easy removable front panel, convenient to install and replace the UVC lamp.
- Indicator light function, able to judge the working status of lamps in time.


Drawing

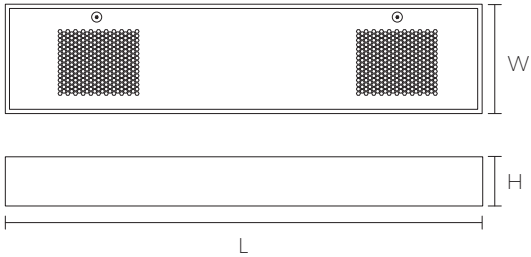

Parameter

Power	Input Voltage	UV light source	UV irradiance	Air Flow	Tube size	Size
96W	AC220-240V	2G11 UVC 254nm	52 $\mu\text{W}/\text{cm}^2$ @ 1M	126m ³ /H	411mm	1195x295x98mm
96W	AC220-240V	2G11 UVC 254nm	52 $\mu\text{W}/\text{cm}^2$ @ 1M	126m ³ /H	411mm	1213x303x98mm

Details

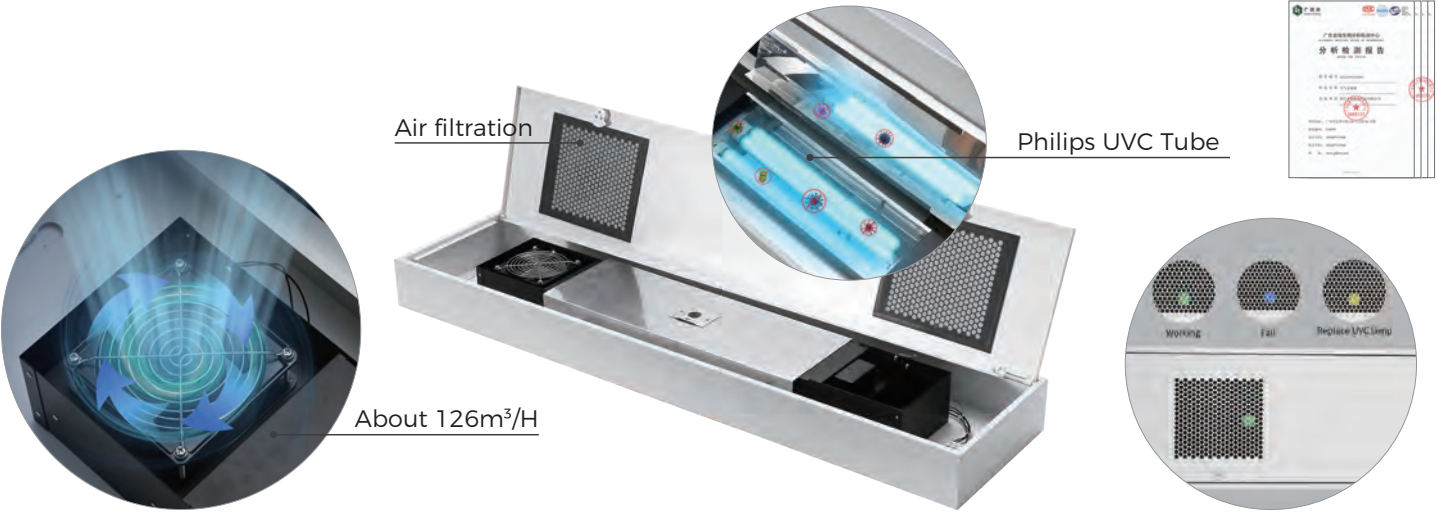

UV-LED AIR STERILIZATION PANEL

36+15W


SEC-L-UV127



Features

- Build-in UVLED lightsource tube, fully enclosed design, avoid UVC radiation from harming the human body.
- High power fan with long life time.(Air flow 30.73CFM, quick and effective sterilization.)
- UVLED and LED light two in one, work at the same time, air sterilization and illumination all day.
- 99.90% Sterilization rate.

Drawing

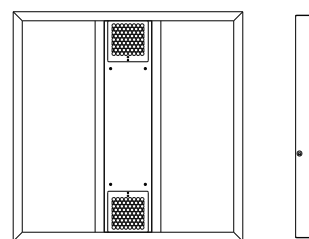


Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
36+15W	AC220-240V	3000/4000/6500K	100lm/W	> 95	> 0.9	595x595x50mm


Details



Detachable air filter



High power fan, about 126m³/H.



UV LED lightsource

LIFTABLE UV-C AIR PURIFIER

92W


SEC-G-UV128



Features

- Build-in 2pcs CNLIGHT 36W UV tube, fully enclosed design, avoid UVC radiation from harming the human body.
- High power fan with long life time. (Air flow 75CFM, around 124.4m³/H, quick and effective sterilization.)
- Two sterilization modes:
 1. Sterilization by irradiated circulating air when people in the room.
 2. Lower down UVC tubes by remote control and sterilization by irradiated air directly when people left room.
- Remote control, easy operation.
- Simple front panel disassembly design, easily replacing tubes.
- 99.90% Sterilization rate.
- Recessed, surface mounted and hanging, suit for multi-applications.

Drawing

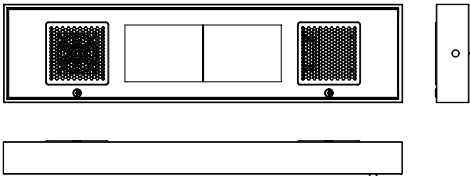


Parameter

Power	Input Voltage	UVC Tube	Air Flow	Life	Size
92W	AC220-240V	36Wx2	124.4m³	Fan: 30000H UVC tube: 8000H Ballast: 15000H	1195x295x98mm

Details



High power fan



UVC Tube x2

BUS CIRCULATING STERILIZER (CIRCULATING LAMP)

Light 18W+UVC 18W


SEC-L-UV129



Features

- Products are divided into two type, UV-C air purifiers and UV-C air purifiers with lighting two in one. Control by switch.
- UVC parts is fully enclosed design, sterilization by irradiating passing air, it more safer, avoid UVC irradiating human body.
- Built-in 18W philips UVC tube, with two fans, effective sterilization. In an environment of 10m³, sterilizing rate within 2 hours is 99.95%
- Easy to installation: Hanging, Surface mounted.



Drawing

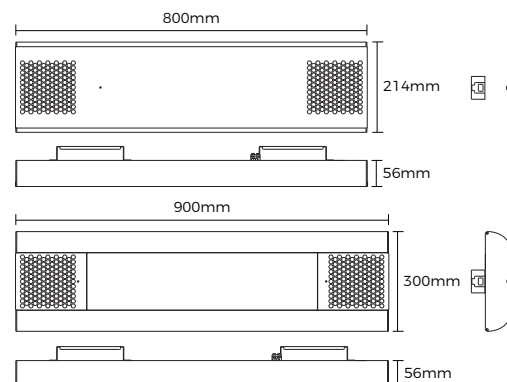

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	Fan Air Flow	Noise Of Fan
Light 18W+UVC 18W	AC220-240V	3000K/4000K/5000K	80lm/W	>95	51.75 CFM	26.73 dBA


Details

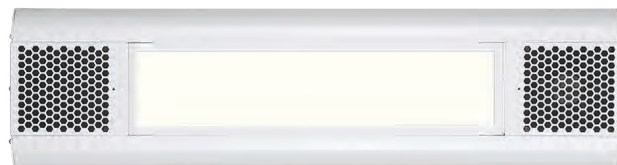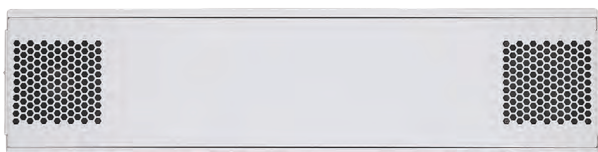

High power fan



UVC LED

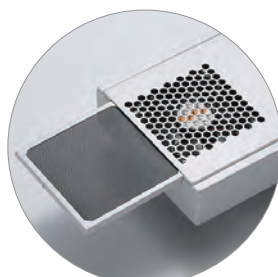

Filter Screen




Interface



Features

- Sterilization at any time.
- Light Replaceable, steriliser can be purchased separately with 30x120 fixture. Side-illuminated, straight down, or grille models for universal use.
- Built-in dual fan design, increase air intake to sterilise and disinfect by air circulation.
- Built-in high efficiency air filter, filters airborne dust impurities.
- Using LED UVC beads, more efficient and safer.


Drawing

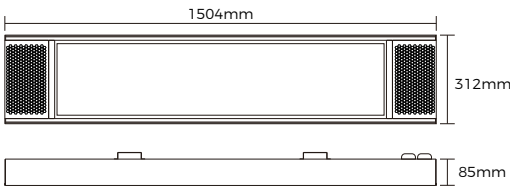

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	Fan Air Flow	Noise Of Fan
Light 36W+UVC 14W	AC220-240V	3000K/4000K/6500K	100lm/W	>80	60.34 CFM	31.6 dBA

Details

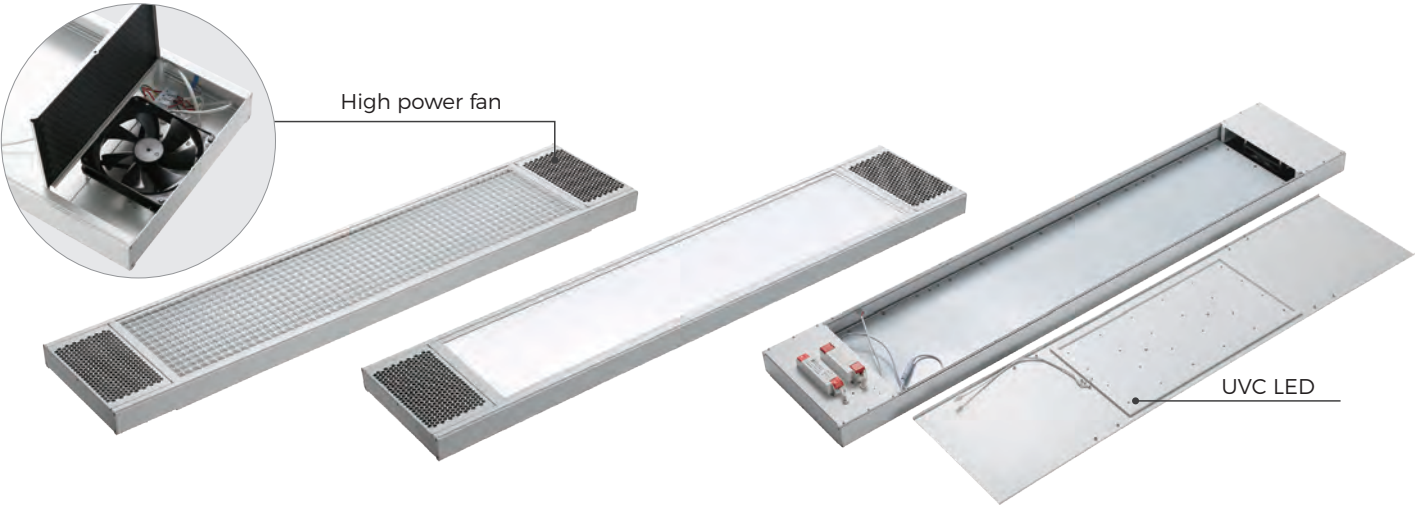

EUROPEAN AIR DISINFECTION PANEL LIGHT

LED luminaire 38W + UVC lamp 36W


SEC-L-PL200



Features

- Integrated Lighting and UVC sterilization functions, one lamp for two using, high efficiency and saving space.
- The special beam splitter design prevents ultraviolet light from directly irradiating the human body, and irradiates and sterilizes the upper air through air flow.
- When the equipment is working, the people in the space can move and work normally without avoiding it, and there is no impact on the human body and objects.
- Using high-quality quartz UV tube, high temperature resistance, high exhalation rate, low loss rate and long lifetime, strong sterilization.

Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
LED luminaire 38W UVC lamp 36W	AC220-240V	3000K/4000K/6500K/ CCT+Dimmable	90lm/W	> 80	> 0.9	595×595×90mm

Details



UL UVC AIR DISINFECTION LED PANEL LIGHT

LED luminaire 38W+UVC lamp 36W


SEC-L-PL205



Features

- Integrated Lighting and UVC sterilization functions, one lamp for two using, high efficiency and saving space.
- When the equipment is working, the people in the space can move and work normally without avoiding it, and there is no impact on the human body and objects.
- It can sterilize 24 hours a day and kill 99.9% of virus in the air.
- Use air flow to sterilize the air.

Drawing



Parameter

Power	Input Voltage	CCT	CRI	PF	Size
LED luminaire 38W UVC lamp 36W	AC100-277V	3000K/4000K/6500K/ CCT+Dimmable	> 80	> 0.9	603×603×90mm

Details





CEILING LIGHT



THREE-IN-ONE LED PROJECTION CEILING LIGHT

100W


SEC-L-PJ102




Features

- Intelligent dimming and CCT changing.
- 3D surround hi-fi, surround down shocking sound quality, can be used as a music player alone.
- Future wall, user-defined clock, sleep mode, nature scenes, etc., increase user's life quality.
- Super large screen, 0.8:1 throw ratio, super large screen like in the cinema.
- Screen can be adjusted up and down.
- High definition, high brightness, physical pixel 1080p full HD, 4K supported, 800ANSI brightness, suitable for bedrooms.
- AOS system, diffuse imaging, protecting your eyes, convenient for children study and entertainment.
- Fast installation, easy to install or replace.

Drawing



Accessory



Mounting bracket



Remote control



Screws



Expansion screws

Parameter

Machine Parameter

Input Voltage: AC220-240V/50-60Hz / 0.5A

Whole Machine Power: 100W

Power Projector: 62W

Dimension: Ø 460*95mm

Net Weight Of Product: 5Kg

Material: Lampshade PP、 Middle frame shell PC+ABS

Light Parameter

Lamp Power: 38W(80 X 1W/LED module+72 X 0.2W/LED module)

CCT: 3000K-6000K

Lumens: 3200lm

Lighting Source Life: 50000h

CRI: >90

Viewing Background Lamp: Adjustable brightness

(Projection) Optical parameter

Projection Technology: DLP Technology

Display Chip(Size): 0.23inch

Brightness: 800ANSI

Light Source Type: LED

Physical Pixel: 1920*1080 Full HD/4K Compatible

Optical Machine Life: 20000h

THREE-IN-ONE LED PROJECTION CEILING LIGHT

100W

SEC-L-PJ102

Projection Parameter	
Throw Ratio: 0.8: 1	Throw Range: 60~150inches
Projection Distance: 1.2-2.5m	Focus Mode: Electric focusing
Keystone Correction: Manual trapezoidal correction	Screen Width Ratio: Default 16: 9 compatible with 4: 3
Projection Mode: Desktop presentation; hoisting forward throw	
Move The Picture Up And Down: The 100-inch picture can be adjusted up and down by 35cm	
System Parameters	
TCPU: RK3399 dual cortex-A72+ quad cortex-A53 CPU architecture	
Memory: 2G	Basic Frequency: Max 1.8GHz
Operating System: Android 9.0 system	RAM: 32G
WIFI: WIFI 2.4G 、 5G LAN IEEE 802.11a/b/g/n/ac	Bluetooth: BLE
Sound Effects: Surround around	Language: Chinese, English, Japanese
Built-in speaker: Two-channel speaker +4 groups of bass diaphragm	
Interface	
USB: USB HOST 2.0*1	

Details



THREE-IN-ONE LED PROJECTION CEILING LIGHT

120W


SEC-L-PJ103



Features

- Dimming and CCT, no flicker, high CRI, anti-glare and better eye protection.
- High quality loudspeaker, two-channel stereo with dolby prologic support.
- Support wireless projection screen, small screen changes to big screen.
- 1080P resolution, restore more light and shadow details and colors.
- RGB multicoloured, light can change with the rhythm of music.
- Diffuse reflection imaging, almost zero damage to eyes.
- Remote control lighting when start/finish projection.
- No need walk to press wall switch.Very Convenient.

Drawing

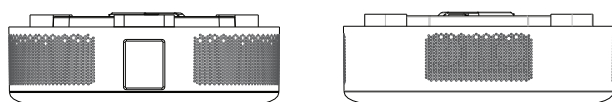

Accessory



Mounting bracket Remote control Screws Expansion screws

Parameter

Machine Parameter

Input Voltage: AC100-240V

Standby Power Consumption: ≤1W

Net Weight: 6.6Kg

Whole Machine Power: 120W

Dimension: Ø 480*165mm

Working Temperature: 0-40°C

Light Parameter

Lamp Power: 40W

CCT: 3000K-6000K

PF: >0.9

Lumens: 3800lm@4000K

CRI: >90

Projection Parameter

Projection Technology: American Ti DLP technology

Light Source Type: ORSAM RGB

Projection Light Source Life: 20000h@L50/B50

Display Chip: Ti 0.47" 1080P DMD

Projection Luminous Flux: 750-950ANSI

FOFO Contrast: (240-666):1

THREE-IN-ONE LED PROJECTION CEILING LIGHT

120W

SEC-L-PJ103

Projection Parameter	
Resolution: 1920*1080(1080P)	Throw Ratio: 0.80
Projection Distance: 1.0-2.5m	Projection Range: 60-120inch
Aspect Ratio: 16:10	Trapezoidal Correction: Manually Operated
Projection Method: Flush-mounted Ceiling Projection	Material: PC+Sheet Metal
Focus Mode: Manually Operated	Speakers: 2*10W 8Ω
System Parameters	
CPU: Amlogic T982	Cache: 4G
RAM: 32G	Operating System: Android 9.0
WIFI: 2.4G/5G Dual Band	Bluetooth: BT5.0
Remote Control: Bluetooth + Infrared	External Interface: 1*HDMI、1*RJ45、2*USB

Details



ULTRA SLIM CEILING LIGHT

17W / 24.5W


SEC-L-XD123



Features

- 2CCT and step dimmable by switching 4000K 100% - 3000K 50%.
- 20mm ultra-slim design with built-in driver.
- 300mm and 400mm sizes optional.

Drawing



Parameter

Power	Input Voltage	CCT & Dimmable	Lumen Efficiency	CRI	PF	Size
17W	AC220-240V	4000K 100% - 3000K 50%	100lm/W	> 80	> 0.9	Ø 300x22mm
24.5W	AC220-240V	4000K 100% - 3000K 50%	100lm/W	> 80	> 0.9	Ø 400x22mm

Details



UP AND DOWN ILLUMINATION LED CEILING LIGHT

18W / 24W


SEC-L-XD125



Square




Round



Features

- Exclusive design, double faces lighting.
- Nice outlook with good quality feeling.
- Quick wiring, easy Installation.
- With soft and uniform lighting.

Drawing

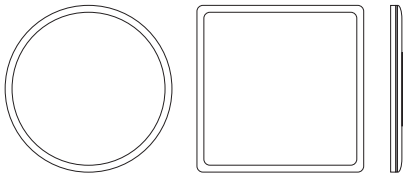

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
18W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.5	Ø 300x28mm
18W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.5	300x300x28mm
24W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.5	Ø 420x28mm
24W	AC220-240V	3000K/4000K/6500K	80lm/W	> 80	> 0.5	420x420x28mm

Details



Quick wiring



Wall switch



Safety rope design



Soft light




FRESH LIGHT




FRESH WATERPROOF BRACKET LIGHT

3-36W

SEC-L-LL204



Anti-drop bayonet design




IP68 Waterproof



Features

- Customize the lighting color according to the place.
- Flexible, meet a variety of fish tank sizes.
- IP68 deep waterproof.
- Can be used for high waterproof requirements supermarket sales shelves, and refrigerators, freezers and other wet places.

Drawing

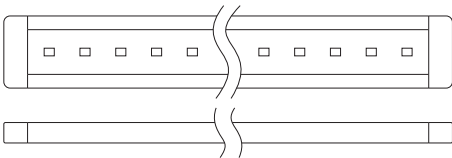


Parameter

Power	Input Voltage	IP Rating	Beam Angle	Lifetime	Size
3W	AC220-240V	IP68	120°	30000h	160x36x9mm
6W	AC220-240V	IP68	120°	30000h	260x36x9mm
9W	AC220-240V	IP68	120°	30000h	360x36x9mm
12W	AC220-240V	IP68	120°	30000h	460x36x9mm
14W	AC220-240V	IP68	120°	30000h	560x36x9mm
16W	AC220-240V	IP68	120°	30000h	660x36x9mm
18W	AC220-240V	IP68	120°	30000h	760x36x9mm
20W	AC220-240V	IP68	120°	30000h	860x36x9mm
22W	AC220-240V	IP68	120°	30000h	960x36x9mm
24W	AC220-240V	IP68	120°	30000h	1060x36x9mm
27W	AC220-240V	IP68	120°	30000h	1160x36x9mm
30W	AC220-240V	IP68	120°	30000h	1260x36x9mm
33W	AC220-240V	IP68	120°	30000h	1360x36x9mm
36W	AC220-240V	IP68	120°	30000h	1460x36x9mm


Details




Fresh meat area



Seafood area



Vegetable area



Fruit area

SPECIAL SPECTRUM FRESH FOOD LIGHT

36W


SEC-L-LL206



Features

- Single-sided light-emitting, can be used for various spectrum fresh lighting.
- Fitting for different kinds of fresh food, can also be used for full spectrum lighting.
- Hanging installation, adjustable angle, three colors optional.
- Special lens design, make the light more uniform, the luminous uniformity is close to 85.
- Diffusser function, illumilating certain area and peripheral area is not effected.
- High-quality power supply, flicker free, the whole lamp is safe and reliable.


Drawing



Parameter

Power	Input Voltage	CCT	PF	Size
36W	AC220-240V	3000K/4000K/6500K	> 0.9	1200x88x84mm

Details

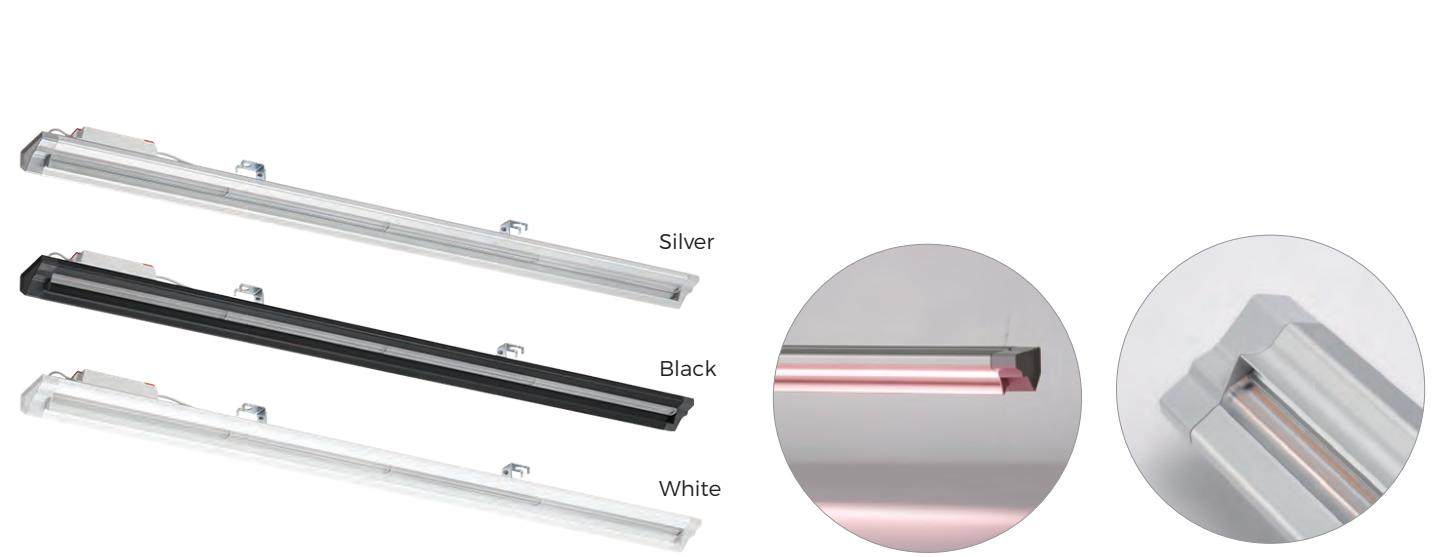



ACCESSORY




DTETACHABLE FRAME

625x635x27mm

SEC-E-PL224



Recessed

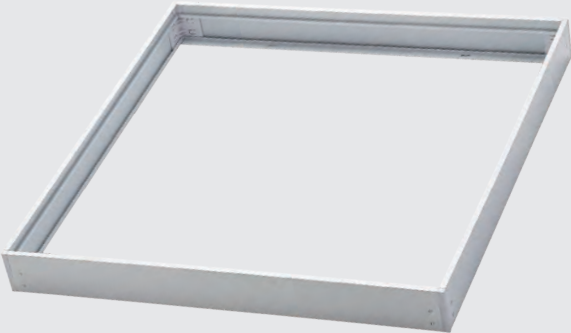


Surface



Features

- Detachable, save packaging volume.
- Recessed mounted and surface mounted for panel lights.
- Screw fixing, easy installation and removal.
- High quality aluminum, safe and not easy to fall off.

Drawing

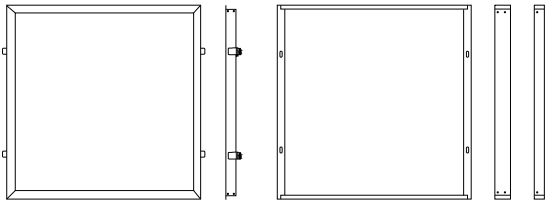

Parameter

Main Material	Exterior Color	Installation Method
Aluminum	White	Recessed/Surface


Details



Recessed Frame




Surface Frame (Two options)



3 HOURS LED EMERGENCY CONTROLLER

3-55W

SEC-L-EL124

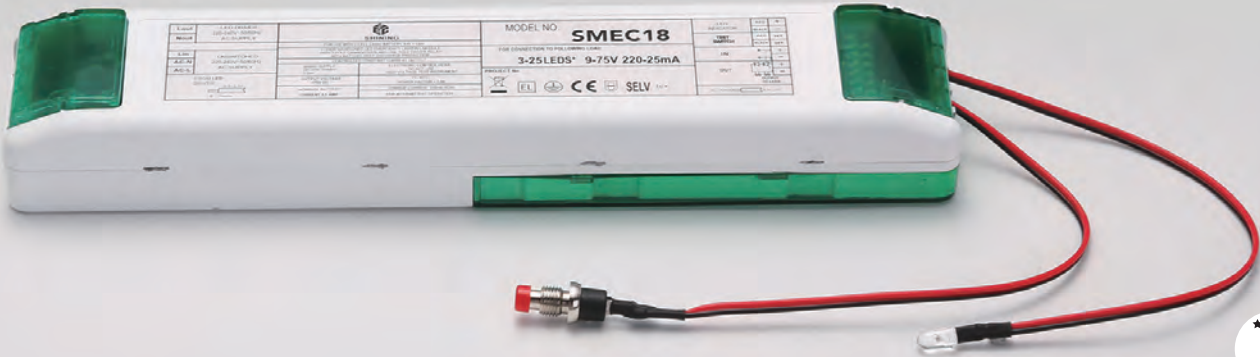

Features

- 3 hours LED emergency controller
- Lithium battery is thinner and lighter, built into the controller is more
- Concise and easy to use.
- Wide range of applications, applicable to lamps of different voltage ranges.


Drawing




Parameter

Power	Input Voltage	Output Voltage	Battery	Battery Capacity	Emergency	Size
3-55W	AC220-240V	DC 9-80V	Lithium Battery	6.4V 2000mAh	3H	218x45x26mm

Details

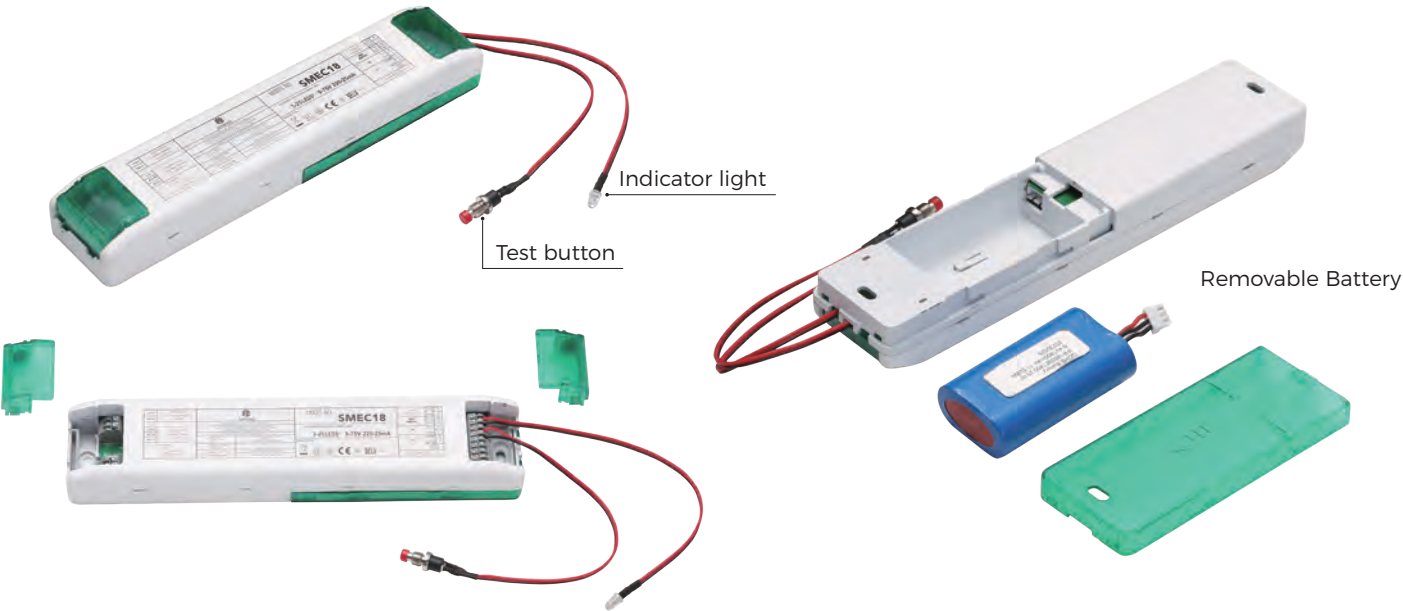

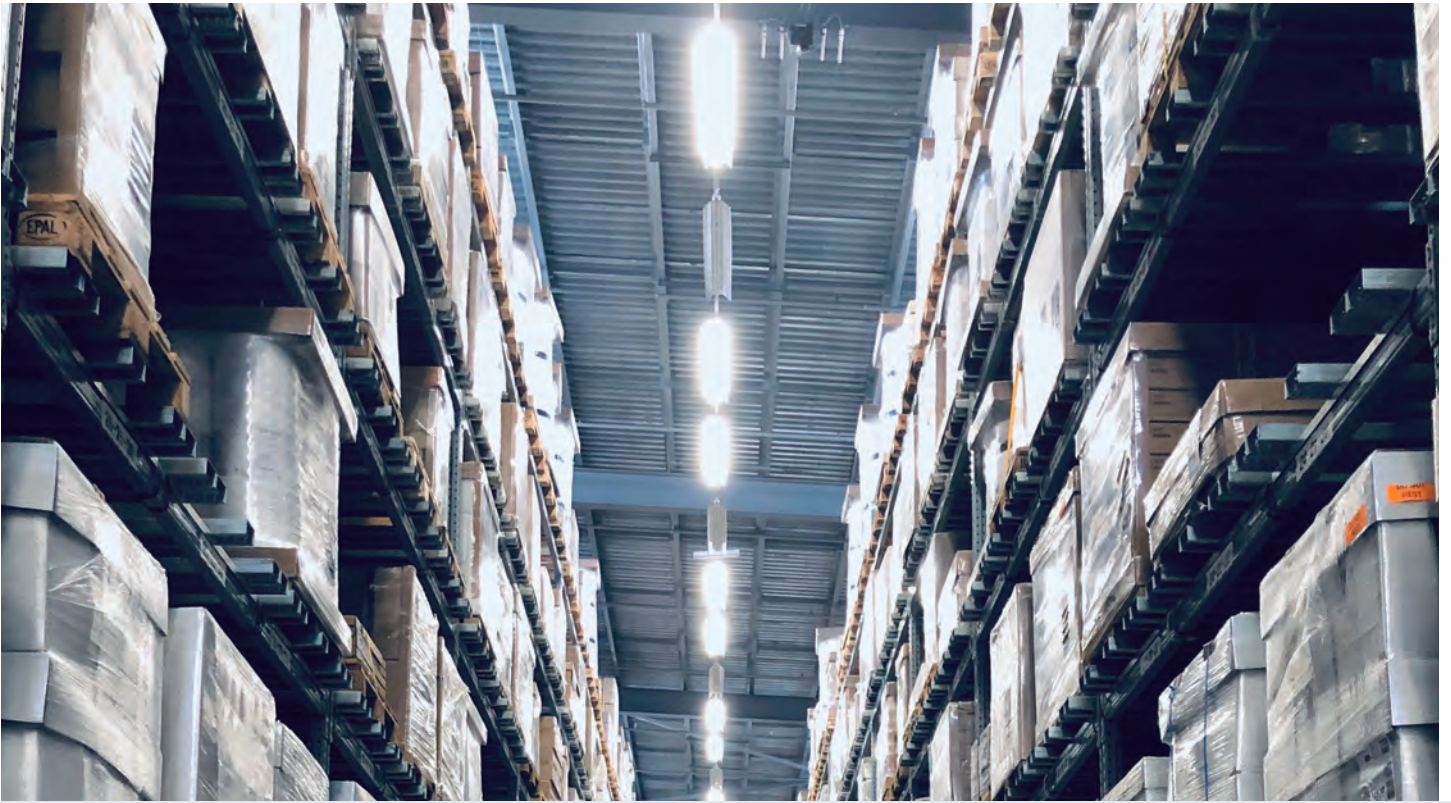

HIGH BAY LIGHT



UFO LED HIGH BAY

100W / 150W / 200W / 240W


SEC-L-GD119



Features

- Die-cast aluminum housing for good heat dissipation.
- Meamwell linear driver and Philips circular driver are available.
- 60° and 110° beam angle of lens are optional.
- High lumen efficiency up to 150lm/W.
- Long lifetime for 5 years warranty.

Drawing

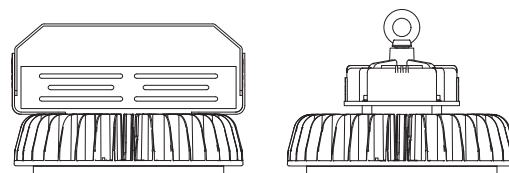

Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
100W	AC220-240V	4000K/6500K	150lm/W	> 80	> 0.9	Ø 262x162mm
150W	AC220-240V	4000K/6500K	150lm/W	> 80	> 0.9	Ø 262x162mm
200W	AC220-240V	4000K/6500K	150lm/W	> 80	> 0.9	Ø 262x171mm
240W	AC220-240V	4000K/6500K	150lm/W	> 80	> 0.9	Ø 290x189mm

Details



Good heat dissipation

Rotatable bracket

Die-cast aluminum housing

110° glass diffuser

LED LINEAR HIGH BAY LIGHT

75W / 150W / 200W


SEC-L-GD120



Features

- Unique design, high Luminous Flux, 140lm/W.
- Thicken Iron body, better heat dissipation.
- Hanging Mounted/Surface Mounting, Different kinds of installations, suit different places.
- Emergency kit available.
-

Drawing



IP65



Emergency



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Beam Angle	Size
75W	AC100-240V	4000K/6500K	140lm/W	> 80	> 0.9	60° / 90° / 120°	600x145x75mm
150W	AC100-240V	4000K/6500K	140lm/W	> 80	> 0.9	60° / 90° / 120°	1172x145x75mm
200W	AC100-240V	4000K/6500K	140lm/W	> 80	> 0.9	60° / 90° / 120°	1458x145x75mm

Details



60° / 90° / 120° lens




Seal ring

Emergency kit



Brand driver



Hanging



Surface hook



Black



Gray



White

LED LOWBAY

30W / 50W / 75W / 100W / 125W / 150W


SEC-L-GD131



Features

- 2 sizes, up to 6 specifications to choose from.
- With anti-collision grille protection, it is suitable for all kinds of warehouses, factories and badminton halls.
- Easy to install, can quickly open the face frame for installation, and with safety protection function; It can be opened without any tools.
- Small size, high power, simple and generous design.
- Highlight the lighting effect, up to 140 lm/w.
- The module area is sealed and installed separately from the drive, which can protect the module to the greatest extent.


Drawing



Parameter

Power	Input Voltage	CCT	Lumen Efficiency	CRI	PF	Size
30W	AC100-265V	3000K/4000K/6500K	100-140lm/W	> 80	> 0.9	560x270mm
50W	AC100-265V	3000K/4000K/6500K	100-140lm/W	> 80	> 0.9	560x270mm
75W	AC100-265V	3000K/4000K/6500K	100-140lm/W	> 80	> 0.9	560x270mm
100W	AC100-265V	3000K/4000K/6500K	100-140lm/W	> 80	> 0.9	560x370mm
125W	AC100-265V	3000K/4000K/6500K	100-140lm/W	> 80	> 0.9	560x370mm
150W	AC100-265V	3000K/4000K/6500K	100-140lm/W	> 80	> 0.9	560x370mm

Details

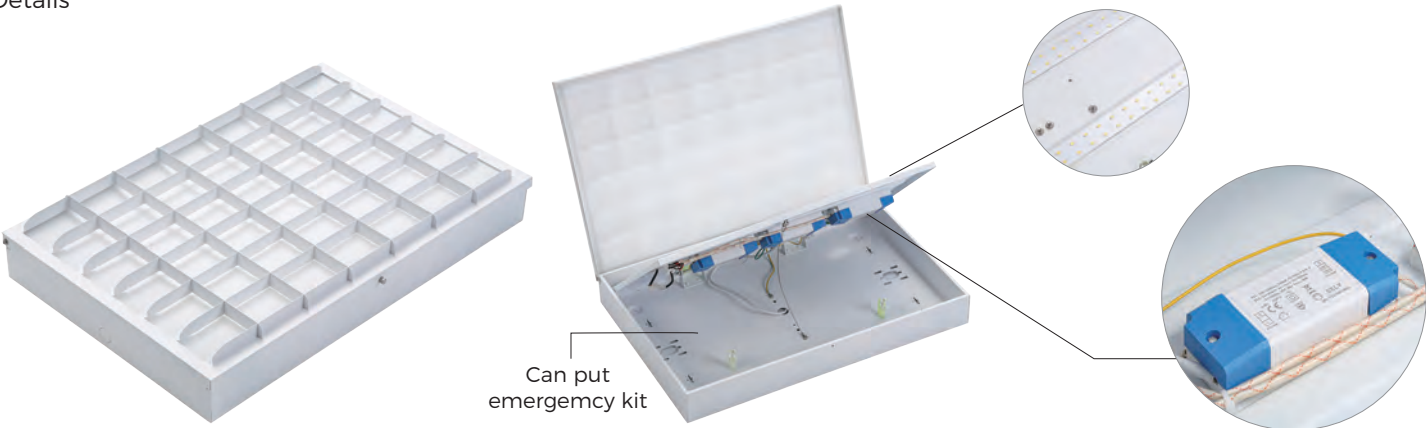

Can put
emergency kit



SHINING ELECTRONIC CO., LTD

ZHEJIANG TAI-G PHOTOELECTRIC TECHNOLOGY CO., LTD

Office: 12F, 1# Yitian Plaza, 290 Dongxin Ave., Binjiang District, Hangzhou, Zhejiang, China

Factory: 576 Gaoxin Xiyi Rd., Tongxiang, Jiaxing, Zhejiang, China

Business Phone: 86-0571-86822327 / 86-0571-86052895

Fax: 86-0571-86815836

Mail: ldy@shinlight.com