

IP65 IK08  CB  ErP 



VE-GS

Advantage:




1. IP65 IK08
2. Ease of installation
3. Two color extrusion, one body molding
4. Lifetime: L70B50 50,000h, 5 years warranty
5. High light efficiency: 130lm/w to 170lm/w

Application:

Warehouse, workshop, car parking and so on.




Type	CCT(K)	Power(W)	Luminous(lm)	Efficiency(lm/W)	Protection grade	Dimensions(mm)
VE106GS	4000	18	2350	130	IP65	605*56*63
VE112GS	4000	36	4700	130	IP65	1205*56*63
VE115GS	4000	48	6300	130	IP65	1405*56*63
VE106GS-TW1	4000	18	2350	130	IP65	655*56*63
VE115GS-TW1	4000	36	4700	130	IP65	1255*56*63
VE115GS-TW1	4000	48	6300	130	IP65	1455*56*63

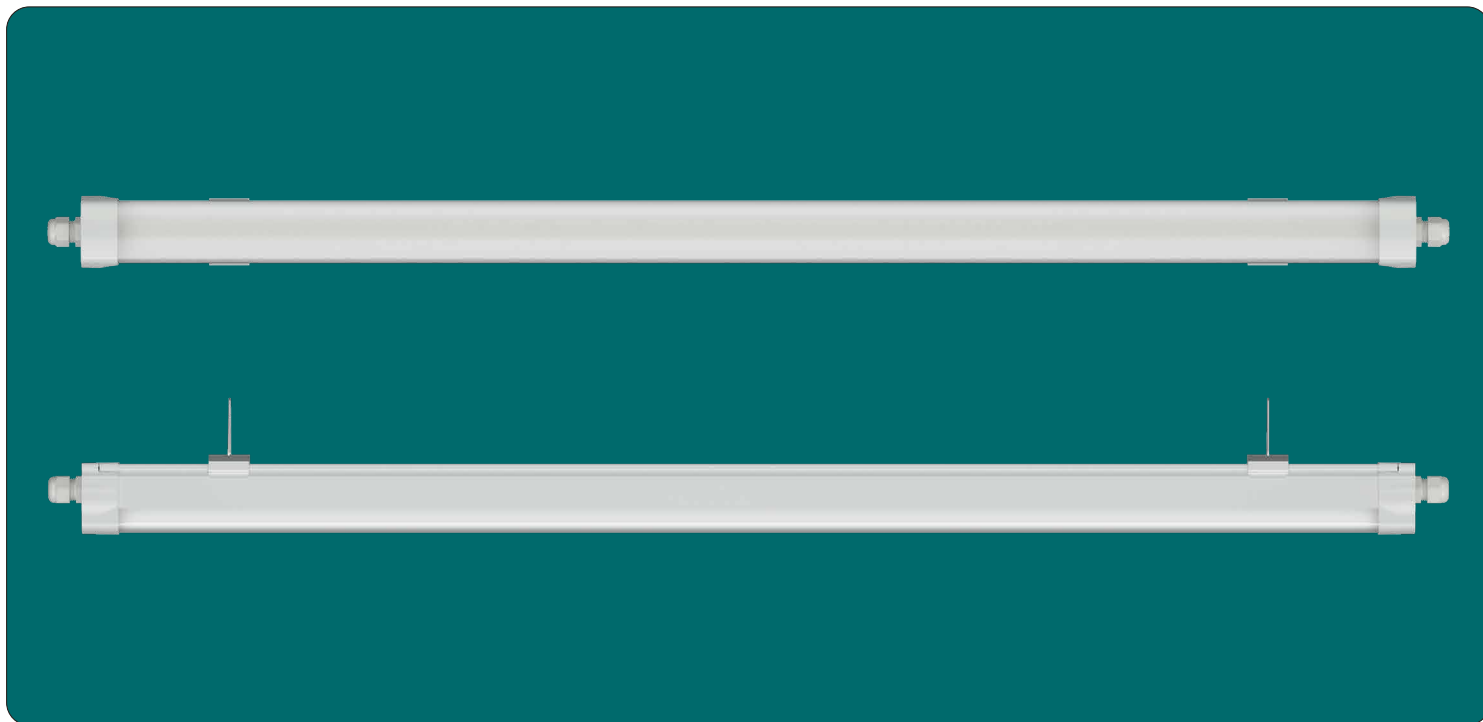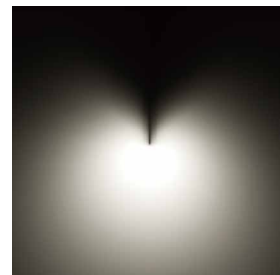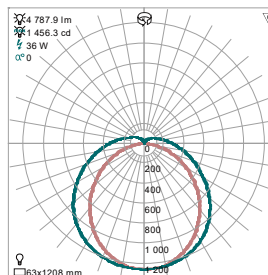


High light efficacy LED chip

130lm/w to 170lm/w

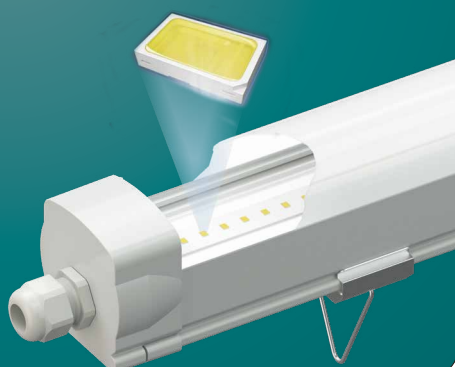


Flick-free LED driver

ripple < 5%

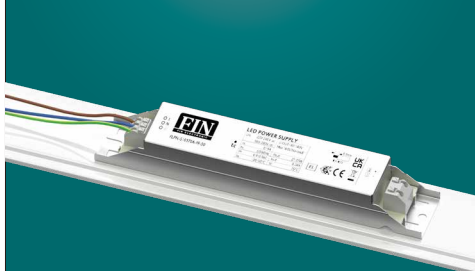

Stainless steel 304 installation accessory

Efficient and convenient installation, firm and not easy to rust

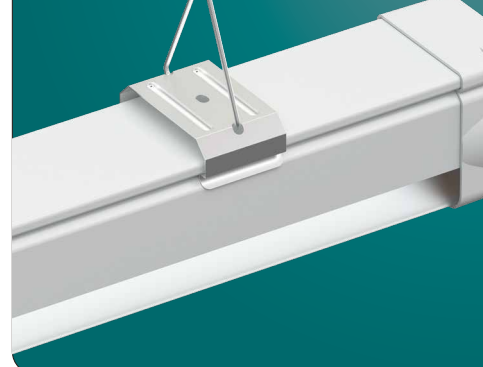


Two color extrusion, one body molding

Integrated molding process, waterproof performance is better



Knob end cover

Knob end cap for quick wiring and easy maintenance.

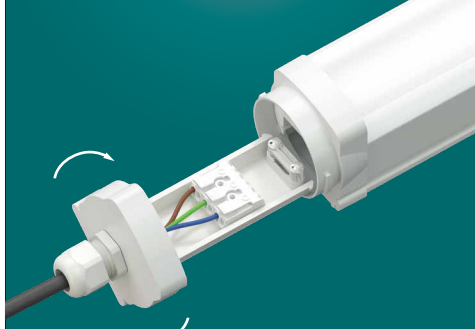

Socket light source

Easy maintenance, quick replacement of light source, reduce maintenance cost

