

WATERPROOF LED LIGHT VE-GE02




VE-GE02

APPLICATIONS

Can be applied in wet interior, dusty place and outdoor places such as Cellars, Sheds, Plant rooms, Warehouses, Open and closed parking areas, Workstations, Corridors etc.


SPECIFICATION FEATURES

1. An IP65 waterproof LED light;
2. Integrates PC cover with light diffusing agent and colored PC housing;
3. Housing caps sealed by silicon rubber gasket;
4. Adopt male and female quick connector, making the wiring easier;
5. No clips.

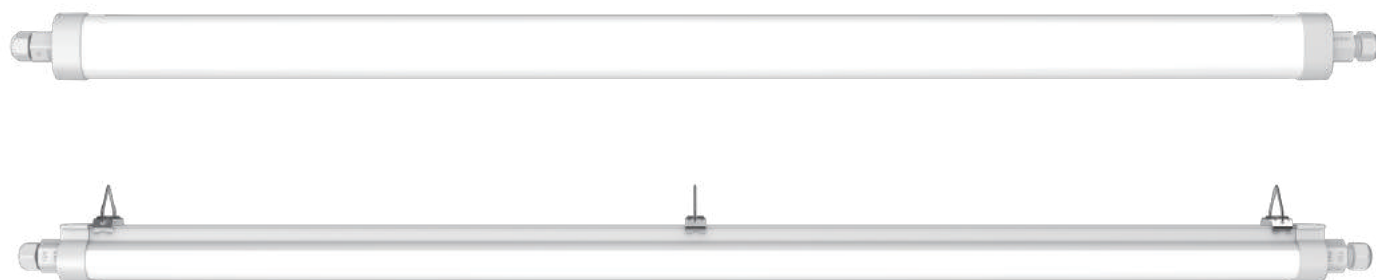

IP65  CB  ErP 

PRODUCT SIZE

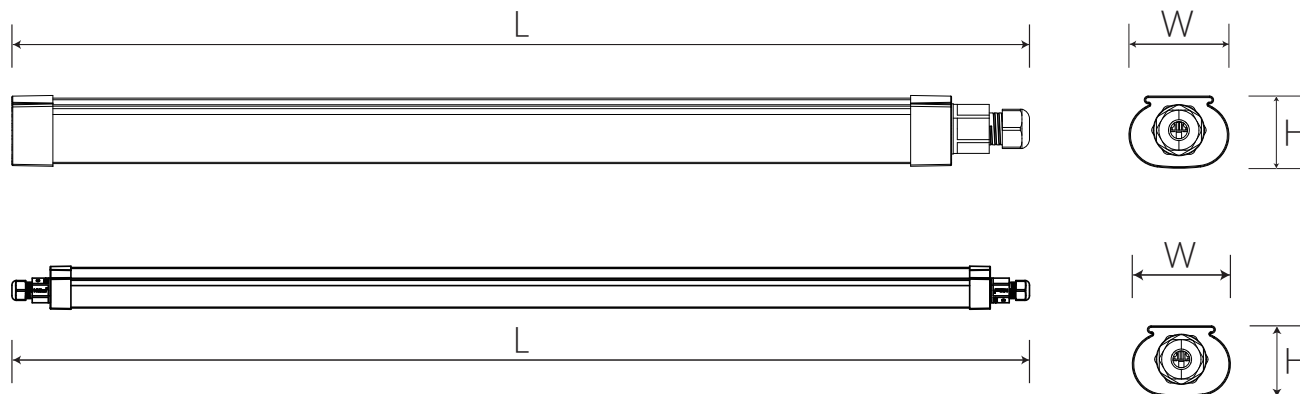


WATERPROOF LED LIGHT VE-GE02




DIMENSIONS AND WEIGHT

Type	Power	Luminous	CCT	Dimensions(L×W×H)	Packing size
VE106GE02	18W	2400lm	4000K	620×60×43mm	650×204×204mm
VE112GE02	30W	4200lm	4000K	1180×60×43mm	1210×204×204mm
VE115GE02	40W	5500lm	4000K	1460×60×43mm	1490×204×204mm
VE106GE02 - TW1	18W	2400lm	4000K	675×60×52mm	715×204×238mm
VE112GE02 - TW1	30W	4200lm	4000K	1235×60×52mm	1265×204×238mm
VE115GE02 - TW1	40W	5500lm	4000K	1515×60×52mm	1555×204×238mm


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

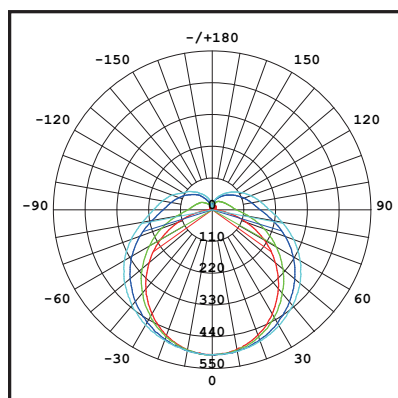

VE106GE02 Photometric

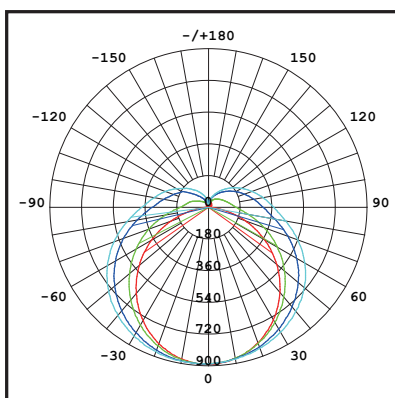

VE112GE02 Photometric

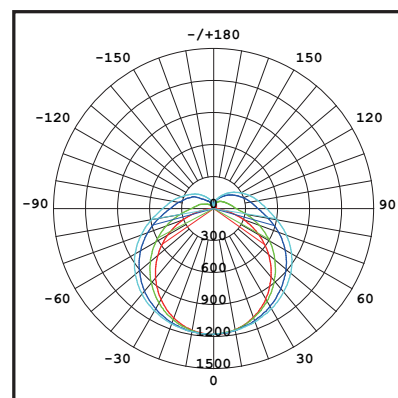

VE115GE02 Photometric

LUMINAIRES PARAMETER TABLE

Item description	VE-GE
Input voltage [Vac]	AC 220~240V
IP Rating	IP65
IK Rating	IK08
Operating temperature	-25°C~40°C
Beam angle	120°
CRI	Ra>80
Quality guarantee	3 years