



Significant[®]

LED Product Series



2022 V1

30 years OEM, ODM service experience

Nantong Zhongrun Lighting Electrical Co., LTD.



Significant®

Smart LED Bulb RED/ERP/CE



ITEM NO.	Model	Voltage	Watts	Luminous Flux	CCT	Beam Angle	Lifetime	Dimensions(mm)
NT21-013-4.8-CW	Smart GU10 CW 4.8W PC	220-240V	4.8W	400Lm	6500K+2700K	120°	25000H	Φ50*57mm
NT21-013-4.8-RGBW	Smart GU10 RGBW 4.8W PC	220-240V	4.8W	400Lm	RGB+2700K	120°	25000H	Φ50*57mm
NT21-013-4.8-RGBCW	Smart GU10 RGBCW 4.8W PC	220-240V	4.8W	400Lm	RGB+6500K+2700K	120°	25000H	Φ50*57mm
NT21-013-10-CW	Smart GU10 CW 10W PC	220-240V	10W	810Lm	6500K+2700K	120°	25000H	Φ50*82mm
NT21-013-10-RGBW	Smart GU10 RGBW 10W PC	220-240V	10W	810Lm	RGB+2700K	120°	25000H	Φ50*82mm
NT21-013-10-RGBCW	Smart GU10 RGBCW 10W PC	220-240V	10W	810Lm	RGB+6500K+2700K	120°	25000H	Φ50*82mm
NT21-014-4.8-CW	Smart GU10 CW 4.8W Glass	220-240V	4.8W	400Lm	6500K+2700K	120°	25000H	Φ50*57mm
NT21-014-4.8-RGBW	Smart GU10 RGBW 4.8W Glass	220-240V	4.8W	400Lm	RGB+2700K	120°	25000H	Φ50*57mm
NT21-014-4.8-RGBCW	Smart GU10 RGBCW 4.8W Glass	220-240V	4.8W	400Lm	RGB+6500K+2700K	120°	25000H	Φ50*57mm
NT21-015-4.8-CW	Smart GU10 MCOB CW 4.8W	220-240V	4.8W	400Lm	6500K+2700K	36°	25000H	Φ50*57mm
NT21-015-4.8-RGBW	Smart GU10 MCOB RGBW 4.8W	220-240V	4.8W	400Lm	RGB+2700K	36°	25000H	Φ50*57mm
NT21-015-4.8-RGBCW	Smart GU10 MCOB RGBCW 4.8W	220-240V	4.8W	400Lm	RGB+6500K+2700K	36°	25000H	Φ50*57mm
NT21-016-6-CW	Smart Candle CW 6W	220-240V	6W	470Lm	6500K+2700K	270°	25000H	Φ35*100mm
NT21-016-6-RGBW	Smart Candle RGBW 6W	220-240V	6W	470Lm	RGB+2700K	270°	25000H	Φ35*100mm
NT21-016-6-RGBCW	Smart Candle RGBCW 6W	220-240V	6W	470Lm	RGB+6500K+2700K	270°	25000H	Φ35*100mm
NT21-017-10-CW	Smart A60 CW 10W	220-240V	9W	810Lm	6500K+2700K	270°	25000H	Φ60*117mm
NT21-017-10-RGBW	Smart A60 RGBW 10W	220-240V	9W	810Lm	RGB+2700K	270°	25000H	Φ60*117mm
NT21-017-10-RGBCW	Smart A60 RGBCW 10W	220-240V	9W	810Lm	RGB+6500K+2700K	270°	25000H	Φ60*117mm
NT21-018-6-CW	Smart R50 CW 6W	220-240V	6W	470Lm	6500K+2700K	270°	25000H	Φ50*86mm
NT21-018-6-RGBW	Smart R50 RGBW 6W	220-240V	6W	470Lm	RGB+2700K	270°	25000H	Φ50*86mm
NT21-018-6-RGBCW	Smart R50 RGBCW 6W	220-240V	6W	470Lm	RGB+6500K+2700K	270°	25000H	Φ50*86mm
NT21-019-10-CW	Smart R63 CW 10W	220-240V	10W	806Lm	6500K+2700K	270°	25000H	Φ63*100mm
NT21-019-10-RGBW	Smart R63 RGBW 10W	220-240V	10W	806Lm	RGB+2700K	270°	25000H	Φ63*100mm
NT21-019-10-RGBCW	Smart R63 RGBCW 10W	220-240V	10W	806Lm	RGB+6500K+2700K	270°	25000H	Φ63*100mm
NT21-020-12-CW	Smart R80 CW 12W	220-240V	12W	1055Lm	6500K+2700K	270°	25000H	Φ80*115mm
NT21-020-12-RGBW	Smart R80 RGBW 12W	220-240V	12W	1055Lm	RGB+2700K	270°	25000H	Φ80*115mm
NT21-020-12-RGBCW	Smart R80 RGBCW 12W	220-240V	12W	1055Lm	RGB+6500K+2700K	270°	25000H	Φ80*115mm
NT21-021-10-CW	Smart PAR30 CW 10W	220-240V	10W	806Lm	6500K+2700K	270°	25000H	Φ95*92mm
NT21-021-10-RGBW	Smart PAR30 RGBW 10W	220-240V	10W	806Lm	RGB+2700K	270°	25000H	Φ95*92mm
NT21-021-10-RGBCW	Smart PAR30 RGBCW 10W	220-240V	10W	806Lm	RGB+6500K+2700K	270°	25000H	Φ95*92mm
NT21-022-12-CW	Smart PAR38 CW 12W	220-240V	12W	1055Lm	6500K+2700K	270°	25000H	Φ121*136mm
NT21-022-12-RGBW	Smart PAR38 RGBW 12W	220-240V	12W	1055Lm	RGB+2700K	270°	25000H	Φ121*136mm
NT21-022-12-RGBCW	Smart PAR38 RGBCW 12W	220-240V	12W	1055Lm	RGB+6500K+2700K	270°	25000H	Φ121*136mm


Smart LED Module RED/ERP/CE

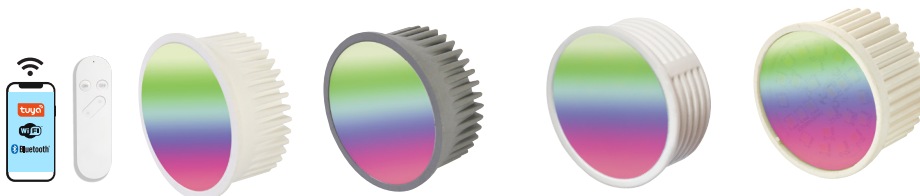

Model	Voltage	Watts	LED Number	Luminous Flux	CCT	Beam Angle	Lifetime	Dimensions(mm)
Smart WiFi & Bluetooth PC Module 4.8W RGBCCT	220-240V	4.8W	8+8+6	400Lm	RGB+CCT	110°	25000H	Φ50*25mm
Smart WiFi & Bluetooth PC Module 4.8W RGBW	220-240V	4.8W	8+6	400Lm	RGB+W	110°	25000H	Φ50*25mm
Smart WiFi & Bluetooth PC Module 4.8W CCT	220-240V	4.8W	8+8	400Lm	CCT	110°	25000H	Φ50*25mm

Significant®

Smart LED downlight series RED/ERP/CE



Model	Voltage	Watts	Luminous Flux	CCT	Beam Angle	Lifetime
NT-21001 RGBCT	220-240V	4.8W	400Lm	RGB+CCT	110°	25000H
NT-21001 RGBW	220-240V	4.8W	400Lm	RGB+W	110°	25000H
NT-21001 CW	220-240V	4.8W	400Lm	CCT	110°	25000H
NT-21002 RGBCT	220-240V	4.8W	400Lm	RGB+CCT	110°	25000H
NT-21002 RGBW	220-240V	4.8W	400Lm	RGB+W	110°	25000H
NT-21002 CW	220-240V	4.8W	400Lm	CCT	110°	25000H

LED Bulb

GS/EMC/LVD/RoHS/ERP



Model	Voltage	Watts	LED Number	Luminous Flux	CCT	Beam Angle	Lifetime	Dimensions(mm)
GU10 5SMD 2.9W Glass	220-240V	2.9W	5	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 5SMD 2.9W PC	220-240V	2.9W	5	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 5SMD 2.9W Glass	220-240V	2.9W	5	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 5SMD 2.9W PC	220-240V	2.9W	5	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 5SMD 2.9W Glass S	220-240V	2.9W	5	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 5SMD 2.9W PC S	220-240V	2.9W	5	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 5SMD 2.9W Glass S	220-240V	2.9W	5	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 5SMD 2.9W PC S	220-240V	2.9W	5	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 5SMD 3W Glass	220-240V	3W	5	300Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 5SMD 3W PC	220-240V	3W	5	300Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 5SMD 3W Glass	220-240V	3W	5	300Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 5SMD 3W PC	220-240V	3W	5	300Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 5SMD 3W Glass S	220-240V	3W	5	300Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 5SMD 3W PC S	220-240V	3W	5	300Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 5SMD 3W Glass S	220-240V	3W	5	300Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 5SMD 3W PC S	220-240V	3W	5	300Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 5SMD 4W Glass	220-240V	4W	5	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 5SMD 4W PC	220-240V	4W	5	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 5SMD 4W Glass	220-240V	4W	5	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 5SMD 4W PC	220-240V	4W	5	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 5SMD 4W Glass S	220-240V	4W	5	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 5SMD 4W PC S	220-240V	4W	5	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 5SMD 4W Glass S	220-240V	4W	5	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 5SMD 4W PC S	220-240V	4W	5	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 5SMD 4.5W Glass	220-240V	4.5W	5	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 5SMD 4.5W PC	220-240V	4.5W	5	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 5SMD 4.5W Glass	220-240V	4.5W	5	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 5SMD 4.5W PC	220-240V	4.5W	5	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 5SMD 4.5W Glass S	220-240V	4.5W	5	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 5SMD 4.5W PC S	220-240V	4.5W	5	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 5SMD 4.5W Glass S	220-240V	4.5W	5	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 5SMD 4.5W PC S	220-240V	4.5W	5	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 5SMD 4.8W Glass	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 5SMD 4.8W PC	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 5SMD 4.8W Glass	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 5SMD 4.8W PC	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)

GU10 5SMD 4.8W Glass S	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 5SMD 4.8W PC S	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 5SMD 4.8W Glass S	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 5SMD 4.8W PC S	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 7SMD 2.9W Glass	220-240V	2.9W	7	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 7SMD 2.9W PC	220-240V	2.9W	7	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 7SMD 2.9W Glass	220-240V	2.9W	7	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 7SMD 2.9W PC	220-240V	2.9W	7	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 7SMD 2.9W Glass S	220-240V	2.9W	7	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 7SMD 2.9W PC S	220-240V	2.9W	7	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 7SMD 2.9W Glass S	220-240V	2.9W	7	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 7SMD 2.9W PC S	220-240V	2.9W	7	260Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 7SMD 3W Glass	220-240V	3W	7	300Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 7SMD 3W PC	220-240V	3W	7	300Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 7SMD 3W Glass S	220-240V	3W	7	300Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 7SMD 3W PC S	220-240V	3W	7	300Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 7SMD 4W Glass	220-240V	4W	7	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 7SMD 4W PC	220-240V	4W	7	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 7SMD 4W Glass S	220-240V	4W	7	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 7SMD 4W PC	220-240V	4W	7	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 7SMD 4W Glass S	220-240V	4W	7	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 7SMD 4W PC S	220-240V	4W	7	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 7SMD 4W Glass S	220-240V	4W	7	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 7SMD 4W PC S	220-240V	4W	7	350Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 7SMD 4.5W Glass	220-240V	4.5W	7	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 7SMD 4.5W PC	220-240V	4.5W	7	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 7SMD 4.5W Glass	220-240V	4.5W	7	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 7SMD 4.5W PC	220-240V	4.5W	7	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 7SMD 4.5W Glass S	220-240V	4.5W	7	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 7SMD 4.5W PC S	220-240V	4.5W	7	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 7SMD 4.5W Glass S	220-240V	4.5W	7	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 7SMD 4.5W PC S	220-240V	4.5W	7	380Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 7SMD 4.8W Glass	220-240V	4.8W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 7SMD 4.8W PC	220-240V	4.8W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 7SMD 4.8W Glass	220-240V	4.8W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 7SMD 4.8W PC	220-240V	4.8W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 7SMD 4.8W Glass S	220-240V	4.8W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 7SMD 4.8W PC S	220-240V	4.8W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 7SMD 4.8W Glass S	220-240V	4.8W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 7SMD 4.8W PC S	220-240V	4.8W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 15SMD 5W Glass	220-240V	5W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 15SMD 5W PC	220-240V	5W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 15SMD 5W Glass	220-240V	5W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 15SMD 5W PC	220-240V	5W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 15SMD 5W Glass S	220-240V	5W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 15SMD 5W PC S	220-240V	5W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 15SMD 5W Glass S	220-240V	5W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 15SMD 5W PC S	220-240V	5W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 15SMD 6W Glass	220-240V	6W	15	500Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 15SMD 6W PC	220-240V	6W	15	500Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 15SMD 6W Glass	220-240V	6W	15	500Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 15SMD 6W PC	220-240V	6W	15	500Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 15SMD 6W Glass S	220-240V	6W	15	500Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
GU10 15SMD 6W PC S	220-240V	6W	15	500Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*57mm
JDR 15SMD 6W Glass S	220-240V	6W	15	500Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*74.5mm(E14)/Φ50*72.5mm(E27)
JDR 15SMD 6W PC S	220-240V	6W	15	500Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*76mm(E14)/Φ50*73mm(E27)
GU10 15SMD 7W PC	220-240V	7W	15	600Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*69.5mm
GU10 15SMD 7W PC S	220-240V	7W	15	600Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*69.5mm
GU10 15SMD 9W PC	220-240V	9W	15	700Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*69.5mm
GU10 15SMD 9W PC S	220-240V	9W	15	700Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*69.5mm
GU10 MCOB 5SMD 2.9W Glass	220-240V	2.9W	5	260Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
GU10 MCOB 5SMD 2.9W PC	220-240V	2.9W	5	260Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*54mm
JDR MCOB 5SMD 2.9W Glass	220-240V	2.9W	5	260Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73mm(E14)/Φ50*73mm(E27)
JDR MCOB 5SMD 2.9W PC	220-240V	2.9W	5	260Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73.5mm(E14)/Φ50*70mm(E27)
GU10 MCOB 5SMD 3W Glass	220-240V	3W	5	300Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
GU10 MCOB 5SMD 3W PC	220-240V	3W	5	300Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*54mm
JDR MCOB 5SMD 3W Glass	220-240V	3W	5	300Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73mm(E14)/Φ50*73mm(E27)
JDR MCOB 5SMD 3W PC	220-240V	3W	5	300Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73.5mm(E14)/Φ50*70mm(E27)

Significant®

GU10 MCOB 5SMD 4W Glass	220-240V	4W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
GU10 MCOB 5SMD 4W PC	220-240V	4W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*54mm
JDR MCOB 5SMD 4W Glass	220-240V	4W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73mm(E14)/Φ50*73mm(E27)
JDR MCOB 5SMD 4W PC	220-240V	4W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73.5mm(E14)/Φ50*70mm(E27)
GU10 MCOB 5SMD 4.5W Glass	220-240V	4.5W	5	380Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
GU10 MCOB 5SMD 4.5W PC	220-240V	4.5W	5	380Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*54mm
JDR MCOB 5SMD 4.5W Glass	220-240V	4.5W	5	380Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73mm(E14)/Φ50*73mm(E27)
JDR MCOB 5SMD 4.5W PC	220-240V	4.5W	5	380Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73.5mm(E14)/Φ50*70mm(E27)
GU10 MCOB 5SMD 4.8W Glass	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
GU10 MCOB 5SMD 4.8W PC	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*54mm
JDR MCOB 5SMD 4.8W Glass	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73mm(E14)/Φ50*73mm(E27)
JDR MCOB 5SMD 4.8W PC	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73.5mm(E14)/Φ50*70mm(E27)
GU10 MCOB 7SMD 5W Glass	220-240V	5W	7	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
GU10 MCOB 7SMD 5W PC	220-240V	5W	7	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*54mm
JDR MCOB 7SMD 5W Glass	220-240V	5W	7	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73mm(E14)/Φ50*73mm(E27)
JDR MCOB 7SMD 5W PC	220-240V	5W	7	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73.5mm(E14)/Φ50*70mm(E27)
GU10 MCOB 7SMD 6W Glass	220-240V	6W	7	450Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
GU10 MCOB 7SMD 6W PC	220-240V	6W	7	450Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*54mm
JDR MCOB 7SMD 6W Glass	220-240V	6W	7	450Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73mm(E14)/Φ50*73mm(E27)
JDR MCOB 7SMD 6W PC	220-240V	6W	7	450Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73.5mm(E14)/Φ50*70mm(E27)
GU10 MCOB 8SMD 3.5W Glass	220-240V	3.5W	8	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
GU10 MCOB 8SMD 3.5W PC	220-240V	3.5W	8	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*54mm
JDR MCOB 8SMD 3.5W Glass	220-240V	3.5W	8	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73mm(E14)/Φ50*73mm(E27)
JDR MCOB 8SMD 3.5W PC	220-240V	3.5W	8	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73.5mm(E14)/Φ50*70mm(E27)
GU10 MCOB 8SMD 4.2W Glass	220-240V	4.2W	8	450Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
GU10 MCOB 8SMD 4.2W PC	220-240V	4.2W	8	450Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*54mm
JDR MCOB 8SMD 4.2W Glass	220-240V	4.2W	8	450Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73mm(E14)/Φ50*73mm(E27)
JDR MCOB 8SMD 4.2W PC	220-240V	4.2W	8	450Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*73.5mm(E14)/Φ50*70mm(E27)
GU10 MCOB 12SMD 7W	220-240V	7W	12	600Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*67mm
GU10 MCOB 12SMD 9W	220-240V	9W	12	700Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*67mm

G9 details

GS/EMC/LVD/RoHS/ERP



Model	Voltage	Watts	LED Number	Luminous Flux	CCT	Lifetime	Dimensions(mm)
G9 3.5W	220-240V	3.5W	51	400Lm	2700K/3000K/4000K/6500K	25000H	Φ17.5x50mm
G9 32SMD 3W	220-240V	3W	32	320Lm	2700K/3000K/4000K/6500K	25000H	Φ17.5x50mm
E14 32SMD 3W	220-240V	3W	32	320Lm	2700K/3000K/4000K/6500K	25000H	Φ17.5x54mm
G9 64SMD 4W	220-240V	4W	64	500Lm	2700K/3000K/4000K/6500K	25000H	Φ18.5x60mm

T26 details

GS/EMC/LVD/RoHS/ERP



Model	Voltage	Watts	LED Number	Luminous Flux	CCT	Lifetime	Dimensions(mm)
ST26 4SMD 1.5W	220-240V	1.5W	4	150Lm	2700K/3000K/4000K/6500K	25000H	Φ23x51mm
ST26 4SMD 2W	220-240V	2W	4	200Lm	2700K/3000K/4000K/6500K	25000H	Φ23x51mm

E14/E27 retrofit bulb details

GS/EMC/LVD/RoHS/ERP



Model	Voltage	Watts	LED Number	Luminous Flux	CCT	Lifetime	Dimensions(mm)
LED Piston Shape 4W	220-240V	4W	34	400Lm	2700K/3000K/4000K/6500K	25000H	"Φ30x88.5mm(E14) Φ30x88mm(E27)"
LED Piston Shape GU10 4W	220-240V	4W	34	400Lm	2700K/3000K/4000K/6500K	25000H	Φ30x80mm
LED Piston Shape 8W	220-240V	8W	34	806Lm	2700K/3000K/4000K/6500K	25000H	"Φ40x117mm(E14) Φ40x111mm(E27)"

Dimmable/Step-dimmable LED Bulb

CE/RoHS/ERP



Model	Voltage	Watts	LED Number	Luminous Flux	CCT	Beam Angle	Lifetime	Dimensions(mm)
Dimmable GU10 MCOB 5W Glass	220-240V	5W	8	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
Dimmable GU10 MCOB 5W PC	220-240V	5W	8	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
Dimmable GU10 15SMD 5W Glass	220-240V	5W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
Dimmable GU10 15SMD 5W PC	220-240V	5W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
Step-dimmable GU10 MCOB 4.8W Glass	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
Step-dimmable GU10 MCOB 4.8W PC	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H	Φ50*53mm
Step-dimmable GU10 15SMD 4.8W Glass	220-240V	4.8W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm
Step-dimmable GU10 15SMD 4.8W PC	220-240V	4.8W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*55mm

S15 LED Bulb

CE/RoHS/ERP



Model	Voltage	Watts	Luminous Flux	CCT	Lifetime	Dimensions(mm)
S15 221mm 4W	220-240V	4W	360Lm	2700K/3000K/4000K/6500K	25000H	Φ25.5*221mm
S15 284mm 4W	220-240V	4W	360Lm	2700K/3000K/4000K/6500K	25000H	Φ25.5*284mm
S15 284mm 6W	220-240V	6W	500Lm	2700K/3000K/4000K/6500K	25000H	Φ25.5*284mm

S19 LED Bulb

CE/RoHS/ERP



Model	Voltage	Watts	Luminous Flux	CCT	Lifetime	Dimensions(mm)
S19 8W	220-240V	8W	800Lm	2700K/3000K/4000K/6500K	25000H	Φ38*310mm

R7s LED Bulb

CE/RoHS/ERP



Model	Voltage	Watts	Luminous Flux	CCT	Lifetime	Dimensions(mm)
R7s J78mm 6W	220-240V	6W	550Lm	2700K/3000K/4000K/6500K	25000H	28*78mm
R7s J118mm 6W	220-240V	6W	550Lm	2700K/3000K/4000K/6500K	25000H	17*118mm

P45 LED Bulb
CE/RoHS/ERP



Model	Voltage	Watts	Luminous Flux	CCT	Lifetime	Dimensions(mm)
P45 E14 230V 1W	220-240V	1W	55Lm	2700K/3000K/4000K/6500K	25000H	Φ45*80mm

Starry string bulb series
CE/RoHS/ERP



Model	Voltage	Watts	Luminous Flux	CCT	Lifetime	Dimensions(mm)
G120 Starry Light 1.5W	220-240V	1.5W	55Lm	2700K/3000K	25000H	Φ120*150mm
G80 Starry Light 1.5W	220-240V	1.5W	55Lm	2700K/3000K	25000H	Φ80*104mm
G80 PC E27 0.6W	220-240V	0.6W	55Lm	2700K/3000K	25000H	Φ80*104mm
G80 PC B22 0.6W	220-240V	0.6W	55Lm	2700K/3000K	25000H	Φ80*104mm
ST64 PC E27 0.6W	220-240V	0.6W	55Lm	2700K/3000K	25000H	Φ64*136mm
ST64 PC B22 0.6W	220-240V	0.6W	55Lm	2700K/3000K	25000H	Φ64*136mm
ST45 Amber PC 0.6W	220-240V	0.6W	55Lm	Amber	25000H	Φ45*88mm
A60 PC 0.8W Red	220-240V	0.8W	30Lm	Red	25000H	Φ60*105mm
A60 PC 0.8W Yellow	220-240V	0.8W	80Lm	Yellow	25000H	Φ60*105mm
A60 PC 0.8W Light Green	220-240V	0.8W	130Lm	Light Green	25000H	Φ60*105mm
A60 PC 0.8W Light Blue	220-240V	0.8W	55Lm	Light Blue	25000H	Φ60*105mm
A60 PC 0.8W Pink	220-240V	0.8W	22Lm	Pink	25000H	Φ60*105mm
A60 PC 0.8W Purple	220-240V	0.8W	30Lm	Purple	25000H	Φ60*105mm
A60 PC 0.6W Warmwhite	220-240V	0.6W	55Lm	2700K/3000K	25000H	Φ60*105mm

LED Module
GS/EMC/LVD/RoHS/ERP




Model	Voltage	Watts	LED Number	Luminous Flux	CCT	Beam Angle	Lifetime	Dimensions(mm)
LED module 7SMD 4.8W ceramic	220-240V	4.8W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*23mm
LED module 15SMD 4.8W ceramic	220-240V	4.8W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*23mm
LED module 7SMD 4.8W PC	220-240V	4.8W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*25mm
LED module 15SMD 4.8W PC	220-240V	4.8W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*25mm
step-dimmable LED module 7SMD 4.8W ceramic	220-240V	4.8W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*23mm
step-dimmable LED module 15SMD 4.8W ceramic	220-240V	4.8W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*23mm
step-dimmable LED module 7SMD 4.8W PC	220-240V	4.8W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*25mm
step-dimmable LED module 15SMD 4.8W PC	220-240V	4.8W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*25mm
Dimmable LED module 7SMD 5W ceramic	220-240V	5W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*23mm
Dimmable LED module 15SMD 5W ceramic	220-240V	5W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*23mm
Dimmable LED module 7SMD 5W PC	220-240V	5W	7	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*25mm
Dimmable LED module 15SMD 5W PC	220-240V	5W	15	400Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*25mm
LED module 15SMD 7W ceramic	220-240V	7W	15	650Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*36mm
step-dimmable LED module 15SMD 7W ceramic	220-240V	7W	15	650Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*36mm
Dimmable LED module 15SMD 7W ceramic	220-240V	7W	15	600Lm	2700K/3000K/4000K/6500K	110°	25000H	Φ50*36mm
LED module MCOB 4.8W PC	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°/50°/110°	25000H	Φ50*25mm
LED module MCOB 4.8W ceramic	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°/50°/110°	25000H	Φ50*33mm
step-dimmable LED module MCOB 4.8W PC	220-240V	4.8W	5	400Lm	2700K/3000K/4000K/6500K	36°/38°/50°/110°	25000H	Φ50*25mm
Dimmable LED module MCOB 5W PC	220-240V	5W	8	400Lm	2700K/3000K/4000K/6500K	36°/38°/50°/110°	25000H	Φ50*25mm
Dimmable LED module MCOB 5W PC FT	220-240V	5W	8	400Lm	2700K/3000K/4000K/6500K	36°/38°/50°/110°	25000H	Φ50*25mm
Dimmable LED module MCOB 6W ceramic	220-240V	6W	8	480Lm	2700K/3000K/4000K/6500K	36°/38°/50°/110°	25000H	Φ50*33mm
Dimmable LED module MCOB 7W ceramic	220-240V	7W	8		2700K/3000K/4000K/6500K	36°/38°/50°/110°	25000H	Φ50*33mm

Significant®

LED downlight series

GS/EMC/LVD/RoHS/ERP



Model	Voltage	Watts	Luminous Flux	CCT	Beam Angle	Lifetime
NT-21001 SMD	220-240V	3.5W	400Lm	2700K/3000K/4000K/6500K	110°	25000H
NT-21002 SMD	220-240V	4W	400Lm	2700K/3000K/4000K/6500K	110°	25000H
NT-21003 MCOB	220-240V	3.5W	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H
NT-21004 MCOB	220-240V	4W	400Lm	2700K/3000K/4000K/6500K	36°/38°	25000H

LED wall lamp

CE/RoHS/ERP



Model	Voltage	Watts	LED Number	Luminous Flux	CCT	Lifetime	Dimensions(mm)
NT21001-xx	220-240V	5.5W	15	600Lm	3000K/4000K	25000H	166x106x76mm
NT21002-xx	220-240V	5.5W	15	600Lm	3000K/4000K	25000H	172x148x84mm
NT21003-xx	220-240V	5.5W	15	600Lm	3000K/4000K	25000H	168x115x76mm
NT21004-xx	220-240V	5.5W	15	600Lm	3000K/4000K	25000H	168x115x76mm
NT21005-xx	220-240V	8W	15	700Lm	3000K/4000K	25000H	166x106x76mm
NT21006-xx	220-240V	8W	15	700Lm	3000K/4000K	25000H	172x148x84mm
NT21007-xx	220-240V	8W	15	700Lm	3000K/4000K	25000H	168x115x76mm
NT21008-xx	220-240V	8W	15	700Lm	3000K/4000K	25000H	150x172x76mm

Smart LED wall lamp

RED/ERP/SAA/CE




Model	Voltage	Watts	Luminous Flux	CCT	Lifetime	Dimensions(mm)
NT21001-xx RGBCW	220-240V	5.5W	600Lm	RGB+6500K+2700K	25000H	168x115x76mm
NT21001-xx CW	220-240V	5.5W	600Lm	6500K+2700K	25000H	168x115x76mm
NT21002-xx RGBCW	220-240V	5.5W	600Lm	RGB+6500K+2700K	25000H	150x172x80mm
NT21002-xx CW	220-240V	5.5W	600Lm	6500K+2700K	25000H	150x172x80mm
NT21003-xx RGBCW	220-240V	5.5W	600Lm	RGB+6500K+2700K	25000H	168x115x76mm
NT21003-xx CW	220-240V	5.5W	600Lm	6500K+2700K	25000H	168x115x76mm
NT21004-xx RGBCW	220-240V	5.5W	600Lm	RGB+6500K+2700K	25000H	150x172x76mm
NT21004-xx CW	220-240V	5.5W	600Lm	6500K+2700K	25000H	150x172x76mm
NT21005-xx RGBCW	220-240V	8W	700Lm	RGB+6500K+2700K	25000H	168x115x76mm
NT21005-xx CW	220-240V	8W	700Lm	6500K+2700K	25000H	168x115x76mm
NT21006-xx RGBCW	220-240V	8W	700Lm	RGB+6500K+2700K	25000H	150x172x80mm
NT21006-xx CW	220-240V	8W	700Lm	6500K+2700K	25000H	150x172x80mm
NT21007-xx RGBCW	220-240V	8W	700Lm	RGB+6500K+2700K	25000H	168x115x76mm
NT21007-xx CW	220-240V	8W	700Lm	6500K+2700K	25000H	168x115x76mm
NT21008-xx RGBCW	220-240V	8W	700Lm	RGB+6500K+2700K	25000H	150x172x76mm
NT21008-xx CW	220-240V	8W	700Lm	6500K+2700K	25000H	150x172x76mm

LED ceiling lamp



Model	Voltage	Watts	Luminous Flux	Luminous Flux	CCT	Beam Angle	Lifetime	Dimensions(mm)
LED Ceiling light 12W	220-240V	12W	800Lm	800Lm	3000K/4000K/6500K	120°	25000H	260x260x57mm
LED Ceiling light 18W	220-240V	18W	1260Lm	1260Lm	3000K/4000K/6500K	120°	25000H	330x330x66mm
LED Ceiling light 24W	220-240V	24W	1680Lm	1680Lm	3000K/4000K/6500K	120°	25000H	380x380x66mm

LED T5 integrated light
CE/EMC/LVD

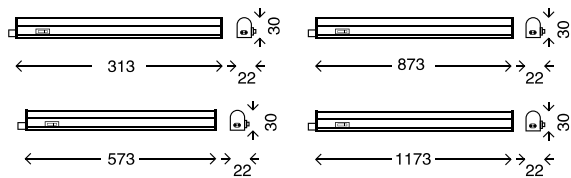

Model	Voltage	Watts	Luminous Flux	CCT	Lifetime	Dimensions(mm)
LED T5 integrated light 4W	220-240V	4W	400lm	3000K/4000K/6500K	25000H	313x22x30mm
LED T5 integrated light 8W	220-240V	8W	810Lm	3000K/4000K/6500K	25000H	573x22x30mm
LED T5 integrated light 10W	220-240V	10W	1055Lm	3000K/4000K/6500K	25000H	873x22x30mm
LED T5 integrated light 14W	220-240V	14W	1400Lm	3000K/4000K/6500K	25000H	1173x22x30mm
Led T5 2-colors CCT light 4W	220-240V	4W	400Lm	"2700K-4000K 3000K-4000K"	25000H	313x22x30mm
Led T5 2-colors CCT light 7.5W	220-240V	7.5W	800Lm	"2700K-4000K 3000K-4000K"	25000H	573x22x30mm
Led T5 2-colors CCT light 8W	220-240V	8W	700Lm	"2700K-4000K 3000K-4000K"	25000H	573x22x30mm
Led T5 2-colors CCT light 9.5W	220-240V	9.5W	1000Lm	"2700K-4000K 3000K-4000K"	25000H	873x22x30mm
Led T5 2-colors CCT light 10W	220-240V	10W	1100Lm	"2700K-4000K 3000K-4000K"	25000H	873x22x30mm
Led T5 2-colors CCT light 13W	220-240V	13W	1400Lm	"2700K-4000K 3000K-4000K"	25000H	1173x22x30mm
Led T5 2-colors CCT light 14W	220-240V	14W	1400Lm	"2700K-4000K 3000K-4000K"	25000H	1173x22x30mm
Led T5 3-colors CCT light 4W	220-240V	4W	400lm	"2200K-3000K-4000K 2700K-4000K-6500K"	25000H	313x22x30mm
Led T5 3-colors CCT light 8W	220-240V	8W	810Lm	"2200K-3000K-4000K 2700K-4000K-6500K"	25000H	573x22x30mm
Led T5 3-colors CCT light 10W	220-240V	10W	1055Lm	"2200K-3000K-4000K 2700K-4000K-6500K"	25000H	873x22x30mm
Led T5 3-colors CCT light 14W	220-240V	14W	1400Lm	"2200K-3000K-4000K 2700K-4000K-6500K"	25000H	1173x22x30mm

Significant®

Surface mounted downlight







ITEM NO.	Model	Material	IP	Colors	Dimensions(mm)
NT21-032-1	NT-29	Alu	20	Spray white,Spray black,Brushed Aluminium	Φ90*105mm
NT21-032-2	NT-30	Alu	20	Spray white,Spray black,Brushed Aluminium	Φ90*105mm
NT21-032-3	NT-05-1	Alu	20	Spray white,Spray black,Brushed Aluminium	Φ80*84mm
NT21-032-4	NT-31	Alu	20	Spray white,Spray black,Brushed Aluminium	Φ80*50mm

Frame



ITEM NO.	Model	Material	IP	Colors	diameter(mm)	Cut out(mm)
NT21-033-1	NT-801	Iron/Alu	20	white,black,Chrome, Satin Nickel	Φ78mm	58mm
NT21-033-2	NT-802	Iron/Alu	20	white,black,Chrome, Satin Nickel	Φ83mm	68mm
NT21-033-3	NT-806	Iron/Alu	20	white,black,Chrome, Satin Nickel	Φ83mm	72mm
NT21-033-4	NT-101C	Alu	20	white,black,Chrome, Satin Nickel	Φ83mm	73mm
NT21-033-5	NT-20SZ	Iron	20	white,black,Chrome, Satin Nickel	Φ85mm	68mm

GU10 Lamp holder

ITEM NO.	Model			
NT21-034	NT2021			GU10 socket with leadwire
NT21-035	NT2022			class II GU10 VDE approval socket with double insulation Telfon cable, end of cable with "shark" end cap
NT21-036	NT2023			GU10 plastic box +tail



ErP



RED



FC

CE



RoHS

Nantong Zhongrun Lighting Electrical Co., Ltd.

Add: PINGBEIIND.AREA,PINGCHAO,NANTONG,JIANGSU,226361 P.R. CHINA.

Tel: +86-513-86571959 86728551 Fax: +86-513-86714826

Http://www.OEM-lighting.com Email:lamps@OEM-lighting.com