

厦门亚得电子科技有限公司
Xiamen AcTEC Electronics Co., Ltd.

📍 福建省厦门市同安区同安工业集中区同福路 4 号
No. 4, Tongfu Road, Tong'an Industrial Center, Tong'an District, Xiamen, Fujian, China

☎ +86-0592-7986160 🌐 www.actec.com.cn

✉ info@actec.com.cn

Copyright 2023 AcTEC. All rights reserved. Rev. A-(05/2023)



SMART LIFE





AcTEC SMART LIFE

亚得智能生活






Xiamen Xiang'an Factory



Xiamen Tong'an Factory & R&D Center



Fuzhou R&D Center

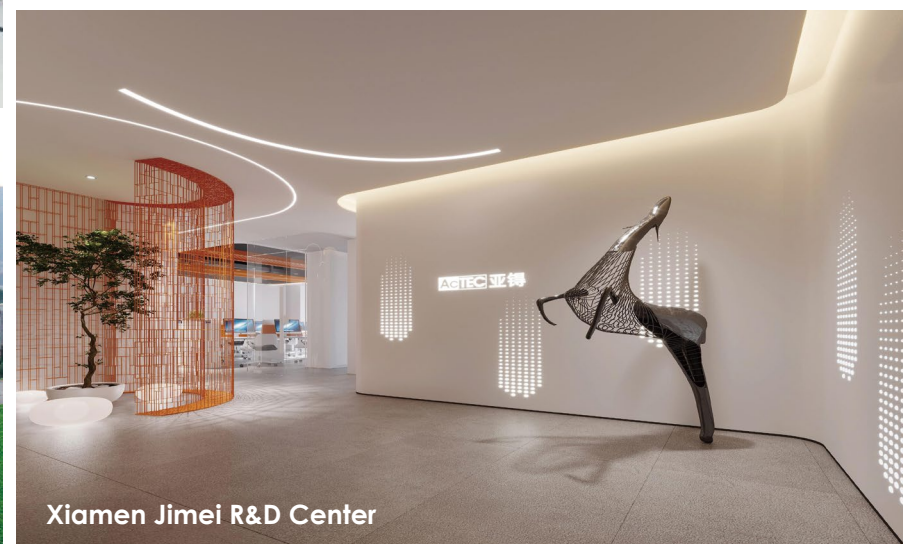

Xiamen Jimei R&D Center

About AcTEC

企业简介

亚得产品涵盖工业电源、照明电源、照明电器控制、应急照明、移动感应、电工开关调光器等智能控制产品，广泛运用于家庭、商业、工业等领域，是国内领先的KNX和DALI协议有线控制和Z-wave、Zigbee、WiFi、BLE无线IoT（物联网）设备和智能家居解决方案提供商，销售遍及全球几十个国家。

亚得是国家级高新技术企业，生产面积约110,000平米，集研发、生产和销售于一身，在福州、厦门、深圳建立四个研发中心，两个生产基地，拥有强大的研发团队和专业的自动化生产线。公司的实验中心获得CNAS国家实验室认可，TUV莱茵的CTF实验室认可，TUV莱茵、TUV南德和NEMKO的TMP目击实验室认可。同时通过ISO9001质量管理体系、ISO14001环境管理体系，推广6SIGEMA、FMEA等国际先进的管理理念，为产品质量提供可靠的保证。


我们提供ODM，OEM及联合开发服务，致力于成为全球智能电源、智能控制器、智能照明等产品的可信赖供应商。

AcTEC products cover industrial power supply, lighting power supply, lighting control, emergency lighting, motion sensor, electrical switches and dimmers. Its smart control products are widely used in domestic, commercial, and industrial areas. AcTEC is a leading company in providing smart wired control products for KNX and DALI and wireless control products for Z-wave, Zigbee, Wi-Fi, BLE, IoT, and smart home solutions. AcTEC is providing hundreds of global customers with highly reliable electronic products for lighting.

AcTEC is a state-level high-tech enterprise with production area of 110,000 square meters and its own R&D, production, and sales teams. AcTEC has established four R&D centers and two production bases in Xiamen, Fuzhou and Shenzhen, with strong R&D teams and professional automated production lines. AcTEC's in-house test laboratory is accredited by CNAS National Laboratory, CTF Lab of TUV Rhein and TUV Sud, and TMP Lab of Nemko. AcTEC carries out the ISO9001-2015 quality certification system and ISO14001 environmental management system. Quality assurance measures are also implemented with reference to 6 SIGEMA, FMEA and other international advanced management concepts to ensure product quality.

We are committed to become a most trustable ODM, OEM and joint development services provider for smart power supply, smart controllers, and smart lighting products to the global market.



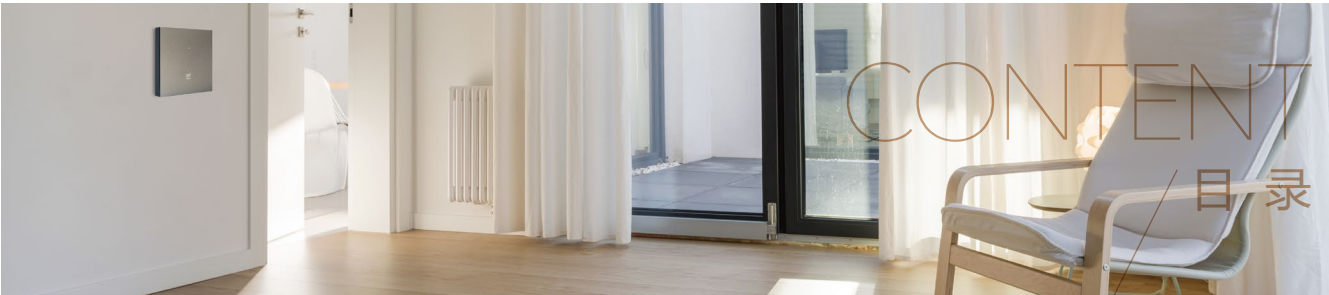

01	AcTEC SMART LIFE	02	AcTEC Smart Life Product
	亚得智能生活		亚得智能产品
Technical Advantages	07	Bluetooth Remote Controller	31
技术优势		蓝牙遥控器	
Smart Life Topology	09	Smart Sensors	32
亚得智能拓扑图		智能传感	
Applications	11	Smart Shading	33
适用场景		智能遮阳	
Smart Lighting System	13	Smart Lighting	34
智能照明系统		智能照明	
P/PM/PA Series Smart Panel	15	Energy Management	35
P/PM/PA系列智能面板		能源管理	
Smart Controller/Smart Driver	25	Media Entertainment	36
智能控制器 / 智能驱动		影音娱乐	
Core Server	29	Smart Application Scenarios	37
核心主机		智能应用场景	
Super Panel	30		
液晶面板			
		Product List	47
		产品家庭列表	
		P Series Product	51
		P系列产品介绍	
		PM Series Product	53
		PM系列产品介绍	
		PA Series Product	55
		PA系列产品介绍	
		Smart Accessories	59
		智能配件	
		Smart Driver	61
		智能驱动	
		Smart Controller	66
		智能控制器	
		Smart Shading / HVAC /	68
		Audio / Camera / Speaker /	
		EV Charger	
		智能遮阳 / 暖通 / 音响 / 安防 / 语音 / 充电桩	



Technical Advantages

技术优势



Extreme lighting control

极致灯光控制

- Multi-scenario mode Optional
- Automatic control, Lighting fade-in & fade-out
- Circadian lighting, customized your rhythm light curve

- 多场景模式可选
- 自动化控制、淡入淡出设置
- 人因照明，自定义节律光曲线



New technology for storing distributed scenarios

全新分布式场景存储技术

- Local scenes
- No gateway needed
- No network required
- Distributed & decentralized environment scenarios

- 本地化
- 去网关
- 可断网
- 分布式去中心化



Bluetooth connection, no network required

蓝牙直连，断网亦可控

Bluetooth 5.0 SIG Mesh technology, no gateway, routing. More reliable lighting control system

蓝牙5.0无线组网技术，无需网关、路由，更可靠的照明控制系统



Easy installation and direct replacement of traditional panels

安装简单，直接替代传统面板

- 80 / 86 Standard bottom box design, a direct replacement for the traditional panel
- Mesh-based wireless deployment without additional wall wiring
- Supporting L/N wires or N wire, no changes to the original wiring are required

- 80/86标准底盒设计，可直接替换传统面板
- 采用BLE Mesh无线部署，无需额外开墙布线
- 单火/零火兼容专利，无需更改原有布线



Integrate third-party devices to meet the whole house intelligence

集成第三方设备，满足全屋智能

With smart lighting at the center, all smart home devices are connected in an orderly manner, covering shades, air conditioning, HVAC, smart audio, security, voice, new energy and other types

以智能照明为中心，将所有智能家居设备，有序连接在一起，涵盖遮阳、空调暖通、智能音响、安防、语音、新能源等类型

Integrate Third-party Devices To Meet The Whole House Intelligence

集成第三方设备，满足全屋智能



Integrate third-party devices to meet the whole house intelligence with smart lighting at the center, all smart home devices are connected

以智能照明为中心，将所有智能家居设备，有序连接在一起

Cover shades, HVAC, audio, security, voice, new energy and more


涵盖遮阳、空调暖通、智能音响、安防、语音、新能源等类型

Products include Duya curtains, air conditioning gateway, SONOS audio, EZVIZ camera, Siri, Amazon, Google, Xiao Ai voice control, smart EV charger

涉及杜亚窗帘、空调网关、SONOS音响、萤石摄像机、Siri、亚马逊、谷歌、小爱语音控制、新能源汽车充电桩

Smart Life Topology

亚得智能拓扑图

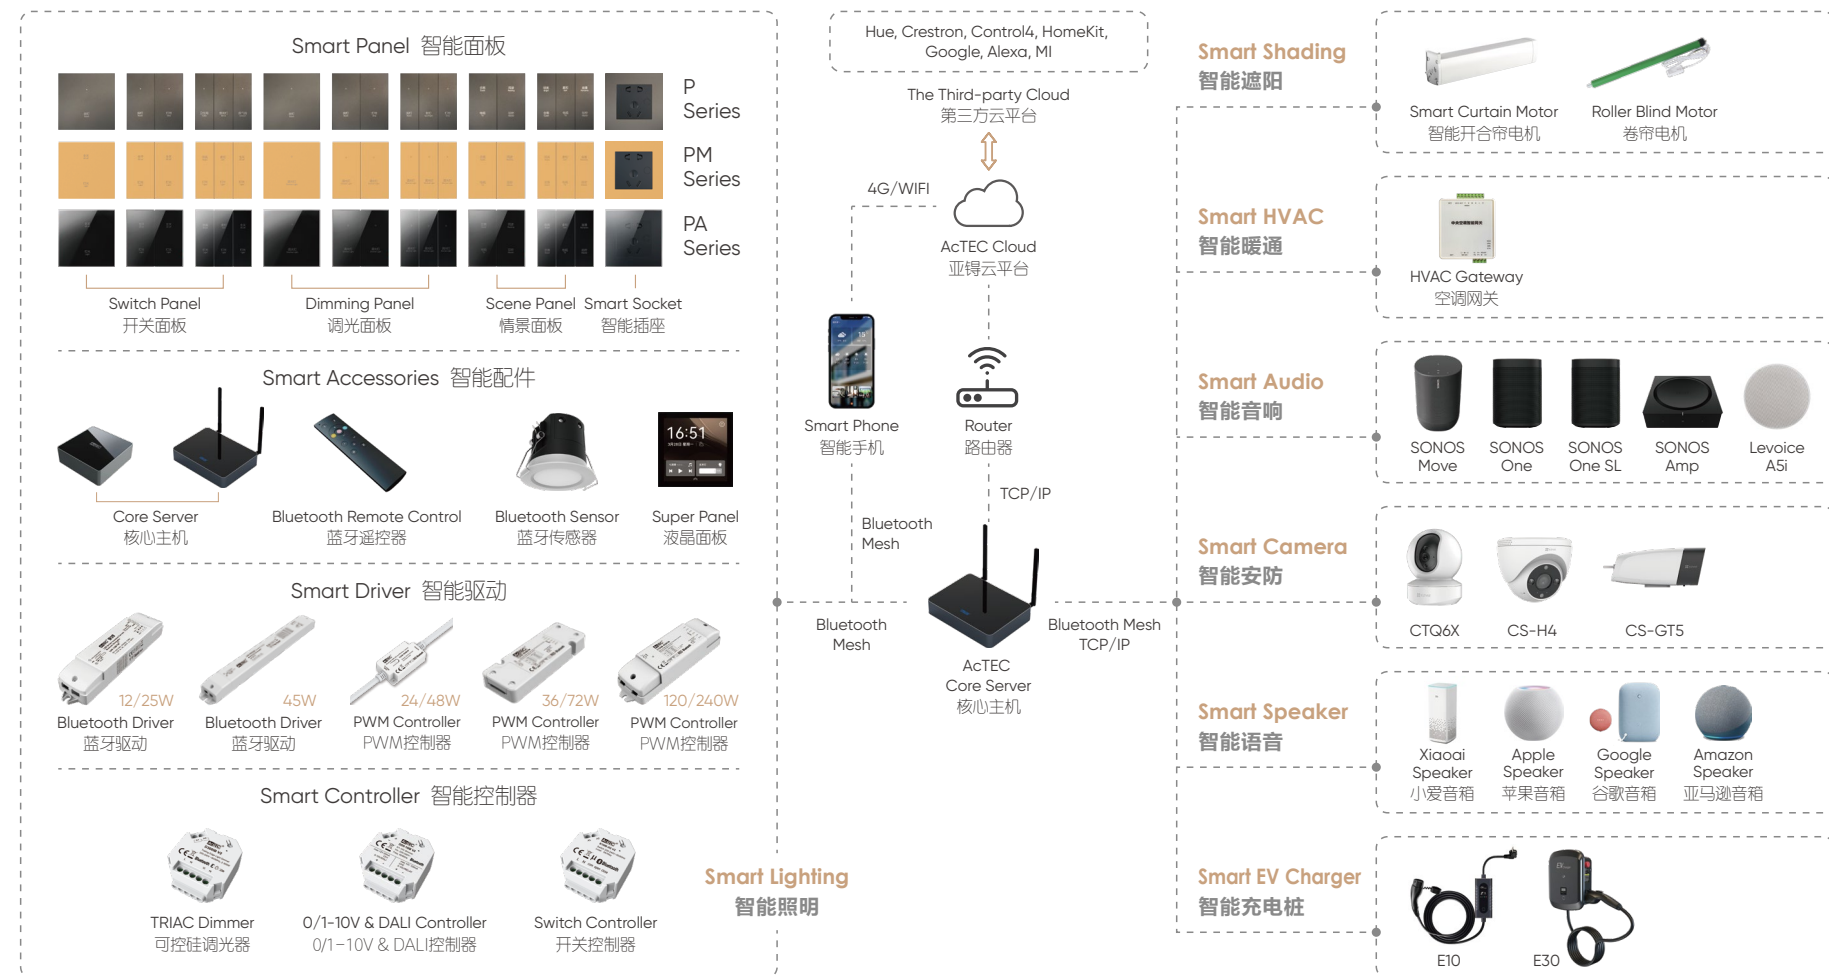

Applications 适用场景



Multiple Collocations To Meet The Individual Needs Of Users

多种搭配，满足用户个性化需求

			Bluetooth 蓝牙直连	Core Server 核心主机
Switch Panel	开关面板		✓	✓
Dimming Panel	调光面板		✓	✓
Scene Panel	情景面板		✓	✓
Bluetooth LED Driver	色温驱动器		✓	✓
Smart Controller	智能控制器		✓	✓
Smart Sensor	智能感应器		✓	✓
Bluetooth Remote Control	蓝牙遥控器		✓	✓
Smart Shading	智能遮阳		✓	✓
Smart Camera	智能摄像机		✓	✓
Core Server	核心主机			✓
HVAC Gateway	空调网关			✓
Smart Audio	智能音响			✓
Smart Speaker	智能语音			✓
Smart EV Charger	智能充电桩			✓

Smart Lighting Lifestyle

智能照明 智享生活


Let there be-lighted smartly according to scene

让灯光不仅只为点亮，赋能照明智能场景化



According to time and the need, CCT, color, & brightness are adjusted to meet the best feelings

根据不同的时间、需求，可调节不同的灯光色温、色彩、亮度等，达到最舒适的使用体验

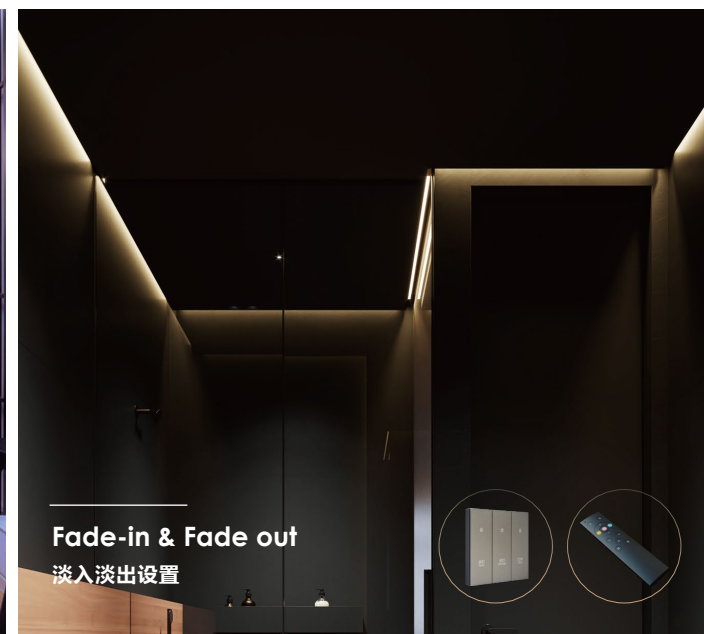

Fade-in & fade-out allows for gradual lighting changes

灯光变化渐显渐隐，无感切换




Customized with rhythmic light curves, feel the true sunrise and sunset at home

自定义节律光曲线，在家中就能感受日出日落，自然节律体验




Execution scenario, animation scenario, thematic, scenario, etc

执行场景、动画场景、主题场景，多场景模式可选

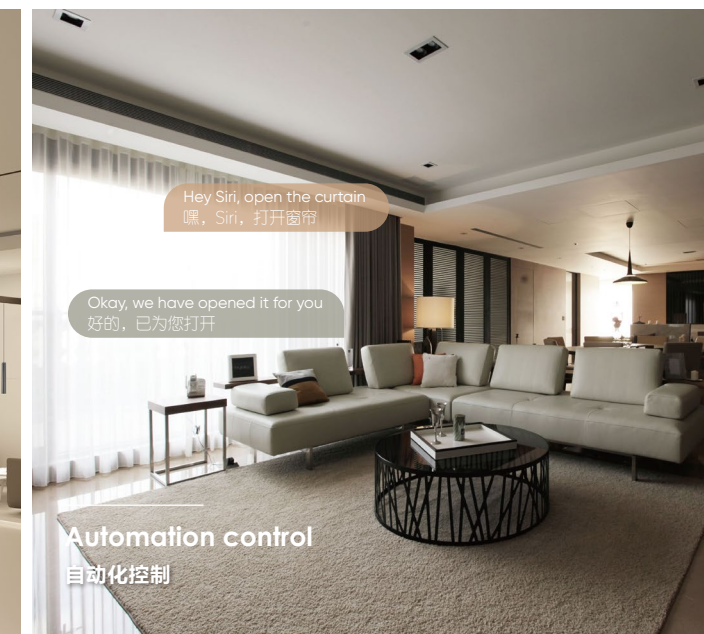

Enjoy smart lighting without daily manual adjustment

拒绝每日手动调节的繁琐操作，享受智能照明

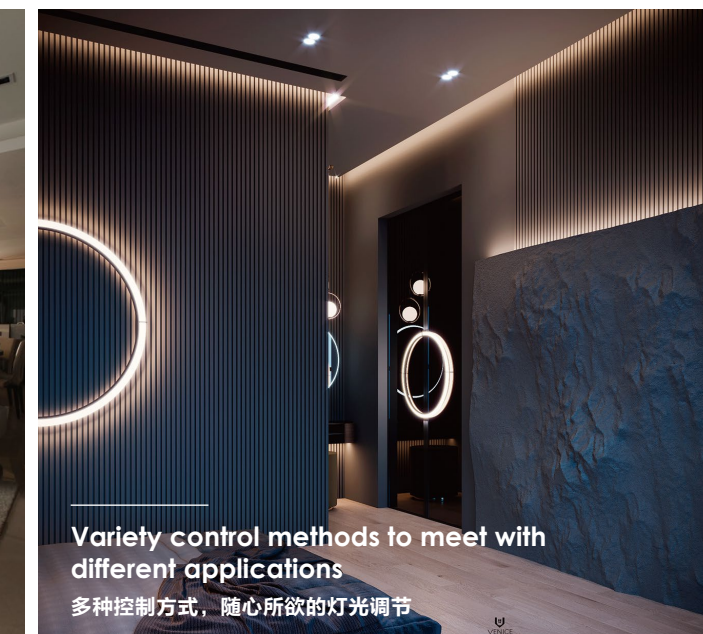


APP, R/C, Scene and scene control

APP控制、独立遥控控制、情景模式控制等

Shared Base Module, Easy To Match Different Series Of Smart Panels

共用底座模组，
可以便捷匹配互换不同系列的智能面板

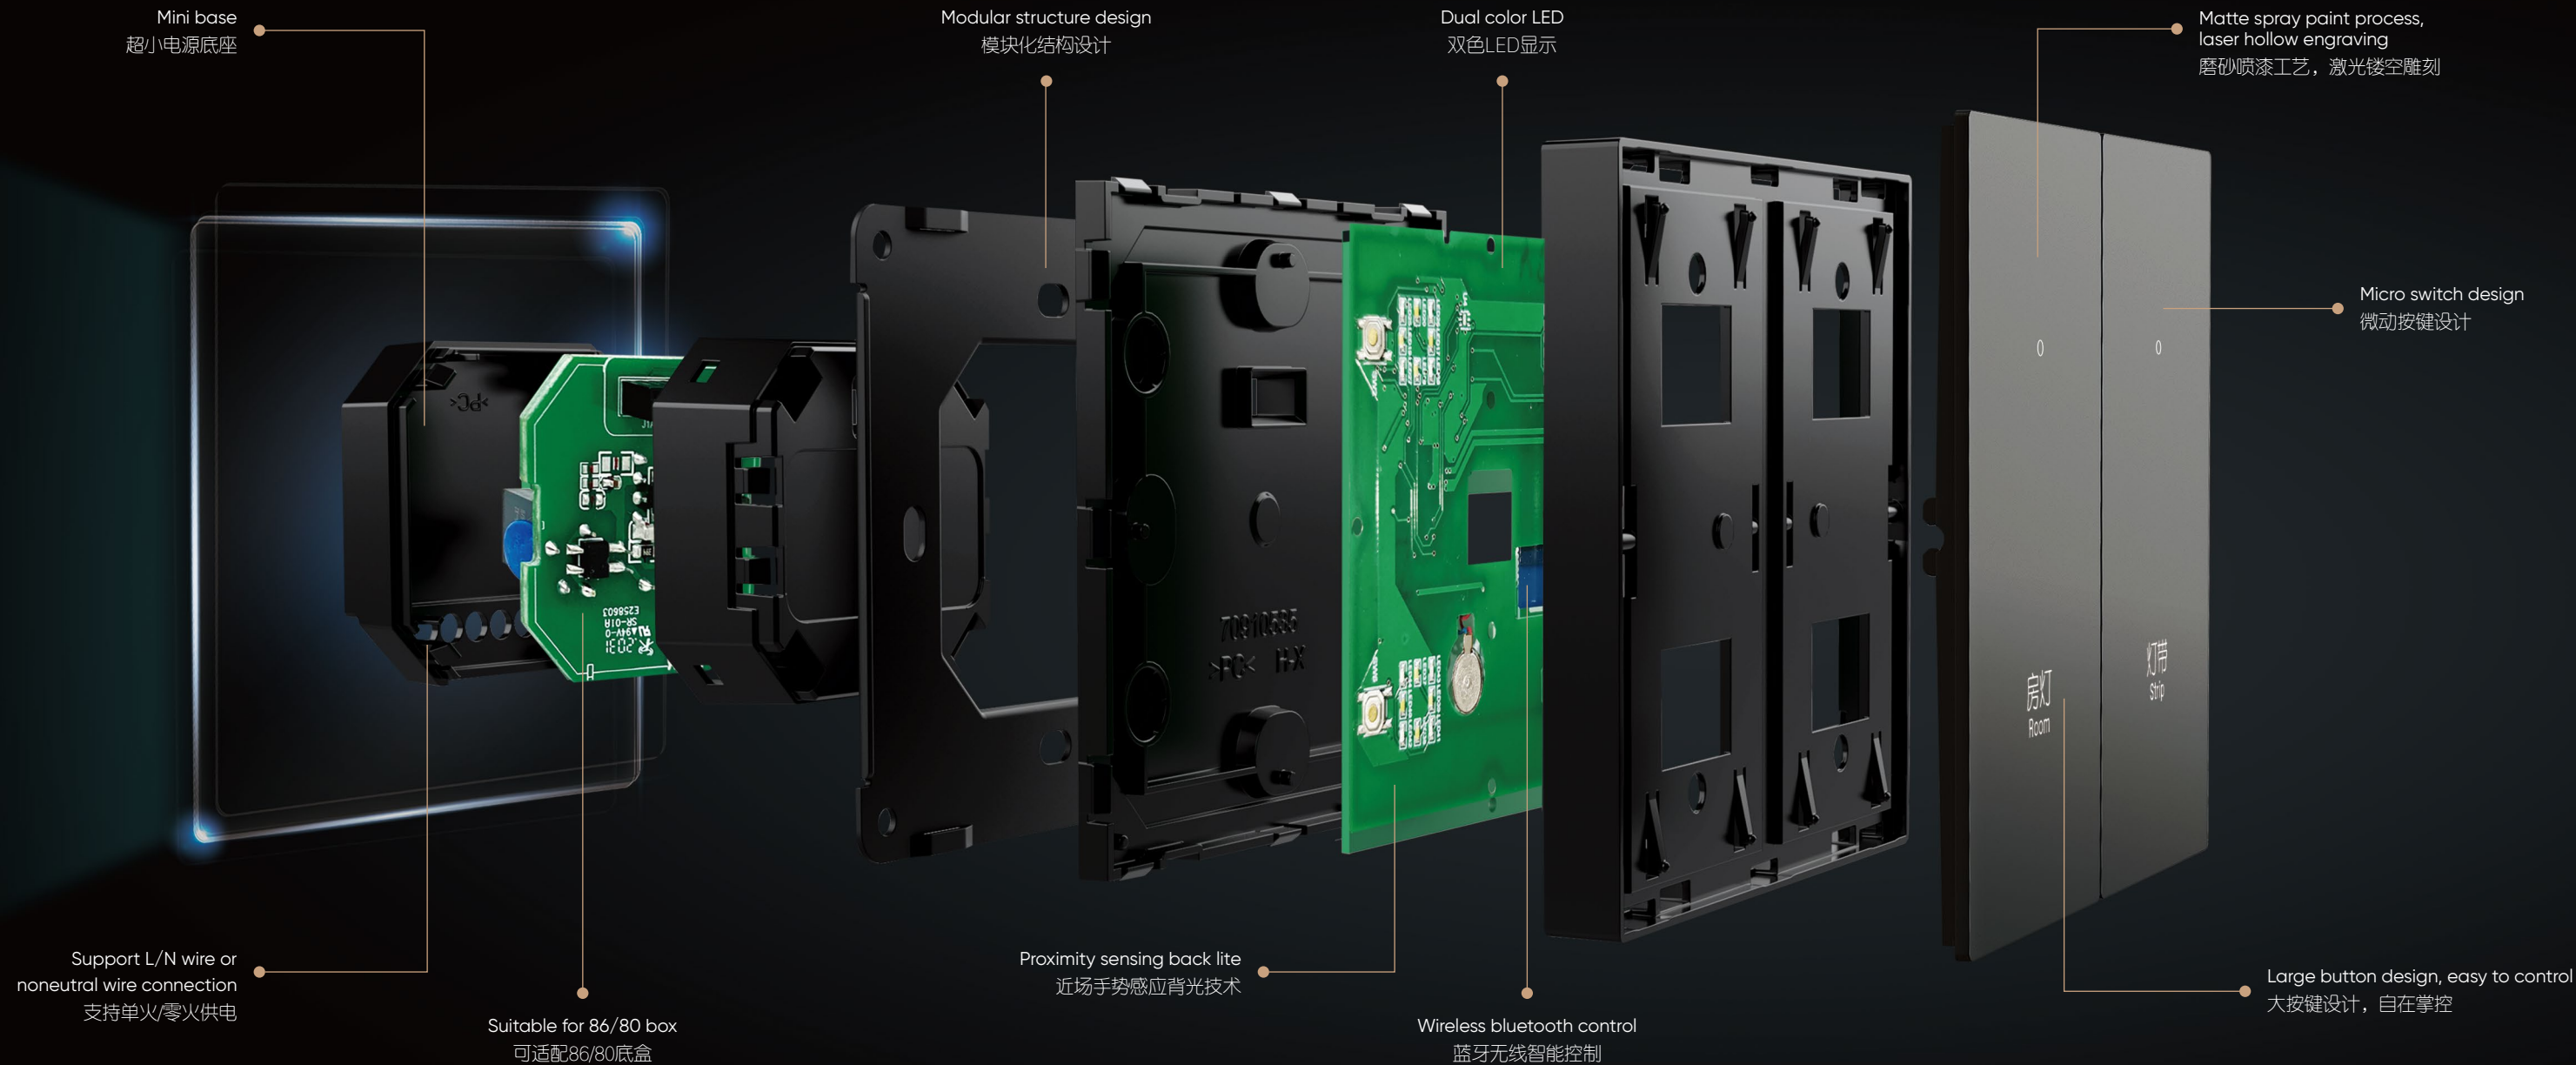



P Series Smart Panel

P系列 智能面板

- White 天鹅白
- Rose gold 玫瑰金
- Amber 琥珀金
- Gray 星空灰
- Champagne 香槟金
- Brown 玄色棕
- Ruby 宝石红
- Black 钢琴黑



Plastic panels, frosting antifouling process
塑胶面板，细皮纹磨砂防污工艺



Frameless & micro switch design
无边框设计、微动按键设计



Two color key state feedback lights
双色键状态反馈灯



Customized printings on buttons
可定制按键图文



Nearby gesture-sensing backlight technology
近场手势感应背光技术



Support L/N wire or noneutral wire connection
支持零火、单火连接



Buttons can configure the scene
按键可配置情景



PM Series Smart Panel

PM系列 智能面板



- Silver
月光银
- Satin bronze
缎光黄铜
- Champagne
香槟金
- Satin nickel
缎光镍
- Golden Bronze
古黄铜



Metal aluminum panel, fashion, exquisite and sedate
金属铝材质面板，时尚精致稳重



Frameless & micro switch design
无边框设计、微动按键设计



Two color key state feedback lights
双色键状态反馈灯



Customized printings on buttons
可定制按键图文



Nearby gesture-sensing backlight technology
近场手势感应背光技术



Support L/N wire or noneutral wire connection
支持零火、单火连接



Buttons can configure the scene
按键可配置情景



PA Series Smart Panel

PA系列 智能面板



AG glass panel, smooth and anti-fingerprin
AG玻璃面板，手感顺滑细腻抗指纹



Frameless & micro switch design
无边框设计、微动按键设计



Two color key state feedback lights
双色键状态反馈灯



Customized printings on buttons
可定制按键图文



Nearby gesture-sensing backlight technology
近场手势感应背光技术



Support L/N wire or noneutral wire connection
支持零火、单火连接



Buttons can configure the scene
按键可配置情景

Free Conjoined Installation, Customized Exclusive Control Panel

自由联排安装，定制专属控制面板




With different function panels,
multiple controls at your fingertips
不同功能面板搭配
多元控制触手可及

Optimized button structure,
clear hand feeling, solid and durable
按键结构优化
手感清晰，坚固耐用

2/3/4/5 conjoined optional,
freely applicable in various scenarios
2/3/4/5联排可选
各种场景应用自如

Smart Controller

智能控制器

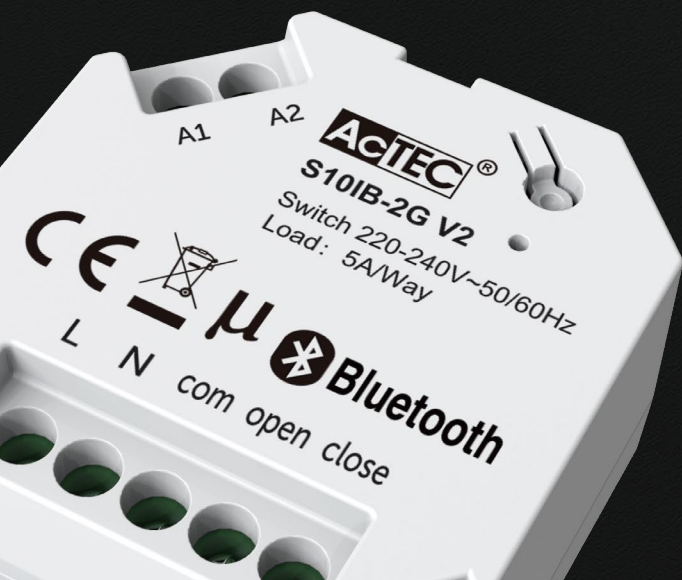

low-power consumption
Bluetooth mesh
低功耗
蓝牙mesh组网



Grouping &
Scene configuration
分组设置
情景设置



Multiin-one
device
多合一设备




Controllable by
scene panel or APP
可接入情景面板控制
APP控制



Support
OTA upgradable
支持
OTA升级

TRIAC Dimmer
可控硅调光器

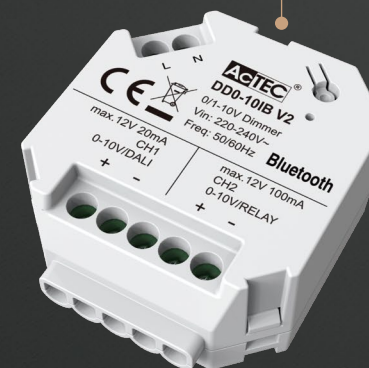

0/1-10V & DALI Controller
0/1-10V & DALI控制器

Single Channel 0/1-10 Dimmer
单路0/1-10调光器

DALI Dimmer
DALI调光器

DALI TW controller
DALI调色调光器

0/1-10V Dimmer(Relay)
0/1-10V调光器 (Relay)

0/1-10V TW controller
0/1-10V调色调光器

Dual Channel 0/1-10 Dimmer
双路0/1-10调光器


Scene Switch
情景开关

Switch Controller
开关控制器

Switch Controller
开关控制器

Dry Contact Controller
干接点控制器

Curtain Controller
窗帘控制器



A variety of built-in smart controllers with very compact sizes and can be used along with reset switches. Also can be controlled wirelessly by smartphones and other smart devices

多种规格内置式智能控制器，尺寸小巧紧凑，可匹配复位开关使用，也可用智能手机等设备实现无线控制，暗盒直接植入，灯光控制改造首选

Smart Driver/LED Controller 智能驱动 / LED 控制器



-  PWM Controller 24/48W PWM控制器
-  PWM Controller 36/72W PWM控制器
-  PWM Controller 120/240W PWM控制器
-  Bluetooth Dimming Driver 蓝牙调光驱动
-  DALI Dimming Driver DALI调光驱动
-  0/1-10V Dimming Driver 0/1-10V调光驱动
-  TRIAC Dimming Driver 可控硅调光驱动



LED controller
LED控制器



Connectable to traditional CCT, RGB, RGBW lighting products
可连接传统CCT, RGB, RGBW等软灯条产品



Enable control over Bluetooth mesh
实现蓝牙连接操控



Smart drivers
智能驱动



Suitable for various types of luminaires
可匹配各类照明产品



Tunable white, light color and intensity are controllable
实现亮度、色温、色彩等多维度控制



Wireless RC, grouping lights, and scene setting
可无线遥控、多灯组合情景联动等



Core Server

核心主机



-  Metal housing with toughened glass panels
全身采用金属材质，镀膜钢化玻璃面板
-  Place on the desktop or wall mounted
桌面放置和墙面壁挂，多种安装方式，随心选择
-  Support for POE power supply, no adapter required
POE供电无需专门配置适配器，节约环保
-  Integrated TCP/IP, Bluetooth, RS485 communication protocols
集成TCP/IP、蓝牙、RS485多种通讯协议
-  Automatic control with geo-fencing, scheduling, and other features to enable intelligent scenarios
自动化控制，搭配地理围栏、时间表等功能实现智能场景
-  Support Siri, Xiao Ai, Google, Amazon speaker control
支持Siri、小爱、谷歌、亚马逊音箱控制

Super Panel

液晶面板



-  Standard 86 specification design, in-situ installation
标准86型规格设计，原位安装
-  4-inch HD LCD and G+F technology with five-point touch
4英寸高清LCD，G+F 工艺五点触控
-  Ambient light sensing, automatic adjustment of screen brightness
环境光线感应，自动调节屏幕亮度
-  A panel to controls the whole house of smart devices
一个面板，等于全屋智能，掌控全屋智能设备





Bluetooth Remote Controller

蓝牙遥控器



Powered by button cell, mobile and handy freely
电池供电，可随心摆放



Five buttons can be used to configure the scene
5个按键可用来配置关联场景



The center button is to control the CCT and brightness of the light
中间按键可用来控制灯光冷暖、亮度



Warning for low battery energy
低电量预警功能

Smart Sensors

智能传感



Bluetooth Sensor
蓝牙感应器



Wall Recessed
墙装



Integrated PIR/Illuminance/humidity/night-light
PIR、光照、小夜灯为一体的多模传感器



Bluetooth 5.0 SIG Mesh technology
蓝牙5.0无线组网技术



Smart auto activation of linked lighting or other devices according to preset conditions
智能联动，根据设定条件自动联动其他设备





Smart Shading

智能遮阳



Smart Curtain Motor
智能开合帘电机



Roller Blind Motor
卷帘电机



Switch Controller
开关控制器



Options for using smart curtain motor, roller blind motor or switch controller
智能开合帘电机、智能卷帘电机、开关控制器3种可选



Smart curtain motor & roller blind motor with built-in Bluetooth module
智能窗帘电机自带蓝牙模块，可联动其他蓝牙设备



Switch controller with built-in bluetooth module can work with ordinary curtain motor and turn it bluetooth controllable
开关控制器可匹配普通窗帘电机，使之转变为蓝牙控制



Can be grouped with luminaire and other devices
可与灯光等其他设备组网



Can be activated via smart sensor
可与智能传感器联动

Smart Lighting


智能照明



Adjustable brightness and color temperature
亮度色温可调节



Intelligent linkage
智能联动



Colorful atmosphere
多彩氛围



Bluetooth 5.0 SIG Mesh technology
蓝牙5.0无线组网技术



2700K-6500K color temperature, dimming range: 0.1...100%
2700K-6500K色温调节，0.1...100%调光输出



Ambient lighting: 16 million colors
氛围照明，1600万种色彩



Lamps grouping configurable, scene mode settings, timer settings
分组设置、情景模式、定时等功能



Support IOS or Android smart devices for wireless control
APP/遥控器控制，IOS、Android两大平台均可使用



Energy Management

能源管理

Direct replacement of traditional sockets to keep decorative style unchanged and can be controlled smartly through linked activation, time pre-set, and provide energy consumption statistics, etc

可直接替换传统插座，便可实现智能联动、定时开关、电量统计等；不影响已有装修风格



Seamlessly integrated into the whole household deign

悄无声息
融入整体家居设计



Device linkage: At 11:30 p.m, ready to go to sleep, press the smart panel at the head of thebed, the table lamp will turns off

设备联动：晚上11点半，准备入睡，按一下床头的无线开关，一键关闭台灯和其他电器，做个随性的懒人



Scheduled On/Off – timely switch on & off of the TV or gadgets powered from the socket so as to stop kids from indulge in movie-watching

定时开关：再也不用担心孩子沉迷观影,设定开启关闭时间做好孩子的时间管理



Energy consumption statistics – Provide visible data of energy consumption via APP

电量统计：精确统计用电量
实现用电可视化，每一度电都在掌握之中

Media Entertainment

影音娱乐



SONOS Smart Audio
SONOS 智能音响



Controllable to SONOS audio systems
可控制SONOS品牌音响



Interface with SONOS Move, One, One SL, Amp, etc
可对接SONOS Move、One、One SL、Amp等



Can broadcast streaming media fromvarious local and overseas platforms
海内外多个流媒体平台均可播放



Mesh connection with other devices in scene
configuration and smart linking
可与其他设备组网、情景模式、智能联动等



Pre-schedule on/off of TV watching can help fostering children in discipline and in good habits in eyesight hygiene

系统提前预设，可以限制儿童观看电视时间，为你的孩子创建一个健康的观影环境，定时开关机，帮助孩子养成良好的用眼习惯



Movie-watching Timer Mode Prevent Children From Excessive Watching

定时观影模式 避免孩子用眼过度






Smart Night Light Silent Guardian & Accompany In Midnight

老人起夜 不摸黑不怕摔

Sensors will detect the movement of your parents who waking up at night, and switch on the night light which lead them washroom safely. The light will fade out smoothly when they back to bed

凌晨2点，当父母起夜上厕所，传感器感应到人体移动，脚边的灯带亮起，再也不用摸黑找开关，等父母上床睡觉时，灯自动熄灭，让他们继续放心安睡

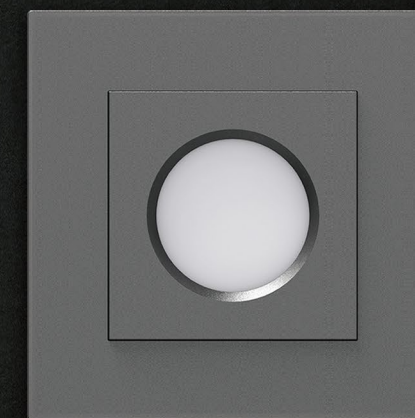



It is 11:00 pm, light music is up to remind time for bed. The wife, coming out bath room, can press a button to activate control into sleeping mode: Curtains close slowly, temperature setting of air-conditioning to the desired level for sleeping, and lights dimmed down for sleep

晚上11点，提醒就寝的音乐响起，太太洗漱完毕，一键开启进入睡眠模式，窗帘自动缓缓关闭，空调自动调至适宜的温度，伴着柔和的灯光安然入睡

Create Comfortable Atmosphere For Sleeping

智能睡眠模式
营造舒适睡眠氛围



Interface With World Famous Sonos Audio System To Provide Background Music To The Whole House

联合全球知名品牌 SONOS
打造全宅背景音乐系统



AcTEC Smart Life works seamlessly with world famous audio system SONOS. According to the needs, the audio system can cover any room in the whole house. It can be music listening in the bedroom and TV watching in the living room simultaneously without any interference between two places. You can also synchronous playback music to the whole house and enjoy the immersive music full out the house at appropriate volume and clearly

亚得智能生活无缝集成全球知名智能影音品牌SONOS，根据需求定制全屋音响系统，任意房间都可放置音响，卧室听音乐、客厅看电视互不干扰，也可以将全宅音响组合同步播放，任何音量下，都能享受清晰、细腻沉浸式音乐

AcTEC SMART LIFE PRODUCT




亚得智能产品


AcTEC Smart Life Product

亚得智能产品


P SERIES SMART PANEL P 系列智能面板

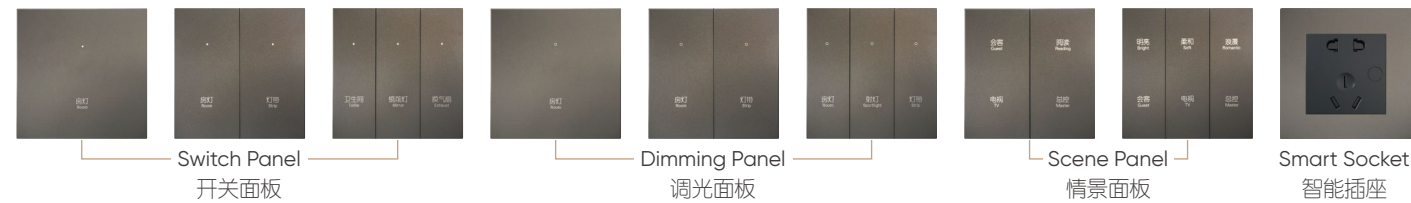


PM SERIES SMART PANEL PM 系列智能面板

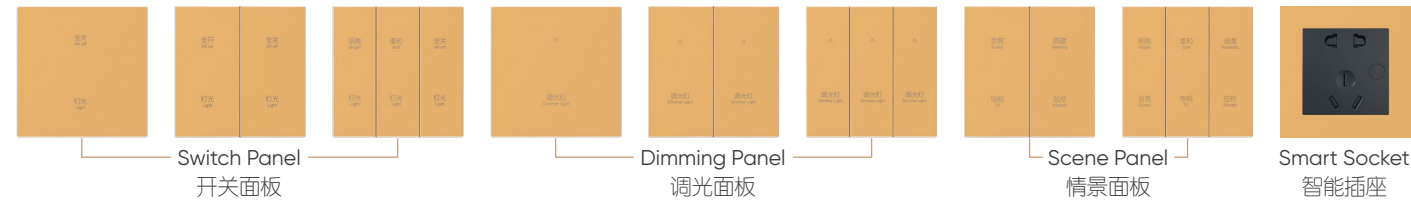

PA SERIES SMART PANEL PA 系列智能面板

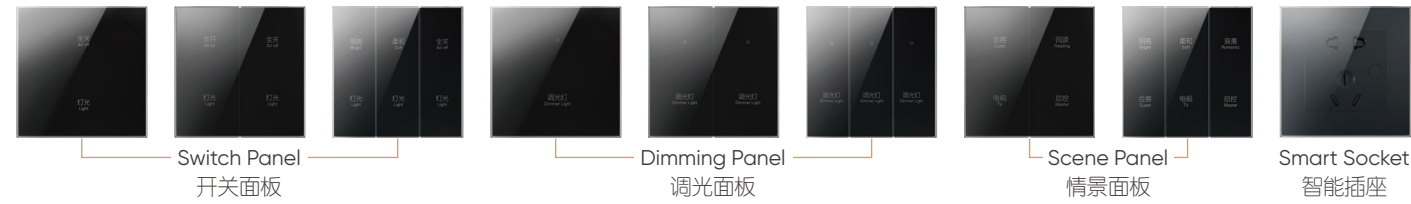

ORDINARY PANEL 普通面板

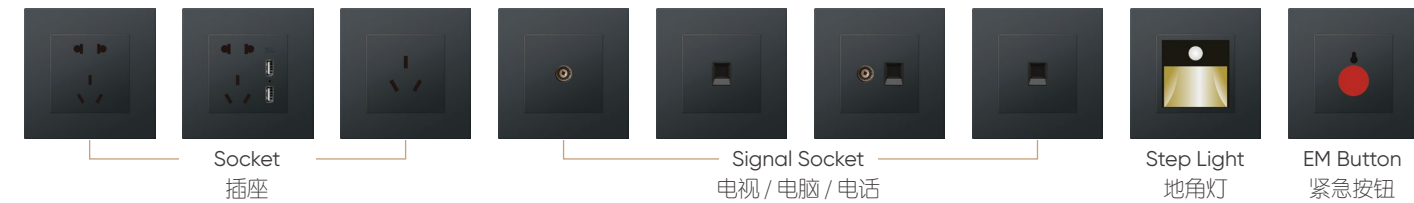

SMART ACCESSORIES 智能配件



AcTEC Smart Life Product

亚得智能产品


SMART DRIVER 智能驱动



SMART CONTROLLER 智能控制器



SMART SHADING 智能遮阳

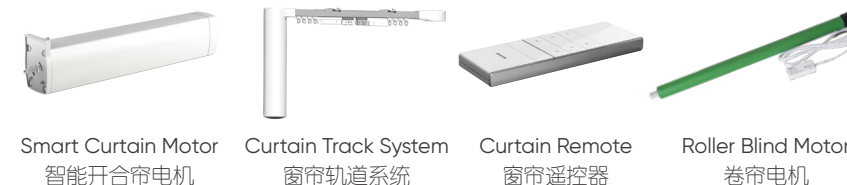

SMART AUDIO 智能音响



SMART SPEAKER 智能语音



SMART HVAC 智能暖通



SMART CAMERA 智能安防



SMART EV CHARGER 智能充电桩



P Series Switch Panel

P系列 开关面板



Model No. 产品型号	Output Channel 输出通道	Push Button 按键	Input Voltage 工作电压	Max. Load Wattage 最大负载功率	Output Current 输出电流	Wireless Mode 无线类型	Dimension 产品尺寸
PS6B-1G V2	1 Gang	2	220-240V	Incandescent≤1440W LED≤750W	6A Max.	Bluetooth 5.0	86x86x41.6mm
PS6B-2G V2	2 Gang	4	220-240V	Incandescent≤2x750W LED≤2x375W	2x3A Max.	Bluetooth 5.0	86x86x41.6mm
PS6B-3G V2	3 Gang	6	220-240V	Incandescent≤3x480W LED≤3x250W	3x2A Max.	Bluetooth 5.0	86x86x41.6mm

- Plastic panels, frosting antifouling process
塑胶面板
细皮纹磨砂防污工艺
- Frameless & micro switch design
无边框设计
微动按键设计
- Two color key state feedback lights
双色键状态反馈灯
- Customized printings on buttons
可定制按键图文
- Nearby gesture-sensing backlight technology
近场手势感应背光技术
- Support L/N wire or noneutral wire connection
支持零火、单火连接
- Buttons can configure the scene
按键可配置情景

P Series Dimming Panel

P系列 调光面板



Model No. 产品型号	Output Channel 输出通道	Push Button 按键	Input Voltage 工作电压	Max. Load Wattage 最大负载功率	Output Current 输出电流	Wireless Mode 无线类型	Dimension 产品尺寸
PD300B V2	1 Gang	2	220-240V	Incandescent≤300W LED≤180W	1.35A Max.	Bluetooth 5.0	86x86x41.6mm
PD400B-2G V2	2 Gang	4	220-240V	Incandescent≤2x200W LED≤2x120W	2x0.87A Max.	Bluetooth 5.0	86x86x41.6mm
PD400B-3G V2	3 Gang	6	220-240V	Incandescent≤3x135W LED≤3x80W	3x0.45A Max.	Bluetooth 5.0	86x86x41.6mm

- Plastic panels, frosting antifouling process
塑胶面板
细皮纹磨砂防污工艺
- Frameless & micro switch design
无边框设计
微动按键设计
- Two color key state feedback lights
双色键状态反馈灯
- Customized printings on buttons
可定制按键图文
- Nearby gesture-sensing backlight technology
近场手势感应背光技术
- Support L/N wire or noneutral wire connection
支持零火、单火连接
- Buttons can configure the scene
按键可配置情景

P Series Scene Panel

P系列 情景面板




Model No. 产品型号	Push Button 按键	Input Voltage 工作电压	No-load Wattage 空载功率	Wireless Mode 无线类型	Dimension 产品尺寸
PR4B V2	4	220-240V	0.5W	Bluetooth 5.0	85.8x85.8x31.6mm
PR6B V2	6	220-240V	0.5W	Bluetooth 5.0	85.8x85.8x31.6mm

- Plastic panels, frosting antifouling process
塑胶面板
细皮纹磨砂防污工艺
- Frameless & micro switch design
无边框设计
微动按键设计
- Two color key state feedback lights
双色键状态反馈灯
- Customized printings on buttons
可定制按键图文
- Nearby gesture-sensing backlight technology
近场手势感应背光技术
- Buttons can be configured to curtain & music panel via AcTEC's APP
按键可通过AcTEC APP配置成
窗帘或音乐面板

P Series Smart Socket

P系列 智能插座




Model No. 产品型号	Type 规格	Input Voltage 工作电压	Load Wattage 负载功率	Wireless Mode 无线类型	Dimension 产品尺寸
PP10B V2	2/3 pole socket 二/三极插座	220-240V	2400W	Bluetooth 5.0	86x86x48mm

- Plastic panels, frosting antifouling process
塑胶面板
细皮纹磨砂防污工艺
- Bluetooth 5.0
SIG Mesh technology
蓝牙5.0
无线组网技术
- Power statistics, parental lock
电量统计
童锁功能
- Timer switch, APP status view/control
定时开关
APP状态反馈 / 控制

PM Series Switch Panel

PM 系列 开关面板



- Metal aluminum panel, fashion, exquisite and sedate
金属铝材质面板 时尚精致稳重
- Frameless & micro switch design
无边框设计 微动按键设计
- Two color key state feedback lights
双色键状态反馈灯
- Customized printings on buttons
可定制按键图文
- Nearby gesture-sensing backlight technology
近场手势感应背光技术
- Support L/N wire or noneutral wire connection
支持零火、单火连接
- Buttons can configure the scene
按键可配置情景

Model No. 产品型号	Output Channel 输出通道	Push Button 按键	Input Voltage 工作电压	Max. Load Wattage 最大负载功率	Output Current 输出电流	Wireless Mode 无线类型	Dimension 产品尺寸
PMS6B-1G	1 Gang	2	220-240V	Incandescent≤1440W LED≤750W	6A Max.	Bluetooth 5.0	86x86x41.6mm
PMS6B-2G	2 Gang	4	220-240V	Incandescent≤2x750W LED≤2x375W	2x3A Max.	Bluetooth 5.0	86x86x41.6mm
PMS6B-3G	3 Gang	6	220-240V	Incandescent≤3x480W LED≤3x250W	3x2A Max.	Bluetooth 5.0	86x86x41.6mm

PM Series Dimming Panel

PM 系列 调光面板



- Metal aluminum panel, fashion, exquisite and sedate
金属铝材质面板 时尚精致稳重
- Frameless & micro switch design
无边框设计 微动按键设计
- Two color key state feedback lights
双色键状态反馈灯
- Customized printings on buttons
可定制按键图文
- Nearby gesture-sensing backlight technology
近场手势感应背光技术
- Support L/N wire or noneutral wire connection
支持零火、单火连接
- Buttons can configure the scene
按键可配置情景

Model No. 产品型号	Output Channel 输出通道	Push Button 按键	Input Voltage 工作电压	Max. Load Wattage 最大负载功率	Output Current 输出电流	Wireless Mode 无线类型	Dimension 产品尺寸
PMD300B	1 Gang	2	220-240V	Incandescent≤300W LED≤180W	1.35A Max.	Bluetooth 5.0	86x86x41.6mm
PMD400B-2G	2 Gang	4	220-240V	Incandescent≤2x200W LED≤2x120W	2x0.87A Max.	Bluetooth 5.0	86x86x41.6mm
PMD400B-3G	3 Gang	6	220-240V	Incandescent≤3x135W LED≤3x80W	3x0.45A Max.	Bluetooth 5.0	86x86x41.6mm

PM Series Scene Panel

PM系列 情景面板



- Metal aluminum panel, fashion, exquisite and sedate
金属铝材质面板 时尚精致稳重
- Frameless & micro switch design
无边框设计 微动按键设计
- Two color key state feedback lights
双色键状态反馈灯
- Customized printings on buttons
可定制按键图文
- Nearby gesture-sensing backlight technology
近场手势感应背光技术
- Buttons can be configured to curtain & music panel via AcTEC's APP
按键可通过AcTEC APP配置成窗帘或音乐面板

Model No. 产品型号	Push Button 按键	Input Voltage 工作电压	No-load Wattage 空载功率	Wireless Mode 无线类型	Dimension 产品尺寸
PMR4B	4	220-240V	0.5W	Bluetooth 5.0	85.8x85.8x31.6mm
PMR6B	6	220-240V	0.5W	Bluetooth 5.0	85.8x85.8x31.6mm

PM Series Smart Socket

PM系列 智能插座



- Metal aluminum panel, fashion, exquisite and sedate
金属铝材质面板 时尚精致稳重
- Bluetooth 5.0 SIG Mesh technology
蓝牙5.0 无线组网技术
- Power statistics, parental lock
电量统计 童锁功能
- Timer switch, APP status view/control
定时开关 APP状态反馈 / 控制

Model No. 产品型号	Type 规格	Input Voltage 工作电压	Load Wattage 负载功率	Wireless Mode 无线类型	Dimension 产品尺寸
PMP10B	2/3 pole socket 二三极插座	220-240V	2400W	Bluetooth 5.0	86x86x48mm

PA Series Switch Panel

PA系列 开关面板



Model No. 产品型号	Output Channel 输出通道	Push Button 按键	Input Voltage 工作电压	Max. Load Wattage 最大负载功率	Output Current 输出电流	Wireless Mode 无线类型	Dimension 产品尺寸
PAS6B-1G	1 Gang	2	220-240V	Incandescent≤1440W LED≤750W	6A Max.	Bluetooth 5.0	86x86x41.1mm
PAS6B-2G	2 Gang	4	220-240V	Incandescent≤2x750W LED≤2x375W	2x3A Max.	Bluetooth 5.0	86x86x41.1mm
PAS6B-3G	3 Gang	6	220-240V	Incandescent≤3x480W LED≤3x250W	3x2A Max.	Bluetooth 5.0	86x86x41.1mm

- AG glass panel, smooth and anti-fingerprin
AG玻璃面板
手感顺滑细腻抗指纹
- Frameless & micro switch design
无边框设计
微动按键设计
- Two color key state feedback lights
双色键状态反馈灯
- Customized printings on buttons
可定制按键图文
- Nearby gesture-sensing backlight technology
近场手势感应背光技术
- Support L/N wire or noneutral wire connection
支持零火、单火连接
- Buttons can configure the scene
按键可配置情景

PA Series Dimming Panel

PA系列 调光面板



Model No. 产品型号	Output Channel 输出通道	Push Button 按键	Input Voltage 工作电压	Max. Load Wattage 最大负载功率	Output Current 输出电流	Wireless Mode 无线类型	Dimension 产品尺寸
PAD300B	1 Gang	2	220-240V	Incandescent≤300W LED≤180W	1.35A Max.	Bluetooth 5.0	86x86x41.1mm
PAD400B-2G	2 Gang	4	220-240V	Incandescent≤2x200W LED≤2x120W	2x0.87A Max.	Bluetooth 5.0	86x86x41.1mm
PAD400B-3G	3 Gang	6	220-240V	Incandescent≤3x135W LED≤3x80W	3x0.45A Max.	Bluetooth 5.0	86x86x41.1mm

- AG glass panel, smooth and anti-fingerprin
AG玻璃面板
手感顺滑细腻抗指纹
- Frameless & micro switch design
无边框设计
微动按键设计
- Two color key state feedback lights
双色键状态反馈灯
- Customized printings on buttons
可定制按键图文
- Nearby gesture-sensing backlight technology
近场手势感应背光技术
- Support L/N wire or noneutral wire connection
支持零火、单火连接
- Buttons can configure the scene
按键可配置情景

PA Series Scene Panel

PA系列 情景面板




Model No. 产品型号	Push Button 按键	Input Voltage 工作电压	No-load Wattage 空载功率	Wireless Mode 无线类型	Dimension 产品尺寸
PAR4B	4	220-240V	0.5W	Bluetooth 5.0	85.8x85.8x31.6mm
PAR6B	6	220-240V	0.5W	Bluetooth 5.0	85.8x85.8x31.6mm

- AG glass panel, smooth and anti-fingerprin
AG玻璃面板
手感顺滑细腻抗指纹
- Frameless & micro switch design
无边框设计
微动按键设计
- Two color key state feedback lights
双色键状态反馈灯
- Customized printings on buttons
可定制按键图文
- Nearby gesture-sensing backlight technology
近场手势感应背光技术
- Buttons can be configured to curtain & music panel via AcTEC's APP
按键可通过AcTEC APP配置成窗帘或音乐面板

PA Series Smart Socket

PA系列 智能插座




Model No. 产品型号	Type 规格	Input Voltage 工作电压	Load Wattage 负载功率	Wireless Mode 无线类型	Dimension 产品尺寸
PAP10B	2/3 pole socket 二三极插座	220-240V	2400W	Bluetooth 5.0	86x86x48mm

- AG glass panel, smooth and anti-fingerprin
AG玻璃面板
手感顺滑细腻抗指纹
- Bluetooth 5.0
SIG Mesh technology
蓝牙5.0
无线组网技术
- Power statistics, parental lock
电量统计
童锁功能
- Timer switch, APP status view/control
定时开关
APP状态反馈 / 控制

Conjoined Installation Frame

联体安装框

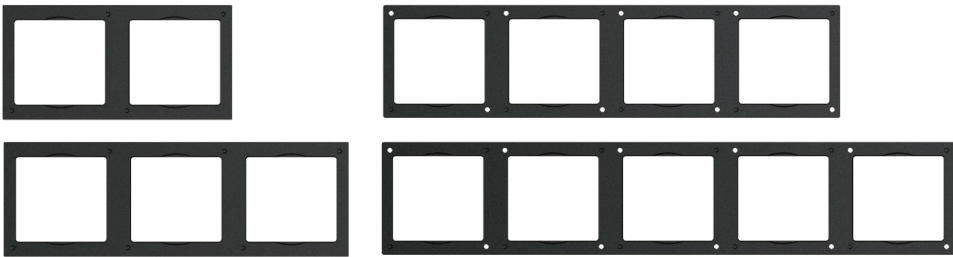

Model No. 产品型号	Type 规格	Dimension 产品尺寸
AC-2B01-BK	2 conjoined 2 联体框	171.2x85.2mm
AC-3B01-BK	3 conjoined 3 联体框	257.2x85.2mm
AC-4B01-BK	4 conjoined 4 联体框	343.2x85.2mm
AC-5B01-BK	5 conjoined 5 联体框	429.2x85.2mm

Easy installation into a standard 86 box
标准86型规格
安装方便

Compatibility design, suitable for P/PM/PA series products
兼容性设计
适配P / PM / PA系列产品

Freely combined, seamlessly connected
任何面板均可自由组合
无缝连接

Ordinary Panel

普通面板

* Remarks: frame can be replaced with metal and glass materials
边框可替换为金属、玻璃材质



Model No. 产品型号	Type 规格	Input Voltage 工作电压	Load Wattage 负载功率	Dimension 产品尺寸
PP10	2/3 pole socket 二三极插座	220V	10A	86x86x31.9mm
PP10U2	2/3 pole & 2 USB 二三极插座 & 2 USB	220V	Socket 10A USB 10W	86x86x41mm
PP16	3 pole 三极插座	220V	16A	86x86x33mm

Easy installation into a standard 86 box
标准86型规格
安装方便


Frosted metal texture elegant and gorgeous
磨砂类金属质感
优雅华丽

A variety of colors customized exclusive style
多种外框颜色可选
定制专属风格

Ordinary Panel

普通面板

* Remarks: frame can be replaced with metal and glass materials
边框可替换为金属、玻璃材质

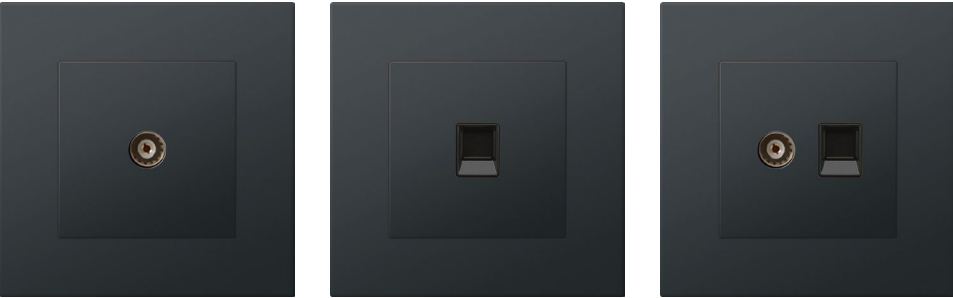

Model No. 产品型号	Type 规格	Input Voltage 工作电压	Dimension 产品尺寸
PTV-1G	TV socket 电视插座	220V	86x86x26mm
PTVC-2G	Computer socket 电脑插座	220V	86x86x41mm
PC-1G	TV & Computer socket 电视电脑二位插座	220V	86x86x41mm

Easy installation into a standard 86 box
标准86型规格
安装方便

Frosted metal texture elegant and gorgeous
磨砂类金属质感
优雅华丽

A variety of colors customized exclusive style
多种外框颜色可选
定制专属风格

Ordinary Panel

普通面板

* Remarks: frame can be replaced with metal and glass materials
边框可替换为金属、玻璃材质



Model No. 产品型号	Type 规格	Input Voltage 工作电压	Wattage 功率	Dimension 产品尺寸
PTEL-1G	TEL socket 电话插座	220V	/	86x86x30mm
PFLI	Step lighting 地角灯	220V	0.6W	86x86x32mm
PEC	Emergency call 紧急呼叫	220V	1A	86x86x26mm

Easy installation into a standard 86 box
标准86型规格
安装方便


Frosted metal texture elegant and gorgeous
磨砂类金属质感
优雅华丽

A variety of colors customized exclusive style
多种外框颜色可选
定制专属风格

Ordinary Panel

普通面板

* Remarks: frame can be replaced with metal and glass materials
边框可替换为金属、玻璃材质

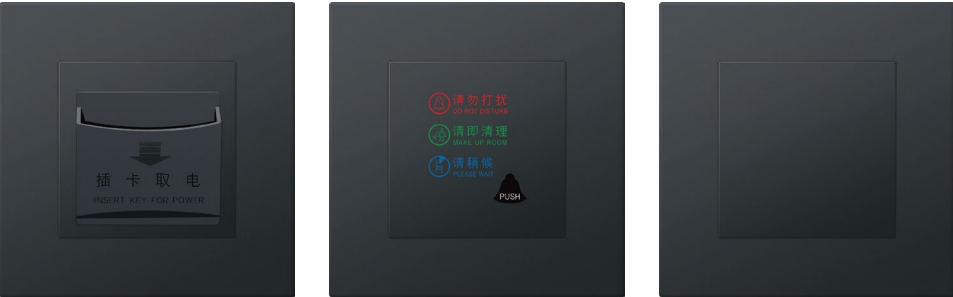

Model No. 产品型号	Type 规格	Input Voltage 工作电压	Current 电流	Dimension 产品尺寸
PCFE	Card to get electricity 插卡取电	220V	40A	86x86x53mm
PTT3F	Service panel 轻触式3功能	12V	1A	86x86x36mm
PBP	Blank board 空白面板	/	/	86x86x15mm

Easy installation into a standard 86 box
标准86型规格
安装方便

Frosted metal texture elegant and gorgeous
磨砂类金属质感
优雅华丽

A variety of colors customized exclusive style
多种外框颜色可选
定制专属风格

Core Server

核心主机



Model No. 产品型号	Power Supply 供电方式	Input Voltage 工作电压	Wireless Mode 无线类型	Wireless Frequency 无线频率	Supported Device 支持设备	Communication Mode 通讯方式	Dimension 产品尺寸
C3	Type-C	5V	Bluetooth Wi-Fi	2.4GHz	80pcs	TCP/IP, Bluetooth, RS485	80x80x26mm
C5	Type-C POE	5V 50V	Bluetooth Wi-Fi	2.4GHz, 5GHz	100pcs	TCP/IP, Bluetooth, RS485	160x120x30mm

Metal housing with toughened glass panels
金属材质
镀膜钢化玻璃面板

Support for POE power supply
POE供电
节约环保

Integrated TCP/IP, Bluetooth, RS485 communication protocols
集成TCP/IP、蓝牙、RS485
多种通讯协议

Remote control
远程控制

Automatic control
自动化控制

Interconnecting with third-party devices
对接第三方设备

Support Siri, Xiao Ai, Google, Amazon speaker control
支持Siri、小爱、谷歌
亚马逊音箱控制

Bluetooth Remote Control

蓝牙遥控器

Model No. 产品型号	Input Voltage 工作电压	Battery 电池型号	Wireless Mode 无线类型	Dimension 产品尺寸
RB03	3VDC	2×AAA alkaline battery	Bluetooth 5.0	150x38x5mm



Power by battery cell, warning for low energy
电池供电
低电量预警

Compact, portable and light in weight
尺寸小巧
轻盈便携

The buttons can be set, e.g. device, group, scene
设备、群组、场景、按键
皆可配

Adjust the color temperature and brightness
智能调节
灯光冷暖、亮度

Bluetooth Sensor

蓝牙感应器

Model No. 产品型号	Input Voltage 工作电压	Wattage 功率	Wireless Mode 无线类型	Cut-out 开孔尺寸	Dimension 产品尺寸
SI08B	220-240V	1W	Bluetooth 5.0	Ø40mm	Ø50x40.2mm



Detection area: 5*3m(Ø*H)
感应范围
5*3m(Ø*H)

Daylight threshold: 1-2000lux
光敏感应
1-2000lux

Night light in 1800K, 0.5W
小夜灯功能
1800K, 0.5W

Bluetooth 5.0 SIG Mesh technology
蓝牙5.0
无线组网技术

Ceiling recessed 86 Junction box installation
安装方式:
嵌入安装、86底盒安装

Super Panel
液晶面板



Model No. 产品型号	Input Voltage 工作电压	Screen 屏幕	Operating System 操作系统	Wireless Mode 无线类型	Dimension 产品尺寸
S6	100-240VAC	4 inch, 480x480 multi-touch	Android	Bluetooth 4.2 Wi-Fi	86x86x36mm



Standard 86 specification design,
in-situ installation
标准86型规格设计
原位安装



4-inch HD LCD and G+F
technology with five-point touch
4英寸高清LCD, G+F
工艺五点触控



Ambient light sensing, automatic
adjustment of screen brightness
环境光线感应
自动调节屏幕亮度



A panel to controls the
whole house of smart devices
一个面板, 等于全屋智能
掌控全屋智能设备

Bluetooth LED Driver
Constant Current
蓝牙LED驱动器-恒流驱动



Model No. 产品型号	Input Voltage 工作电压	Max. Wattage 最大功率	Current Range 电流范围	Wireless Mode 无线类型	Dimension 产品尺寸
LIM-12B TW	220-240V	12W	150-700mA	Bluetooth 5.0	132x35x20mm
LIM-25B TW	220-240V	25W	260-700mA	Bluetooth 5.0	156x44x28mm
LIM-45B TW	220-240V	45W	350-1050mA	Bluetooth 5.0	320x35x23mm



Bluetooth 5.0
SIG Mesh technology
蓝牙5.0
无线组网技术



2700-6500K color temperature,
dimming range: 0.1...100%
2700K-6500K色温调节
0.1...100%调光输出



Support IOS or Android
devices for wireless control
IOS、Android
两大平台均可使用



AcTEC, TUYA, CASAMBI,
etc. are available
AcTEC、涂鸦、Casambi
等多款可选

PWM Controller
PWM控制器



CCT, brightness
& color control
色温、亮度、颜色调节

Model No. 产品型号	Input Voltage 输入电压	Max. Output Wattage 最大输出功率	Output Current 输出电流	Dimming Range 调光范围	CCT Range 色温调节范围	Color Range 颜色调节范围	Wireless Mode 无线类型	Dimension 产品尺寸
C2AB-RBGTW V2	12/24VDC	24/48W	2A/ch	0.1...100%	2700K-6500K	Panchromatic domain	Bluetooth 5.0	53x31x12.8mm
C3AB-RBGTW V2	12/24VDC	36/72W	3A/ch	0.1...100%	2700K-6500K	Panchromatic domain	Bluetooth 5.0	116x42x18mm
C10AB-RBGTW	12/24VDC	120/240W	10A/ch	0.1...100%	2700K-6500K	Panchromatic domain	Bluetooth 5.0	156x44x28mm



Fade-in
& fade-out
淡入淡出



Various control methods: mobile phone APP, intelligent
remote control, situational mode, automatic control, etc
多种控制方式, 手机APP、智能遥控器
情景模式、自动化控制



Adjust the lighting according
to the circadian rhythm
支持人因照明
根据昼夜节律调节灯光

DALI LED Driver
Constant Current
DALI调光LED驱动器-恒流驱动



DALI-2 certified
LED driver
DALI-2 认证
LED驱动

Model No. 产品型号	Input Voltage 工作电压	Max. Wattage 最大功率	Current Range 电流范围	Voltage Range 电压范围	Dimension 产品尺寸
LIM-12D	220-240V	12W	150-700mA	2-42V	132x30x20mm
LIM-25D	220-240V	25W	260-700mA	20-60V	156x44x28mm
LI-45D	220-240V	45W	350-1050mA	25-70V	320x35x23mm



Switch dimming function,
dimming range: 0.1...100%
Switch调光功能
0.1...100%调光输出



Configurable constant current
output via dip-switch
通过拨码开关
选择输出电流

DALI LED Driver
 Constant Current
 DALI调光 LED驱动器-恒流驱动



DALI-2 certified
 LED driver
 DALI-2 认证
 LED驱动

2700-6500K color temperature,
 dimming range: 2...100%
 2700K-6500K色温调节
 2...100%调光输出

Configurable constant current
 output via dip-switch
 通过拨码开关
 选择输出电流

Model No. 产品型号	Input Voltage 工作电压	Max. Wattage 最大功率	Current Range 电流范围	Voltage Range 电压范围	Dimension 产品尺寸
LIM-12D TW	220-240V	12W	150-700mA	2-42V	132x35x20mm
LIM-25D TW	220-240V	25W	260-700mA	10-42V	156x44x28mm
LIM-45D TW	220-240V	45W	350-1050mA	10-50V	320x35x23mm

DALI LED Driver DT6
 Constant Voltage
 DALI DT6调光LED驱动器-恒压驱动



DALI-2 certified LED driver
 DALI-2 认证 LED驱动

Dimming range: 0.1...100%
 0.1...100%调光输出

Model No. 产品型号	Input Voltage 工作电压	Max. Wattage 最大功率	Output Voltage 输出电压	Current Range 电流范围	Dimension 产品尺寸
LT-75-24D	220-240V	75W	24V	0-3.12A	400x32x21.6mm
LT-75-48D	220-240V	75W	48V	0-1.57A	400x32x21.6mm
LT-100-24D	220-240V	100W	24V	0.4.17A	400x32x21.6mm
LT-100-48D	220-240V	100W	48V	0-2.08A	400x32x21.6mm
LT-150-24D	220-240V	150W	24V	0-6.25A	400x32x21.6mm
LT-150-48D	220-240V	150W	48V	0-3.12A	400x32x21.6mm
LT-200-24D	220-240V	200W	24V	0-8.33A	450x32x23mm
LT-200-48D	220-240V	200W	48V	0-4.17A	450x32x23mm
LT-240-24D	220-240V	240W	24V	0-10A	450x32x23mm
LT-240-48D	220-240V	240W	48V	0-5A	450x32x23mm

DALI LED Driver DT8
 Constant Voltage
 DALI DT8调光LED驱动器-恒压驱动



DALI-2 certified LED driver
 DALI-2 认证 LED驱动

2700-6500K color temperature, dimming range: 0.1...100%
 2700K-6500K色温调节、0.1...100%调光输出

Model No. 产品型号	Input Voltage 工作电压	Max. Wattage 最大功率	Output Voltage 输出电压	Current Range 电流范围	Dimension 产品尺寸
LT-75-24D TW	220-240V	75W	24V	0-3.12A	400x32x21.6mm
LT-75-48D TW	220-240V	75W	48V	0-1.57A	400x32x21.6mm
LT-100-24D TW	220-240V	100W	24V	0.4.17A	400x32x21.6mm
LT-100-48D TW	220-240V	100W	48V	0-2.08A	400x32x21.6mm
LT-150-24D TW	220-240V	150W	24V	0-6.25A	400x32x21.6mm
LT-150-48D TW	220-240V	150W	48V	0-3.12A	400x32x21.6mm
LT-200-24D TW	220-240V	200W	24V	0-8.33A	450x32x23mm
LT-200-48D TW	220-240V	200W	48V	0-4.17A	450x32x23mm
LT-240-24D TW	220-240V	240W	24V	0-10A	450x32x23mm
LT-240-48D TW	220-240V	240W	48V	0-5A	450x32x23mm

0/1-10V LED Driver
 Constant Current
 0/1-10V调光LED驱动器-恒流驱动



Dimming with Low-voltage
 control signal (DC 0...10V)
 适用低压直流
 0...10V调光器

Dimming range: 1...100%
 flicker free
 1...100%调光输出
 无频闪

Configurable constant current
 output via dip-switch
 通过拨码开关
 选择输出电流

Model No. 产品型号	Input Voltage 工作电压	Max. Wattage 最大功率	Current Range 电流范围	Voltage Range 电压范围	Dimension 产品尺寸
IE-12A	220-240V	12W	180-500mA	15-54V	119x52x22.5mm
IE-25A	220-240V	25W	200-700mA	6-60V	119x52x22.5mm

TRIAC LED Driver
Constant Current
可控硅调光LED驱动器-恒流驱动



Model No. 产品型号	Input Voltage 工作电压	Max. Wattage 最大功率	Current Range 电流范围	Voltage Range 电压范围	Dimension 产品尺寸
LIM-8T	220-240V	8W	120-200mA	21-42V	132x30x20mm
LIM-15T	220-240V	15W	200-350mA	21-42V	156x44x28mm
LIM-25T	220-240V	25W	350-600mA	21-42V	156x44x28mm



Dimming with trailing edge dimmer
适用于普通可控硅后切相调光器



Dimming range: 1...100% flicker free
1...100%调光输出无频闪



Configurable constant current output via dip-switch
通过拨码开关选择输出电流



Wide output voltage extended down to 50%
50%宽电压输出范围

TRIAC LED Driver
Constant Current
可控硅调光LED驱动器-恒流驱动



Model No. 产品型号	Input Voltage 工作电压	Current Range 电流范围	Voltage Range 电压范围	Wattage Range 功率范围
NTF Series	220-240V	180-1300mA	10-53V	9-50W



Dimmable with leading edge or trailing edge dimmer
适用于普通可控硅前切相或后切相调光器



Dimming range: 1...100% flicker free
1...100%调光输出无频闪



Wide output voltage extended down to 50%
50%宽电压输出范围

TRIAC LED Driver
Constant Voltage
可控硅调光LED驱动器-恒压驱动



Dimmable with leading edge or trailing edge dimmer
适用于普通可控硅前切相或后切相调光器



Dimming range: 1...100% flicker free
1...100%调光输出无频闪



Smooth dimming compatible with most dimmers
平滑高性能调光匹配更多的调光器

Model No. 产品型号	Input Voltage 工作电压	Max. Wattage 最大功率	Output Voltage 输出电压	Current Range 电流范围	Dimension 产品尺寸
DIM-25	220-240V	25W	12V/24V	0.1-2.08A	128x52x30mm
DIM-50	220-240V	50W	12V/24V	0.5-4.16A	184x61x32mm
DIM-100	220-240V	100W	12V/24V	1.4-8.3A	210x67x34mm
V2-100	220-240V	100W	12V/24V	1.4-8.3A	191x70x40mm
V2-200	220-240V	200W	12V/24V	2.7-16.7A	249x72x40mm

Triac Dimmer
可控硅调光器



Support installation in 86/80 standard bottom box
小巧紧凑，可直接安装于86/80标准底盒内



External switch control or APP control
可外接实体按键控制或通过APP控制



Collocation with other intelligent devices to achieve linkage control
与其他智能设备搭配实现联动控制



Various control methods: mobile phone APP, intelligent remote control, situational mode, automatic control, etc
多种控制方式，手机APP、智能遥控器、情景模式、自动化控制等



Support OTA upgrade
支持OTA升级

Model No. 产品型号	Input Voltage 工作电压	Load 负载	Dimming Range 调光范围	Wireless Mode 无线类型	Dimension 产品尺寸
D300IB V2	220-240V	Incandescent lamp: 300VA LED lamp: 155VA	0.1...100%	Bluetooth 5.0	51.3x46.9x22.5mm

0-10V & DALI Controller

0/1-10V & DALI控制器

Model No. 产品型号	Input Voltage 工作电压	Input Current 输入电流	Dimming 调光范围	Dimming Method 调光方式	Wireless Mode 无线类型	Dimension 产品尺寸
DD0-10IB V2	220-240V	100mA	0.1...100%	0/1-10V DALI DT6/DT8	Bluetooth 5.0	51.3x46.9x22.5mm



- Support installation in 86/80 standard bottom box
小巧紧凑，可直接安装于86/80标准底盒内
- External switch control or APP control
可外接实体按键控制或通过APP控制
- Multiin-one device
多合一设备
- Collocation with other intelligent devices to achieve linkage control
与其他智能设备搭配实现联动控制
- Various control methods: mobile phone APP, intelligent remote control, situational mode, automatic control, etc
多种控制方式，手机 APP、智能遥控器、情景模式、自动化控制等
- Support OTA upgrade
支持 OTA 升级

Switch Controller

开关控制器

Model No. 产品型号	Output Channel 输出通道	Input Voltage 工作电压	Load 负载	Wireless Mode 无线类型	Dimension 产品尺寸
S10IB-2G V2	2 Gang	220-240V	Incandescent lighting (1200W/Gang) LED Load (600W/Gang) AC motor (300W/Gang)	Bluetooth 5.0	51.3x46.9x22.5mm



- Support installation in 86/80 standard bottom box
小巧紧凑，可直接安装于86/80标准底盒内
- External switch control or APP control
可外接实体按键控制或通过APP控制
- Multiin-one device
多合一设备
- Collocation with other intelligent devices to achieve linkage control
与其他智能设备搭配实现联动控制
- Various control methods: mobile phone APP, intelligent remote control, situational mode, automatic control, etc
多种控制方式，手机 APP、智能遥控器、情景模式、自动化控制等
- Support OTA upgrade
支持 OTA 升级

Smart Curtain Motor

智能开合帘电机

杜亚 DOOYA + AcTEC 联合定制

Model No. 产品型号	Input Voltage 工作电压	Current 工作电流	Wireless Mode 无线类型	Load Bearing 载重
DT82TV/P-1.2/14	100-240V	0.14A	Bluetooth 5.0	50kg



- Bluetooth 5.0 SIG Mesh technology, no gateway
蓝牙5.0无线组网技术 无需网关
- Group setting scene model setting
分组设置 情景设置
- Max. load 50Kg
Width 0.5-6m
最大载重50Kg 宽度0.5-6m
- Point memory time switch function
点位记忆 定时功能


Curtain Track System

窗帘轨道系统

杜亚 DOOYA

Model No. 产品型号	Supply 匹配电机	Texture Of Material 材质	Belt Type 皮带类型
DS175-05	DT82TV	Aluminium alloy 铝合金	M

The length of curtain track should be processed according to the actual measurement
窗帘轨道长度，需根据现场实测需求加工




- Aviation aluminum electrophoresis track, 2.1 mm thick
航空铝电泳轨道 厚2.1mm
- Super quiet boom, 13 sets of wheels guarantee smooth running
超静音吊臂 13组轮子保障顺滑无比
- Double bearing transmission box imported DuPont POM material
双轴承传动箱 进口杜邦POM材质
- Strong and durable, M-belt contains multiple strands of steel wire
经久耐用 M型皮带内含多股钢丝

Curtain Remote

窗帘遥控器



Model No. 产品型号	Type 规格	Belt Type 电池型号	Launch Distance 发射距离	Dimension 产品尺寸
DC1602	15-channel 15通道	CR2450	Indoor 35m 室内35米	130x44x10.5mm



One transmitter channel can control up to 20 receivers
1个发射器通道
最多可控制20个接收器



Ultra long transmitting distance:
Outdoor 200m, indoor 35m
超远发射距离:
户外200米, 室内35米



Transmitting frequency:
433.92MHz ± 100KHz
发射频率:
433.92MHz ± 100KHz

Roller Blind Motor

卷帘电机



Model No. 产品型号	Input Voltage 工作电压	Rated Wattage 功率	Input Current 工作电流	Wireless Mode 无线类型	Dimension 产品尺寸
DM35EQL/Y	220-240V	98W	0.43A	Bluetooth 5.0	Ø35x498mm



Bluetooth 5.0 SIG Mesh technology,
no gateway
蓝牙5.0无线组网技术
无需网关



Group configuration and
scenes setting
分组设置
情景设置



Point memory and time
switch function
点位记忆和
定时开关功能

Smart HVAC

智能暖通



Multi-in-one air conditioning
gateway, compact in size
and easy to install
多合一空调网关
体积小巧, 便于安装



Support for both
internal and external
mounting modes
支持内机、外机
两种安装方式



Available in multiple brands of central
air conditioners, local direct-dip, Daikin,
Toshiba, Hitachi, Panasonic, Midea, etc
适配多个品牌的中央空调, 本地直接拨码
大金、东芝、日立、松下、美的等



It is compatible with the technetium smart system,
enabling remote control and adjustment of temperature,
wind speed, mode switching and other functions
兼容亚得智能系统, 实现远程控制
调节温度、风速、模式切换等功能

SONOS Smart Audio

智能音响

SONOS



Move



One/One SL



Amp

Model No. 产品型号	Acceptance Distance 接受距离	Wireless Mode 无线类型	Dimension 产品尺寸
SONOS Move	10m	Wi-Fi	240x160x126mm
SONOS One	10m	Wi-Fi	161x120x120mm
SONOS One SL	10m	Wi-Fi	162x120x120mm
SONOS Amp	10m	Wi-Fi	64x217x217mm



Compact design
exquisite appearance
外形设计
小巧紧凑




Based on trueplay™ tuning
technology enhances sound effect
利用Trueplay™
调音技术增强音效



Cooperate with more than 100 streaming
media platforms rich repertoire
与全球100+流媒体平台合作
曲库丰富

Levoice Audio
扬声器
levoice®



Simple and beautiful
user friendly design
简洁美观
人性化设计

Professional frequency divider design
excellent reliability
专业的分频器设计
优良的可靠性

Ceiling mounted
integrated with home
吸顶式安装
与家居融为一体

Model No. 产品型号	Impedance 阻抗	Rated/Max. wattage 额定/最大功率	Frequency response 频响范围	Dimension 产品尺寸	Dimension 安装尺寸
Levoice A5i	8Ω	30W / 60W	65Hz~20KHz	Ø209x92mm	Ø178x97mm

Smart Camera
智能安防
EZVIZ萤石



Two-way
conversation
双向语音对讲

AI-powered human
shape detection
智能人形检测

Auto-tracking
智能追踪
跟拍移动物体

View from anywhere
via APP
支持手机远程监控

Model No. 产品型号	Max. Resolution 分辨率	Lens 镜头	Dimension 产品尺寸
CTQ6X	1920x1080	4mm@F2.0, viewing angle: 99° (diagonal)	88x88x118.7mm
CS-H4	1920x1080	4mm@F2.0, viewing angle: 86° (horizontal), 102° (diagonal)	Ø105x88mm
CS-GT5	2304x1296	4mm@ F2.0, viewing angle: 87° (horizontal), 104° (diagonal)	192x100x79mm

Smart Speaker
智能语音



Home devices control
家居设备控制

Ecological access
生态接入

Voice dialog
语音对话

Brand 品牌	Model No. 产品型号	Power Supply 电源供应	Dimension 产品尺寸
Xiaocai Speaker 小爱音箱	LX06A L15A	DC12V/1.5A	211.6x88.2x88.2mm
Apple Speaker 苹果音箱	HomePod mini	20W power adapter	Ø84.3x97.9mm
Google Speaker 谷歌音箱	Nest Nest Mini	100~240V	100x100x89mm
Amazon Speaker 亚马逊音箱	Echo Dot	100~240V	124x175x78mm

Smart EV Charger

智能充电桩



Compact
in size
小巧轻便
随车携带



Plug and
play
即插即充



Preset charging power
& delay charging time
预设充电功率
和充电时间



OLED screen
& status indication
带OLED显示屏及
LED状态指示灯



Residual current protection:
Type A + DC6mA
漏电保护
Type A + DC 6mA



Multiple
protection
多重防护

Smart EV Charger

智能充电桩



Fully dynamic charging power
1.4- 22kW, 1 and 3 phase charging
1.4-22kW动态充电功率设置
单三相兼容



Preset charging power
& delay charging time
预设充电功率
和充电时间



6A, 10A, 13A, 16A, 20A,25A, 32A
output current can be set
7档输出电流可选
6A, 10A, 13A, 16A, 20A, 25A, 32A



1.3" OLED screen
& status indication
带1.3" OLED显示屏
及LED状态指示灯



Residual current protection:
Type A + DC6mA
漏电保护
Type A + DC 6mA



Multiple
protection
多重防护

Model No. 产品型号	Input Voltage 工作电压	Output Current 输出电流	Output Power 输出功率	Charging Mode 充电模式	Dimension 产品尺寸
E10	220-240V	16A	Max. 3.68kW	Mode 2	205x90x51mm

Model No. 产品型号	Input Voltage 工作电压	Output Current 输出电流	Output Power 输出功率	Charging Mode 充电模式	Dimension 产品尺寸
E30	220-240V (1 phase) 380-415V (3 phase)	6A, 10A, 13A, 16A, 20A, 25A, 32A	Max. 7kW (1 Phase) Max. 21kW (3 Phase)	Mode 3	325x240x134mm



We Sincerely Invite Cooperation To Build The Future Together

诚邀合作 共筑未来

AcTEC

Adhere to the original intention of quality
Switch to Brighter Future

亚 得

坚守品质初心 开启美好未来

80+

产品销往全球80多个国家
Products are exported to
more than 80 countries around the world

400+

与全球400余客户建立合作
Establish cooperation with more than
400 customers around the world

Cooperative Partner 合作伙伴

CRESTRON

Control4

SAVANT

LUTRON

SONOS

DOOYA

EZVIZ 萤石

阿里巴巴
Alibaba.com

Bluetooth

zigbee

ZWAVE

matter

THREAD

WiFi

CASAMBI

SILVAIR

PHILIPS
hue
personal wireless lighting

tuya

SILICON LABS

Qualcomm

mijia

HarmonyOS

Works with
Apple HomeKit

Google

amazon